Wera
BE A TOOL REBEL

# Compact Catalogue

# CONTENT

## Screwdrivers

| | |
|---|---|
| Kraftform Stainless Steel | 6 |
| Kraftform Plus – Series 900 | 8 |
| Kraftform Plus – Series 300 | 11 |
| Kraftform Ball-Grip – Series 1800 | 28 |
| Flagdriver Series | 30 |
| Screwdriving Accessories | 31 |
| Kraftform Micro | 34 |
| 400 T-Handle Series | 41 |
| ESD Tools | 49 |


## Tools for Electricians

| | |
|---|---|
| Kraftform Stainless VDE | 58 |
| Kraftform 100 VDE | 60 |
| Kraftform Kompakt VDE Safe-Torque Speed | 68 |
| Kraftform Kompakt VDE Stainless | 69 |
| Kraftform Kompakt VDE with ratchet functionality | 73 |
| Kraftform Kompakt VDE | 76 |
| Kraftform Kompakt Turbo VDE | 84 |
| Kraftform 1000 VDE | 91 |
| Series T-handle Screwdrivers | 92 |
| The Zyklop Ratchet VDE and Accessories | 93 |
| Joker VDE Self-setting, Adjustable Spanner | 98 |
| Torque-indicators for Electricians | 99 |
| Wera 2go E 1 Tool set for electricians | 303 |


## Ratchets & Accessories

| | |
|---|---|
| 1/4" Zyklop Speed | 102 |
| 1/4" Zyklop Metal Push | 107 |
| 1/4" Zyklop Metal Switch | 108 |
| 1/4" Zyklop Accessories | 110 |
| 3/8" Zyklop Speed | 120 |
| 3/8", Zyklop Comfort Ratchet | 124 |
| 3/8" Zyklop Metal Push | 126 |
| 3/8" Zyklop Metal Switch | 128 |
| 3/8" Zyklop Accessories | 130 |
| 1/2" Zyklop Speed | 145 |
| 1/2" Zyklop Hybrid | 148 |
| 1/2" Zyklop Metal Push | 149 |
| 1/2" Zyklop Metal Switch | 151 |
| 1/2" Zyklop Accessories | 152 |
| Zyklop Pocket | 165 |
| 1/2" Koloss | 169 |
| Zyklop Mini | 172 |


## Tool-Check

| | |
|---|---|
| Tool-Check Modular | 180 |
| Tool-Check PLUS | 185 |
| Tool-Check | 189 |


## Joker Wrenches & Spanners

| | |
|---|---|
| 6000 Joker Ratcheting Combination Wrenches | 194 |
| 6001 Joker Switch Ratcheting Combination Wrenches, with Switch Lever | 197 |
| 6002 Joker Double Open-Ended Wrenches | 199 |
| 6003 Joker Ring Spanner | 199 |
| 6004 Joker Self-setting, Adjustable Spanner | 205 |
| 6005 Joker Double Open-Ended Wrenches | 207 |
| 6006 Joker Self-setting Double Spanners | 207 |
| 6007 Joker Ring Ratchet Spanners, long design | 209 |


## L-Keys

| | |
|---|---|
| L-Keys for Hexagon Socket Screws | 212 |
| L-Keys for TORX® Screws | 227 |


## Kraftform Kompakt with Ratchet Function

| | |
|---|---|
| Kraftform Kompakt 20 RA-R, 25 RA-R, 26 RA-R, 27 RA, 28 RA | 234 |
| Kraftform Kompakt 60 RA-R | 237 |
| Kraftform Kompakt 400 RA | 238 |
| Kraftform Kompakt 838 with Ratchet Function | 241 |
| Kraftform Kompakt Pistol with Ratchet Function | 243 |
| Kraftform Kompakt Stubby magazine with Ratchet Function | 244 |
| Kraftform Kompakt Vario with Ratchet Function | 246 |


## Kraftform Kompakt without Ratchet Functionality

| | |
|---|---|
| Kraftform Kompakt Turbo | 248 |
| Kraftform Kompakt 10, 12 | 249 |
| Kraftform Kompakt 20, 25, 26, 27, 28 | 250 |
| Kraftform Kompakt 40, 41 | 255 |
| Kraftform Kompakt 60, 62 | 256 |
| Kraftform Kompakt 70, 71 | 260 |
| Kraftform Kompakt 100 | 261 |
| Kraftform Kompakt 400 | 262 |
| Kraftform Kompakt Stubby | 262 |
| Kraftform Kompakt Vario without Ratchet Functionality | 264 |
| Kraftform Kompakt Accessories | 265 |


## Kraftform Kompakt impact screwdriver

| | |
|---|---|
| Kraftform Kompakt 900 | 267 |


## Kraftform Kompakt User-Specific Sets

| | |
|---|---|
| Kraftform Kompakt User-Specific Sets | 270 |

## Bitholding Screwdrivers and Adaptors

Bitholding Screwdrivers and Adaptors 277


## Roller cabinet and foam inserts

Roller cabinet and foam inserts 282


## Wera 2go




Wera 2go 300


## Bits




Bits for Phillips Screws 308
Bits for Pozidriv Screws 319
Bits for Plusminus Screws –Slotted/Phillips 326
Bits for Plusminus Screws – Slotted/Pozidriv 327
Bits for TORX® Screws 327
Bits for TORX® BO Screws 335
Bits for TORX PLUS® Screws 337
Bits for TORX PLUS® IPR Screw 338
Bits for Slotted Screws 338
Bits for Hexagon Socket Screws 341
Bits for Hexagon Socket BO Screws 347
Bits for Square Socket Screws 348
Bits for TORQ-SET® Screws 351
Bits for TRI-WING® Screws 352
Bits for Multi-Point Screws 352
Bits for Microstix® Screws 352
Bits for Spanner Screws 353
Nutsetters 353
Internal Thread Insertion Tool 355


## Holders and Adaptors

Impaktor Bit Holders 358
Rapidaptor Bit Holders 359
Universal Bit Holders With Quick-Release Chuck 361
Universal Bit Holders With Retaining Ring 362
Universal Bit Holders With Stainless Steel Sleeve 362
Bit Holders With Adjustable Depth-Control Stop 364
Adaptors 364


## Bit Sets

Bit-Checks Impaktor 370
Bit-Checks Stainless 373
Bit-Checks / Bit-Safes BiTorsion 374
Bit-Checks Diamond 377
Bit-Checks / Bit-Safes Universal 379
Bit-Checks Wood 387
Bit-Checks Metal 391
Bit Sets for Special Applications 392


## Torque Tools

**Series 7400 Kraftform Torque Screwdrivers**
with variable torque value adjustment 400
with a factory pre-set measurement value 405
adjustable to customer requirements within the specified measurement range 410
**Series 7500 Kraftform Safe-Torque Speed Torque Screwdrivers** 415
**Series Torque-indicators** 417
**Safe-Torque torque wrenches and accessories** 419
**Series Click-Torque**
Adjustable Torque Wrenches with Reversible Ratchet 422
Adjustable torque wrenches with reversible ratchet and Torque Lock function 430
Adjustable torque wrenches for clockwise and anti-clockwise torque-control 431
Adjustable torque wrenches for clockwise and anti-clockwise torque-control and Torque Lock function 431
Adjustable Torque Wrenches for Insert Tools 434
Pre-set, Adjustable Torque Wrenches for Insert Tools 439
**Insert Tools Series** 441
**Accessories** 455


## Impact Driver

Impact Driver 90 Nm 456


## Index


Techlex 457
Code No. Index 461
Article No. Index 476

Wera

# Screwdrivers

## Kraftform Stainless - stainless steel to prevent rust

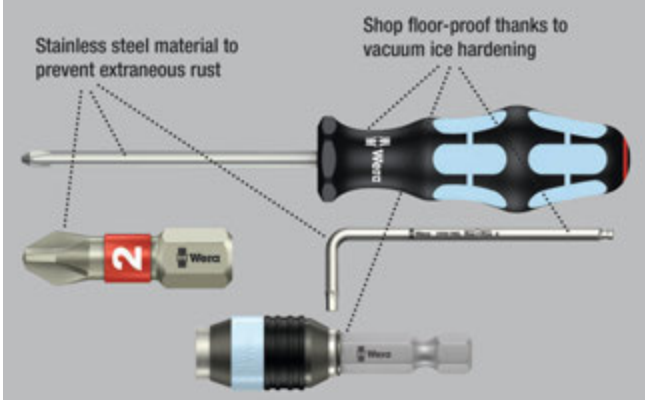


High quality Kraftform Plus screwdriver out of stainless steel. The stainless tools from Wera are vacuum ice-hardened and have the hardness and strength needed for screw connections. They can be used for industrial apsplication without hesitation. The Lasertip tip literally bites into the head of the screw and thereby prevents any slipping out of the screw head. Multi-component Kraftform handle for fast and low-fatigue working.

Take it easy Tool Finder: colour coding according to profile and size. The hexagonal anti-roll feature prevents any bothersome rolling away at the workplace.

- Multi-component Kraftform handle for fast and ergonomic screwdriving
- Take it easy tool finder: colour coding according to profile and size
- Hexagonal anti-roll feature against rolling away
- Lasertip tips for more secure fit in the screw head

## Lasertip - laser engineered blade

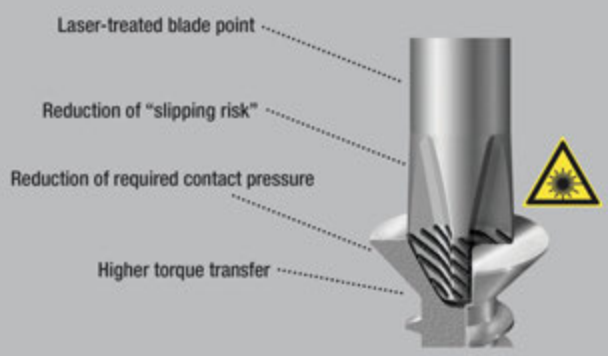


### 3335 Screwdriver for slotted screws, stainless

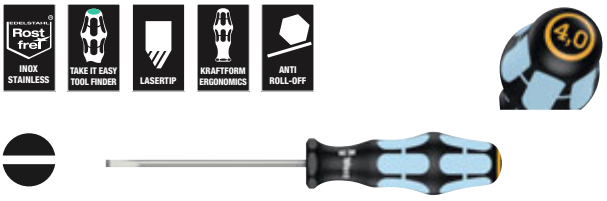


| | EAN | | | ∅ | | | | |
|---|---|---|---|---|---|---|---|---|
| Code | 4013288 | mm | mm | mm | mm | mm | | |
| 05**032001**001 [1] | *107329* | 0,5 | 3,0 | 3,0 | 80 | 81 | 1/8" | 10 |
| 05**032002**001 [1] | *107336* | 0,6 | 3,5 | 3,5 | 100 | 81 | 9/64" | 10 |
| 05**032003**001 | *107343* | 0,8 | 4,0 | 4,0 | 100 | 98 | 5/32" | 10 |
| 05**032004**001 | *107350* | 1,0 | 5,5 | 5,5 | 125 | 98 | 7/32" | 10 |

[1] without Lasertip

### 3334 Screwdriver for slotted screws, stainless

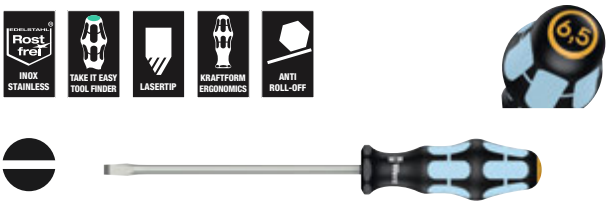


| | EAN | | | ∅ | | | | |
|---|---|---|---|---|---|---|---|---|
| Code | 4013288 | mm | mm | mm | mm | mm | | |
| 05**032005**001 | *107367* | 1,2 | 6,5 | 6,0 | 150 | 105 | 1/4" | 10 |
| 05**032006**001 | *107374* | 1,2 | 8,0 | 7,0 | 175 | 112 | 5/16" | 10 |
| 05**032007**001 | *107381* | 1,6 | 10,0 | 9,0 | 200 | 112 | 3/8" | 5 |

### 3350 PH Screwdriver for Phillips screws, stainless

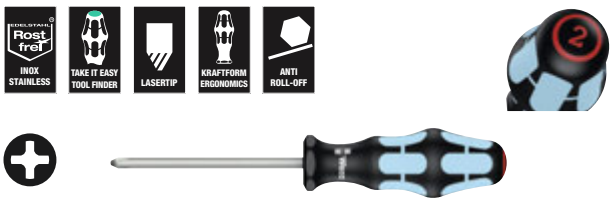


| | EAN | | | | ∅ | | | |
|---|---|---|---|---|---|---|---|---|
| Code | 4013288 | | mm | mm | mm | | | |
| 05**032020**001 [1] | *107398* | PH 0 | 60 | 81 | 3,0 | 2 3/8" | | 5 |
| 05**032021**001 | *107404* | PH 1 | 80 | 98 | 4,5 | 3 1/8" | | 10 |
| 05**032022**001 | *107411* | PH 2 | 100 | 105 | 6,0 | 4" | | 10 |
| 05**032023**001 | *107428* | PH 3 | 150 | 112 | 8,0 | 6" | | 5 |

[1] without Lasertip

## 3355 PZ Screwdriver for Pozidriv screws, stainless

| Code | EAN 4013288 | | mm | mm | mm | | | |
|---|---|---|---|---|---|---|---|---|
| 05**032030**001 [1] | *107435* | PZ 0 | 60 | 81 | 3,0 | 2 3/8" | | 5 |
| 05**032031**001 | *107442* | PZ 1 | 80 | 98 | 4,5 | 3 1/8" | | 10 |
| 05**032032**001 | *107459* | PZ 2 | 100 | 105 | 6,0 | 4" | | 10 |
| 05**032033**001 | *107466* | PZ 3 | 150 | 112 | 8,0 | 6" | | 5 |

[1] without Lasertip

## 3367 Screwdriver for TORX® screws, stainless

| Code | EAN 4013288 | | mm | mm | mm | | | |
|---|---|---|---|---|---|---|---|---|
| 05**032050**001 | *107473* | TX 8 | 60 | 81 | 3,5 | 2 3/8" | | 10 |
| 05**032051**001 | *107480* | TX 9 | 60 | 81 | 4,0 | 2 3/8" | | 10 |
| 05**032052**001 | *107497* | TX 10 | 80 | 81 | 4,0 | 3 1/8" | | 10 |
| 05**032053**001 | *107503* | TX 15 | 80 | 98 | 4,0 | 3 1/8" | | 10 |
| 05**032054**001 | *107510* | TX 20 | 100 | 98 | 4,5 | 4" | | 10 |
| 05**032055**001 | *107527* | TX 25 | 100 | 105 | 5,0 | 4" | | 10 |
| 05**032056**001 | *107534* | TX 27 | 115 | 105 | 5,5 | 4 9/16" | | 10 |
| 05**032057**001 | *107541* | TX 30 | 115 | 105 | 6,0 | 4 9/16" | | 10 |
| 05**032058**001 | *107558* | TX 40 | 130 | 112 | 7,0 | 5 3/16" | | 10 |

## 3368 Screwdriver for square socket screws, stainless

- Stainless screwdriver for square socket screws
- Multi-component Kraftform handle for fast and ergonomic screwdriving
- Handle markings simplify finding and sorting of tools
- Hexagonal anti-roll feature against rolling away
- Stainless against extraneous rust

## 3368 Screwdriver for square socket screws, stainless

| Code | EAN 4013288 | | mm | mm | mm | | | |
|---|---|---|---|---|---|---|---|---|
| 05**032070**002 | *114150* | # 1 | 80 | 98 | 4,5 | 3 1/8" | | 10 |
| 05**032071**002 | *114167* | # 2 | 100 | 105 | 6,0 | 4" | | 10 |

## 3334/6 Screwdriver set, stainless and rack

- Storage rack for wall-mounting

## 3334/6 Screwdriver set, stainless and rack



| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 05**032060**001 | *111388* | | | 1 |
| | | | **3350 PH**<br>1x PH 1x80; 1x PH 2x100 | |
| | | | **3335**<br>1x 0,5x3,0x80 [1]; 1x 0,8x4,0x100;<br>1x 1,0x5,5x125 | |
| | | | **3334**<br>1x 1,2x6,5x150 | |

[1] without Lasertip

## 3334/3355/6 Screwdriver set, stainless and rack

- Storage rack for wall-mounting

## 3334/3355/6 Screwdriver set, stainless and rack

| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 05**032061**001 | *111395* | | | 1 |
| | | | **3355 PZ**<br>1x PZ 1x80; 1x PZ 2x100 | |
| | | | **3335**<br>1x 0,5x3,0x80 [1]; 1x 0,8x4,0x100;<br>1x 1,0x5,5x125 | |
| | | | **3334**<br>1x 1,2x6,5x150 | |

[1] without Lasertip

## 3334/3350/3355/6 Screwdriver set, stainless and rack

- Storage rack for wall-mounting

### 3334/3350/3355/6 Screwdriver set, stainless and rack

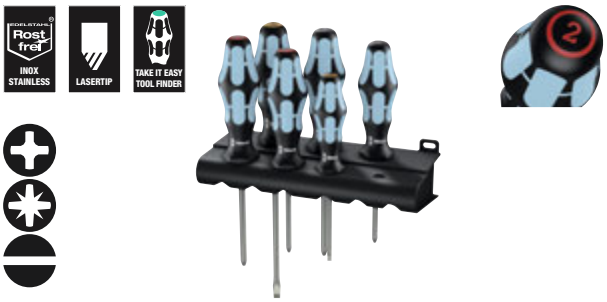


| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 05**032063**001 | *111739* | | | 1 |
| | | | **3350 PH**<br>1x PH 1x80; 1x PH 2x100 | |
| | | | **3355 PZ**<br>1x PZ 1x80; 1x PZ 2x100 | |
| | | | **3335**<br>1x 0,5x3,0x80 [1] | |
| | | | **3334**<br>1x 1,2x6,5x150 | |

[1] without Lasertip

## Wera Chiseldriver

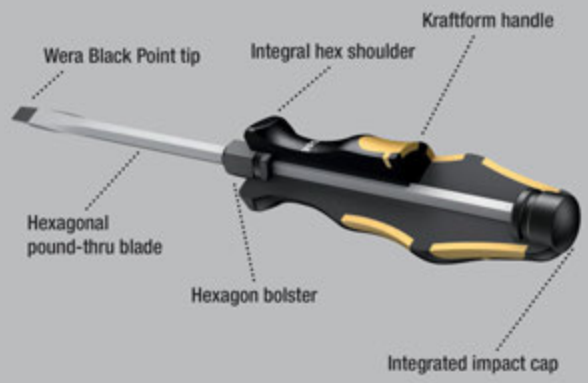


Wera Chiseldriver for fastening, chiselling and loosening seized screws. Multi-component Kraftform handle for fast and low-fatigue working. Kraftform Plus: hard gripping zones for high working speeds whereas soft zones ensure high torque transfer. A hexagon blade out of high quality bit material that extends right through the blade ensures full transfer of force, even when struck with a hammer.

The ductile tempered material prevents the blade from splintering or breaking. Comes with an impact cap for durability and reduced risk of splintering. More torque can be transferred with the help of an open-end or ring spanner applied to the integrated hexagonal bolster.

The Wera Black Point tip and a complex hardening process ensure a long service life of the tip, enhanced corrosion protection and an exact fit. The hexagonal anti-roll feature prevents any bothersome rolling away at the workplace.

### 932 A Screwdriver for slotted screws

| Code | EAN 4013288 | mm | mm | mm | mm | mm | mm | |
|---|---|---|---|---|---|---|---|---|
| 05**018260**001 [1] | *018007* | 0,6 | 3,5 | 4 | | 80 | 81 | 10 |
| 05**018262**001 | *018014* | 0,8 | 4,5 | 5 | 8 | 90 | 98 | 10 |
| 05**018264**001 | *018021* | 1,0 | 5,5 | 6 | 10 | 100 | 105 | 10 |
| 05**018266**001 | *018038* | 1,2 | 7,0 | 6 | 10 | 125 | 105 | 10 |
| 05**018268**001 | *018045* | 1,6 | 9,0 | 8 | 13 | 150 | 112 | 10 |
| 05**018270**001 | *018052* | 1,6 | 10,0 | 8 | 13 | 175 | 112 | 5 |
| 05**018272**001 [2] | *018069* | 2,0 | 12,0 | 10 | 16 | 200 | 117 | 2 |
| 05**018274**001 [2] | *018076* | 2,5 | 14,0 | 10 | 16 | 250 | 117 | 2 |

[1] No throughout blade, no impact cap and no hexagon bolster
[2] Kraftform with non-roll feature, single-component

### 932 A SB Screwdriver for slotted screws

| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 05**100085**001 | *181596* | | **932 A**<br>1x 1.0x5.5x100 | 10 |
| 05**100086**001 | *181602* | | **932 A**<br>1x 1.2x7.0x125 | 10 |
| 05**100087**001 | *181619* | | **932 A**<br>1x 1.6x9.0x150 | 10 |

## 932 AS Screwdriver for slotted screws

- Hexagonal blade extending through the handle, impact cap with integrated square and bolster

### 932 AS Screwdriver for slotted screws

| Code | EAN 4013288 | mm | mm | mm | mm | mm | mm | |
|---|---|---|---|---|---|---|---|---|
| 05**018300**001 | *134486* | 0,8 | 4,5 | 5 | 8 | 100 | 98 | 10 |
| 05**018301**001 | *134462* | 1,0 | 5,5 | 6 | 10 | 113 | 105 | 10 |
| 05**018302**001 | *134455* | 1,2 | 7,0 | 6 | 10 | 138 | 105 | 10 |

## 917 SPH Screwdriver for Phillips screws

| | EAN | | | | | | | |
|---|---|---|---|---|---|---|---|---|
| Code | 4013288 | | mm | mm | mm | mm | | |
| 05**017005**001 | *017734* | PH 1 | 5 | 8 | 80 | 98 | 3 1/8" | 10 |
| 05**017010**001 | *017741* | PH 2 | 6 | 10 | 100 | 105 | 4" | 10 |
| 05**017015**001 | *017758* | PH 3 | 8 | 13 | 150 | 112 | 6" | 5 |
| 05**017020**001 | *017765* | PH 4 | 10 | 16 | 200 | 117 | 8" | 2 |

## 917 SPH SB Screwdriver for Phillips screws

| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 05**100075**001 | *181565* | | **917 SPH**<br>1x PH 1x80 | 10 |
| 05**100076**001 | *181572* | | **917 SPH**<br>1x PH 2x100 | 10 |
| 05**100077**001 | *181589* | | **917 SPH**<br>1x PH 3x150 | 5 |

## 917 SPHS Screwdriver for Phillips screws

- Hexagonal blade extending through the handle, impact cap with integrated square and bolster

## 917 SPHS Screwdriver for Phillips screws

| | EAN | | | | | | | |
|---|---|---|---|---|---|---|---|---|
| Code | 4013288 | | mm | mm | mm | mm | | |
| 05**017040**001 | *134493* | PH 1 | 5 | 8 | 90 | 98 | 3 35/64" | 10 |
| 05**017041**001 | *134448* | PH 2 | 6 | 10 | 113 | 105 | 4 29/64" | 10 |

## 918 SPZ Screwdriver for Pozidriv screws

| | EAN | | | | | | | |
|---|---|---|---|---|---|---|---|---|
| Code | 4013288 | | mm | mm | mm | mm | | |
| 05**017050**001 | *017772* | PZ 1 | 5 | 8 | 80 | 98 | 3 1/8" | 10 |
| 05**017052**001 | *017789* | PZ 2 | 6 | 10 | 100 | 105 | 4" | 10 |
| 05**017054**001 | *017796* | PZ 3 | 8 | 13 | 150 | 112 | 6" | 5 |
| 05**017056**001 | *017802* | PZ 4 | 10 | 16 | 200 | 117 | 8" | 2 |

## 918 SPZ SB Screwdriver for Pozidriv screws

| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 05**100080**001 | *181633* | | **918 SPZ**<br>1x PZ 1x80 | 10 |
| 05**100081**001 | *181640* | | **918 SPZ**<br>1x PZ 2x100 | 10 |
| 05**100082**001 | *181657* | | **918 SPZ**<br>1x PZ 3x150 | 5 |

## 977 Screwdriver for TORX® screws

| | EAN | | | | | | | |
|---|---|---|---|---|---|---|---|---|
| Code | 4013288 | | mm | mm | mm | mm | | |
| 05**024400**001 | *094742* | TX 15 | 5 | 8 | 80 | 98 | 3 1/8" | 10 |
| 05**024401**001 | *094759* | TX 20 | 5 | 8 | 90 | 98 | 3 1/2" | 10 |
| 05**024402**001 | *094766* | TX 25 | 6 | 10 | 100 | 105 | 4" | 10 |
| 05**024403**001 | *094773* | TX 27 | 6 | 10 | 125 | 105 | 5" | 10 |
| 05**024404**001 | *094780* | TX 30 | 8 | 13 | 150 | 112 | 6" | 10 |
| 05**024405**001 | *094797* | TX 40 | 8 | 13 | 150 | 112 | 6" | 10 |

## Big Pack 900 Screwdriver set Kraftform Wera: Chiseldriver and rack

- Storage rack for wall-mounting

### Big Pack 900 Screwdriver set Kraftform Wera: Chiseldriver and rack

| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 05**133285**001 | *176349* | | | 1 |
| | | | **917 SPH**<br>1x PH 1x80; 1x PH 2x100; 1x PH 3x150 | |
| | | | **918 SPZ**<br>1x PZ 1x80; 1x PZ 2x100; 1x PZ 3x150 | |
| | | | **932 A**<br>1x 0,6x3,5x80 [1]; 1x 0,8x4,5x90; 1x 1,0x5,5x100; 1x 1,2x7,0x125; 1x 1,6x9,0x150 | |
| | | | **977 TORX®**<br>1x TX 20x90; 1x TX 25x100 | |
| | | | **Rack**<br>2x 190,0x50,0 | |

[1] No throughout blade, no impact cap and no hexagon bolster

## 932/6 Screwdriver set Kraftform Wera: Chiseldriver and rack

- Storage rack for wall-mounting

### 932/6 Screwdriver set Kraftform Wera: Chiseldriver and rack

| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 05**018282**001 | *018090* | | | 1 |
| | | | **917 SPH**<br>1x PH 1x80; 1x PH 2x100 | |
| | | | **932 A**<br>1x 0,6x3,5x80 [1]; 1x 0,8x4,5x90; 1x 1,0x5,5x100; 1x 1,2x7,0x125 | |

[1] No throughout blade, no impact cap and no hexagon bolster

## 932 S/6 Screwdriver set Kraftform Wera: Chiseldriver and rack

- Impact cap with integrated square and bolster for the transfer of higher torque
- Storage rack for wall-mounting

### 932 S/6 Screwdriver set Kraftform Wera: Chiseldriver and rack

| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 05**018283**001 | *134479* | | | 1 |
| | | | **917 SPHS**<br>1x PH 1x90; 1x PH 2x113 | |
| | | | **932 A**<br>1x 0,6x3,5x80 [1] | |
| | | | **932 AS**<br>1x 0,8x4,5x100; 1x 1,0x5,5x113; 1x 1,2x7,0x138 | |

[1] No throughout blade, no impact cap and no hexagon bolster

## 932/918/6 Screwdriver set Kraftform Wera: Chiseldriver and rack

- Storage rack for wall-mounting

### 932/918/6 Screwdriver set Kraftform Wera: Chiseldriver and rack

| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 05**018287**001 | *018137* | | | 1 |
| | | | **918 SPZ**<br>1x PZ 1x80; 1x PZ 2x100 | |
| | | | **932 A**<br>1x 0,6x3,5x80 [1]; 1x 0,8x4,5x90; 1x 1,0x5,5x100; 1x 1,2x7,0x125 | |

[1] No throughout blade, no impact cap and no hexagon bolster

## 977/6 TORX® Screwdriver set Kraftform Wera: Chiseldriver and rack

- Storage rack for wall-mounting

### 977/6 TORX® Screwdriver set Kraftform Wera: Chiseldriver and rack

| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 050**24410**001 | *094803* | | | 1 |
| | | | **977 TORX®**<br>1x TX 15x80; 1x TX 20x90; 1x TX 25x100;<br>1x TX 27x125; 1x TX 30x150; 1x TX 40x150 | |

## Kraftform - the shape that adapts to the hand

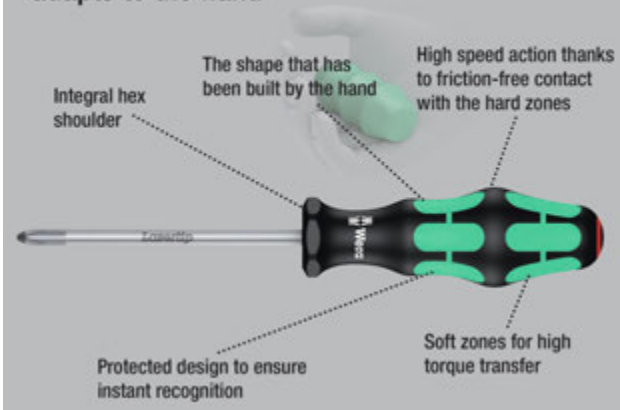


High quality Kraftform Plus screwdriver with electrician's blade. Multi-component Kraftform Plus handle for pleasant, ergonomic working that makes blisters and calluses a thing of the past. Hard gripping zones for high working speeds whereas soft zones ensure high torque transfer.

The tips of Wera Lasertip screwdrivers are microscopically roughened by means of laser beams. This rough surface literally bites into the head of the screw. Any unintentional slipping out is therefore prevented.

Take it easy tool finder with colour coding according to profiles and size stamp – for simple and rapid accessing of the required tool. The hexagonal anti-roll feature prevents any bothersome rolling away at the workplace and handle markings make for simplified finding and sorting of the tool.

- Smooth hard zones for high speed turning, soft grip zones for high torque transfer
- Take it easy tool finder: colour coding according to profile and size
- Hexagonal anti-roll feature against rolling away
- Lasertip tips for more secure fit in the screw head

## Lasertip - laser engineered blade

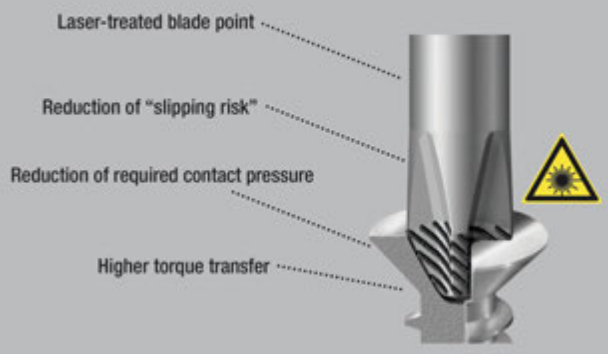


### 335 Screwdriver for slotted screws

| Code | EAN 4013288 | mm | mm | mm | mm | mm | | |
|---|---|---|---|---|---|---|---|---|
| 050**08006**001 [1] | *039996* | 0,4 | 2,0 | 60 | 70 | 2,5 | 5/64" | 10 |
| 051**10000**001 [1] | *003232* | 0,4 | 2,5 | 60 | 70 | 2,5 | 3/32" | 10 |
| 050**08007**001 [1] | *003249* | 0,4 | 2,5 | 75 | 70 | 2,5 | 3/32" | 10 |
| 051**10001**001 [1] | *003256* | 0,5 | 3,0 | 80 | 81 | 3,0 | 1/8" | 10 |
| 050**08008**001 [1] | *107985* | 0,5 | 3,0 | 150 | 81 | 4,0 | 1/8" | 10 |
| 050**08009**001 [1] | *107992* | 0,5 | 3,0 | 200 | 81 | 4,0 | 1/8" | 5 |
| 050**08015**001 [1] | *003263* | 0,6 | 3,5 | 100 | 81 | 3,5 | 9/64" | 10 |
| 051**10002**001 [1] | *003270* | 0,6 | 3,5 | 125 | 81 | 3,5 | 9/64" | 10 |
| 051**10003**001 [1] | *003287* | 0,6 | 3,5 | 200 | 81 | 3,5 | 9/64" | 5 |
| 051**10004**001 | *003294* | 0,8 | 4,0 | 100 | 98 | 4,0 | 5/32" | 10 |
| 051**10005**001 | *003300* | 0,8 | 4,0 | 150 | 98 | 4,0 | 5/32" | 10 |
| 051**10006**001 | *003317* | 0,8 | 4,0 | 200 | 98 | 4,0 | 5/32" | 5 |
| 050**08027**001 [1] | *003324* | 0,8 | 4,0 | 300 | 98 | 4,0 | 5/32" | 2 |
| 051**10007**001 | *003331* | 1,0 | 5,5 | 125 | 98 | 5,5 | 7/32" | 10 |
| 050**08055**001 | *003348* | 1,0 | 5,5 | 150 | 98 | 5,5 | 7/32" | 10 |
| 051**10008**001 | *003355* | 1,0 | 5,5 | 200 | 98 | 5,5 | 7/32" | 5 |
| 050**08060**001 [1] | *003362* | 1,0 | 5,5 | 300 | 98 | 5,5 | 7/32" | 2 |
| 050**08061**001 | *108005* | 1.2 | 6.0 | 100 | 105 | 6.0 | 15/64" | 10 |

[1] without Lasertip

## 335 SB Slotted screwdriver

| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 051**00042**001 | *181275* | | **335** 1x 0.6x3.5x100 [1] | 10 |
| 051**00043**001 | *181251* | | **335** 1x 0.8x4.0x100 | 10 |
| 051**00044**001 | *181244* | | **335** 1x 1.0x5.5x125 | 10 |

## 334 SK Screwdriver for slotted screws

- Hexagonal blade and bolster for higher torque transfer

## 334 SK Screwdriver for slotted screws

| Code | EAN 4013288 | mm | mm | mm | mm | mm | mm | |
|---|---|---|---|---|---|---|---|---|
| 050**07670**001 [1] | *108036* | 0,6 | 3,5 | 4 | - | 75 | 81 | 10 |
| 050**07671**001 | *108043* | 0,8 | 4,0 | 4 | - | 90 | 81 | 10 |
| 050**07672**001 | *108050* | 0,8 | 4,5 | 5 | 8 | 90 | 98 | 10 |
| 050**07673**001 | *108067* | 1,0 | 5,5 | 6 | 10 | 100 | 98 | 10 |
| 050**07674**001 | *108074* | 1,2 | 6,5 | 6 | 10 | 125 | 105 | 10 |
| 050**07675**001 | *108081* | 1,2 | 7,0 | 6 | 10 | 125 | 105 | 10 |
| 050**07676**001 | *108098* | 1,6 | 9,0 | 8 | 13 | 150 | 112 | 10 |
| 050**07677**001 | *108104* | 1,6 | 10,0 | 8 | 13 | 175 | 112 | 5 |

[1] without Lasertip

## 334 Screwdriver for slotted screws

| Code | EAN 4013288 | mm | mm | mm | mm | mm | | |
|---|---|---|---|---|---|---|---|---|
| 050**07610**001 | *003058* | 0,8 | 5,0 | 100 | 98 | 5,0 | 3/16" | 10 |
| 050**07620**001 | *003065* | 1,0 | 6,0 | 125 | 105 | 6,0 | 1/4" | 10 |
| 053**40330**001 | *102553* | 1,0 | 6,0 | 150 | 105 | 6,0 | 1/4" | 10 |
| 051**10010**001 | *003089* | 1,2 | 6,5 | 150 | 105 | 6,0 | 1/4" | 10 |
| 050**07635**001 | *003072* | 1,2 | 7,0 | 150 | 105 | 7,0 | 9/32" | 10 |
| 050**07621**001 | *108012* | 1.2 | 6.5 | 200 | 105 | 7.0 | 1/4" | 5 |
| 051**10011**001 | *003096* | 1,2 | 8,0 | 175 | 112 | 7,0 | 5/16" | 5 |
| 050**07640**001 | *108029* | 1,6 | 8,0 | 175 | 112 | 7,0 | 5/16" | 5 |
| 051**10104**001 | *003102* | 1,6 | 10,0 | 200 | 112 | 9,0 | 3/8" | 5 |
| 051**10105**001 [1] | *003119* | 2,0 | 12,0 | 250 | 117 | 10,0 | 1/2" | 2 |

[1] without Lasertip

## 334 SB Screwdriver for slotted screws

| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 051**00030**001 | *181411* | | **334** 1x 1.2x6.5x150 | 10 |
| 051**00031**001 | *181220* | | **334** 1x 1.2x8.0x175 | 5 |

## 350 SK PH Screwdriver for Phillips screws

- Hexagonal blade and bolster for higher torque transfer

### 350 SK PH Screwdriver for Phillips screws

| Code | EAN 4013288 | | mm | mm | mm | mm | | |
|---|---|---|---|---|---|---|---|---|
| 05**008750**001 [1] | *108128* | PH 0 | 4 | | 60 | 81 | 2 3/8" | 5 |
| 05**008751**001 | *108135* | PH 1 | 5 | 8 | 80 | 98 | 3 1/8" | 10 |
| 05**008752**001 | *108142* | PH 2 | 6 | 10 | 100 | 105 | 4" | 10 |
| 05**008753**001 | *108159* | PH 3 | 8 | 13 | 150 | 112 | 6" | 5 |

[1] without Lasertip

### 350 PH Screwdriver for Phillips screws

| Code | EAN 4013288 | | mm | mm | mm | | | |
|---|---|---|---|---|---|---|---|---|
| 05**008705**001 [1] | *003591* | PH 0 | 60 | 81 | 3,0 | 2 3/8" | | 5 |
| 05**008706**001 [1] | *108111* | PH 0 | 100 | 81 | 3,0 | 4" | | 5 |
| 05**008710**001 | *003607* | PH 1 | 80 | 98 | 4,5 | 3 1/8" | | 10 |
| 05**008712**001 | *003614* | PH 1 | 200 | 98 | 4,5 | 8" | | 2 |
| 05**008715**001 [1] | *003621* | PH 1 | 300 | 98 | 4,5 | 12" | | 2 |
| 05**008720**001 | *003638* | PH 2 | 100 | 105 | 6,0 | 4" | | 10 |
| 05**008723**001 | *097996* | PH 2 | 150 | 105 | 6,0 | 6" | | 10 |
| 05**008725**001 | *003645* | PH 2 | 200 | 105 | 6,0 | 8" | | 2 |
| 05**008730**001 [1] | *003652* | PH 2 | 300 | 105 | 6,0 | 12" | | 2 |
| 05**008735**001 | *003669* | PH 3 | 150 | 112 | 8,0 | 6" | | 5 |
| 05**008740**001 [1] | *003676* | PH 4 | 200 | 112 | 10,0 | 8" | | 2 |

[1] without Lasertip

### 350 PH SB Screwdriver for Phillips screws

| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 05**100050**001 | *181329* | | **350 PH**<br>1x PH 0x60 [1] | 10 |
| 05**100051**001 | *181336* | | **350 PH**<br>1x PH 1x80 | 10 |
| 05**100052**001 | *181343* | | **350 PH**<br>1x PH 2x100 | 10 |

[1] without Lasertip

## 355 SK PZ Screwdriver for Pozidriv screws

- Hexagonal blade and bolster for higher torque transfer

### 355 SK PZ Screwdriver for Pozidriv screws

| Code | EAN 4013288 | | mm | mm | mm | mm | | |
|---|---|---|---|---|---|---|---|---|
| 05**009340**001 [1] | *108180* | PZ 0 | 4 | | 60 | 81 | 2 3/8" | 5 |
| 05**009341**001 | *108197* | PZ 1 | 5 | 8 | 80 | 98 | 3 1/8" | 10 |
| 05**009342**001 | *108203* | PZ 2 | 6 | 10 | 100 | 105 | 4" | 10 |
| 05**009343**001 | *108210* | PZ 3 | 8 | 13 | 150 | 112 | 6" | 5 |

[1] without Lasertip

## 355 PZ Screwdriver for Pozidriv screws

| Code | EAN 4013288 | | mm | mm | mm | | | |
|---|---|---|---|---|---|---|---|---|
| 05**009305**001 [1] | *004024* | PZ 0 | 60 | 81 | 3,0 | 2 3/8" | | 10 |
| 05**009310**001 | *004031* | PZ 1 | 80 | 98 | 4,5 | 3 1/8" | | 10 |
| 05**009312**001 | *004048* | PZ 1 | 200 | 98 | 4,5 | 8" | | 2 |
| 05**009313**001 [1] | *108166* | PZ 1 | 300 | 98 | 4,5 | 12" | | 2 |
| 05**009315**001 | *004055* | PZ 2 | 100 | 105 | 6,0 | 4" | | 10 |
| 05**009317**001 | *004062* | PZ 2 | 200 | 105 | 6,0 | 8" | | 2 |
| 05**347743**001 | *097040* | PZ 2 | 250 | 105 | 6,0 | 10" | | 2 |
| 05**009319**001 [1] | *108173* | PZ 2 | 300 | 105 | 6,0 | 12" | | 2 |
| 05**009320**001 | *004079* | PZ 3 | 150 | 112 | 8,0 | 6" | | 5 |
| 05**009325**001 [1] | *004086* | PZ 4 | 200 | 112 | 10,0 | 8" | | 2 |

[1] without Lasertip

## 355 PZ SB Screwdriver for Pozidriv screws

| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 05**100055**001 | *181282* | | **355 PZ**<br>1x PZ 0x60 [1] | 10 |
| 05**100056**001 | *181299* | | **355 PZ**<br>1x PZ 1x80 | 10 |
| 05**100057**001 | *181305* | | **355 PZ**<br>1x PZ 2x100 | 10 |

[1] without Lasertip

## Hex-Plus - lets hexagon socket screws last longer

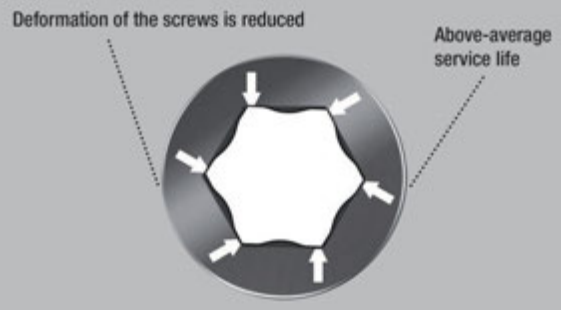


High quality Kraftform Plus screwdriver.

Multi-component Kraftform handle for fast and low-fatigue working. Kraftform Plus: hard gripping zones for high working speeds whereas soft zones ensure high torque transfer.

Hex-Plus offers a larger contact surface within the screw head. This reduces the notching effects to a minimum and almost completely eliminates the risk of destroying the screw recess.

Take it easy Tool Finder: colour coding according to profile and size. The hexagonal anti-roll feature prevents any bothersome rolling away at the workplace.

- Hexagonal screwdriver Hex-Plus
- Hex-Plus allows socket head screws to live longer

## 354 Screwdriver for hexagon socket screws

| Code | EAN 4013288 | mm | mm | mm | mm | | | |
|---|---|---|---|---|---|---|---|---|
| 05**023105**001 | *003942* | 2,0 | 75 | 70 | 3,0 | 3" | | 5 |
| 05**023107**001 | *003959* | 2,5 | 75 | 81 | 3,0 | 3" | | 10 |
| 05**023110**001 | *003966* | 3,0 | 75 | 81 | 4,0 | 3" | | 10 |
| 05**023115**001 | *003973* | 4,0 | 75 | 98 | 5,0 | 3" | | 10 |
| 05**023120**001 | *003980* | 5,0 | 80 | 105 | 6,0 | 3 1/8" | | 10 |
| 05**023125**001 | *003997* | 6,0 | 80 | 105 | 7,0 | 3 1/8" | | 5 |
| 05**023130**001 | *004000* | 8,0 | 100 | 112 | 10,0 | 4" | | 5 |

## 352 Ball end screwdriver for hexagon socket screws

- Hexagonal blade and ballpoint for secure working even in difficult installation situations

### 352 Ball end screwdriver for hexagon socket screws

| | EAN | | | | | | | |
|---|---|---|---|---|---|---|---|---|
| Code | 4013288 | mm | | mm | mm | | | |
| 05**022795**001 | *032577* | 1,5 | | 60 | 70 | 2 3/8" | | 10 |
| 05**022800**001 | *003751* | 2,0 | | 100 | 70 | 4" | | 10 |
| 05**138070**001 | *003768* | 2,5 | | 100 | 81 | 4" | | 10 |
| 05**022805**001 | *003775* | 3,0 | | 100 | 81 | 4" | | 10 |
| 05**022810**001 | *003782* | 4,0 | | 100 | 98 | 4" | | 10 |
| 05**022815**001 | *003799* | 5,0 | | 100 | 105 | 4" | | 10 |
| 05**022820**001 | *003805* | 6,0 | | 125 | 105 | 5" | | 5 |
| 05**022825**001 | *003812* | 8,0 | | 150 | 112 | 6" | | 5 |
| 05**022830**001 | *003829* | 10,0 | | 150 | 112 | 6" | | 5 |
| 05**022835**001 | *003836* | 12,0 | | 150 | 117 | 6" | | 5 |
| 05**022905**001 | *003843* | | 5/32" | 100 | 98 | 4" | | 5 |
| 05**022910**001 | *003850* | | 3/16" | 100 | 105 | 4" | | 5 |
| 05**022920**001 | *003874* | | 1/4" | 125 | 105 | 5" | | 5 |

## TORX® Tools with holding function

High quality Kraftform Plus screwdriver.

Multi-component Kraftform handle for fast and low-fatigue working. Kraftform Plus: hard gripping zones for high working speeds whereas soft zones ensure high torque transfer.

Holding function: the wedging forces resulting from the contact pressure between the drive tip and the screw profile securely hold the screw on the tool.

The hexagonal anti-roll feature prevents any bothersome rolling away at the workplace. Handle markings for simplified finding and sorting of the tool.

- Screwdriver for recessed TORX® screws
- Holding function for TORX® screws
- Multi-component Kraftform handle for fast and ergonomic screwdriving
- Handle markings simplify finding and sorting of tools
- Hexagonal anti-roll feature against rolling away

### 367 TORX® HF Screwdriver with holding function for TORX® screws

| | EAN | | | | | | | |
|---|---|---|---|---|---|---|---|---|
| Code | 4013288 | | mm | mm | mm | | | |
| 05**028048**001 | *106643* | TX 8 | 60 | 81 | 3,5 | 2 3/8" | | 10 |
| 05**028049**001 | *106650* | TX 9 | 60 | 81 | 4,0 | 2 3/8" | | 10 |
| 05**028050**001 | *100696* | TX 10 | 80 | 81 | 4,0 | 3 1/8" | | 10 |
| 05**028051**001 | *100702* | TX 15 | 80 | 98 | 4,0 | 3 1/8" | | 10 |
| 05**028052**001 | *100719* | TX 20 | 100 | 98 | 4,5 | 4" | | 10 |
| 05**028070**001 | *138415* | TX 20 | 300 | 98 | 4,5 | 12" | | 4 |
| 05**028053**001 | *100726* | TX 25 | 100 | 105 | 5,0 | 4" | | 10 |
| 05**028071**001 | *138408* | TX 25 | 300 | 105 | 6,0 | 12" | | 4 |
| 05**028054**001 | *100733* | TX 27 | 115 | 105 | 5,5 | 4 9/16" | | 10 |
| 05**028072**001 | *138392* | TX 27 | 300 | 105 | 6,0 | 12" | | 4 |
| 05**028055**001 | *100740* | TX 30 | 115 | 105 | 6,0 | 4 9/16" | | 10 |
| 05**028073**001 | *138385* | TX 30 | 300 | 105 | 6,0 | 12" | | 4 |
| 05**028056**001 | *100757* | TX 40 | 130 | 112 | 7,0 | 5 3/16" | | 10 |

## 367 Screwdriver for TORX® screws

| Code | EAN 4013288 | | mm | mm | mm | | | |
|---|---|---|---|---|---|---|---|---|
| 05**028000**001 | *025852* | TX 5 | 60 | 70 | 3,5 | 2 3/8" | | 10 |
| 05**028001**001 | *004185* | TX 6 | 60 | 70 | 3,5 | 2 3/8" | | 10 |
| 05**028002**001 | *004192* | TX 7 | 60 | 70 | 3,5 | 2 3/8" | | 10 |
| 05**028003**001 | *004208* | TX 8 | 60 | 81 | 3,5 | 2 3/8" | | 10 |
| 05**028004**001 | *004215* | TX 9 | 60 | 81 | 4,0 | 2 3/8" | | 10 |
| 05**028005**001 | *004222* | TX 10 | 80 | 81 | 4,0 | 3 1/8" | | 10 |
| 05**028008**001 | *004239* | TX 15 | 80 | 98 | 4,0 | 3 1/8" | | 10 |
| 05**028010**001 | *004246* | TX 20 | 100 | 98 | 4,5 | 4" | | 10 |
| 05**028012**001 | *004253* | TX 25 | 100 | 105 | 5,0 | 4" | | 10 |
| 05**028013**001 | *004260* | TX 27 | 115 | 105 | 5,5 | 4 9/16" | | 10 |
| 05**028015**001 | *004277* | TX 30 | 115 | 105 | 6,0 | 4 9/16" | | 10 |
| 05**028020**001 | *004284* | TX 40 | 130 | 112 | 7,0 | 5 1/8" | | 10 |

## 367 SB Screwdriver for TORX® screws

| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 05**100060**001 | *181350* | | **367 TORX®** 1x TX 10x80 | 10 |
| 05**100061**001 | *181367* | | **367 TORX®** 1x TX 15x80 | 10 |
| 05**100062**001 | *181374* | | **367 TORX®** 1x TX 20x100 | 10 |
| 05**100063**001 | *181381* | | **367 TORX®** 1x TX 25x100 | 10 |
| 05**100064**001 | *181398* | | **367 TORX®** 1x TX 30x115 | 10 |

## 367 TORX® BO Screwdriver for tamper-proof TORX® screws

High quality Kraftform Plus screwdriver. Multi-component Kraftform handle for fast and low-fatigue working.

TORX® BO screws have a protruding pin in their drive profile. This prevents any unauthorised loosening since the “normal” hex tools cannot move these screws. Only special TORX® BO tools have a bore hole which can slip over the pin.

The Wera Black Point tip and a complex hardening process ensure a long service life of the tip, enhanced corrosion protection and an exact fit.

The hexagonal anti-roll feature prevents any bothersome rolling away at the workplace. Handle markings for simplified finding and sorting of the tool.

- Screwdrivers for recessed TORX® screws with safety pin

## 367 TORX® BO Screwdriver for tamper-proof TORX® screws

| Code | EAN 4013288 | | mm | mm | mm | | | |
|---|---|---|---|---|---|---|---|---|
| 05**138257**001 | *039965* | TX 7 | 60 | 70 | 3,5 | 2 3/8" | | 5 |
| 05**138258**001 | *039972* | TX 8 | 60 | 81 | 3,5 | 2 3/8" | | 5 |
| 05**138259**001 | *039989* | TX 9 | 60 | 81 | 4,0 | 2 3/8" | | 5 |
| 05**138260**001 | *025869* | TX 10 | 80 | 81 | 4,0 | 3 1/8" | | 5 |
| 05**138268**001 | *108234* | TX 10 | 300 | 81 | 4,0 | 12" | | 5 |
| 05**138261**001 | *025876* | TX 15 | 80 | 98 | 4,0 | 3 1/8" | | 5 |
| 05**138269**001 | *108241* | TX 15 | 300 | 98 | 4,0 | 12" | | 2 |
| 05**138262**001 | *025883* | TX 20 | 100 | 98 | 4,5 | 4" | | 5 |
| 05**138270**001 | *108258* | TX 20 | 300 | 98 | 4,5 | 12" | | 2 |
| 05**138263**001 | *025890* | TX 25 | 100 | 105 | 5,0 | 4" | | 5 |
| 05**138264**001 | *025906* | TX 27 | 115 | 105 | 5,5 | 4 9/16" | | 5 |
| 05**138265**001 | *025913* | TX 30 | 115 | 105 | 6,0 | 4 9/16" | | 5 |
| 05**138266**001 | *025920* | TX 40 | 130 | 112 | 7,0 | 5 3/16" | | 5 |

## 367 TORX PLUS® Screwdriver for TORX PLUS® screws

High quality Kraftform Plus screwdriver by Wera. TORX PLUS® profile: in comparison to "normal" TORX® profiles, the enlargement of the 6 torque-transferring flanks between the tool and screw is implemented by using an elliptical and not circular profile design.

This means that the power applied when fastening is spread across a larger surface area. Higher torque is transferred and the service life of the screw and tool is also enhanced. Multi-component Kraftform handle for rapid and convenient working.

Kraftform Plus: hard gripping zones for high working speeds whereas soft zones ensure high torque transfer. The Wera Black Point tip offers a perfect fit and optimised corrosion protection. The hexagonal non-roll feature prevents any annoying rolling away at the workplace. Handle markings for simplified finding and sorting of the tools.

### 367 TORX PLUS® Screwdriver for TORX PLUS® screws

| Code | EAN 4013288 | | mm | mm | mm | | |
|---|---|---|---|---|---|---|---|
| 05**0028029**001 | *041555* | 5 IP | 60 | 70 | 3,5 | 2 3/8" | 5 |
| 05**0028030**001 | *040091* | 6 IP | 60 | 70 | 3,5 | 2 3/8" | 5 |
| 05**0028031**001 | *040107* | 7 IP | 60 | 70 | 3,5 | 2 3/8" | 5 |
| 05**0028032**001 | *040114* | 8 IP | 60 | 70 | 3,5 | 2 3/8" | 5 |
| 05**0028033**001 | *040121* | 9 IP | 60 | 81 | 4,0 | 2 3/8" | 5 |
| 05**0028034**001 | *040138* | 10 IP | 80 | 81 | 4,0 | 3 1/8" | 5 |
| 05**0028035**001 | *040145* | 15 IP | 80 | 98 | 4,0 | 3 1/8" | 5 |
| 05**0028036**001 | *040152* | 20 IP | 100 | 98 | 4,5 | 4" | 5 |
| 05**0028037**001 | *040169* | 25 IP | 100 | 105 | 5,0 | 4" | 5 |
| 05**0028038**001 | *040176* | 30 IP | 115 | 105 | 6,0 | 4 9/16" | 5 |

## 368 Screwdriver for square socket head screws

High quality Kraftform Plus screwdriver for square socket screws. The colour coding system allows the user to quickly find and identify the size needed. Multi-component Kraftform handle for fast and low-fatigue working.

The Wera Black Point tip offers optimised corrosion protection and an exact fit. The hexagonal anti-roll feature prevents any bothersome rolling away at the workplace. Handle markings for simplified finding and sorting of the tool.

### 368 Screwdriver for square socket head screws

| Code | EAN 4013288 | | | mm | mm | mm | | |
|---|---|---|---|---|---|---|---|---|
| 05**117680**001 | *028723* | | # 00 | 60 | 81 | 3,5 | 2 3/8" | 5 |
| 05**117681**001 | *028730* | | # 0 | 60 | 81 | 4,0 | 2 3/8" | 5 |
| 05**117682**001 | *028747* | | # 1 | 80 | 98 | 4,5 | 3 1/8" | 5 |
| 05**117683**001 | *028754* | | # 1 | 200 | 98 | 4,5 | 8" | 5 |
| 05**117684**001 | *028761* | | # 2 | 100 | 105 | 6,0 | 4" | 5 |
| 05**117685**001 | *028778* | | # 2 | 200 | 105 | 6,0 | 8" | 5 |
| 05**117691**001 | *040916* | | # 2 | 300 | 105 | 6,0 | 12" | 2 |
| 05**117686**001 | *028785* | | # 3 | 150 | 112 | 8,0 | 6" | 5 |
| 05**117687**001 | *028792* | | # 4 | 200 | 112 | 8,0 | 8" | 5 |

### 368 SB Screwdriver for square socket head screws

| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 05**100070**001 | *181404* | | **368** 1x # 1x80 | 5 |
| 05**100071**001 | *181428* | | **368** 1x # 2x100 | 5 |
| 05**100072**001 | *181435* | | **368** 1x # 3x150 | 5 |

## 338 Actuation tool for terminal blocks (spring cages)

- Special tool for unlocking contact springs in electrotechnical line terminals
- Due to the curved geometry, even terminal blocks that cannot be reached with normal screwdrivers can be operated
- Suitable for spring terminals with a conductor cross-section of up to 1.5 mm² and 2.5 to 4.0 mm²

### 338 Actuation tool for terminal blocks (spring cages)

| | EAN | | | | | | | |
|---|---|---|---|---|---|---|---|---|
| Code | 4013288 | mm | mm | mm | mm | mm | | |
| 05**008101**001 | *225641* | 0,4 | 2,5 | 81 | 81 | 2,5 | 3/32" | 10 |
| 05**008102**001 | *225788* | 0,6 | 3,5 | 81 | 81 | 3,5 | 9/64" | 10 |

## 391 Hose clamp screwdriver

- Hose clamp screwdriver for hexagon head screws
- Flexible, circular blade

### 391 Hose clamp screwdriver

| | EAN | | | | | | | |
|---|---|---|---|---|---|---|---|---|
| Code | 4013288 | mm | mm | mm | | | | |
| 05**028148**001 | *004703* | 6 | 167 | 98 | 6 9/16" | | | 5 |
| 05**028150**001 | *004710* | 7 | 167 | 98 | 6 9/16" | | | 5 |
| 05**028152**001 | *004727* | 8 | 167 | 98 | 6 9/16" | | | 5 |

## 395 Nutdriver

- Nutsetter for hexagon head screws

### 395 Nutdriver

| | EAN | | | | | | | |
|---|---|---|---|---|---|---|---|---|
| Code | 4013288 | mm | mm | mm | mm | | | |
| 05**028205**001 | *004734* | 3,0 | 125 | 98 | 5,0 | 5" | | 5 |
| 05**028210**001 | *004741* | 3,5 | 125 | 98 | 6,1 | 5" | | 5 |
| 05**028215**001 | *004758* | 4,0 | 125 | 98 | 6,9 | 5" | | 5 |
| 05**028220**001 | *004765* | 4,5 | 125 | 98 | 7,1 | 5" | | 5 |
| 05**028225**001 | *004772* | 5,0 | 125 | 98 | 8,1 | 5" | | 5 |
| 05**028230**001 | *004789* | 5,5 | 125 | 98 | 8,1 | 5" | | 5 |
| 05**029405**001 | *004796* | 6,0 | 125 | 98 | 9,1 | 5" | | 5 |
| 05**029410**001 | *004802* | 7,0 | 125 | 105 | 11,0 | 5" | | 5 |
| 05**029415**001 | *004819* | 8,0 | 125 | 105 | 12,1 | 5" | | 5 |
| 05**029420**001 | *004826* | 9,0 | 125 | 105 | 13,1 | 5" | | 5 |
| 05**029425**001 | *004833* | 10,0 | 125 | 112 | 14,1 | 5" | | 5 |
| 05**029430**001 | *004840* | 11,0 | 125 | 112 | 16,0 | 5" | | 5 |
| 05**029435**001 | *004857* | 12,0 | 125 | 112 | 17,1 | 5" | | 5 |
| 05**029440**001 | *004864* | 13,0 | 125 | 112 | 18,1 | 5" | | 5 |
| 05**029445**001 | *004871* | 14,0 | 125 | 112 | 19,1 | 5" | | 5 |
| 05**029450**001 | *004888* | 15,0 | 125 | 112 | 21,0 | 5" | | 5 |

## 395 HO Nutdriver

High quality nutsetter with hollow shaft by Wera. Hollow shaft for the fastening of threaded rods; only then can the threaded rod with nut slip into the hollow shaft. Multi-component Kraftform handle for high working speeds and particularly ergonomic screwdriving.

Kraftform Plus: hard gripping zones for high working speeds whereas soft zones ensure high torque transfer. Hexagonal anti-roll feature prevents any rolling away and handle markings make for simplified finding and sorting of the tool; for hexagon head screws.

- Nutsetter for hexagon head screws
- Hollow shaft for protruding threaded rods, chrome-plated

## 395 HO Nutdriver

| | EAN | | | | | | | |
|---|---|---|---|---|---|---|---|---|
| Code | 4013288 | mm | | mm | mm | mm | | |
| 05029460001 | *108296* | 5,0 | | 90 | 98 | 7,2 | 3 35/64" | 5 |
| 05029461001 | *108302* | 5,5 | | 90 | 98 | 7,2 | 3 35/64" | 5 |
| 05029462001 | *108319* | 6,0 | | 90 | 98 | 7,2 | 3 35/64" | 5 |
| 05029463001 | *108326* | 7,0 | | 90 | 105 | 7,2 | 3 35/64" | 5 |
| 05029464001 | *108333* | 8,0 | | 90 | 105 | 9,3 | 3 35/64" | 5 |
| 05029465001 | *108340* | 10,0 | | 90 | 112 | 9,3 | 3 35/64" | 5 |
| 05029466001 | *108357* | 13,0 | | 90 | 112 | 11,0 | 3 35/64" | 5 |
| 05029501001 | *110503* | | 3/16" | 90 | 98 | 7,2 | 3 35/64" | 5 |
| 05029502001 | *110510* | | 1/4" | 90 | 98 | 7,2 | 3 35/64" | 5 |
| 05029503001 | *110527* | | 5/16" | 90 | 105 | 9,3 | 3 35/64" | 5 |
| 05029504001 | *110534* | | 11/32" | 90 | 105 | 9,3 | 3 35/64" | 5 |
| 05029505001 | *110541* | | 3/8" | 90 | 112 | 9,3 | 3 35/64" | 5 |
| 05029506001 | *110558* | | 7/16" | 90 | 112 | 11,0 | 3 35/64" | 5 |
| 05029507001 | *110565* | | 1/2" | 90 | 112 | 11,0 | 3 35/64" | 5 |

## Take it easy tool finder with color markings - for quick tool identification

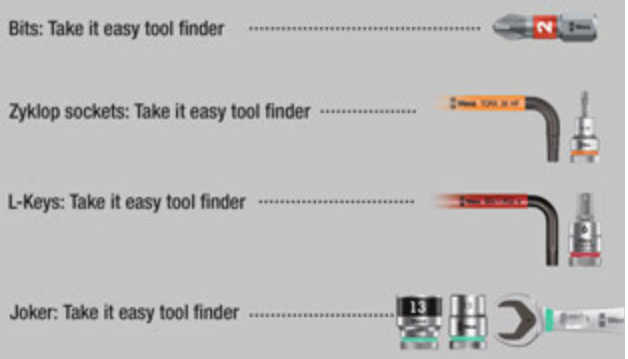


Especially small screwdrivers with short blades for hard to reach areas. The 2-component Kraftform handle with its practical combination of hard and soft zones allows for a firm grip and precise working.

The blades have all the benefits of the Wera Bit technology. Special surface treatment of the blades for high corrosion protection and optimum fitting accuracy in the screw.

The hexagon anti-roll protection prevents annoying rolling away of bits in the workplace.

- Short compact shape for working in confined spaces
- Ergonomic 2-component Kraftform handle for precise work
- Blades with the benefits of the Wera Bit technology
- Hexagonal anti-roll feature against rolling away
- Take it easy tool finder: colour coding according to profile and size

## 335 Stubby/carburetor screwdriver

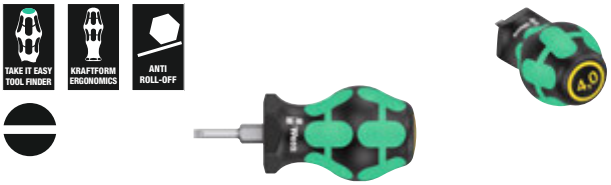


| | EAN | | | | | | | |
|---|---|---|---|---|---|---|---|---|
| Code | 4013288 | mm | mm | mm | mm | mm | | |
| 05008840001 | *212115* | 0,6 | 3,5 | 24,5 | 54 | 3,5 | 9/64" | 5 |
| 05008841001 | *212122* | 0,8 | 4,0 | 24,5 | 54 | 4,0 | 5/32" | 5 |
| 05008842001 | *212139* | 1,0 | 5,5 | 24,5 | 54 | 5,5 | 7/32" | 5 |
| 05008843001 | *212146* | 1,2 | 6,5 | 24,5 | 54 | 6,5 | 1/4" | 5 |
| 05008844001 | *212153* | 1,2 | 7,0 | 24,5 | 54 | 8,0 | 5/16" | 5 |

## 350 PH Phillips-head Stubby/carburetor screwdriver

| | EAN | | | | | | | |
|---|---|---|---|---|---|---|---|---|
| Code | 4013288 | | mm | mm | mm | | | |
| 05008850001 | *212160* | PH 1 | 25 | 54 | 4,2 | 1" | | 5 |
| 05008851001 | *212177* | PH 2 | 25 | 54 | 5,2 | 1" | | 5 |
| 05008852001 | *212184* | PH 3 | 25 | 54 | 6,2 | 1" | | 5 |

## 355 PZ Phillips-head Stubby/carburetor screwdriver

| | EAN | | | | | | | |
|---|---|---|---|---|---|---|---|---|
| Code | 4013288 | | mm | mm | mm | | | |
| 05008853001 | *212191* | PZ 1 | 25 | 54 | 4,5 | 1" | | 5 |
| 05008854001 | *212207* | PZ 2 | 25 | 54 | 6,0 | 1" | | 5 |
| 05008855001 | *212214* | PZ 3 | 25 | 54 | 8,0 | 1" | | 5 |

## 367 TORX® Stubby screwdriver

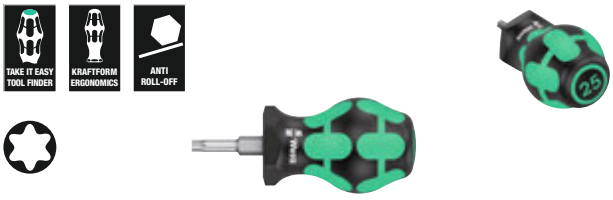


| | EAN | | | | | | | |
|---|---|---|---|---|---|---|---|---|
| Code | 4013288 | | mm | mm | mm | | | |
| 05008856001 | *212245* | TX 10 | 25 | 54 | 3,4 | 1" | | 5 |
| 05008857001 | *212252* | TX 15 | 25 | 54 | 3,7 | 1" | | 5 |
| 05008858001 | *212269* | TX 20 | 25 | 54 | 4,0 | 1" | | 5 |
| 05008859001 | *212276* | TX 25 | 25 | 54 | 4,5 | 1" | | 5 |
| 05008860001 | *212283* | TX 27 | 25 | 54 | 5,1 | 1" | | 5 |
| 05008861001 | *212290* | TX 30 | 25 | 54 | 5,6 | 1" | | 5 |
| 05008862001 | *212306* | TX 40 | 25 | 54 | - | 1" | | 5 |

## 368 Stubby screwdriver for square head socket screws

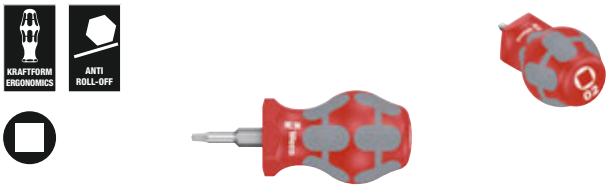

| Code | EAN 4013288 | | | mm | mm | mm | | |
|---|---|---|---|---|---|---|---|---|
| 05**008863**001 | *212313* | | # 01 | 25 | 54 | 4,2 | 1" | 5 |
| 05**008864**001 | *212320* | | # 02 | 25 | 54 | 4,2 | 1" | 5 |

### 9650 Magnetic rail Kraftform screwdriver set

Kraftform screwdriver set, 9-piece set, on a magnetic rail. Screwdriver all-round set. Kraftform Plus handle for comfortable ergonomic screwdriving, avoiding blisters and calluses. Hard handle zones for high working speeds, while soft handle zones guarantee a high torque transfer.

932 A with pound-thru hexagonal blade and impact cap; 350, 355 and 335 with Lasertip: The tips of Wera Lasertip screwdrivers are microscopically roughened with laser beams.

This rough surface “bites” into the screw head and unintentional slipping is a thing of the past. 160 iS VDE-insulated and with Lasertip.

“Take it easy” Tool finder with colour coding by profile and size stamping - for quick and easy identification of the required tool. The clips hold the tools perfectly. With its strong magnet, the rail holds securely to metal surfaces. It can also be bolted to the wall.

- For every application the right tool
- The clips hold the tools perfectly
- With its strong magnet, the rail holds securely to metal surfaces. It can also be bolted to the wall

## 9650 Magnetic rail Kraftform screwdriver set

| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 05**051012**001 | *228970* | | | 1 |
| | | | **932 A**<br>1x 1,0x5,5x100; 1x 1,2x7,0x125 | |
| | | | **350**<br>1x PH 2x100 | |
| | | | **355**<br>1x PZ 1x80; 1x PZ 2x100 | |
| | | | **367 TORX®**<br>1x TX 20x100; 1x TX 25x100 | |
| | | | **335**<br>1x 0,8x4,0x100 | |
| | | | **160 iS VDE**<br>1x 0,6x3,5x100 | |
| | | | **9611**<br>1x 30,0x400,0 | |

### Kraftform Big Pack 300

- Screwdrivers for slotted, cross-recess Phillips and Pozidriv screws and TORX®

## Kraftform Big Pack 300

| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 05**105630**001 | *163622* | | | 1 |
| | | | **350 PH**<br>1x PH 1x80; 1x PH 2x100; 1x PH 3x150 | |
| | | | **355 PZ**<br>1x PZ 1x80; 1x PZ 2x100; 1x PZ 3x150 | |
| | | | **367 TORX®**<br>1x TX 10x80; 1x TX 15x80; 1x TX 20x100; 1x TX 25x100; 1x TX 30x115 | |
| | | | **334**<br>1x 1,2x6,5x150 | |
| | | | **335**<br>1x 0,6x3,5x100 [1]; 1x 0,8x4,0x100 | |
| | | | **Rack**<br>2x 190,0x50,0 | |

[1] without Lasertip

## Kraftform XXL

- For every application the right tool

### Kraftform XXL

| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 05**051010**001 | *139092* | | | 1 |
| | | | **350 PH**<br>1x PH 1x80; 1x PH 2x100 | |
| | | | **355 PZ**<br>1x PZ 1x80; 1x PZ 2x100 | |
| | | | **932 A**<br>1x 1,0x5,5x100; 1x 1,2x7,0x125 | |
| | | | **334**<br>1x 1,2x6,5x150 | |
| | | | **335**<br>1x 0,8x4,0x100; 1x 1,0x5,5x125 | |
| | | | **160 i VDE**<br>1x 0,4x2,5x80 [1]; 1x 0,6x3,5x100 [1] | |
| | | | **247**<br>1x 0,5x3,0x70 | |
| | | | **Rack**<br>2x 190,0x50,0 | |

[1] without Lasertip
*Product not available in the USA and Canada.

### Kraftform XXL 2

| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 05**051011**001 | *144225* | | | 1 |
| | | | **350 PH**<br>1x PH 2x100 | |
| | | | **355 PZ**<br>1x PZ 1x80; 1x PZ 2x100 | |
| | | | **932 A**<br>1x 1,0x5,5x100; 1x 1,2x7,0x125 | |
| | | | **335**<br>1x 0,8x4,0x100 | |
| | | | **367 TORX®**<br>1x TX 15x80; 1x TX 20x100; 1x TX 25x100 | |
| | | | **160 i VDE**<br>1x 0,4x2,5x80 [1]; 1x 0,6x3,5x100 [1] | |
| | | | **247**<br>1x 0,5x3,0x70 | |
| | | | **Rack**<br>2x 190,0x50,0 | |

[1] without Lasertip
*Product not available in the USA and Canada.

### Kraftform XXL 3

| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 05**347106**001 | *182388* | | | 1 |
| | | | **932 A**<br>1x 1,0x5,5x100; 1x 1,2x7,0x125 | |
| | | | **350 PH**<br>1x PH 1x80; 1x PH 2x100 | |
| | | | **334**<br>1x 1,2x6,5x150 | |
| | | | **335**<br>1x 0,8x4,0x100; 1x 1,0x5,5x125 | |
| | | | **368**<br>1x # 1x80; 1x # 2x100 | |
| | | | **160 i VDE**<br>1x 0,4x2,5x80 [1]; 1x 0,6x3,5x100 [1] | |
| | | | **Rack**<br>2x 190,0x50,0 | |

[1] without Lasertip

## Kraftform 2go 300

11 Kraftform screwdrivers; with Take it easy Toolfinder; in the Wera 2go 4 quiver; comes with an adjustable partition element for individual sectioning.

- Suitable for docking with the Wera 2go system

### Kraftform 2go 300

| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 05**004313**001 | *187833* | | | 1 |
| | | | **Wera 2go 4**<br>1x 165,0x165,0x105,0 | |
| | | | **350 PH**<br>1x PH 1x80; 1x PH 2x100 | |
| | | | **355 PZ**<br>1x PZ 1x80; 1x PZ 2x100 | |
| | | | **367 TORX®**<br>1x TX 10x80; 1x TX 15x80; 1x TX 20x100; 1x TX 25x100; 1x TX 30x115 | |
| | | | **334 SK**<br>1x 0,8x4,5x90; 1x 1,2x7,0x125 | |
| | | | **K120**<br>1x 50,0x120,0 | |

## 334 SK/6 Rack Screwdriver set Kraftform Plus Lasertip and rack

- Hexagonal blade and bolster for higher torque transfer

### 334 SK/6 Rack Screwdriver set Kraftform Plus Lasertip and rack

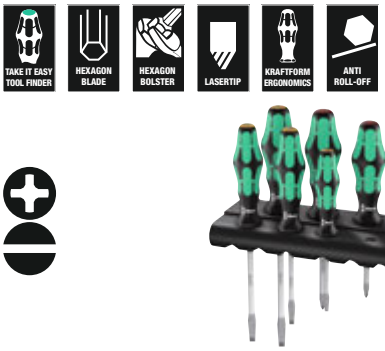


| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 05**007680**001 | *111418* | | | 1 |
| | | | **350 SK PH**<br>1x PH 1x80; 1x PH 2x100 | |
| | | | **334 SK**<br>1x 0,6x3,5x75 [1]; 1x 0,8x4,0x90; 1x 1,0x5,5x100; 1x 1,2x6,5x125 | |

[1] without Lasertip

### 334/6 Rack Screwdriver set Kraftform Plus Lasertip and rack

| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 05**105650**001 | *003133* | | | 1 |
| | | | **350 PH**<br>1x PH 1x80; 1x PH 2x100 | |
| | | | **334**<br>1x 1,2x6,5x150 | |
| | | | **335**<br>1x 0,5x3,0x80 [1]; 1x 0,8x4,0x100; 1x 1,0x5,5x125 | |

[1] without Lasertip

## 334/355 SK/6 Screwdriver set Kraftform Plus Lasertip and rack

- Hexagonal blade and bolster for higher torque transfer

### 334/355 SK/6 Screwdriver set Kraftform Plus Lasertip and rack

| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 05**007681**001 | *111425* | | | 1 |
| | | | **355 SK PZ**<br>1x PZ 1x80; 1x PZ 2x100 | |
| | | | **334 SK**<br>1x 0,6x3,5x75 [1]; 1x 0,8x4,0x90; 1x 1,0x5,5x100; 1x 1,2x6,5x125 | |

[1] without Lasertip

## 334/355/6 Rack Screwdriver set Kraftform Plus Lasertip and rack

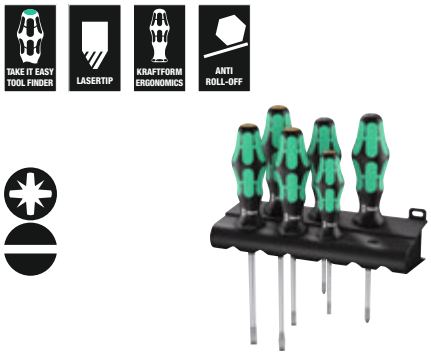

| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 05**105656**001 | *003140* | | | 1 |
| | | | **355 PZ**<br>1x PZ 1x80; 1x PZ 2x100 | |
| | | | **334**<br>1x 1,2x6,5x150 | |
| | | | **335**<br>1x 0,5x3,0x80 [1]; 1x 0,8x4,0x100;<br>1x 1,0x5,5x125 | |

[1] without Lasertip

## 335/350/355/6 Screwdriver set Kraftform Plus Lasertip and rack

| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 05**105622**001 | *041616* | | | 1 |
| | | | **350 PH**<br>1x PH 1x80; 1x PH 2x100 | |
| | | | **355 PZ**<br>1x PZ 1x80; 1x PZ 2x100 | |
| | | | **335**<br>1x 0,8x4,0x100; 1x 1,0x5,5x125 | |

## 335/350/355/3 Screwdriver set Kraftform Plus 300 mm-long blades

- Extra-long blade for low-lying working situations

## 335/350/355/3 Screwdriver set Kraftform Plus 300 mm-long blades

| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 05**347735**002 | *120991* | | | 1 |
| | | | **335**<br>1x 1,0x5,5x300 [1] | |
| | | | **350 PH**<br>1x PH 2x300 [1] | |
| | | | **355 PZ**<br>1x PZ 2x300 [1] | |

[1] without Lasertip

## 335/350/355/4 Screwdriver set Kraftform Plus Lasertip 200 mm-long blades

- Extra-long blade for low-lying working situations

## 335/350/355/4 Screwdriver set Kraftform Plus Lasertip 200 mm-long blades

| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 05**347736**002 | *117397* | | | 1 |
| | | | **350 PH**<br>1x PH 2x200 | |
| | | | **355 PZ**<br>1x PZ 1x200; 1x PZ 2x200 | |
| | | | **335**<br>1x 1,0x5,5x200 | |

### 335/350/367/7 Rack Screwdriver set Kraftform Plus Lasertip and rack

| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 05**320540**001 | *094704* | | | 1 |
| | | | **350 PH**<br>1x PH 2x100 | |
| | | | **355 PZ**<br>1x PZ 1x80; 1x PZ 2x100 | |
| | | | **335**<br>1x 0,8x4,0x100 | |
| | | | **367 TORX®**<br>1x TX 15x80; 1x TX 20x100; 1x TX 25x100 | |

## 367/7 TORX® HF Kraftform Plus Screwdriver set with holding function and rack

- Holding function for TORX® screws, chrome-plated

### 367/7 TORX® HF Kraftform Plus Screwdriver set with holding function and rack

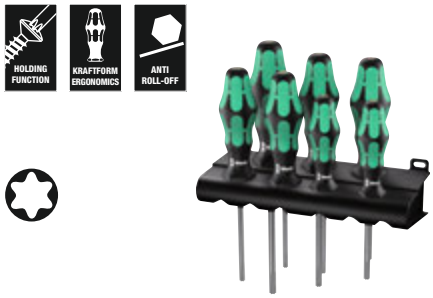


| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 05**223161**001 | *118226* | | | 1 |
| | | | **367 TORX® HF**<br>1x TX 8x60; 1x TX 10x80; 1x TX 15x80;<br>1x TX 20x100; 1x TX 25x100; 1x TX 27x115;<br>1x TX 30x115 | |

### 367/6 TORX® HF Kraftform Plus Screwdriver set with holding function and rack

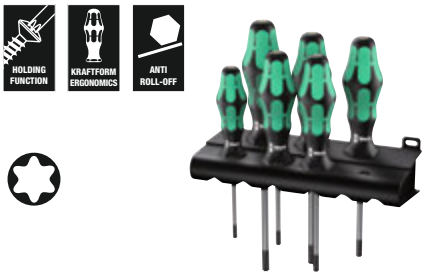


| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 05**028059**001 | *100764* | | | 1 |
| | | | **367 TORX® HF**<br>1x TX 10x80; 1x TX 15x80; 1x TX 20x100;<br>1x TX 25x100; 1x TX 30x115; 1x TX 40x130 | |

## 367/4 TORX® HF Kraftform Plus Screwdriver set with holding function and 300 mm-long blades

- Screwdriver for TORX® screws; holding function and extra-long 300 mm blade

### 367/4 TORX® HF Kraftform Plus Screwdriver set with holding function and 300 mm-long blades

| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 05**028074**001 | *138378* | | | 1 |
| | | | **367 TORX® HF**<br>1x TX 20x300; 1x TX 25x300; 1x TX 27x300;<br>1x TX 30x300 | |

## 367/6 TORX® Screwdriver set Kraftform Plus and rack

| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 050**28062**001 | *028891* | | | 1 |
| | | | **367 TORX®**<br>1x TX 10x80; 1x TX 15x80; 1x TX 20x100;<br>1x TX 25x100; 1x TX 30x115; 1x TX 40x130 | |

## 334/368/6 Screwdriver set and rack

| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 053**47778**001 | *122735* | | | 1 |
| | | | **350 PH**<br>1x PH 1x80; 1x PH 2x100 | |
| | | | **334**<br>1x 1,2x6,5x150 | |
| | | | **335**<br>1x 0,8x4,0x100 | |
| | | | **368**<br>1x # 1x80; 1x # 2x100 | |

## 367/6 TORX® BO Kraftform Plus Screwdriver set and rack

- Screwdrivers for recessed TORX® screws with safety pin

## 367/6 TORX® BO Kraftform Plus Screwdriver set and rack

| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 051**38250**001 | *028907* | | | 1 |
| | | | **367 TORX® BO**<br>1x TX 10x80; 1x TX 15x80; 1x TX 20x100;<br>1x TX 25x100; 1x TX 30x115; 1x TX 40x130 | |

## 395 HO/7 SM Nutdriver set

- Nutsetter for hexagon head screws
- Hollow shaft for protruding threaded rods, chrome-plated

## 395 HO/7 SM Nutdriver set

| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 050**29510**001 | *111432* | | | 1 |
| | | | **395 HO**<br>1x 5,0x90; 1x 5,5x90; 1x 6,0x90; 1x 7,0x90;<br>1x 8,0x90; 1x 10,0x90; 1x 13,0x90 | |

## 338/2 Set of actuation tools for terminal blocks (spring cages)

Set with 2 actuation tools for spring terminals. The curved blades also make it easy to operate spring terminals in distribution boxes which cannot be reached with a straight blade.

The blade stays in the terminal block, leaving both hands free to insert the wire. Multi-component Kraftform handle for fast and smooth work.

- Special tool for unlocking contact springs in electrotechnical line terminals
- Due to the curved geometry, even terminal blocks that cannot be reached with normal screwdrivers can be operated
- Suitable for spring terminals with a conductor cross-section of up to 1.5 mm² and 2.5 to 4.0 mm²

### 338/2 Set of actuation tools for terminal blocks (spring cages)

| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 05**008100**001 | *225658* | | | 1 |
| | | | **338**<br>1x 0,4x2,5x81; 1x 0,6x3,5x81 | |

## 391/3 Hose clamp screwdriver set

- Flexible, circular blade

### 391/3 Hose clamp Screwdriver set

| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 05**135311**001 | *169860* | | | 1 |
| | | | **391**<br>1x 6x167; 1x 7x167; 1x 8x167 | |

## 395 HO/3 Sanitary Nutdriver set

- Nutsetter for hexagon head screws, chrome-plated
- With hollow shaft for protruding threaded rods, particularly suitable for installing/removing mixer taps on washbasins

### 395 HO/3 Sanitary Nutdriver set

| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 05**134275**001 | *207616* | | | 1 |
| | | | **395 HO**<br>1x 10,0x90; 1x 13,0x90; 1x 7/16"x90 | |

## Stubby Set 1 Screwdriver set

Especially small screwdrivers with short blades for hard to reach areas. The 2-component Kraftform handle with its practical combination of hard and soft zones allows for a firm grip and precise working.

The blades have all the benefits of the Wera Bit technology. Special surface treatment of the blades for high corrosion protection and an optimum fit in the screw head.

The hexagon anti-roll protection prevents annoying rolling away of bits in the workplace.

- Short compact shape for working in confined spaces
- Ergonomic 2-component Kraftform handle for precise work
- Blades with the benefits of the Wera Bit technology
- Hexagonal anti-roll feature against rolling away
- Take it easy tool finder: colour coding according to profile and size

### Stubby Set 1 Screwdriver set

| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 05**008870**001 | *212337* | | | 1 |
| | | | **335 Stubby**<br>1x 0,6x3,5x24,5; 1x 0,8x4,0x24,5;<br>1x 1,0x5,5x24,5 | |
| | | | **350 PH Stubby**<br>1x PH 1x25; 1x PH 2x25 | |

## Stubby Set 2 Screwdriver set

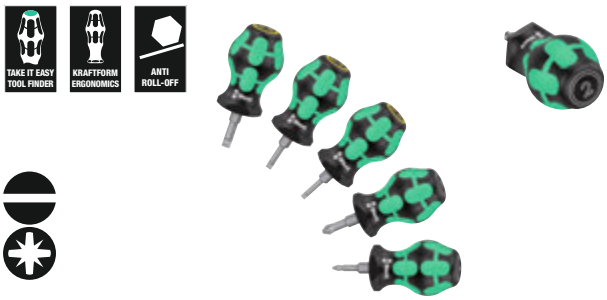


| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 05**008871**001 | *212344* | | | 1 |
| | | | **335 Stubby**<br>1x 0,6x3,5x24,5; 1x 0,8x4,0x24,5;<br>1x 1,0x5,5x24,5 | |
| | | | **355 PZ Stubby**<br>1x PZ 1x25; 1x PZ 2x25 | |

## Stubby Set 3 Screwdriver set

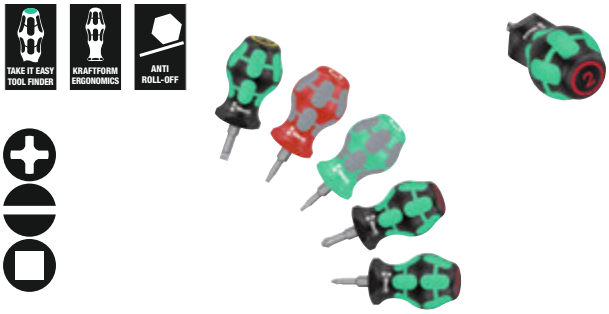


| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 05**008872**001 | *214096* | | | 1 |
| | | | **350 PH Stubby**<br>1x PH 1x25; 1x PH 2x25 | |
| | | | **335 Stubby**<br>1x 1,0x5,5x24,5 | |
| | | | **368 Stubby**<br>1x # 01x25; 1x # 02x25 | |

## Stubby Set TX 1 Screwdriver set TORX®

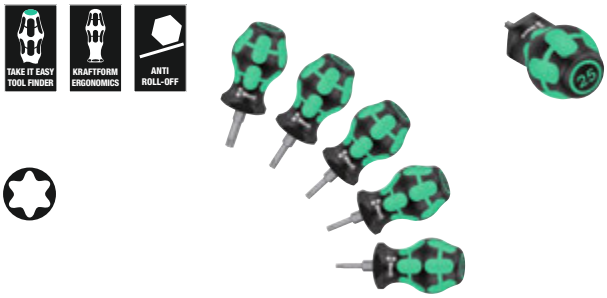


| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 05**008876**001 | *212351* | | | 1 |
| | | | **367 TORX® Stubby**<br>1x TX 10x25; 1x TX 15x25; 1x TX 20x25;<br>1x TX 25x25; 1x TX 30x25 | |

## Bicycle Big Pack 1

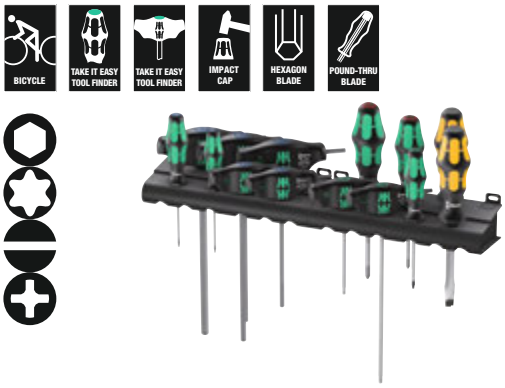


| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 05**004190**001 | *220745* | | | 1 |
| | | | **354 Hex-Plus**<br>1x 2,0x75; 1x 2,5x75 | |
| | | | **454 HF**<br>1x 3x100; 1x 4x150; 1x 5x150; 1x 6x200;<br>1x 8x200 | |
| | | | **367 TORX®**<br>1x TX 10x80 | |
| | | | **467 TORX® HF**<br>1x TX 20x100; 1x TX 25x200 | |
| | | | **932 A**<br>1x 1,0x5,5x100; 1x 1,2x7,0x125 | |
| | | | **350 PH**<br>1x PH 1x80; 1x PH 2x100 | |

## 1850 PH Kraftform Ball-Grip Phillips-head screwdriver

Screwdriver with Kraftform handle series 1800 for Phillips-head screws. The handle fits perfectly in the hand. The convex shape allows the transmission of high torques.

The soft handle zones ensure a good grip and low-loss power transmission. The hard handle zones allow a high power transmission, even when pressure is applied with the ball of the hand. The recesses at the upper end of the handle facilitate fine adjustment while screwdriving.

Due to the narrow transition between handle and blade, even sunken screws in narrow areas can be easily reached.

The anti-roll protection at the rear end of the handle hinders the tool from rolling away annoyingly at the workplace. The tips of Wera Lasertip screwdrivers are microscopically roughened with laser beams.

This rough surface “bites” into the screw head which avoids unintentional slipping out of the screw.

- Screwdriver for cross-recess screws, Phillips
- Kraftform series 1800 handle for high torques
- Soft handle zones for high power transmission
- Hard handle zones for palm pressure
- Handle recesses for your fingers allow fine adjustment
- Narrow transition between handle and blade for hard-to-reach and sunken screws in tight areas
- Take it easy tool finder: colour coding according to profile and size
- Lasertip tips for more secure fit in the screw head

### 1850 PH Kraftform Ball-Grip Phillips-head screwdriver

| | EAN | | | | | | | |
|---|---|---|---|---|---|---|---|---|
| Code | 4013288 | | mm | mm | mm | mm | | |
| 05**007905**001 | *222770* | PH 1 | 50 | 80 | 135 | 4,5 | 2" | 10 |
| 05**007906**001 | *222695* | PH 2 | 70 | 100 | 135 | 6,0 | 2 3/4" | 10 |
| 05**007907**001 | *222701* | PH 2 | 120 | 150 | 135 | 6,0 | 4 23/32" | 10 |
| 05**007908**001 | *222718* | PH 3 | 120 | 150 | 135 | 8,0 | 4 23/32" | 10 |

## 1855 PZ Kraftform Ball-Grip Pozidriv-head screwdriver

- Screwdriver for Pozidriv screws

### 1855 PZ Kraftform Ball-Grip Pozidriv-head screwdriver

| | EAN | | | | | | | |
|---|---|---|---|---|---|---|---|---|
| Code | 4013288 | | mm | mm | mm | mm | | |
| 05**007910**001 | *222725* | PZ 2 | 70 | 100 | 135 | 6,0 | 2 25/32" | 10 |

## 1834 Kraftform Ball-Grip Slotted screwdriver – workshop blade

- Slotted screwdriver - workshop blade

### 1834 Kraftform Ball-Grip Slotted screwdriver – workshop blade

| | EAN | | | | | | | |
|---|---|---|---|---|---|---|---|---|
| Code | 4013288 | mm | mm | mm | mm | mm | mm | |
| 05**007900**001 | *222671* | 1,0 | 6,0 | 70 | 100 | 135 | 6,0 | 10 |
| 05**007901**001 | *222688* | 1,0 | 6,0 | 120 | 150 | 135 | 6,0 | 10 |

## 9621 Belt holster Set 2

The tool set for the belt. The tool holster has 5 zones for inserting and accessing the required tools at any time. The holster has a robust construction, is made of tear-resistant material and is also suitable for use in adverse conditions. The included tools can be supplemented or exchanged individually. The holster can be worn on the hips. Ideal for mobile use at different locations.

Kraftform Plus handle for comfortable ergonomic screwdriving, avoiding blisters and calluses. Hard handle zones for high working speeds, while soft handle zones guarantee a high torque transfer.

Includes some tools with Lasertip: The tips of Wera Lasertip screwdrivers are microscopically roughened with laser beams. This rough surface “bites” into the screw head and unintentional slipping is a thing of the past. Take it easy tool finder with colour coding by profile and size stamping - for quick and easy identification of the required tool.

Including chiseldriver with pound-thru hexagonal blade made of premium bit material which ensures power transmission without loss even at hammer blows.

Some of the screwdrivers are equipped with ball handles, which allows a lot of pressure to be transferred while screwdriving. The palm encloses the handle from above, which allows high torques and high axial forces.

- Belt holster for perfect tool organization and instant access to the required tools
- Screwdriver for cross recess screws Phillips and Pozidriv, TORX®, slotted (VDE), and chiseldriver for screwdriving, chiselling, mortising
- Some of the tools come with a ball handle to achieve high axial forces and particularly high torques during manual screwdriving

### 9621 Belt holster Set 2

| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 05**136033**001 | *227621* | | | 1 |
| | | | **1850 PH**<br>1x PH 1x80; 1x PH 2x100 | |
| | | | **1834**<br>1x 1,0x6,0x100 | |
| | | | **932 A**<br>1x 1,0x5,5x100 | |
| | | | **162 i VDE PH**<br>1x PH 1x80; 1x PH 2x100 | |
| | | | **160 i VDE**<br>1x 0,6x3,5x100 [1] | |
| | | | **9522**<br>1x 170,0x240,0 | |

[1] without Lasertip

## 1267 A TORX® Flagdriver for TORX® screws

High quality Wera flagdriver for recessed TORX® screws. High torque transfer for small screws. Particularly suitable for exchanging indexable inserts.

The BlackLaser surface treatment provides outstanding surface protection, even against corrosion, and a long service life. Multi-component for outstanding grip.

- TORX® flagdriver for recessed TORX® screws
- Multi-component handle
- Circular blade with BlackLaser treatment for outstanding surface protection and long service life
- High corrosion protection
- High torque transfer for small screws

### 1267 A TORX® Flagdriver for TORX® screws

| | EAN | | | | ∅ | | | |
|---|---|---|---|---|---|---|---|---|
| Code | 4013288 | | mm | mm | mm | | | |
| 05**026350**001 | *093516* | TX 6 | 33 | 62,0 | 3,0 | 1 19/64" | | 10 |
| 05**026351**001 | *093523* | TX 7 | 33 | 62,0 | 3,0 | 1 19/64" | | 10 |
| 05**026352**001 | *093530* | TX 8 | 40 | 69,0 | 3,0 | 1 37/64" | | 10 |
| 05**026353**001 | *093547* | TX 9 | 40 | 69,0 | 3,0 | 1 37/64" | | 10 |
| 05**026354**001 | *093554* | TX 10 | 40 | 69,0 | 3,0 | 1 37/64" | | 10 |

### 1267 A TORX PLUS® Flagdriver for TORX PLUS® screws

| | EAN | | | | ∅ | | | |
|---|---|---|---|---|---|---|---|---|
| Code | 4013288 | | mm | mm | mm | | | |
| 05**026360**001 | *093561* | 6 IP | 33 | 62,0 | 3,0 | 1 19/64" | | 10 |
| 05**026361**001 | *093578* | 7 IP | 33 | 62,0 | 3,0 | 1 19/64" | | 10 |
| 05**026363**001 | *093608* | 9 IP | 40 | 69,0 | 3,0 | 1 37/64" | | 10 |

## 1267 B TORX® combination flagdriver for TORX® and hexagon socket screws

High quality Wera flagdrivers with combination profiles for recessed TORX and socket head screws. High torque can be applied to small screws. Particularly suitable for the replacement of indexable inserts. The BlackLaser surface treatment provides outstanding surface protection, even against corrosion, and a long service life. Multi-component for an especially good grip.

### 1267 B TORX® Combination flagdriver for TORX® and hexagon socket screws

| | EAN | | | | | | | |
|---|---|---|---|---|---|---|---|---|
| Code | 4013288 | | mm | mm | mm | | | |
| 05**026372**001 | *093639* | TX 15 | 3,5 | 47 | 86,0 | 1 27/32" | | 10 |
| 05**026373**001 | *093707* | TX 15 | 4 | 47 | 86,0 | 1 27/32" | | 10 |
| 05**026374**001 | *093646* | TX 20 | 4 | 47 | 86,0 | 1 27/32" | | 10 |

### 1267 B TORX PLUS® Combination flagdriver for TORX PLUS® and hexagon socket screws

| | EAN | | | | | | | |
|---|---|---|---|---|---|---|---|---|
| Code | 4013288 | | mm | mm | mm | | | |
| 05**026382**001 | *093677* | 15 IP | 3,5 | 47 | 86,0 | 1 27/32" | | 10 |

## 9500 Magnetiser SB

Wera magnetiser to magnetise and demagnetise tools to ensure the screw remains firmly on the blade.

- To magnetise and demagnetise tool tips
- To magnetise, move the tool tip along the positive side
- To demagnetise, move the tool tip along the negative side

### 9500 Magnetiser SB

| | EAN | | | | | | | |
|---|---|---|---|---|---|---|---|---|
| Code | 4013288 | mm | | | | | | |
| 05**033404**001 | *219589* | 64,6 | | | | | | 1 |

### 1427 Awl

| | EAN | | | | | | | |
|---|---|---|---|---|---|---|---|---|
| Code | 4013288 | mm | mm | | | | | |
| 05**027405**001 | *019998* | 105 | 92 | 4 3/16" | | | | 5 |

### 1428 Reamer

| | EAN | | | | | | | |
|---|---|---|---|---|---|---|---|---|
| Code | | mm | mm | | | | | |
| 05**027455**001 | *020000* | 107 | 92 | 4 9/32" | | | | 5 |

## 9611 Magnetic rail for up to 9 Kraftform screwdrivers, empty

- The clips hold the tools perfectly
- With its strong magnet, the rail holds securely to metal surfaces. It can also be bolted to the wall

### 9611 Magnetic rail for up to 9 Kraftform screwdrivers, empty

| | EAN | | | | | | | |
|---|---|---|---|---|---|---|---|---|
| Code | 4013288 | mm | mm | | | | | |
| 05**136414**001 | *230690* | 30,0 | 400,0 | | | | | 1 |

### Rack for Kraftform Micro screwdrivers

| | | | | | | | | |
|---|---|---|---|---|---|---|---|---|
| | | mm | mm | | | | | |
| 05**134002**001 | *100047* | 190,0 | 80 | | | | | 1 |

### Rack for Kraftform screwdrivers

| | EAN | | | | | | | |
|---|---|---|---|---|---|---|---|---|
| Code | 4013288 | mm | mm | | | | | |
| 05**134001**001 | *100030* | 190,0 | 50,0 | | | | | 1 |

## 1440/1442 Screw gripper set

Screw gripper set: attachment tool with holding function for screws. Holds all screw profiles securely on the tool.

During the job, the gripper can be pushed up along the blade so that it is not in the way when working with low-lying screws.

- Screw gripper set
- Attachment tool with holding function for screws
- Holds all screw profiles and sizes securely on the tool
- Made out of stable, elastomer material

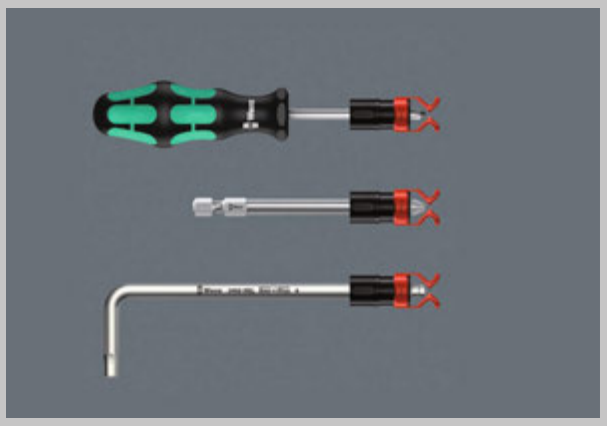

### 1441 SB Screw gripper attachment for screwdriver blades, long bits and L-keys, with holding function for screws

| | EAN | ∅ | | | | | | |
|---|---|---|---|---|---|---|---|---|
| Code | 4013288 | mm | mm | | | | | |
| 05**073681**001 | *140357* | 4,5-6,0 | 41,0 | | | | | 1 |

### 1440/1442 Screw gripper set



| | | | | |
|---|---|---|---|---|
| Code | EAN 4013288 | | | |
| 05**073680**001 | *140340* | | | 1 |
| | | | **1440**<br>1x 4,5-6,0x41,0 | |
| | | | **1442**<br>1x 6,0-8,5x41,0 | |

## 9108/2 PV Set of installation tools for MC4 Solar connectors

Set consisting of 2 installation tools for MC4 solar connectors (Multi-Contact).

- 2x 9108 installation tools for MC4 solar connectors (Multi-Contact)
- For attaching and disconnecting MC4 connectors
- Glass fibre reinforced plastic

### 9108/2 PV Set of installation tools for MC4 Solar connectors

| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 05**136700**001 | *230461* | | | 1 |
| | | | **9108**<br>2x 115 | |

## 9523 Chain riveter spare part kit

- With chain riveter and chain fastener with exchangeable rivet pin for opening and closing bicycle chains. Suitable for single-speed chains, up to 12-speed

### 9523 Chain riveter spare part kit

| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 05**136039**001 | *227867* | | | 1 |
| | | | **9513 Chain Tool** | |
| | | | **9512 Chain-Hook** | |

## Bicycle Set 13

2-piece tyre lever set for the mobile and stationary use. Both tyre levers are made of glass fibre reinforced plastic: 9502 tyre lever with bit mounting, which is also suitable to secure the French valve, and 9503 tyre lever with valve ejector.

With the glass fibre reinforced plastic tyre levers, the tyres can be safely levered off the rim without damaging the rim.

- 2 tyre levers (9502+9503) made of glass fibre reinforced plastic
- Safely lever the tyres off of the rim without damaging the rim
- The 1/4" hexagon mounting in the 9502 tyre lever allows the fixing of French valves and the use of a 1/4" bit
- 9503 tyre lever with valve ejector and deflater

### Bicycle Set 13

| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 05**004184**001 | *220585* | | **9502**<br>1x 105.0 | 5 |
| | | | **9503**<br>1x 105.0 | |

## Bicycle Set 15

The ultra compact and lightweight bike tools with two quadruple bits and three tyre levers. Four different screw profiles can be operated with just one bit.

Significant weight savings of over 50 %. The enormous space savings make the Bicycle Set 15 perfect for mobile use. The operability of the large profiles is made possible by the spring compression of the small tips. The bit with a 1/4" hexagon drive (Wera connection series 1) can also be used with e.g. bit ratchets and bitholding screwdrivers with Rapidaptor.

The 9504 tyre lever has a 1/4" mounting for using a 1/4" bit. When both 9504 tyre levers are stacked together, a 4-in-1 bit can be inserted and you get a screwdriving tool. The 9505 tyre lever serves as both valve ejector and bleeder valve. The levers and 4-in-1 bits can be clipped together, so that everything is compact and nothing will be lost.

### Bicycle Set 15

| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 05**004182**001 | *222190* | | | 1 |
| | | | **9504**<br>2x 105,0 | |
| | | | **9505**<br>1x 105,0 | |
| | | | **9506**<br>1x 3,0; 4,0; 5,0; 6,0x37 | |
| | | | **9507**<br>1x 2,5; 5,0; 6,0; TX 25x37 | |

## Kraftform Micro - the electronic screwdriver

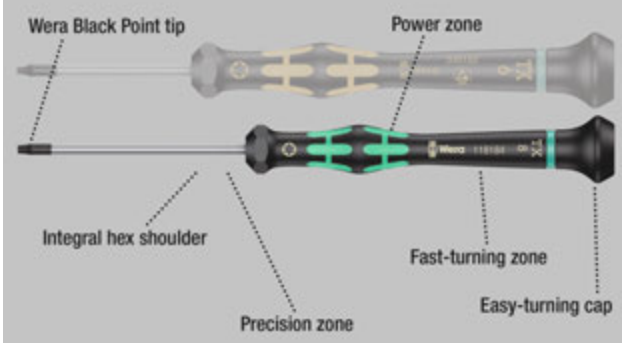


High quality Wera Micro screwdriver for precision mechanical jobs. Rapid twisting results from fixing the hand on the head and using the fast-turning zone just below.

This makes time-consuming grip adjustments unnecessary. Power zones with integrated soft sections ensure the transfer of high loosening and tightening torque; a precision zone for the right rotation angle during fine adjustment work.

The Black Point tip offers optimised corrosion protection and an exact fit. Take it easy tool finder with colour coding according to profiles and size stamp – for simple and rapid accessing of the required tool.

- Multi-component Kraftform Micro handle for fast and ergonomic screwdriving
- Anti-roll feature and swivel cap for rapid twisting
- The Wera Black Point tip offers an exact fit and optimum corrosion protection
- Take it easy tool finder: colour coding according to profile and size
- E.g. for electricians, opticians, precision mechanics, jewellers or IT hardware fitters

### 2035 Screwdriver for slotted screws for electronic applications

| | EAN | | | | | ∅ | | |
|---|---|---|---|---|---|---|---|---|
| Code | 4013288 | mm | mm | mm | mm | mm | | |
| 05**117990**001 | *108418* | 0,16 | 0,8 | 40 | 97 | 2,0 | 1/32" | 10 |
| 05**117991**001 | *108425* | 0,18 | 1,0 | 40 | 97 | 2,0 | 0,04" | 10 |
| 05**117992**001 | *108432* | 0,20 | 1,2 | 40 | 97 | 2,0 | 0,05" | 10 |
| 05**118002**001 | *031877* | 0,23 | 1,5 | 40 | 97 | 2,0 | 1/16" | 10 |
| 05**118003**001 | *108456* | 0,23 | 1,5 | 60 | 97 | 2,0 | 1/16" | 10 |
| 05**118000**001 | *031860* | 0,25 | 1,2 | 40 | 97 | 2,0 | 0,05" | 10 |
| 05**117993**001 | *108463* | 0,30 | 1,8 | 40 | 97 | 2,0 | 0,07" | 10 |
| 05**118004**001 | *031884* | 0,30 | 1,8 | 60 | 97 | 2,0 | 0,07" | 10 |
| 05**118017**001 | *151704* | 0.30 | 2.0 | 50 | 97 | 2.0" | 5/64" | 10 |
| 05**117997**001 | *194824* | 0.35 | 2.5 | 40 | 97 | 2.5 | 3/32" | 10 |
| 05**118005**001 | *108470* | 0,40 | 2,0 | 40 | 97 | 2,5 | 5/64" | 10 |
| 05**118006**001 | *031891* | 0,40 | 2,0 | 60 | 97 | 2,5 | 5/64" | 10 |
| 05**118007**001 | *108487* | 0,40 | 2,0 | 100 | 97 | 2,5 | 5/64" | 10 |
| 05**117994**001 | *108494* | 0,40 | 2,5 | 50 | 97 | 2,5 | 3/32" | 10 |
| 05**118008**001 | *031907* | 0,40 | 2,5 | 80 | 97 | 2,5 | 3/32" | 10 |
| 05**117995**001 | *108517* | 0,50 | 3,0 | 50 | 97 | 3,0 | 1/8" | 10 |
| 05**118010**001 | *031914* | 0,50 | 3,0 | 80 | 97 | 3,0 | 1/8" | 10 |
| 05**118012**001 | *031921* | 0,60 | 3,5 | 80 | 97 | 4,0 | 9/64" | 10 |
| 05**118014**001 | *031938* | 0,80 | 4,0 | 80 | 97 | 4,0 | 5/32" | 10 |

### 2055 PZ Screwdriver for Pozidriv screws for electronic applications

| | EAN | | | | ∅ | | | |
|---|---|---|---|---|---|---|---|---|
| Code | 4013288 | | mm | mm | mm | | | |
| 05**118030**001 | *032195* | PZ 0 | 60 | 97 | 3,0 | 2 3/8" | | 10 |
| 05**118032**001 | *032201* | PZ 1 | 80 | 97 | 4,0 | 3 1/16" | | 10 |

## 2050 PH Screwdriver for Phillips screws for electronic applications



| Code | EAN 4013288 | | mm | mm | mm | | | |
|---|---|---|---|---|---|---|---|---|
| 05**345290**001 [1) 2)] | *164506* | PH 000 | 40 | 97 | 1,5/2,5 | 1 9/16" | | 10 |
| 05**118019**001 [1) 2)] | *108562* | PH 00 | 40 | 97 | 1,8/2,5 | 1 9/16" | | 10 |
| 05**118020**001 [1)] | *031969* | PH 00 | 60 | 97 | 2,5 | 2 3/8" | | 10 |
| 05**118026**001 [3)] | *194800* | PH 0 | 40 | 97 | 3,0 | 1 9/16" | | 10 |
| 05**118022**001 [3)] | *031976* | PH 0 | 60 | 97 | 3,0 | 2 3/8" | | 10 |
| 05**118023**001 | *108579* | PH 1 | 60 | 97 | 4,0 | 2 3/8" | | 10 |
| 05**118024**001 | *031983* | PH 1 | 80 | 97 | 4,0 | 3 1/8" | | 10 |

[1)] Optimised for Asian PH screws
[2)] On the output side, the blade is turned to a nominal length of 10 mm
[3)] Size 0 modificated according to JCIS 0 (Japanese Camera Industrial Standard)

## 2067 TORX® HF Screwdriver with holding function for electronic applications

- Holding function for TORX® screws

## 2067 TORX® HF Screwdriver with holding function for electronic applications



| Code | EAN 4013288 | | mm | mm | mm | | | |
|---|---|---|---|---|---|---|---|---|
| 05**118180**001 | *108623* | TX 4 | 40 | 97 | 2,5 | 1 9/16" | | 5 |
| 05**118181**001 | *108630* | TX 5 | 40 | 97 | 3,0 | 1 9/16" | | 5 |
| 05**118182**001 | *108647* | TX 6 | 40 | 97 | 3,0 | 1 9/16" | | 5 |
| 05**118183**001 | *108654* | TX 7 | 60 | 97 | 3,0 | 2 3/8" | | 5 |
| 05**118184**001 | *108661* | TX 8 | 60 | 97 | 3,0 | 2 3/8" | | 5 |
| 05**118185**001 | *108678* | TX 9 | 60 | 97 | 4,0 | 2 3/8" | | 5 |
| 05**118186**001 | *108685* | TX 10 | 60 | 97 | 4,0 | 2 3/8" | | 5 |

## 2067 TORX® Screwdriver for TORX® screws for electronic applications

| Code | EAN 4013288 | | mm | mm | mm | | | |
|---|---|---|---|---|---|---|---|---|
| 05**118035**001 | *108593* | TX 1 | 40 | 97 | 2,0 | 1 9/16" | | 5 |
| 05**118036**001 | *108609* | TX 2 | 40 | 97 | 2,0 | 1 9/16" | | 5 |
| 05**118037**001 | *108616* | TX 3 | 40 | 97 | 2,0 | 1 9/16" | | 5 |
| 05**118039**001 | *040084* | TX 4 | 40 | 97 | 2,5 | 1 9/16" | | 5 |
| 05**118040**001 | *032218* | TX 5 | 40 | 97 | 3,0 | 1 9/16" | | 5 |
| 05**118042**001 | *032225* | TX 6 | 40 | 97 | 3,0 | 1 9/16" | | 5 |

## 2067 TORX® BO Screwdriver for tamper-proof TORX® screws for electronic applications

| Code | EAN 4013288 | | mm | mm | mm | | | |
|---|---|---|---|---|---|---|---|---|
| 05**118044**001 | *032232* | TX 7 | 60 | 97 | 3,0 | 2 3/8" | | 5 |
| 05**118046**001 | *032249* | TX 8 | 60 | 97 | 3,0 | 2 3/8" | | 5 |
| 05**118048**001 | *032256* | TX 9 | 60 | 97 | 4,0 | 2 3/8" | | 5 |
| 05**118050**001 | *032263* | TX 10 | 60 | 97 | 4,0 | 2 3/8" | | 5 |
| 05**118052**001 | *032270* | TX 15 | 60 | 97 | 4,0 | 2 3/8" | | 5 |
| 05**118054**001 | *032287* | TX 20 | 60 | 97 | 4,0 | 2 3/8" | | 5 |

## 2067 IPR TORX PLUS® Screwdriver for electronic applications



| Code | EAN 4013288 | | mm | mm | mm | | | |
|---|---|---|---|---|---|---|---|---|
| 05**030160**001 | *178749* | 1 IPR | 40 | 97 | 2.0 | 1 37/64" | | 5 |

[1)] Without bore hole

## Hex-Plus - lets hexagon socket screws last longer

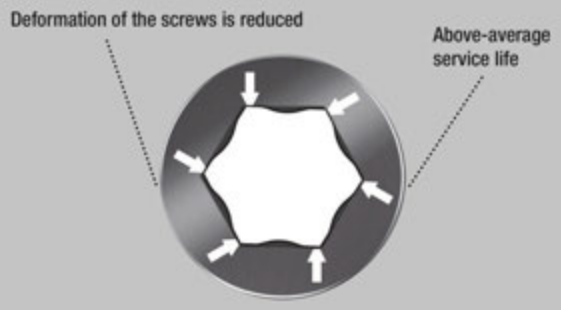


- Kraftform Micro screwdriver for hexagon socket screws
- Hex-Plus allows socket head screws to live longer

### 2054 Screwdriver for hexagon socket screws for electronic applications



| | EAN | | | | | | | |
|---|---|---|---|---|---|---|---|---|
| Code | 4013288 | mm | | mm | mm | mm | | |
| 05118060001 | *032072* | 0,7 | | 40 | 97 | 3,0 | 1 9/16" | 5 |
| 05118062001 | *032089* | 0,9 | | 40 | 97 | 3,0 | 1 9/16" | 5 |
| 05118064001 | *032096* | 1,3 | | 40 | 97 | 3,0 | 1 9/16" | 5 |
| 05118066001 | *032102* | 1,5 | | 60 | 97 | 3,0 | 2 3/8" | 5 |
| 05118068001 | *032119* | 2 | | 60 | 97 | 3,0 | 2 3/8" | 5 |
| 05118070001 | *032126* | 2,5 | | 60 | 97 | 4,0 | 2 3/8" | 5 |
| 05118072001 | *032133* | 3,0 | | 60 | 97 | 4,0 | 2 3/8" | 5 |
| 05345284001 | *152206* | - | 0,028" | 40 | 97 | 3,0 | 1 9/16" | 5 |
| 05345285001 | *152213* | - | 0,035" | 40 | 97 | 3,0 | 1 9/16" | 5 |
| 05118074001 | *032140* | - | 0,05" | 40 | 97 | 3,0 | 1 9/16" | 5 |
| 05118076001 | *032157* | - | 1/16" | 60 | 97 | 3,0 | 2 3/8" | 5 |
| 05118078001 | *032164* | - | 5/64" | 60 | 97 | 3,0 | 2 3/8" | 5 |
| 05118080001 | *032171* | - | 3/32" | 60 | 97 | 4,0 | 2 3/8" | 5 |
| 05118082001 | *032188* | - | 7/64" | 60 | 97 | 4,0 | 2 3/8" | 5 |
| 05118075001 | *108807* | - | 1/8" | 60 | 97 | 4,0 | 2 3/8" | 5 |

## 2052 Ball end hexagon screwdriver for electronic applications

- Ballpoint for dependable working even in difficult installation situations

### 2052 Ball end hexagon screwdriver for electronic applications

| | EAN | | | | | | | |
|---|---|---|---|---|---|---|---|---|
| Code | 4013288 | mm | | mm | mm | mm | | |
| 05118089001 | *108814* | 1,3 | | 60 | 97 | 3,0 | 2 3/8" | 5 |
| 05118090001 | *031990* | 1,5 | | 60 | 97 | 3,0 | 2 3/8" | 5 |
| 05118092001 | *032003* | 2,0 | | 60 | 97 | 3,0 | 2 3/8" | 5 |
| 05118094001 | *032010* | 2,5 | | 60 | 97 | 4,0 | 2 3/8" | 5 |
| 05118096001 | *032027* | 3,0 | | 60 | 97 | 4,0 | 2 3/8" | 5 |
| 05118098001 | *032034* | - | 1/16" | 60 | 97 | 3,0 | 2 3/8" | 5 |
| 05118100001 | *032041* | - | 5/64" | 60 | 97 | 3,0 | 2 3/8" | 5 |
| 05118102001 | *032058* | - | 3/32" | 60 | 97 | 3,0 | 2 3/8" | 5 |
| 05118106001 | *110954* | - | 7/64" | 60 | 97 | 4,0 | 2 3/8" | 5 |
| 05118103001 | *108821* | - | 1/8" | 60 | 97 | 4,0 | 2 3/8" | 5 |

### 2072 Screwdriver for Microstix® screws

| | EAN | | | | | | | |
|---|---|---|---|---|---|---|---|---|
| Code | | | mm | mm | mm | | | |
| 05118145001 | *194817* | m | 40 | 97 | 2,5 | 1 9/16" | | 5 |

## 2069 Nutdriver for electronic applications

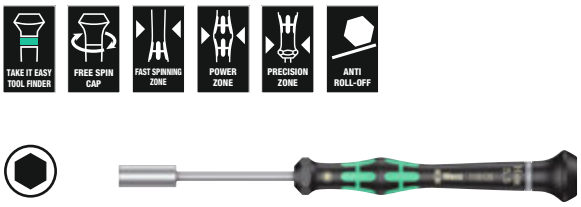


| Code | EAN 4013288 | mm | | mm | mm | mm | | |
|---|---|---|---|---|---|---|---|---|
| 05**118108**001 | *108852* | 1,5 | | 60 | 97 | 5,7 | 2 3/8" | 5 |
| 05**118109**001 | *108869* | 1,8 | | 60 | 97 | 5,7 | 2 3/8" | 5 |
| 05**118110**001 | *032300* | 2,0 | | 60 | 97 | 5,7 | 2 3/8" | 5 |
| 05**118112**001 | *032317* | 2,5 | | 60 | 97 | 5,7 | 2 3/8" | 5 |
| 05**118114**001 | *032324* | 3,0 | | 60 | 97 | 5,7 | 2 3/8" | 5 |
| 05**118116**001 | *032331* | 3,2 | | 60 | 97 | 5,7 | 2 3/8" | 5 |
| 05**118118**001 | *032348* | 3,5 | | 60 | 97 | 5,7 | 2 3/8" | 5 |
| 05**118120**001 | *032355* | 4,0 | | 60 | 97 | 5,7 | 2 3/8" | 5 |
| 05**118122**001 | *032362* | 4,5 | | 60 | 97 | 6,4 | 2 3/8" | 5 |
| 05**118124**001 | *032379* | 5,0 | | 60 | 97 | 7,0 | 2 3/8" | 5 |
| 05**118126**001 | *032386* | 5,5 | | 60 | 97 | 7,8 | 2 3/8" | 5 |
| 05**345281**001 | *150189* | 6,0 | | 60 | 97 | 8,5 | 2 3/8" | 5 |
| 05**118128**001 | *032393* | - | 3/32" | 60 | 97 | 5,7 | 2 3/8" | 5 |
| 05**118130**001 | *032409* | - | 7/64" | 60 | 97 | 5,7 | 2 3/8" | 5 |
| 05**118132**001 | *032416* | - | 1/8" | 60 | 97 | 5,7 | 2 3/8" | 5 |
| 05**118134**001 | *032423* | - | 9/64" | 60 | 97 | 5,7 | 2 3/8" | 5 |
| 05**118136**001 | *032430* | - | 5/32" | 60 | 97 | 5,7 | 2 3/8" | 5 |
| 05**118135**001 | *110596* | - | 3/16" | 60 | 97 | 6,6 | 2 3/8" | 5 |
| 05**118137**001 | *112019* | - | 7/32" | 60 | 97 | 7,8 | 2 3/8" | 5 |
| 05**345282**001 | *150196* | - | 1/4" | 60 | 97 | 9,0 | 2 3/8" | 5 |

## 1429 Chip Removal Tool

- Lifting fork to remove firmly-fitted parts from a circuit board after desoldering

## 1429 Chip Removal Tool

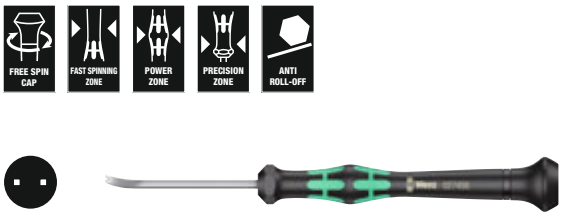


| Code | EAN 4013288 | mm | mm | mm | mm | | | |
|---|---|---|---|---|---|---|---|---|
| 05**027456**001 | *112187* | 1,0 | 3,5 | 50 | 97 | | | 10 |

## 1013 Kraftform Micro Bitholding screwdriver

Kraftform Micro holder with ergonomic Kraftform handle for fast and low-fatigue working.

The anti-roll feature prevents any bothersome rolling away at the workplace.

Suitable for take-up of bits with 4 mm halfmoon drive and bits with 4 mm HIOS drive. Ideal for applications on smartphones, cell phones, cameras, electronic equipment, in dental laboratories and dental surgeries.

- Kraftform Micro bit holder
- Multi-component Kraftform Micro handle with anti-roll feature and swivel cap
- Suitable for take-up of bits with 4 mm halfmoon drive and bits with 4 mm HIOS drive
- Applications e.g. on smartphones, mobile phones, cameras, electronic equipment

## 1013 Kraftform Micro Bitholding screwdriver

| Code | EAN 4013288 | mm | mm | | | | | |
|---|---|---|---|---|---|---|---|---|
| 05**051276**001 | *183699* | 23 | 97 | 29/32" | | | | 1 |

## 1014 Kraftform Micro Bitholding screwdriver

- Bitholding screwdriver for bits with 4 mm external hexagon drive

## 1014 Kraftform Micro Bitholding screwdriver

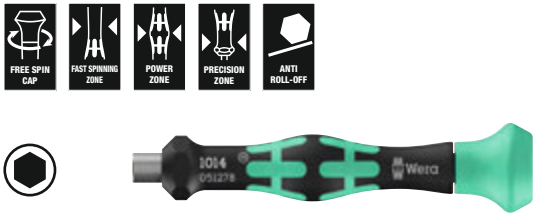


| Code | EAN 4013288 | mm | mm | mm | | | | |
|---|---|---|---|---|---|---|---|---|
| 05**051278**001 | *234292* | 4 | 80,0 | 74,0 | | | | 1 |

## Kraftform Micro Big Pack 1 Screwdriver set for electronic applications

Wera Micro screwdriver set for fine mechanical screw connections. By supporting the hand on the rotating cap, and by the fast rotating zone below the rotating cap, lightning fast turning is possible.

Time-consuming hand switching is eliminated. Storage and transport in a robust roll-bag, so the correct tool is always at hand.

With Take it easy tool finder: colour coding by profile and size stamping.

- 25-piece Kraftform Micro screwdriver set in a robust and compact roll bag
- Kraftform Micro handle for fast and ergonomic working
- Tools with anti-roll protection and rotating cap for fast turning
- The Wera Black Point tip offers an exact fit and optimum corrosion protection
- Take it easy tool finder: colour coding according to profile and size
- Suitable for electricians, opticians, precision mechanics, jewellers or computer hardware engineers

### Kraftform Micro Big Pack 1 Screwdriver set for electronic applications



| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 05**134000**001 | *209580* | | | 1 |
| | | | **2050 PH Micro**<br>1x PH 000x40 [1) 2)]; 1x PH 00x40 [1) 2)];<br>1x PH 0x40 [3)] | |
| | | | **2067 TORX®**<br>1x TX 5x40; 1x TX 6x40 | |
| | | | **2067 TORX® HF**<br>1x TX 5x40; 1x TX 6x40; 1x TX 7x60;<br>1x TX 8x60; 1x TX 10x60 | |
| | | | **2067 TORX PLUS® IPR Micro**<br>1x 1 IPRx40 | |
| | | | **2054 Micro**<br>1x 0,9x40; 1x 1,3x40; 1x 1,5x60; 1x 2x60 | |
| | | | **2035 Micro**<br>1x 0,23x1,5x40; 1x 0,30x1,8x60;<br>1x 0,35x2,5x40; 1x 0,40x2,0x60; 1x 0,50x3,0x80 | |
| | | | **2069 Micro**<br>1x 4,0x60; 1x 5,5x60 | |
| | | | **2072** 1x mx40 | |
| | | | **1429** 1x 1,0x3,5x50 | |
| | | | **K 240** 1x 50,0x240,0 | |

[1)] Optimised for Asian PH screws
[2)] On the output side, the blade is turned to a nominal length of 10 mm
[3)] Size 0 modificated according to JCIS 0 (Japanese Camera Industrial Standard)

## Kraftform Micro 12 Universal 1 Screwdriver set for electronic applications

- Kraftform Micro set in a robust pouch

### Kraftform Micro 12 Universal 1 Screwdriver set for electronic applications

| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 05**073675**001 | *165695* | | | 1 |
| | | | **2050 PH Micro**<br>1x PH 00x60 [1)]; 1x PH 0x60 [2)] | |
| | | | **2067 TORX® HF**<br>1x TX 5x40; 1x TX 6x40 | |
| | | | **2035 Micro**<br>1x 0,23x1,5x40; 1x 0,30x1,8x60;<br>1x 0,40x2,0x60; 1x 0,40x2,5x80; 1x 0,50x3,0x80 | |
| | | | **2054 Micro**<br>1x 0,9x40; 1x 1,5x60; 1x 2x60 | |

[1)] Optimised for Asian PH screws
[2)] Size 0 modificated according to JCIS 0 (Japanese Camera Industrial Standard)

## Kraftform Micro 12 Electronics 1 Screwdriver set for electronic applications

- Kraftform Micro screwdriver for slotted, Phillips, TORX® BO, Hex, IPR and Microstix® screws plus chip lifter

### Kraftform Micro 12 Electronics 1 Screwdriver set for electronic applications

| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 05**073677**001 | *194831* | | | 1 |
| | | | **2050 PH Micro**<br>1x PH 000x40 [1] [2]; 1x PH 00x40 [1] [2];<br>1x PH 0x40 [3] | |
| | | | **2067 TORX® BO Micro**<br>1x TX 8x60; 1x TX 10x60 | |
| | | | **2067 TORX PLUS® IPR Micro**<br>1x 1 IPRx40 | |
| | | | **2035 Micro**<br>1x 0,23x1,5x40; 1x 0,35x2,5x40 | |
| | | | **2069 Micro**<br>1x 2,5x60; 1x 3,0x60 | |
| | | | **2072**<br>1x mx40 | |
| | | | **1429**<br>1x 1,0x3,5x50 | |

[1] Optimised for Asian PH screws
[2] On the output side, the blade is turned to a nominal length of 10 mm
[3] Size 0 modificated according to JCIS 0 (Japanese Camera Industrial Standard)

## Kraftform Kompakt Micro 11 Electronics 1

Kraftform Kompakt Micro Set for precision mechanical applications; suitable for the take-up of bits with 4 mm halfmoon drive (Wera series 9) and bits with 4 mm HIOS drive (Wera series 21); handle/interchangeable blade system for rapid blade change; Kaftform Micro handle with twist cap and free-turning zone for rapid twisting, making any time-consuming repositioning of the fingers unnecessary; power zone with integrated soft zones for the transfer of higher tightening and loosening torque; precision zone directly above the blade for the right angle for adjustment work; comes with 10 bits for manual as well as power tool operations; rapid fixing of the bit: just push the bit into the insert for automatic locking and a secure fit.

To change the bit, simply push the sleeve forward and remove; free-turning sleeve for simple guidance of the tool during the screwdriving process.

### Kraftform Kompakt Micro 11 Electronics 1

| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 05**073676**001 | *194848* | | | 1 |
| | | | **1013 Kraftform Micro**<br>1x 97 | |
| | | | **851/9 C**<br>1x PH 000x44 [1]; 1x PH 00x44 [1]; 1x PH 0x44 [2] | |
| | | | **867/9 C TORX®**<br>1x TX 8x44 | |
| | | | **867/9 C TORX PLUS®**<br>1x 3 IPx44 | |
| | | | **867/9 IPR TORX® PLUS**<br>1x 1 IPRx44 | |
| | | | **800/9 C**<br>1x 0,35x2,5x44 | |
| | | | **872/9**<br>1x mx44 | |
| | | | **869/9**<br>1x 2,5x44,0; 1x 3,0x44,0 | |

[1] Optimised for Asian PH screws
[2] Size 0 modificated according to JCIS 0 (Japanese Camera Industrial Standard)

## Kraftform Kompakt Micro 11 Universal 1

| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 05**135938**001 | *178343* | | | 1 |
| | | | **1013 Kraftform Micro**<br>1x 97 | |
| | | | **851/9 C**<br>1x PH 00x44 [1]; 1x PH 0x44 [2]; 1x PH 1x44 [1] | |
| | | | **840/9 C**<br>1x 1,5x44; 1x 2,0x44 | |
| | | | **800/9 C**<br>1x 0,23x1,5x44; 1x 0,40x2,0x44;<br>1x **0,50x3,0x44** | |
| | | | **867/9 C TORX®**<br>1x TX 5x44; 1x TX 6x44 | |

[1] Optimised for Asian PH screws

[2] Size 0 modificated according to JCIS 0 (Japanese Camera Industrial Standard)

## 2035/6 A Screwdriver set and rack for electronic applications

- With useful plastic rack

### 2035/6 A Screwdriver set and rack for electronic applications

| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 05**118150**001 | *031945* | | | 1 |
| | | | **2050 PH Micro**<br>1x PH 00x60 [1]; 1x PH 0x60 [2] | |
| | | | **2035 Micro**<br>1x 0,30x1,8x60; 1x 0,40x2,0x60;<br>1x 0,40x2,5x80; 1x 0,50x3,0x80 | |

[1] Optimised for Asian PH screws

[2] Size 0 modificated according to JCIS 0 (Japanese Camera Industrial Standard)

## 2035/6 B Screwdriver set and rack for electronic applications

- With useful plastic rack

### 2035/6 B Screwdriver set and rack for electronic applications

| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 05**118152**001 | *031952* | | | 1 |
| | | | **2050 PH Micro**<br>1x PH 0x60 [1]; 1x PH 1x80 | |
| | | | **2035 Micro**<br>1x 0,40x2,5x80;1x 0,50x3,0x80;<br>1x 0,60x3,5x80; 1x 0,80x4,0x80 | |

[1] Size 0 modificated according to JCIS 0 (Japanese Camera Industrial Standard)

## 2050/6 Screwdriver set and rack for electronic applications

- Kraftform Micro screwdriver for slotted, Phillips-Recess, IPR and Microstix® screws
- With useful plastic rack

### 2050/6 Screwdriver set and rack for electronic applications

| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 05**030181**001 | *194794* | | | 1 |
| | | | **2050 PH Micro**<br>1x PH 000x40 [1] [2]; 1x PH 00x40 [1] [2];<br>1x PH 0x40 [3] | |
| | | | **2067 TORX PLUS® IPR Micro**<br>1x 1 IPRx40 | |
| | | | **2072**<br>1x mx40 | |
| | | | **2035 Micro**<br>1x 0,35x2,5x40 | |

[1] Optimised for Asian PH screws

[2] On the output side, the blade is turned to a nominal length of 10 mm

[3] Size 0 modificated according to JCIS 0 (Japanese Camera Industrial Standard)

## 2052/6 Hexagon Screwdriver set and rack for electronic applications

- Kraftform Micro screwdriver with ballpoint for hexagon socket screws

### 2052/6 Hexagon Screwdriver set and rack for electronic applications

| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 05**118156**001 | *032065* | | | 1 |
| | | | **2052 Micro**<br>1x 1,5x60; 1x 2,0x60; 1x 2,5x60; 1x 3,0x60 | |
| | | | **2054 Micro**<br>1x 0,9x40; 1x 1,3x40 | |

## 2067/6 TORX® BO Screwdriver set and rack for electronic applications

- Kraftform Micro screwdriver set for recessed TORX® screws with safety pin

### 2067/6 TORX® BO Screwdriver set and rack for electronic applications

| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 05**118154**001 | *032294* | | | 1 |
| | | | **2067 TORX® BO Micro**<br>1x TX 7x60; 1x TX 8x60; 1x TX 9x60;<br>1x TX 10x60; 1x TX 15x60; 1x TX 20x60 | |

### 2069/6 Screwdriver set and rack for electronic applications

| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 05**118158**001 | *032447* | | | 1 |
| | | | **2069 Micro**<br>1x 2,0x60; 1x 2,5x60; 1x 3,0x60; 1x 3,5x60;<br>1x 4,0x60; 1x 5,0x60 | |

## Series 400 T-Handle

The ergonomically shaped 2-component T-handle with finger recesses and pleasant surface facilitates very high power transmission and fatigue-free working.

Due to the special surface treatment, the blades receive a high level of corrosion protection. The optimum fitting accuracy of the screw is also guaranteed.

- T-handle screwdriver for the transmission of particularly high tightening and loosening moments
- Ergonomic 2-component handle with finger handle recesses and pleasant surface feel for very high power transmission and fatigue-free working.
- Take it easy tool finder: colour coding according to profile and size
- With additional short arm for the transmission of extremely high torques due to the leverage of the long arm

### 454 T-handle hexdriver

| Code | EAN 4013288 | mm | mm | mm | mm | mm | | |
|---|---|---|---|---|---|---|---|---|
| 05**023330**001 | *207753* | 2 | 100 | 12 | 32 | 65 | 4" | 5 |
| 05**023332**001 | *207814* | 2,5 | 100 | 12 | 32 | 65 | 4" | 5 |

## 454 HF T-handle hexagon screwdriver Hex-Plus with holding function

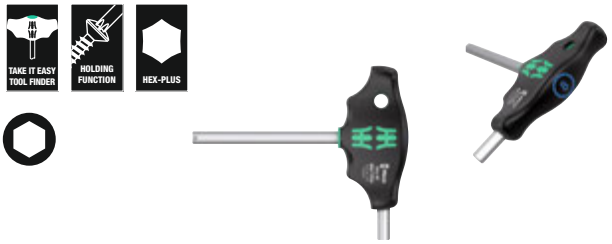

| Code | EAN | | mm | mm | mm | mm | | |
|---|---|---|---|---|---|---|---|---|
| 05**023334**001 | *207838* | 3 | 100 | 15 | 38 | 77 | | 5 |
| 05**023338**001 | *207883* | 4 | 100 | 15 | 38 | 77 | | 5 |
| 05**023339**001 | *207876* | 4 | 150 | 15 | 38 | 77 | | 5 |
| 05**023340**001 | *207890* | 4 | 200 | 15 | 38 | 77 | | 5 |
| 05**023342**001 | *207913* | 5 | 100 | 20 | 49 | 99 | | 5 |
| 05**023343**001 | *207920* | 5 | 150 | 20 | 49 | 99 | | 5 |
| 05**023344**001 | *207937* | 5 | 200 | 20 | 49 | 99 | | 5 |
| 05**023346**001 | *207951* | 6 | 100 | 20 | 49 | 99 | | 5 |
| 05**023347**001 | *207968* | 6 | 150 | 20 | 49 | 99 | | 5 |
| 05**023348**001 | *207975* | 6 | 200 | 20 | 49 | 99 | | 5 |
| 05**023350**001 | *208002* | 7 | 200 | 20 | 49 | 99 | | 5 |
| 05**023351**001 | *208019* | 8 | 100 | 20 | 49 | 99 | | 5 |
| 05**023352**001 | *208026* | 8 | 150 | 20 | 49 | 99 | | 5 |
| 05**023353**001 | *208033* | 8 | 200 | 20 | 49 | 99 | | 5 |
| 05**023354**001 | *208057* | 10 | 100 | 20 | 49 | 99 | | 5 |
| 05**023355**001 | *208064* | 10 | 200 | 20 | 49 | 99 | | 5 |

## 454 Imperial T-handle hexagon screwdriver Hex-Plus, imperial

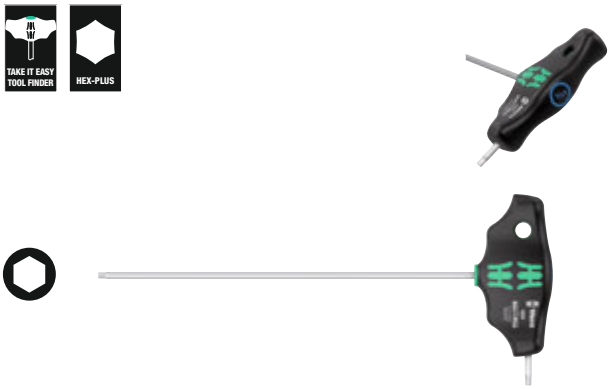

| Code | EAN | | mm | mm | mm | mm | | |
|---|---|---|---|---|---|---|---|---|
| 05**023356**001 | *214133* | 5/64" | 150 | 12 | 32 | 65 | | 5 |
| 05**023357**001 | *208071* | 3/32" | 150 | 12 | 32 | 65 | | 5 |
| 05**023358**001 | *208088* | 7/64" | 150 | 12 | 32 | 65 | | 5 |

## 454 HF T-handle hexagon screwdriver Hex-Plus with holding function, imperial

- With holding function (HF) on the long arm to securely hold the screw on the tool

## 454 HF T-handle hexagon screwdriver Hex-Plus with holding function, imperial

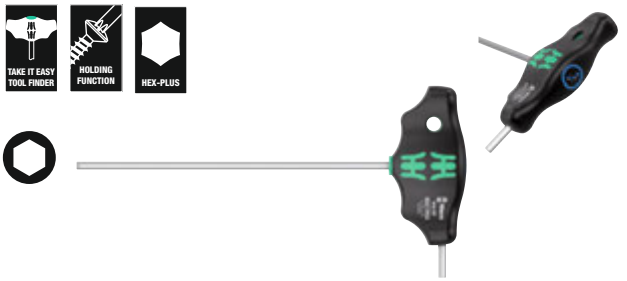

| Code | EAN | | mm | mm | mm | mm | | |
|---|---|---|---|---|---|---|---|---|
| 05**023359**001 | *208095* | 1/8" | 150 | 15 | 38 | 77 | | 5 |
| 05**023360**001 | *208101* | 9/64" | 150 | 15 | 38 | 77 | | 5 |
| 05**023361**001 | *208118* | 5/32" | 150 | 15 | 38 | 77 | | 5 |
| 05**023362**001 | *208125* | 3/16" | 150 | 20 | 49 | 99 | | 5 |
| 05**023363**001 | *208132* | 7/32" | 150 | 20 | 49 | 99 | | 5 |
| 05**023364**001 | *208149* | 1/4" | 150 | 15 | 49 | 99 | | 5 |
| 05**023365**001 | *208156* | 5/16" | 150 | 20 | 49 | 99 | | 5 |
| 05**023366**001 | *208163* | 3/8" | 150 | 20 | 49 | 99 | | 5 |

## 467 TORX® HF T-handle screwdriver with holding function

- With holding function (HF) on the long arm to securely hold the screw on the tool

## 467 TORX® HF T-handle screwdriver with holding function

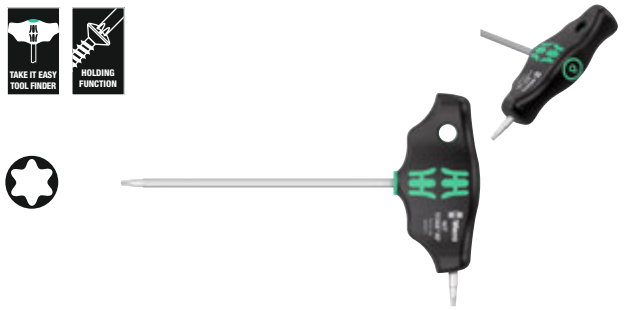

| Code | EAN | | mm | mm | mm | mm | mm | |
|---|---|---|---|---|---|---|---|---|
| 05**023367**001 | *208217* | TX 6 | 100 | 12 | 32 | 65 | 3,0 | 5 |
| 05**023368**001 | *208224* | TX 7 | 100 | 12 | 32 | 65 | 3,0 | 5 |
| 05**023369**001 | *208231* | TX 8 | 100 | 12 | 32 | 65 | 3,5 | 5 |
| 05**023370**001 | *208248* | TX 9 | 100 | 12 | 32 | 65 | 3,5 | 5 |
| 05**023371**001 | *208255* | TX 10 | 100 | 12 | 32 | 65 | 4,0 | 5 |
| 05**023372**001 | *208262* | TX 15 | 100 | 15 | 38 | 77 | 4,0 | 5 |
| 05**023373**001 | *208279* | TX 20 | 100 | 15 | 38 | 77 | 4,5 | 5 |
| 05**023374**001 | *208286* | TX 20 | 200 | 15 | 38 | 77 | 4,5 | 5 |
| 05**023375**001 | *208293* | TX 25 | 100 | 15 | 38 | 77 | 5,0 | 5 |
| 05**023376**001 | *208309* | TX 25 | 200 | 15 | 38 | 77 | 5,0 | 5 |
| 05**023377**001 | *208316* | TX 27 | 200 | 20 | 49 | 99 | 6,0 | 5 |
| 05**023378**001 | *208323* | TX 30 | 200 | 20 | 49 | 99 | 6,0 | 5 |
| 05**023379**001 | *208330* | TX 40 | 200 | 20 | 49 | 99 | 8,0 | 5 |
| 05**023380**001 | *208347* | TX 45 | 200 | 20 | 49 | 99 | 9,0 | 5 |

## 495 T-handle socket wrench screwdrivers

| | EAN | | | | | | | |
|---|---|---|---|---|---|---|---|---|
| Code | 4013288 | | mm | mm | mm | | | |
| 05**023381**001 | *208354* | 5 | 230 | 38 | 77 | 9" | | 5 |
| 05**023382**001 | *208361* | 5,5 | 230 | 38 | 77 | 9" | | 5 |
| 05**023383**001 | *208378* | 6 | 230 | 38 | 77 | 9" | | 5 |
| 05**023384**001 | *208385* | 7 | 230 | 49 | 99 | 9" | | 5 |
| 05**023385**001 | *208392* | 8 | 230 | 49 | 99 | 9" | | 5 |
| 05**023386**001 | *208408* | 9 | 230 | 49 | 99 | 9" | | 5 |
| 05**023387**001 | *208415* | 10 | 230 | 49 | 99 | 9" | | 5 |
| 05**023389**001 | *208439* | 11 | 230 | 49 | 99 | 9" | | 5 |
| 05**023391**001 | *208477* | 12 | 230 | 49 | 99 | 9" | | 5 |
| 05**023393**001 | *208491* | 13 | 230 | 49 | 99 | 9" | | 5 |

## Radidaptor - the amazing compact multifunction tool

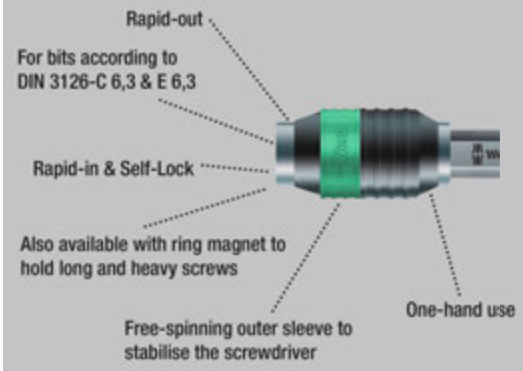


The ergonomically shaped 2-component T-handle with finger recesses and pleasant surface facilitates very high power transmission and fatigue-free working.

For bits with 1/4" hex head drive as per DIN ISO 1173-C 6.3 and E 6.3. With Rapidaptor technology for lightning-fast bit changes.

- T-handle screwdriver for the transmission of particularly high tightening and loosening moments
- Ergonomic 2-component handle with finger handle recesses and pleasant surface feel for very high power transmission and fatigue-free working.
- With Rapidaptor technology for lightning-fast bit changes
- Bitholders, magnetic, for easier application of the screw
- For bits with 1/4" external hexagon drive as per DIN ISO 1173-C 6.3 and E 6.3

## 416 R T-handle bitholding screwdriver Rapidaptor

RAPIDAPTOR TECHNOLOGY

| | EAN | | | | | | | |
|---|---|---|---|---|---|---|---|---|
| Code | 4013288 | | mm | mm | mm | | | |
| 05**023404**001 | *214157* | 1/4" | 45 | 44 | 99 | 1 25/32" | | 2 |

## 416 RA T-handle bitholding screwdriver with ratchet function and Rapidaptor quick-release chuck

The integrated ratchet with fine toothing (80 teeth/return angle 4.5°) eases and accelerates screwdriving without having to reposition the tool. The ratchet mechanism completely embedded in the handle ensures very handy and comfortable work. With reversing lever for comfortable clockwise/counterclockwise direction change in one-hand operation.

The ergonomic shape of the handle fills the ball of the hand well, the fingers lie securely in the softly rounded recessed grips. The whole hand comes into contact with the handle, friction loss between hand and handle is avoided.

Bit holder for bits with 1/4" external hexagon drive as per DIN ISO 1173-C 6.3 and E 6.3. With Rapidaptor technology for lightning-fast bit changes.

- The integrated ratchet with fine toothing ensures fast and safe working
- Reversing lever for comfortable clockwise/counterclockwise direction change
- Convenient working thanks to the ratchet mechanism fully embedded in the handle
- Ergonomic 2-component handle with finger handle recesses and pleasant surface feel for very high power transmission and fatigue-free working
- Fast-rotating sleeve for extremely high working speed
- Rapidaptor bitholding screwdriver with fast-rotating sleeve for lightning-fast bit changes and high working speeds
- For bits with 1/4" external hexagon drive as per DIN ISO 1173-C 6.3 and E 6.3

### 416 RA T-handle bitholding screwdriver with ratchet function and Rapidaptor quick-release chuck

| | EAN | | | | | | | |
|---|---|---|---|---|---|---|---|---|
| Code | 4013288 | | mm | mm | mm | | | |
| 05**023461**001 | *222824* | 1/4" | 45 | 44 | 99 | 1 25/32" | | 2 |

## 411 A RA T-handle adapter screwdriver with ratchet function, 1/4"

The integrated ratchet with fine toothing (80 teeth/return angle 4.5°) eases and accelerates screwdriving without having to reposition the tool.

The ratchet mechanism completely embedded in the handle ensures very handy and comfortable work. With reversing lever for comfortable clockwise/counterclockwise direction change in one-hand operation.

The ergonomic shape of the handle fills the ball of the hand well, the fingers lie securely in the softly rounded recessed grips. The whole hand comes into contact with the handle, friction loss between hand and handle is avoided. ¼" socket mounting with secure locking mechanism.

- The integrated ratchet with fine toothing ensures fast and safe working
- Reversing lever for comfortable clockwise/counterclockwise direction change
- Convenient working thanks to the ratchet mechanism fully embedded in the handle
- Ergonomic 2-component handle with finger handle recesses and pleasant surface feel for very high power transmission and fatigue-free working
- Fast-rotating sleeve for extremely high working speed
- 1/4" socket mounting with secure ball lock

### 411 A RA T-handle adapter screwdriver with ratchet function, 1/4"

| | EAN | | | | | | | |
|---|---|---|---|---|---|---|---|---|
| Code | 4013288 | | mm | mm | mm | | | |
| 05**023460**001 | *222817* | 1/4" | 45 | 44 | 99 | 1 25/32" | | 2 |

## 454/7 HF Set 1 screwdiver set T-handle screwdrivers Hex-Plus with holding function

- With holding function (HF) on the long arm to securely hold the screw on the tool

### 454/7 HF Set 1 screwdriver set T-handle screwdrivers Hex-Plus with holding function

| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 05**023450**001 | *214829* | | | 1 |
| | | | **454**<br>1x 2,5x100 | |
| | | | **454 HF**<br>1x 3x100; 1x 4x100; 1x 5x150; 1x 6x150; 1x 8x200; 1x 10x200 | |
| | | | **Rack**<br>2x 190,0x50,0 | |

## 454/7 HF Set 2 Screwdriver set T-handle Hex-Plus screwdrivers with holding function

- T-handle screwdriver for the transmission of particularly high tightening and loosening torque
- Ergonomic 2-component handle with finger handle recesses and pleasant surface feel for very high power transmission and fatigue-free working
- Take it easy tool finder: colour coding according to profile and size
- With additional short arm for the transmission of extremely high torques due to the leverage of the long arm
- With holding function (HF) on the long arm to securely hold the screw on the tool
- Including metal rack; the rack can be placed upright or hung on the tool wall.

### 454/7 HF Set 2 Screwdriver set T-handle Hex-Plus screwdrivers with holding function

| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 05**023453**001 | *221742* | | | 1 |
| | | | **454**<br>1x 2,5x100 | |
| | | | **454 HF**<br>1x 3x100; 1x 4x100; 1x 5x150; 1x 6x150; 1x 8x200; 1x 10x200 | |
| | | | **9604**<br>1x 214,0x78,0 | |

## 454/10 HF Set Imperial 1 screwdiver set T-handle screwdrivers Hex-Plus with holding function, imperial

- With holding function (HF) on the long arm to securely hold the screw on the tool

### 454/10 HF Set Imperial 1 screwdiver set T-handle screwdrivers Hex-Plus with holding function, imperial

| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 05**023451**001 | *214836* | | | 1 |
| | | ○ | **454 Imperial**<br>1x 3/32"x150; 1x 7/64"x150 | |
| | | ○ | **454 Imperial HF**<br>1x 1/8"x150; 1x 9/64"x150; 1x 5/32"x150;<br>1x 3/16"x150; 1x 7/32"x150; 1x 1/4"x150;<br>1x 5/16"x150; 1x 3/8"x150 | |
| | | | **Rack**<br>2x 190,0x50,0 | |

## 454/10 HF Set Imperial 2 Screwdriver set T-handle Hex-Plus screwdrivers with holding function, imperial

T-handle screwdriver: The ideal handle shape allows the transmission of particularly high tightening and loosening torque. The ergonomic shape of the handle fills the palm of the hand well, the fingers lie safely in the soft rounded handle recesses. The whole hand makes contact with the handle and friction losses between the hand and the handle are avoided.

With holding function to securely hold the hexagon socket screw on the tool. Special surface treatment of the blades for high corrosion protection and optimum fitting accuracy in the screw. Including metal rack for storage. The rack can be placed on the workbench or hung on the tool wall.

- Including metal rack; the rack can be placed upright or hung on the tool wall.

### 454/10 HF Set Imperial 2 Screwdriver set T-handle Hex-Plus screwdrivers with holding function, imperial

| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 05**023454**001 | *221735* | | | 1 |
| | | ○ | **454 Imperial**<br>1x 3/32"x150; 1x 7/64"x150 | |
| | | ○ | **454 Imperial HF**<br>1x 1/8"x150; 1x 9/64"x150; 1x 5/32"x150;<br>1x 3/16"x150; 1x 7/32"x150; 1x 1/4"x150;<br>1x 5/16"x150; 1x 3/8"x150 | |
| | | | **9605**<br>1x 214,0x78,0 | |

## 454/5 HF SHK Set 1 Screwdriver set T-handle screwdriver Hex-Plus with holding function

- Tool set with 5 T-handle screwdrivers for operations in plumbing, heating and air conditioning
- Extra long blades
- With holding function (HF) on the long arm to securely hold the screw on the tool

### 454/5 HF SHK Set 1 Screwdriver set T-handle screwdriver Hex-Plus with holding function

| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 05**136070**001 | *228000* | | | 1 |
| | | | **454 HF**<br>1x 4x200; 1x 5x200; 1x 6x200; 1x 7x200; 1x 8x200 | |

## 467/7 TORX® HF Set 1 screwdriver set T-handle TORX® screwdrivers with holding function

- With holding function (HF) on the long arm to securely hold the screw on the tool

### 467/7 TORX® HF Set 1 screwdriver set T-handle TORX® screwdrivers with holding function

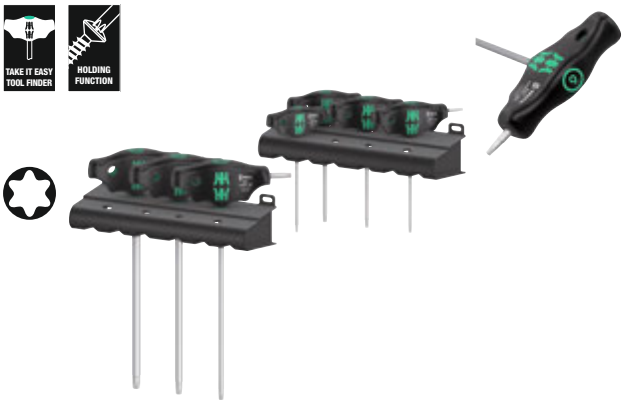


| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 05**023452**001 | *214874* | | | 1 |
| | | | **467 TORX® HF**<br>1x TX 10x100; 1x TX 15x100; 1x TX 20x100; 1x TX 25x100; 1x TX 30x200; 1x TX 40x200; 1x TX 45x200 | |
| | | | **Rack**<br>2x 190,0x50,0 | |

## 467/7 TORX® HF Set 2 Screwdriver set T-handle TORX® screwdrivers with holding function

T-handle screwdriver: The ideal handle shape allows the transmission of particularly high tightening and loosening torque. The ergonomic shape of the handle fills the palm of the hand well, the fingers lie safely in the soft rounded handle recesses. The whole hand makes contact with the handle and friction losses between the hand and the handle are avoided.

With holding function to securely hold the TORX® screw on the tool. Special surface treatment of the blades for high corrosion protection and optimum fitting accuracy in the screw. Including metal rack for storage. The rack can be placed on the workbench or hung on the tool wall.

- Including metal rack; the rack can be placed upright or hung on the tool wall.

### 467/7 TORX® HF Set 2 Screwdriver set T-handle TORX® screwdrivers with holding function

| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 05**023456**001 | *221728* | | | 1 |
| | | | **467 TORX® HF**<br>1x TX 10x100; 1x TX 15x100; 1x TX 20x100; 1x TX 25x100; 1x TX 30x200; 1x TX 40x200; 1x TX 45x200 | |
| | | | **9606**<br>1x 214,0x78,0 | |

## Bicycle set 6

10-piece T-handle screwdriver set for operations on the bike: The ideal handle shape allows the transmission of particularly high tightening and loosening moments. The ergonomic shape of the handle fills the ball of the hand well, the fingers lie securely in the softly rounded recessed grips.

The whole hand comes into contact with the handle and friction losses between hand and handle are avoided. With holding function at the long arm to hold the TORX® and hexagonal socket screws (from size 3) securely on the tool. Special surface treatment for high corrosion protection and optimal fitting accuracy in the screw.

With extra-short arm for the transmission of extremely high torques through the leverage of the long arm. Including metal rack for clearly arranged storage in the workshop.

- T-handle screwdriver for the transmission of particularly high tightening and loosening moments
- With holding function (HF) on the long arm to securely hold the screw on the tool
- With additional short arm for the transmission of extremely high torques due to the leverage of the long arm
- Take it easy Tool Finder: colour coding according to profile and size

### Bicycle set 6

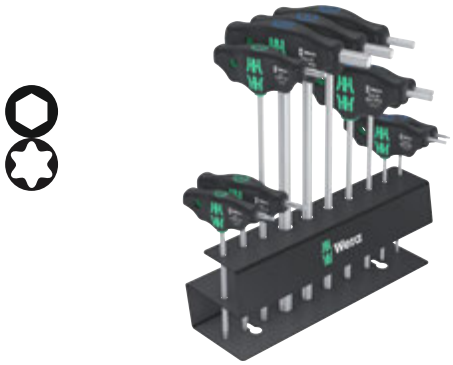

| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 05**004174**001 | *220592* | | | 1 |
| | | | **454**<br>1x 2,5x100 | |
| | | | **454 HF**<br>1x 3x100; 1x 4x150; 1x 5x150; 1x 6x200; 1x 8x200; 1x 10x200 | |
| | | | **467 TORX® HF**<br>1x TX 10x100; 1x TX 20x100; 1x TX 25x200 | |

## 9604 Metal rack for T-handle screwdrivers

Metal rack for T-handle screwdrivers. The rack can be placed on the workbench or hung on the tool wall.

For up to 7 Wera hexagonal socket T-handle screwdrivers.

- Metal rack for T-handle screwdrivers

### 9604 Metal rack for T-handle screwdrivers

| Code | EAN 4013288 | mm | mm | | | | | |
|---|---|---|---|---|---|---|---|---|
| 05**136424**001 | *223418* | 214,0 | 78,0 | | | | | 1 |

## 9605 Metal rack for T-handle screwdrivers

Metal rack for T-handle screwdrivers. The rack can be placed on the workbench or hung on the tool wall.

For up to 10 Wera hexagonal socket T-handle screwdrivers.

- For up to 10 hexagonal socket T-handle screwdrivers

### 9605 Metal rack for T-handle screwdrivers

| Code | EAN 4013288 | mm | mm | | | | | |
|---|---|---|---|---|---|---|---|---|
| 05**136425**001 | *223425* | 214,0 | 78,0 | | | | | 1 |

## 9606 Metal rack for T-handle screwdrivers

Metal rack for T-handle screwdrivers. The rack can be placed on the workbench or hung on the tool wall. For up to 7 Wera TORX® T-handle screwdrivers.

### 9606 Metal rack for T-handle screwdrivers

| | EAN | | | | | | | |
|---|---|---|---|---|---|---|---|---|
| Code | 4013288 | mm | mm | | | | | |
| 05**136426**001 | *223432* | 214,0 | 78,0 | | | | | 1 |

## ESD Series

ESD-safe Micro screwdriver. Dependable protection against electrostatic energy and associated damage. Rapid twisting results from fixing the hand on the head and using the fast-turning zone just below. This makes time-consuming grip adjustments unnecessary.

Power zones with integrated soft sections ensure the transfer of high loosening and tightening torque; a precision zone for the right rotation angle during fine adjustment work.

The Black Point tip offers optimised corrosion protection and an exact fit. Take it easy Tool Finder with colour coding according to profiles and size stamp – for simple and rapid accessing of the required tool.

- ESD-safe tool thanks to surface resistance of ≤ $10^9$ Ohm
- Multi-component Kraftform Micro handle for fast and ergonomic screwdriving
- The Wera Black Point tip offers an exact fit and optimum corrosion protection
- Take it easy Tool Finder: colour coding according to profile and size
- Anti-roll feature and swivel cap for rapid twisting

### 1578 A ESD Kraftform Micro screwdriver for slotted screws

| | EAN | | | | | | | |
|---|---|---|---|---|---|---|---|---|
| Code | 4013288 | mm | mm | mm | mm | mm | | |
| 05**030099**001 | *215253* | 0,16 | 0,8 | 40 | 97 | 2,0 | 1/32" | 5 |
| 05**030101**001 | *039040* | 0,23 | 1,5 | 40 | 97 | 2,0 | 1/16" | 5 |
| 05**030100**001 | *039033* | 0,25 | 1,2 | 40 | 97 | 2,0 | 0,05" | 5 |
| 05**030102**001 | *039057* | 0,30 | 1,8 | 60 | 97 | 2,0 | 0,07" | 5 |
| 05**030108**001 | *194763* | 0,35 | 2,5 | 40 | 97 | 2,5 | 3/32" | 5 |
| 05**030103**001 | *039064* | 0,40 | 2,0 | 60 | 97 | 2,5 | 5/64" | 5 |
| 05**030104**001 | *039071* | 0,40 | 2,5 | 80 | 97 | 2,5 | 3/32" | 5 |
| 05**030105**001 | *039088* | 0,50 | 3,0 | 80 | 97 | 3,0 | 1/8" | 5 |
| 05**030106**001 | *039095* | 0,60 | 3,5 | 80 | 97 | 4,0 | 9/64" | 5 |
| 05**030107**001 | *039101* | 0,80 | 4,0 | 80 | 97 | 4,0 | 5/32" | 5 |

### 1550 PH ESD Kraftform Micro screwdriver for Phillips screws

| | EAN | | | | | | | |
|---|---|---|---|---|---|---|---|---|
| Code | 4013288 | | mm | mm | mm | | | |
| 05**030117**001 [1] [2] | *194725* | PH 000 | 40 | 97 | 1,5/2,5 | 1 9/16" | | 5 |
| 05**030118**001 [1] [2] | *194732* | PH 00 | 40 | 97 | 1,8/2,5 | 1 9/16" | | 5 |
| 05**030110**001 [2] | *039118* | PH 00 | 60 | 97 | 1,8/2,5 | 2 3/8" | | 5 |
| 05**030119**001 [3] | *194749* | PH 0 | 40 | 97 | 3,0 | 1 9/16" | | 5 |
| 05**030111**001 [3] | *039125* | PH 0 | 60 | 97 | 3,0 | 2 3/8" | | 5 |
| 05**030112**001 | *039132* | PH 1 | 80 | 97 | 4,0 | 3 1/8" | | 5 |

[1] Optimised for Asian PH screws

[2] On the output side, the blade is turned to a nominal length of 10 mm

[3] Size 0 modificated according to JCIS 0 (Japanese Camera Industrial Standard)

## 1550 PH S ESD Kraftform Micro screwdrivers

| | EAN | | | | | | | |
|---|---|---|---|---|---|---|---|---|
| Code | 4013288 | | mm | mm | | | | |
| 05**030109**001 | *215222* | # 01 | 40 | 97 | 1 9/16" | | | 5 |

## 1555 PZ ESD Kraftform Micro screwdriver for Pozidriv screws

| | EAN | | | | ∅ | | | |
|---|---|---|---|---|---|---|---|---|
| Code | 4013288 | | mm | mm | mm | | | |
| 05**030115**001 | *039149* | PZ 0 | 60 | 97 | 3,0 | 2 3/8" | | 5 |
| 05**030116**001 | *039156* | PZ 1 | 80 | 97 | 4,0 | 3 1/8" | | 5 |

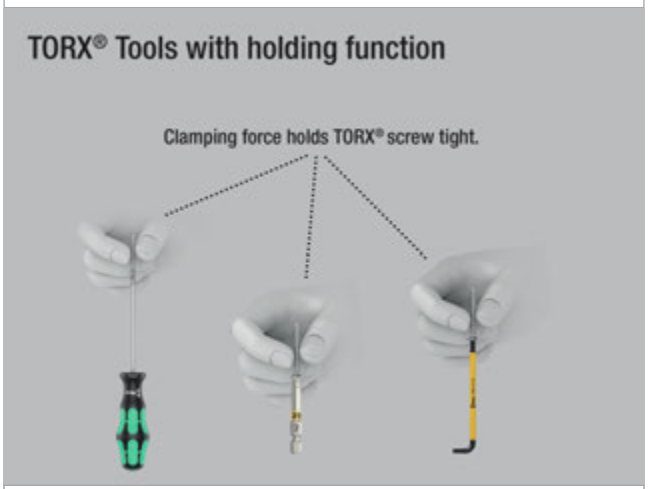


## 1567 TORX® HF ESD Kraftform Micro screwdriver with holding function for TORX® screws

| | EAN | | | | ∅ | | | |
|---|---|---|---|---|---|---|---|---|
| Code | 4013288 | | mm | mm | mm | | | |
| 05**030400**001 | *183972* | TX 4 | 40 | 97 | 2,5 | 1 9/16" | | 5 |
| 05**030401**001 | *183989* | TX 5 | 40 | 97 | 3,0 | 1 9/16" | | 5 |
| 05**030402**001 | *183996* | TX 6 | 40 | 97 | 3,0 | 1 9/16" | | 5 |
| 05**030403**001 | *184009* | TX 7 | 60 | 97 | 3,0 | 2 3/8" | | 5 |
| 05**030404**001 | *184016* | TX 8 | 60 | 97 | 3,0 | 2 3/8" | | 5 |
| 05**030405**001 | *184023* | TX 9 | 60 | 97 | 4,0 | 2 3/8" | | 5 |
| 05**030406**001 | *184030* | TX 10 | 60 | 97 | 4,0 | 2 3/8" | | 5 |

## 1567 TORX® ESD Kraftform Micro screwdriver for TORX® screws

| | EAN | | | | ∅ | | | |
|---|---|---|---|---|---|---|---|---|
| Code | 4013288 | | mm | mm | mm | | | |
| 05**030158**001 | *215239* | TX 2 | 40 | 97 | 2,0 | 1 9/16" | | 5 |
| 05**030159**001 | *215246* | TX 3 | 40 | 97 | 2,0 | 1 9/16" | | 5 |
| 05**030120**001 | *039163* | TX 4 | 40 | 97 | 2,5 | 1 9/16" | | 5 |
| 05**030121**001 | *039170* | TX 5 | 40 | 97 | 3,0 | 1 9/16" | | 5 |
| 05**030122**001 | *039187* | TX 6 | 40 | 97 | 3,0 | 1 9/16" | | 5 |

## 1567 TORX® BO ESD Kraftform Micro screwdriver for tamper-proof TORX® screws

| | EAN | | | | ∅ | | | |
|---|---|---|---|---|---|---|---|---|
| Code | 4013288 | | mm | mm | mm | | | |
| 05**030113**001 | *219473* | TX 6 BO | 60 | 97 | 3,0 | 2 3/8" | | 5 |
| 05**030114**001 | *219480* | TX 8 BO | 60 | 97 | 3,0 | 2 3/8" | | 5 |

## 1567 IPR TORX PLUS® ESD Kraftform Micro screwdriver

| | EAN | | | | ∅ | | | |
|---|---|---|---|---|---|---|---|---|
| Code | 4013288 | | mm | mm | mm | | | |
| 05**030135**001[1] | *194756* | 1 IPR | 40 | 97 | 2,0 | 1 9/16" | | 5 |

[1] Without bore hole

## 1572 ESD Kraftform Micro screwdriver for Microstix® screws

| | EAN | | | | | | | |
|---|---|---|---|---|---|---|---|---|
| Code | 4013288 | | mm | mm | mm | | | |
| 05**030080**001 | *181169* | m | 40 | 97 | 2,5 | 1 9/16" | | 5 |
| 05**030081**001 | *181176* | 00 | 40 | 97 | 2,5 | 1 9/16" | | 5 |
| 05**030082**001 | *181183* | F | 40 | 97 | 2,5 | 1 9/16" | | 5 |
| 05**030083**001 | *181190* | 0 | 40 | 97 | 2,5 | 1 9/16" | | 5 |
| 05**030084**001 | *181206* | 1 | 40 | 97 | 2,5 | 1 9/16" | | 5 |

## 1573 Pentalobe ESD Kraftform Micro screwdriver

- Kraftform Micro screwdriver for Pentalobe screws

## 1573 Pentalobe ESD Kraftform Micro screwdriver

| | EAN | | | | | | | |
|---|---|---|---|---|---|---|---|---|
| Code | 4013288 | | mm | mm | mm | | | |
| 05**030330**001 | *219435* | PL 1,1 | 40 | 97 | 2,0 | 1 9/16" | | 5 |
| 05**030331**001 | *219497* | PL 1,4 | 40 | 97 | 2,0 | 1 9/16" | | 5 |

## 1569 ESD Nutdriver

| | EAN | | | | | | | |
|---|---|---|---|---|---|---|---|---|
| Code | 4013288 | | mm | mm | mm | | | |
| 05**030410**001 | *184047* | 1,5 | 60 | 97 | 5,7 | 2 3/8" | | 5 |
| 05**030411**001 | *184054* | 1,8 | 60 | 97 | 5,7 | 2 3/8" | | 5 |
| 05**030412**001 | *184061* | 2,0 | 60 | 97 | 5,7 | 2 3/8" | | 5 |
| 05**030413**001 | *184078* | 2,5 | 60 | 97 | 5,7 | 2 3/8" | | 5 |
| 05**030414**001 | *184085* | 3,0 | 60 | 97 | 5,7 | 2 3/8" | | 5 |
| 05**030415**001 | *184092* | 3,2 | 60 | 97 | 5,7 | 2 3/8" | | 5 |
| 05**030416**001 | *184108* | 3,5 | 60 | 97 | 5,7 | 2 3/8" | | 5 |
| 05**030417**001 | *184115* | 4,0 | 60 | 97 | 5,7 | 2 3/8" | | 5 |
| 05**030418**001 | *184122* | 4,5 | 60 | 97 | 6,4 | 2 3/8" | | 5 |
| 05**030150**001 | *093486* | 5,0 | 60 | 97 | 7,0 | 2 3/8" | | 5 |
| 05**030151**001 | *093493* | 5,5 | 60 | 97 | 7,8 | 2 3/8" | | 5 |

## 1529 ESD Chip Removal Tool

- Chip lifter to remove firmly-fitted parts from a circuit board after desoldering

## 1529 ESD Chip Removal Tool



| | EAN | | | | | | | |
|---|---|---|---|---|---|---|---|---|
| Code | 4013288 | mm | mm | mm | mm | | | |
| 05**027450**001 | *219428* | 1,0 | 3,5 | 50 | 97 | | | 10 |

## Kraftform Micro ESD Big Pack 1
## Screwdriver set for electronic applications

Electrostatically secured Wera Micro screwdriver 25-piece set. The included screw profiles are especially suitable for the use on mobile phones and tablets. Safe protection against electrostatic energy and associated damage.

By supporting the hand on the rotating cap, and by the fast rotating zone below the rotating cap, lightning fast turning is possible. Time-consuming hand switching is eliminated.

The power zone with integrated soft zones ensures the transmission of high tightening and loosening moments. Precision zone for correct rotation angles whilst adjusting.

The Black Point tip provides fitting accuracy and optimum corrosion protection.

Take it easy Tool Finder with size stamping and colour coding by profile to find the required tool quickly and easily. Storage and transport in a robust textile bag, so the tool is well protected and always close at hand.

- Included profiles especially suitable for servicing mobile phones, tablets and laptops/desktops
- Storage and transport in a robust textile bag, so the tool is well protected and always close at hand

## Kraftform Micro ESD Big Pack 1
## Screwdriver set for electronic applications

| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 05**134019**001 | *219459* | | | 1 |
| | | | **1550 PH ESD Micro**<br>1x PH 000x40 [1) 2)]; 1x PH 00x40 [1) 2)]; 1x PH 0x40 [3)]; 1x PH 1x80 | |
| | | | **1550 PH S ESD Micro**<br>1x # 01x40 | |
| | | | **1567 TORX® HF ESD Micro**<br>1x TX 8x60; 1x TX 10x60 | |
| | | | **1567 TORX® ESD Micro**<br>1x TX 2x40; 1x TX 3x40; 1x TX 4x40; 1x TX 5x40; 1x TX 6x40 | |
| | | | **1567 TORX® BO ESD Micro**<br>1x TX 6 BOx60; 1x TX 8 BOx60 | |
| | | | **1567 TORX PLUS® IPR ESD**<br>1x 1 IPRx40 | |
| | | | **1572 ESD**<br>1x mx40; 1x 00x40; 1x Fx40; 1x 0x40 | |
| | | | **1573 Pentalobe ESD**<br>1x PL 1,1x40; 1x PL 1,4x40 | |
| | | | **1569 ESD**<br>1x 3,0x60 | |
| | | | **1578 A ESD Micro**<br>1x 0,16x0,8x40; 1x 0,23x1,5x40 | |
| | | | **1529 ESD**<br>1x 1,0x3,5x50 | |

[1)] Optimised for Asian PH screws

[2)] On the output side, the blade is turned to a nominal length of 10 mm

[3)] Size 0 modificated according to JCIS 0 (Japanese Camera Industrial Standard)

## 1578 A/6 ESD Screwdriver set and rack for electronic applications

- Includes practical rack for tidy storage of the screwdrivers

### 1578 A/6 ESD Screwdriver set and rack for electronic applications

| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 05**030170**001 | *113900* | | | 1 |
| | | | **1550 PH ESD Micro**<br>1x PH 0x60 [1]; 1x PH 1x80 | |
| | | | **1578 A ESD Micro**<br>1x 0,23x1,5x40; 1x 0,25x1,2x40;<br>1x 0,30x1,8x60; 1x 0,40x2,5x80 | |

[1] Size 0 modificated according to JCIS 0 (Japanese Camera Industrial Standard)

## 1550/6 ESD Screwdriver set and rack for electronic applications

- Includes practical rack for tidy storage of the screwdrivers

### 1550/6 ESD Screwdriver set and rack for electronic applications

| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 05**030180**001 | *194787* | | | 1 |
| | | | **1550 PH ESD Micro**<br>1x PH 000x40 [1) 2)]; 1x PH 00x40 [1) 2)];<br>1x PH 0x40 [3)] | |
| | | | **1578 A ESD Micro**<br>1x 0,35x2,5x40 | |
| | | | **1567 TORX PLUS® IPR ESD**<br>1x 1 IPRx40 | |
| | | | **1572 ESD**<br>1x mx40 | |

[1] Optimised for Asian PH screws

[2] On the output side, the blade is turned to a nominal length of 10 mm

[3] Size 0 modificated according to JCIS 0 (Japanese Camera Industrial Standard)

## 1013 Kraftform Micro ESD bitholding screwdriver

ESD-safe Wera tool. The Kraftform Micro ESD holder for dependable protection against electrostatic energy and associated damage. Electrical surface resistance of ≤ $10^9$ Ohm. Ergonomic Kraftform handle for pleasant and low-fatigue working.

Black anti-roll feature prevents any bothersome rolling away at the workplace. Suitable for the take-up of bits with 4 mm half-moon drive and bits with 4 mm HIOS drive. Ideal for applications on smartphones, cell phones, cameras, electrical appliances, in dental labs and dental surgeries.

- Kraftform Micro ESD bit holder
- ESD-safe tool thanks to surface resistance of ≤ $10^9$ Ohm
- Multi-component Kraftform Micro handle with anti-roll feature and swivel cap
- Suitable for take-up of bits with 4 mm halfmoon drive and bits with 4 mm HIOS drive
- Applications e.g. on smartphones, mobile phones, cameras, electronic equipment

### 1013 Kraftform Micro ESD Bitholding screwdriver

| Code | EAN 4013288 | mm | mm | | | | | |
|---|---|---|---|---|---|---|---|---|
| 05**300004**001 | *168610* | 23 | 97 | 29/32" | | | | 1 |

## Radidaptor - the amazing compact multifunction tool

- ESD bit holder for ESD-safe working
- Surface resistance of ≤ $10^9$ Ohm
- Multi-component Kraftform handle for fast and ergonomic screwdriving
- Hexagonal anti-roll feature against rolling away
- 1/4" hexagon take-up with Rapidaptor quick-release chuck

### 816 R ESD Bitholding screwdriver, non-magnetic

| | EAN | | | | | | | |
|---|---|---|---|---|---|---|---|---|
| Code | 4013288 | | mm | | | | | |
| 05**051464**001 | *103918* | 1/4" | 119 | | | | | 2 |

### 813 R ESD Bitholding screwdriver, non-magnetic

| | EAN | | | | | | | |
|---|---|---|---|---|---|---|---|---|
| Code | 4013288 | | mm | | | | | |
| 05**051273**001 | *103901* | 1/4" | 90 | | | | | 2 |

## Kraftform Kompakt 60 ESD

ESD-safe Wera tool. 16 bits. Includes bitholder 816 R ESD holder, multi-component for high working speeds and particularly ergonomic screwdriving. Dependable protection against electrostatic energy and associated damage.

Compact set that enables both manual as well as power tool operations. Simple sorting according to profile and size, easy bit removal and reinsertion; with belt clip, 18-piece.

- Suitable for manual and power tool operations
- Smooth hard zones for high speed turning, soft grip zones for high torque transfer
- Rapidaptor quick-release chuck
- Tough viscous bits for universal use
- In robust pouch

### Kraftform Kompakt 60 ESD

| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 05**051043**001 | *183934* | | | 1 |
| | | | **816 R ESD**<br>1x 1/4"x119 | |
| | | | **851/4 Z PH**<br>1x PH 1x89; 1x PH 2x89; 1x PH 3x89 | |
| | | | **855/4 Z PZ**<br>1x PZ 1x89; 1x PZ 2x89; 1x PZ 3x89 | |
| | | | **867/4 Z TORX® BO**<br>1x TX 10x89; 1x TX 15x89; 1x TX 20x89;<br>1x TX 25x89; 1x TX 30x89 | |
| | | | **840/4 Z Hex-Plus**<br>1x 3,0x89; 1x 4,0x89; 1x 5,0x89; 1x 6,0x89 | |
| | | | **800/4 Z**<br>1x 1,0x5,5x89 | |

## Kraftform Kompakt Micro 21 ESD 1

Kraftform Kompakt Micro set for precision mechanical work. Suitable for the take-up of bits with 4 mm halfmoon drive (Wera series 9) and bits with 4 mm HIOS drive (Wera series 21). Electrical surface resistance of ≤ $10^9$ Ohm for secure protection against electrostatic charge.

Manufactured in accordance with DIN EN 61340-5-1. Compact handle/interchangeable blade system for fast blade change. Kaftform Micro handle with twist cap and free-turning zone for rapid twisting, making any time-consuming repositioning of the fingers unnecessary.

Power zone with integrated soft zones for the transfer of higher tightening and loosening torque. Precision zone directly above the blade for the right angle for adjustment work. Bits for manual as well as power tool operations. Rapid fixing of the bit: just push the bit into the insert for automatic locking and a secure fit. To change the bit, simply push the sleeve forward and remove. Free-turning sleeve for simple guidance of the tool during the screwdriving process.

### Kraftform Kompakt Micro 21 ESD 1

| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 05**135973**001 | *194855* | | | 1 |
| | | | **1013 Kraftform Micro ESD**<br>1x 97 | |
| | | | **851/9 C**<br>1x PH 000x44 [1]; 1x PH 00x44 [1]; 1x PH 0x44 [2] | |
| | | | **867/9 C TORX®**<br>1x TX 1x44; 1x TX 2x44; 1x TX 3x44; 1x TX 4x44; 1x TX 5x44 | |
| | | | **867/9 C TORX PLUS®**<br>1x 1 IPx44; 1x 2 IPx44; 1x 3 IPx44; 1x 4 IPx44 | |
| | | | **867/9 IPR TORX® PLUS**<br>1x 1 IPRx44 | |
| | | | **872/9**<br>1x mx44; 1x 00x44; 1x Fx44; 1x 0x44 | |
| | | | **800/9 C**<br>1x 0,23x1,5x44; 1x 0,35x2,5x44 | |
| | | | **869/9**<br>1x 2,5x44,0 | |

[1] Optimised for Asian PH screws

[2] Size 0 modificated according to JCIS 0 (Japanese Camera Industrial Standard)

## Kraftform Kompakt Micro 20 ESD 1

- Bit holder suitable for the take-up of bits with 4 mm halfmoon or HIOS drive
- Handle out of material with a surface resistance of ≤ $10^9$ Ohm
- Handle/Interchangeable blade system for rapid exchange of the blade
- Kraftform Micro handle with swivel cap for rapid twisting
- Bits for manual as well as power tool operations

### Kraftform Kompakt Micro 20 ESD 1

| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 05**073671**001 | *169662* | | | 1 |
| | | | **1013 Kraftform Micro ESD**<br>1x 97 | |
| | | | **851/9 C**<br>1x PH 00x44 [1]; 1x PH 0x44 [2]; 1x PH 1x44 [1] | |
| | | | **867/9 C TORX®**<br>1x TX 1x44; 1x TX 2x44; 1x TX 3x44; 1x TX 4x44; 1x TX 5x44; 1x TX 6x44 | |
| | | | **867/9 C TORX PLUS®**<br>1x 1 IPx44; 1x 2 IPx44; 1x 3 IPx44; 1x 4 IPx44 | |
| | | | **840/9 C**<br>1x 1,5x44; 1x 2,0x44 | |
| | | | **800/9 C**<br>1x 0,23x1,5x44; 1x 0,40x2,0x44; 1x 0,50x3,0x44 | |
| | | | **867/9 IPR TORX® PLUS**<br>1x 1 IPRx44 | |

[1] Optimised for Asian PH screws

[2] Size 0 modificated according to JCIS 0 (Japanese Camera Industrial Standard)

## Kraftform Kompakt Micro 11 ESD 1

| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 05**073670**001 | *168344* | | | 1 |
| | | | **1013 Kraftform Micro ESD**<br>1x 97 | |
| | | | **851/9 C**<br>1x PH 00x44 [1]; 1x PH 0x44 [2]; 1x PH 1x44 [1] | |
| | | | **867/9 C TORX®**<br>1x TX 5x44; 1x TX 6x44 | |
| | | | **800/9 C**<br>1x 0,23x1,5x44; 1x 0,40x2,0x44;<br>1x 0,50x3,0x44 | |
| | | | **840/9 C**<br>1x 1,5x44; 1x 2,0x44 | |

[1] Optimised for Asian PH screws

[2] Size 0 modificated according to JCIS 0 (Japanese Camera Industrial Standard)

## Kraftform Kompakt Stubby ESD 1

Handle/interchangeable blade system for lightning fast replacement of the required blade. Especially small ESD bit-holding Stubby screwdriver handle with short blade for eloctrostatically secure working even in hard to reach areas.

Suitable for the mounting of bits with 1/4" hexagon drive as per DIN ISO 1173-C 6.3 and Wera connection series 1. With strong permanent magnet, which also holds large and heavy screws.

The 2-component Kraftform handle with its practical combination of hard and soft zones allows for a firm grip and precise working. High-quality bits for universal use. Compact, textile box with high robustness, low weight and volume. Suitable for docking with the Wera 2go system.

- ESD bits hand holder for electrostatically safe working, magnetic
- 851/1 J: bits optimized for Asian PH screws

## Kraftform Kompakt Stubby ESD 1

| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 05**057472**001 | *214584* | | | 1 |
| | | | **811/1 Stubby ESD**<br>1x 1/4"x54 | |
| | | | **851/1 Z PH**<br>1x PH 0x25; 1x PH 1x25; 1x PH 2x25 | |
| | | | **851/1 J**<br>1x PH 00x25x2,0 [1] | |
| | | | **800/1 Z**<br>1x 0,5x3,0x25; 1x 0,6x4,5x25; 1x 1,0x5,5x25;<br>1x 1,2x6,5x25; 1x 1,2x8,0x25 | |

[1] Size 00 modificated according to JCIS 00 (Japanese Camera Industrial Standard)

## 809/1 ESD Stubby Bitholding screwdriver, with retaining ring

- Short compact shape for working in confined spaces
- Bit holder with retaining ring for bits with 1/4" hexagon drive

### 809/1 ESD Stubby Bitholding screwdriver, with retaining ring

| | EAN | | | | | | | |
|---|---|---|---|---|---|---|---|---|
| Code | 4013288 | | mm | mm | | | | |
| 05**008882**001 | *219206* | 1/4" | 10 | 54 | 3/8" | | | 2 |

## 811/1 ESD Stubby Bitholding screwdriver, magnetic

- Short compact shape for working in confined spaces
- Ergonomic 2-component Kraftform handle for precise work
- Hexagonal anti-roll feature against rolling away
- ESD bits hand holder for electrostatically safe working, magnetic
- For 1/4" bits as per DIN ISO 1173-C 6.3

### 811/1 ESD Stubby Bitholding screwdriver, magnetic

| | EAN | | | | | | | |
|---|---|---|---|---|---|---|---|---|
| Code | | | mm | mm | | | | |
| 05**008881**001 | *212382* | 1/4" | 10 | 54 | 3/8" | | | 2 |

## 9514 ESD Magnetiser SB

Magnetiser. Simply pull the tool along the positive side of the Wera magnetiser and the tool will hold the screw securely on the blade.

To demagnetise, move the tool along the negative side.

- Magnetiser
- ESD-safe tool thanks to surface resistance of ≤ $10^9$ Ohm
- To magnetise and demagnetise tool tips
- Securely holds the screw on the tool

### 9514 ESD Magnetiser SB

| | EAN | | | | | | | |
|---|---|---|---|---|---|---|---|---|
| Code | 4013288 | mm | | | | | | |
| 05**073984**001 | *225924* | 64,6 | | | | | | 1 |

## Kraftform Stainless - stainless steel to prevent rust

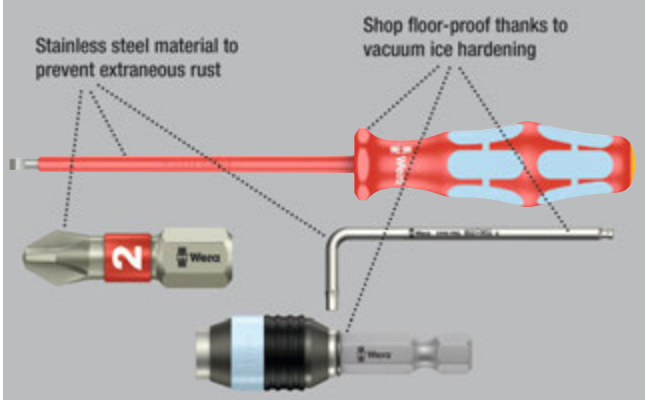


High quality Kraftform Plus VDE screwdriver out of stainless steel by Wera. The stainless tools from Wera are vacuum ice-hardened and have the hardness and strength needed for screw connections. They can be used for industrial application without hesitation.

The individual testing of the Kraftform Stainless VDE screwdrivers at 10,000 volts as per DIN EN 60900 (IEC 60900) ensures safe working with voltages of up to 1,000 volts. Secure working is also ensured under extreme conditions and verified with the proven cold impact resistance at -40° C. Kraftform handle for fast and low-fatigue working.

Take it easy Tool Finder: colour coding according to profile and size. The hexagonal anti-roll feature prevents any bothersome rolling away at the workplace.

## Lasertip - laser engineered blade

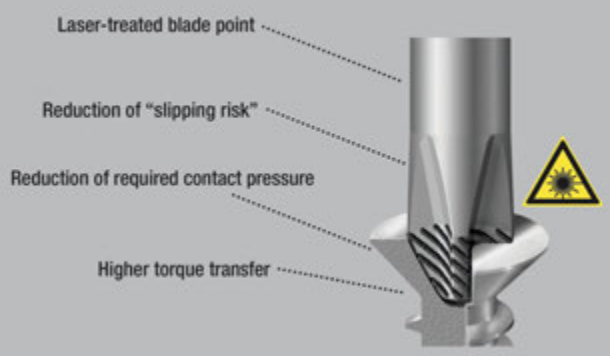


### 3160 i VDE Insulated Screwdriver for slotted screws, stainless

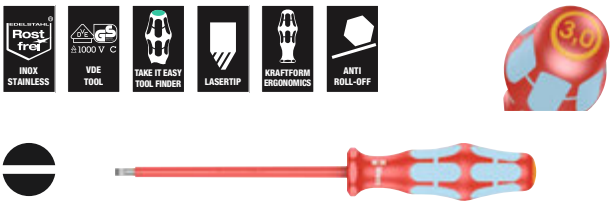




| | EAN | | | | | | | |
|---|---|---|---|---|---|---|---|---|
| Code | 4013288 | mm | mm | mm | mm | | | |
| 05022729001 [1] | *122353* | 0,5 | 3,0 | 80 | 81 | 1/8" | 3 1/8" | 10 |
| 05022730001 [1] | *122148* | 0,6 | 3,5 | 100 | 81 | 9/64" | 4" | 10 |
| 05022731001 | *122155* | 0,8 | 4,0 | 100 | 98 | 5/32" | 4" | 10 |
| 05022732001 | *122162* | 1,0 | 5,5 | 125 | 98 | 7/32" | 5" | 10 |

[1] without Lasertip

### 3162 i PH VDE Insulated Screwdriver for Phillips screws, stainless

| | EAN | | | | | | | |
|---|---|---|---|---|---|---|---|---|
| Code | 4013288 | | mm | mm | | | | |
| 05022733001 | *122179* | PH 1 | 80 | 98 | 3 1/8" | | | 5 |
| 05022734001 | *122186* | PH 2 | 100 | 105 | 4" | | | 5 |

### 3165 i PZ VDE Insulated Screwdriver for Pozidriv screws, stainless

| | EAN | | | | | | | |
|---|---|---|---|---|---|---|---|---|
| Code | 4013288 | | mm | mm | | | | |
| 05022740001 | *183941* | PZ 1 | 80 | 98 | 3 1/8" | | | 5 |
| 05022741001 | *183965* | PZ 2 | 100 | 105 | 4" | | | 5 |

## 3167 i VDE Insulated TORX® screwdriver, stainless steel

| | EAN | | | | | | | |
|---|---|---|---|---|---|---|---|---|
| Code | 4013288 | | mm | mm | | | | |
| 05**022760**001 | *220103* | TX 8 | 80 | 81 | 3 1/8" | | | 5 |
| 05**022761**001 | *220110* | TX 9 | 80 | 81 | 3 1/8" | | | 5 |
| 05**022762**001 | *220127* | TX 10 | 80 | 81 | 3 1/8" | | | 5 |
| 05**022763**001 | *220134* | TX 15 | 80 | 98 | 3 1/8" | | | 5 |
| 05**022764**001 | *220141* | TX 20 | 80 | 98 | 3 1/8" | | | 5 |
| 05**022765**001 | *220158* | TX 25 | 100 | 105 | 4" | | | 5 |
| 05**022766**001 | *220165* | TX 30 | 100 | 105 | 4" | | | 5 |

## 3160 i/7 Screwdriver set, stainless and rack

- Including useful rack for well-arranged storage of the screwdrivers

## 3160 i/7 Screwdriver set, stainless and rack

| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 05**022728**001 | *118073* | | | 1 |
| | | | **3162 i VDE**<br>1x PH 1x80; 1x PH 2x100 | |
| | | | **3160 i VDE**<br>1x 0,5x3,0x80 [1]; 1x 0,6x3,5x100 [1];<br>1x 0,8x4,0x100; 1x 1,0x5,5x125 | |
| | | | **3247**<br>1x 0,5x3,0x70 | |

[1] without Lasertip
[*] Product not available in the USA and Canada.

## 3165 i/6 Screwdriver set, stainless and rack

- Including useful rack for well-arranged storage of the screwdrivers

## 3165 i/6 Screwdriver set, stainless and rack

| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 05**022745**001 | *184207* | | | 1 |
| | | | **3165 i PZ VDE**<br>1x PZ 1x80; 1x PZ 2x100 | |
| | | | **3160 i VDE**<br>1x 0,5x3,0x80 [1]; 1x 0,6x3,5x100 [1];<br>1x 0,8x4,0x100; 1x 1,0x5,5x125 | |

[1] without Lasertip

## 3167 i/7 TORX® Screwdriver set, stainless and rack



| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 05**022767**001 | *220172* | | | 1 |
| | | | **3167 i TORX® VDE**<br>1x TX 8x80; 1x TX 9x80; 1x TX 10x80;<br>1x TX 15x80; 1x TX 20x80; 1x TX 25x100;<br>1x TX 30x100 | |

## Lasertip - laser engineered blade

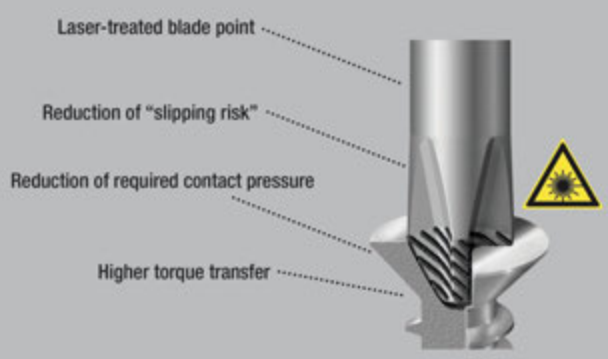


Wera VDE screwdrivers with multi-component Kraftform Plus handle for fast and low-fatigue working: hard gripping zones for high working speeds whereas soft zones ensure high torque transfer. Individually tested at 10,000 volts for secure work at the permissible voltage of 1,000 volts.

The tips of the Wera Lasertip screwdrivers are microscopically roughened by laser beams. This rough surface literally bites into the head of the screw. Any unintentional slipping out is therefore a thing of the past.

Take it easy Tool Finder with colour coding according to profiles and size stamp – for simple and rapid accessing of the required tool. The hexagonal anti-roll feature prevents any bothersome rolling away at the workplace.

- Insulated blades for secure work at 1,000 volts
- Smooth hard zones for high speed turning, soft grip zones for high torque transfer
- Take it easy Tool Finder: colour coding according to profile and size
- Hexagonal anti-roll feature against rolling away
- Conical blade, Lasertip

### 160 i VDE Insulated screwdriver for slotted screws

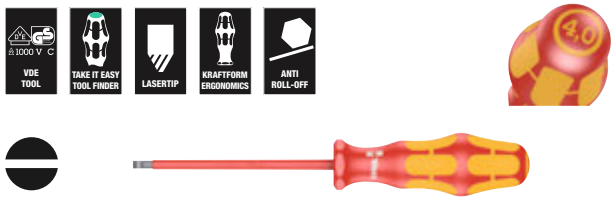


| Code | EAN 4013288 | mm | mm | mm | mm | | | |
|---|---|---|---|---|---|---|---|---|
| 05**006100**001 [1] | *027221* | 0,4 | 2,5 | 80 | 81 | 3/32" | 3 1/8" | 10 |
| 05**006105**001 [1] | *027238* | 0,5 | 3,0 | 100 | 81 | 1/8" | 4" | 10 |
| 05**006110**001 [1] | *027245* | 0,6 | 3,5 | 100 | 81 | 9/64" | 4" | 10 |
| 05**006115**001 | *027252* | 0,8 | 4,0 | 100 | 98 | 5/32" | 4" | 10 |
| 05**006116**001 | *105431* | 0,8 | 4,0 | 150 | 98 | 5/32" | 6" | 5 |
| 05**006120**001 | *027269* | 1,0 | 5,5 | 125 | 98 | 7/32" | 5" | 10 |
| 05**006121**001 | *105448* | 1,0 | 5,5 | 200 | 98 | 7/32" | 8" | 5 |
| 05**006125**001 | *027276* | 1,2 | 6,5 | 150 | 105 | 1/4" | 6" | 10 |
| 05**006126**001 | *105455* | 1,2 | 6,5 | 200 | 105 | 1/4" | 8" | 5 |
| 05**006130**001 | *027283* | 1,2 | 8,0 | 175 | 112 | 5/16" | 7" | 5 |
| 05**006135**001 | *028884* | 1,6 | 8,0 | 200 | 112 | 5/16" | 8" | 5 |
| 05**006140**001 | *028877* | 1,6 | 10,0 | 200 | 112 | 3/8" | 8" | 5 |

[1] without Lasertip

### 160 i SB VDE Insulated screwdriver for slotted screws

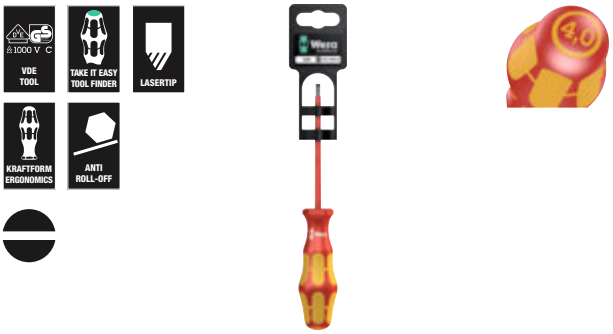


| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 05**100000**001 | *181466* | | **160 i VDE** 1x 0.4x2.5x80 [1] | 10 |
| 05**100001**001 | *181473* | | **160 i VDE** 1x 0.5x3.0x100 [1] | 10 |
| 05**100002**001 | *181480* | | **160 i VDE** 1x 0.6x3.5x100 [1] | 10 |
| 05**100003**001 | *181497* | | **160 i VDE** 1x 0.8x4.0x100 | 10 |
| 05**100004**001 | *181503* | | **160 i VDE** 1x 1.0x5.5x125 | 10 |

[1] without Lasertip

## 160 iS VDE Insulated screwdriver with reduced blade diameter for slotted screws

- Reduced shaft diameter
- Allows screwdriving even in confined situations
- Low-lying screw and spring elements can be reached and actuated

### 160 iS VDE Insulated screwdriver with reduced blade diameter for slotted screws

| Code | EAN 4013288 | mm | mm | mm | mm | | | |
|---|---|---|---|---|---|---|---|---|
| 05**006440**001 | *160089* | 0,6 | 3,5 | 100 | 81 | 9/64" | 4" | 10 |
| 05**006441**001 | *160102* | 0,8 | 4,0 | 100 | 98 | 5/32" | 4" | 10 |
| 05**006442**001 | *160126* | 1,0 | 5,5 | 125 | 98 | 7/32" | 5" | 10 |

## 160 iSS VDE Insulated screwdriver with reduced blade and handle diameter for slotted screws

- Reduced blade and handle diameter
- Allows screwdriving even in confined situations
- Low-lying screw and spring elements can be reached and actuated

### 160 iSS VDE Insulated screwdriver with reduced blade and handle diameter for slotted screws

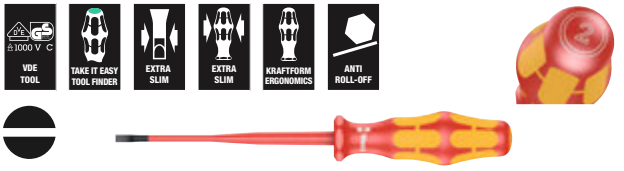


| Code | EAN 4013288 | mm | mm | mm | mm | | | |
|---|---|---|---|---|---|---|---|---|
| 05**020129**001 | *179548* | 0,8 | 4,0 | 100 | 81 | 5/32" | 4" | 5 |

## 162 i PH VDE Insulated screwdriver for Phillips screws

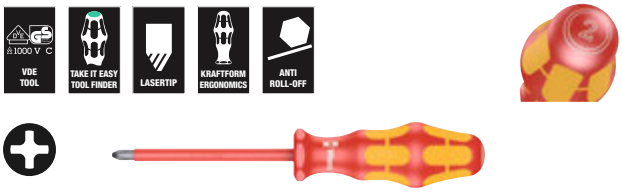


| Code | EAN 4013288 | | mm | mm | | | | |
|---|---|---|---|---|---|---|---|---|
| 05006150001 [1] | *027290* | PH 0 | 80 | 81 | 3 1/8" | | | 5 |
| 05006152001 | *027306* | PH 1 | 80 | 98 | 3 1/8" | | | 5 |
| 05006153001 | *105417* | PH 1 | 150 | 98 | 6" | | | 5 |
| 05006154001 | *027313* | PH 2 | 100 | 105 | 4" | | | 5 |
| 05006159001 | *105424* | PH 2 | 200 | 105 | 8" | | | 5 |
| 05006156001 | *027320* | PH 3 | 150 | 112 | 6" | | | 5 |
| 05006158001 [1] | *027818* | PH 4 | 200 | 112 | 8" | | | 2 |

[1] without Lasertip

## 162 i PH SB VDE Insulated screwdriver for Phillips screws

| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 05100011001 | *181442* | | **162 i PH VDE** 1x PH 1x80 | 5 |
| 05100012001 | *181459* | | **162 i PH VDE** 1x PH 2x100 | 5 |

## 162 iS PH VDE Insulated screwdriver with reduced blade diameter for Phillips screws

- Reduced shaft diameter
- Allows screwdriving even in confined situations
- Low-lying screw and spring elements can be reached and actuated

## 162 iS PH VDE Insulated screwdriver with reduced blade diameter for Phillips screws

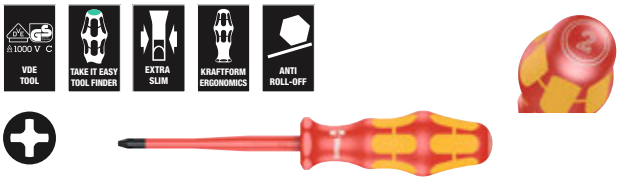


| Code | EAN 4013288 | | mm | mm | | | | |
|---|---|---|---|---|---|---|---|---|
| 05006450001 | *160140* | PH 1 | 80 | 98 | 3 1/8" | | | 5 |
| 05006451001 | *160164* | PH 2 | 100 | 105 | 4" | | | 5 |

## 162 iSS PH VDE Insulated screwdriver with reduced blade diameter for Phillips screws

- Reduced blade and handle diameter
- Allows screwdriving even in confined situations
- Low-lying screw and spring elements can be reached and actuated

## 162 iSS PH VDE Insulated screwdriver with reduced blade diameter for Phillips screws

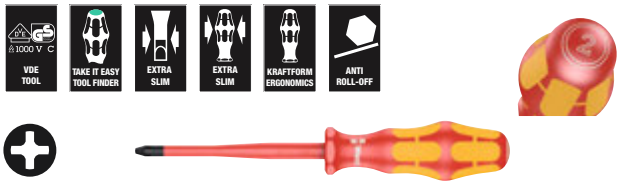


| Code | EAN 4013288 | | mm | mm | | | | |
|---|---|---|---|---|---|---|---|---|
| 05020131001 | *179432* | PH 1 | 80 | 81 | 3 1/8" | | | 5 |
| 05020133001 | *179425* | PH 2 | 100 | 98 | 4" | | | 5 |

## 165 i PZ VDE Insulated screwdriver for Pozidriv screws

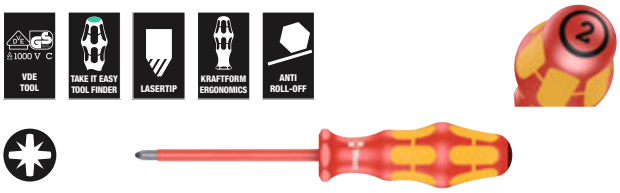


| Code | EAN 4013288 | | mm | mm | | | | |
|---|---|---|---|---|---|---|---|---|
| 05006160001 [1] | *032782* | PZ 0 | 80 | 81 | 3 1/8" | | | 5 |
| 05006162001 | *029836* | PZ 1 | 80 | 98 | 3 1/8" | | | 5 |
| 05006163001 | *105462* | PZ 1 | 150 | 98 | 6" | | | 5 |
| 05006164001 | *029843* | PZ 2 | 100 | 105 | 4" | | | 5 |
| 05006165001 | *105479* | PZ 2 | 200 | 105 | 8" | | | 5 |
| 05006166001 | *029850* | PZ 3 | 150 | 112 | 6" | | | 5 |
| 05006168001 [1] | *029867* | PZ 4 | 200 | 112 | 8" | | | 2 |

[1] without Lasertip

## 165 i PZ SB VDE Insulated screwdriver for Pozidriv screws

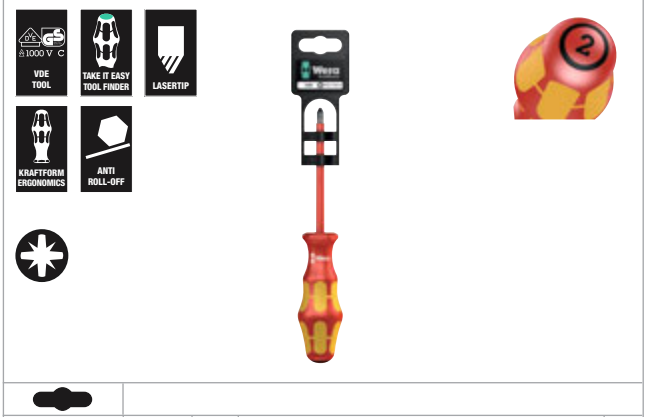


| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 05100015001 | *181510* | | **165 i PZ VDE** 1x PZ 1x80 | 5 |
| 05100016001 | *181527* | | **165 i PZ VDE** 1x PZ 2x100 | 5 |

## 165 iS PZ VDE Insulated screwdriver with reduced blade diameter for Pozidriv screws

- Reduced shaft diameter
- Allows screwdriving even in confined situations
- Low-lying screw and spring elements can be reached and actuated

### 165 iS PZ VDE Insulated screwdriver with reduced blade diameter for Pozidriv screws

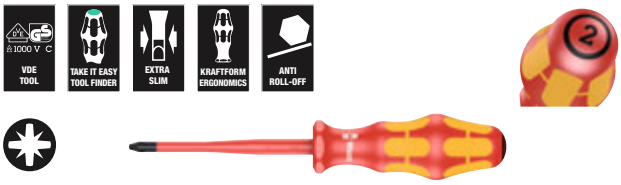


| | EAN | | | | | | | |
|---|---|---|---|---|---|---|---|---|
| Code | 4013288 | | mm | mm | | | | |
| 05**006460**001 | *160188* | PZ 1 | 80 | 98 | 3 1/8" | | | 5 |
| 05**006461**001 | *160249* | PZ 2 | 100 | 105 | 4" | | | 5 |

## 162 i PH/S VDE Insulated screwdriver for PlusMinus screws (Phillips/slotted)

- Combination profile Phillips/slotted

### 162 i PH/S VDE Insulated screwdriver for PlusMinus screws (Phillips/slotted)

| | EAN | | | | | | | |
|---|---|---|---|---|---|---|---|---|
| Code | 4013288 | | mm | mm | | | | |
| 05**006380**001 | *102614* | # 1 | 80 | 98 | 3 1/8" | | | 5 |
| 05**006381**001 | *102621* | # 2 | 100 | 105 | 4" | | | 5 |

### 162 i PH/S SB VDE Insulated screwdriver for PlusMinus screws (Phillips/slotted)

| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 05**100019**001 | *186560* | | **162 i PH/S VDE** 1x # 1x80 | 5 |
| 05**100020**001 | *186577* | | **162 i PH/S VDE** 1x # 2x100 | 5 |

## 162 iS PH/S VDE Insulated screwdriver with reduced blade diameter for PlusMinus screws (Phillips/slotted)

- Reduced shaft diameter: combination profile Phillips/slotted
- Allows screwdriving even in confined situations
- Low-lying screw and spring elements can be reached and actuated

### 162 iS PH/S VDE Insulated screwdriver with reduced blade diameter for PlusMinus screws (Phillips/slotted)

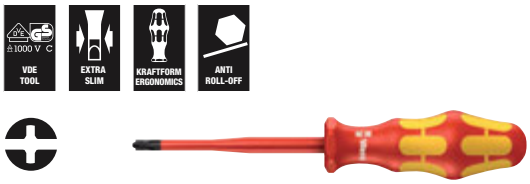


| | EAN | | | | | | | |
|---|---|---|---|---|---|---|---|---|
| Code | 4013288 | | mm | mm | | | | |
| 05**006455**001 | *160201* | # 1 | 80 | 98 | 3 1/8" | | | 5 |
| 05**006456**001 | *160225* | # 2 | 100 | 105 | 4" | | | 5 |

## 165 i PZ/S VDE Insulated screwdriver for PlusMinus screws (Pozidriv/slotted)

- Combination profile Pozidriv/slotted

### 165 i PZ/S VDE Insulated screwdriver for PlusMinus screws (Pozidriv/slotted)

| | EAN | | | | | | | |
|---|---|---|---|---|---|---|---|---|
| Code | 4013288 | | mm | mm | | | | |
| 05**006190**001 | *102638* | # 1 | 80 | 98 | 3 1/8" | | | 5 |
| 05**006191**001 | *102645* | # 2 | 100 | 105 | 4" | | | 5 |

### 165 i PZ/S SB VDE Insulated screwdriver for PlusMinus screws (Pozidriv/slotted)

| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 05**100021**001 | *186584* | | **165 i PZ/S VDE** 1x # 1x80 | 5 |
| 05**100022**001 | *186591* | | **165 i PZ/S VDE** 1x # 2x100 | 5 |

## 165 iS PZ/S VDE Insulated screwdriver with reduced blade diameter for PlusMinus screws (Pozidriv/slotted)

- Reduced shaft diameter: combination profile Pozidriv/slotted
- Allows screwdriving even in confined situations
- Low-lying screw and spring elements can be reached and actuated

### 165 iS PZ/S VDE Insulated screwdriver with reduced blade diameter for PlusMinus screws (Pozidriv/slotted)

| Code | EAN 4013288 | | mm | mm | | | | |
|---|---|---|---|---|---|---|---|---|
| 05006465001 | *160263* | # 1 | 80 | 98 | 3 1/8" | | | 5 |
| 05006466001 | *160287* | # 2 | 100 | 105 | 4" | | | 5 |

## 165 iSS PZ/S VDE Insulated screwdriver with reduced blade diameter for PlusMinus screws (Pozidriv/slotted)

- Reduced blade and handle diameter
- Allows screwdriving even in confined situations
- Low-lying screw and spring elements can be reached and actuated

### 165 iSS PZ/S VDE Insulated screwdriver with reduced blade diameter for PlusMinus screws (Pozidriv/slotted)

| Code | EAN 4013288 | | mm | mm | | | | |
|---|---|---|---|---|---|---|---|---|
| 05020132001 | *179418* | # 1 | 80 | 81 | 3 1/8" | | | 5 |
| 05020134001 | *179401* | # 2 | 100 | 98 | 4" | | | 5 |

## 167 i VDE Insulated screwdriver for TORX® screws

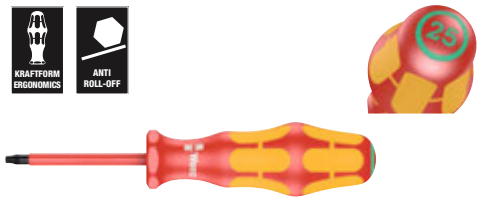

| Code | EAN 4013288 | | mm | mm | | | | |
|---|---|---|---|---|---|---|---|---|
| 05006181001 | *108876* | TX 5 | 80 | 81 | 3 1/8" | | | 5 |
| 05006182001 | *108883* | TX 6 | 80 | 81 | 3 1/8" | | | 5 |
| 05006183001 | *108890* | TX 7 | 80 | 81 | 3 1/8" | | | 5 |
| 05006184001 | *108906* | TX 8 | 80 | 81 | 3 1/8" | | | 5 |
| 05006169001 | *036452* | TX 9 | 80 | 81 | 3 1/8" | | | 5 |
| 05006170001 | *036667* | TX 10 | 80 | 81 | 3 1/8" | | | 5 |
| 05006172001 | *036674* | TX 15 | 80 | 98 | 3 1/8" | | | 5 |
| 05006174001 | *036681* | TX 20 | 80 | 98 | 3 1/8" | | | 5 |
| 05006176001 | *036698* | TX 25 | 100 | 105 | 4" | | | 5 |
| 05006177001 | *036469* | TX 27 | 100 | 105 | 4" | | | 5 |
| 05006178001 | *036704* | TX 30 | 100 | 105 | 4" | | | 5 |
| 05006179001 | *036476* | TX 40 | 150 | 112 | 6" | | | 5 |

## 168 i VDE Insulated screwdriver for square socket head screws

| Code | EAN 4013288 | | | mm | mm | | | |
|---|---|---|---|---|---|---|---|---|
| 05004780001 | *038777* | | # 1 | 80 | 98 | 3 1/8" | | 5 |
| 05004783001 | *105486* | | # 1 | 150 | 98 | 6" | | 5 |
| 05004781001 | *038784* | | # 2 | 100 | 105 | 4" | | 5 |
| 05004784001 | *105493* | | # 2 | 200 | 105 | 8" | | 5 |
| 05004782001 | *040909* | | # 3 | 150 | 112 | 6" | | 5 |

## 168 i SB VDE Insulated screwdriver for square socket head screws

| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 05100024001 | *181534* | | **168 i VDE**<br>1x # 1x80 | 5 |
| 05100025001 | *181541* | | **168 i VDE**<br>1x # 2x100 | 5 |
| 05100026001 | *181558* | | **168 i VDE**<br>1x # 3x150 | 5 |

## 190 i VDE Insulated nutdriver

| Code | EAN 4013288 | mm | | mm | mm | mm | | |
|---|---|---|---|---|---|---|---|---|
| 05**005300**001 | *032485* | 5,5 | | 125 | 98 | 11,0 | 5" | 5 |
| 05**005305**001 | *032492* | 6,0 | | 125 | 98 | 12,0 | 5" | 5 |
| 05**005310**001 | *032508* | 7,0 | | 125 | 105 | 14,0 | 5" | 5 |
| 05**005315**001 | *032515* | 8,0 | | 125 | 105 | 15,0 | 5" | 5 |
| 05**005320**001 | *032522* | 9,0 | | 125 | 105 | 16,0 | 5" | 5 |
| 05**005325**001 | *032539* | 10,0 | | 125 | 112 | 17,0 | 5" | 5 |
| 05**005330**001 | *032546* | 11,0 | | 125 | 112 | 19,0 | 5" | 5 |
| 05**005335**001 | *032553* | 12,0 | | 125 | 112 | 20,0 | 5" | 5 |
| 05**005340**001 | *032560* | 13,0 | | 125 | 112 | 21,0 | 5" | 5 |

## 247 Single-pole phase tester

| Code | EAN 4013288 | mm | mm | mm | mm | | | |
|---|---|---|---|---|---|---|---|---|
| 05**005655**001 | *002686* | 0,5 | 3,0 | 70 | 3,0 | 1/8" | 2 3/4" | 5 |

**)Product not available in the USA and Canada.

## 247 SB Single-pole phase tester

| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 05**100100**001 | *181664* | | **247**<br>1x 0.5x3.0x70 | 5 |

**)Product not available in the USA and Canada.

## Kraftform Big Pack 100 VDE

14-piece screwdriver set with individually tested, insulated screwdrivers as per IEC 60900. Individual testing at 10,000 volts so as to ensure safe working at the permitted voltage of 1,000 volts.

- Insulated blades for secure work at 1,000 volts
- Multi-component Kraftform handle for high working speeds and ergonomic screwdriving
- Take it easy Tool Finder: colour coding according to profile and size
- Hexagonal anti-roll feature against rolling away
- Lasertip tips for more secure fit in the screw head

## Kraftform Big Pack 100 VDE

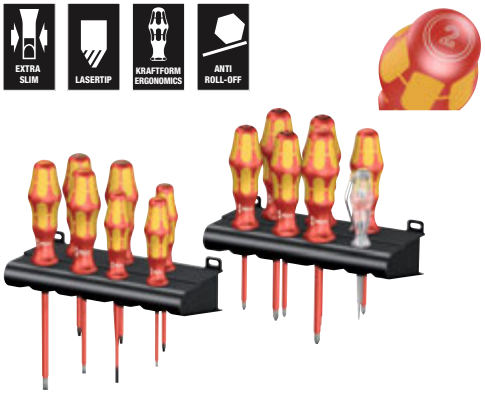

| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 05**105631**001 | *163639* | | | 1 |
| | | | **162 i PH VDE**<br>1x PH 1x80; 1x PH 2x100 | |
| | | | **165 i PZ VDE**<br>1x PZ 1x80; 1x PZ 2x100 | |
| | | | **165 i PZ/S VDE**<br>1x # 1x80; 1x # 2x100 | |
| | | | **167 i TORX® VDE**<br>1x TX 10x80; 1x TX 15x80; 1x TX 20x80 | |
| | | | **160 iS**<br>1x 0,6x3,5x100 | |
| | | | **160 i VDE**<br>1x 0,4x2,5x80 [1]; 1x 0,8x4,0x100;<br>1x 1,0x5,5x125 | |
| | | | **247**<br>1x 0,5x3,0x70 | |
| | | | **Rack**<br>2x 190,0x50,0 | |

[1] without Lasertip
**)Product not available in the USA and Canada.

## Kraftform 2go 100

11 VDE-insulated, Kraftform screwdrivers; with Take it easy Toolfinder; in the Wera 2go 4 quiver; comes with an adjustable partition element for individual sectioning.

- Suitable for docking with the Wera 2go system

### Kraftform 2go 100

| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 050**04310**001 | *187826* | | | 1 |
| | | | **Wera 2go 4** 1x 165,0x165,0x105,0 | |
| | | | **162 i PH VDE** 1x PH 1x80; 1x PH 2x100 | |
| | | | **165 i PZ VDE** 1x PZ 1x80; 1x PZ 2x100 | |
| | | | **167 i TORX® VDE**<br>1x TX 10x80; 1x TX 15x80; 1x TX 20x80 | |
| | | | **160 i VDE**<br>1x 0,4x2,5x80 [1]; 1x 0,8x4,0x150;<br>1x 1,0x5,5x200 | |
| | | | **160 iS** 1x 0,6x3,5x100 | |
| | | | **K120** 1x 50,0x120,0 | |

[1] without Lasertip

## 160 i/6 Rack Screwdriver set Kraftform Plus Series 100 + Rack

- Including useful rack for well-arranged storage of the screwdrivers

### 160 i/6 Rack Screwdriver set Kraftform Plus Series 100 + Rack

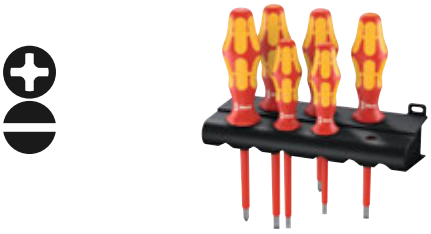

| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 050**06145**001 | *027887* | | | 1 |
| | | | **162 i PH VDE** 1x PH 1x80; 1x PH 2x100 | |
| | | | **160 i VDE**<br>1x 0,4x2,5x80 [1]; 1x 0,6x3,5x100 [1];<br>1x 0,8x4,0x100; 1x 1,0x5,5x125 | |

[1] without Lasertip

## 160 i/7 Rack Screwdriver set Kraftform Plus Series 100, single-pole phase tester and rack

- Including useful rack for well-arranged storage of the screwdrivers

### 160 i/7 Rack Screwdriver set Kraftform Plus Series 100, single-pole phase tester and rack

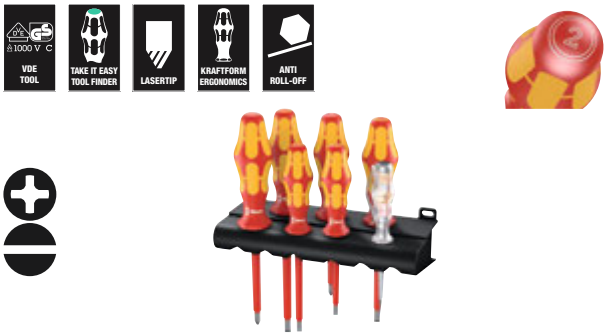

| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 050**06147**001 | *041708* | | | 1 |
| | | | **162 i PH VDE**<br>1x PH 1x80; 1x PH 2x100 | |
| | | | **160 i VDE**<br>1x 0,4x2,5x80 [1]; 1x 0,6x3,5x100 [1];<br>1x 0,8x4,0x100; 1x 1,0x5,5x125 | |
| | | | **247**<br>1x 0,5x3,0x70 | |

[1] without Lasertip
[*] Product not available in the USA and Canada.

## 160 i/165 i/7 Rack Screwdriver set Kraftform Plus Series 100, single-pole phase tester and rack

- Including useful rack for well-arranged storage of the screwdrivers

### 160 i/165 i/7 Rack Screwdriver set Kraftform Plus Series 100, single-pole phase tester and rack

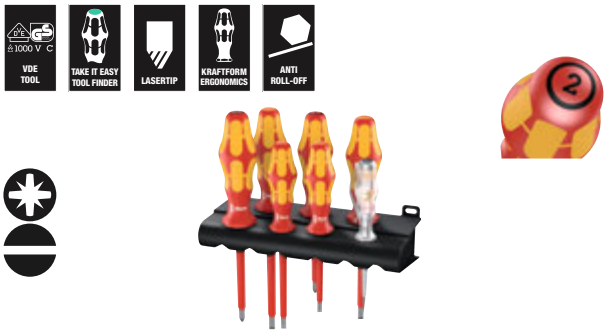

| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 050**06148**001 | *041715* | | | 1 |
| | | | **165 i PZ VDE**<br>1x PZ 1x80; 1x PZ 2x100 | |
| | | | **160 i VDE**<br>1x 0,4x2,5x80 [1]; 1x 0,6x3,5x100 [1];<br>1x 0,8x4,0x100; 1x 1,0x5,5x125 | |
| | | | **247**<br>1x 0,5x3,0x70 | |

[1] without Lasertip
[*] Product not available in the USA and Canada.

## 167 i/6 Screwdriver set Kraftform Plus Series 100

| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 05**133356**001 | *160072* | | | 1 |
| | | | **167 i TORX® VDE**<br>1x TX 8x80; 1x TX 9x80; 1x TX 10x80;<br>1x TX 15x80; 1x TX 20x80; 1x TX 25x100 | |

## 160 iS/7 Rack Screwdriver set Kraftform Plus Series 100, single-pole phase tester and rack. With reduced blade diameter.

- Reduced shaft diameter
- Allows screwdriving even in confined situations
- Low-lying screw and spring elements can be reached and actuated
- Including useful rack for well-arranged storage of the screwdrivers

## 160 iS/7 Rack Screwdriver set Kraftform Plus Series 100, single-pole phase tester and rack. With reduced blade diameter

| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 05**006480**001 | *160713* | | | 1 |
| | | | **162 iS**<br>1x PH 1x80; 1x PH 2x100 | |
| | | | **165 iS PZ/S**<br>1x # 2x100 | |
| | | | **160 iS**<br>1x 0,6x3,5x100; 1x 0,8x4,0x100;<br>1x 1,0x5,5x125 | |
| | | | **247**<br>1x 0,5x3,0x70 | |

**)Product not available in the USA and Canada.

## 160 iSS/7 Screwdriver set Kraftform Plus Series 100. With reduced blade diameters and smaller handle diameters

- Kraftform screwdrivers with reduced blade diameter as well as partially with slim handle design
- Allows screwdriving even in confined situations
- Low-lying screw and spring elements can be reached and actuated
- Safe work at a voltage of 1,000 volts, individually tested

## 160 iSS/7 Screwdriver set Kraftform Plus Series 100. With reduced blade diameters and smaller handle diameters

| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 05**135961**001 | *178640* | | | 1 |
| | | | **160 iSS** 1x 0,8x4,0x100 | |
| | | | **160 iS** 1x 0,6x3,5x100; 1x 1,0x5,5x125 | |
| | | | **162 iSS** 1x PH 1x80; 1x PH 2x100 | |
| | | | **165 iSS PZ/S** 1x # 1x80; 1x # 2x100 | |

## 160 i/168 i/6 Rack Screwdriver set Kraftform Plus Series 100, and rack

- Including useful rack for well-arranged storage of the screwdrivers

### 160 i/168 i/6 Rack Screwdriver set Kraftform Plus Series 100, and rack

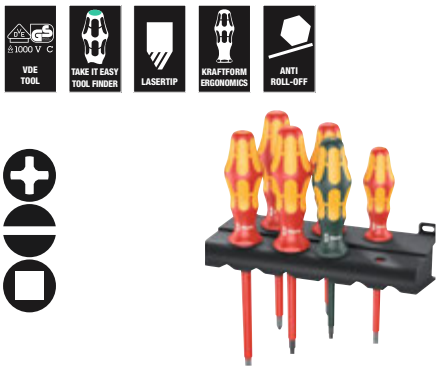

| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 05**347777**001 | *122957* | | | 1 |
| | | | **162 i PH VDE**<br>1x PH 1x80; 1x PH 2x100 | |
| | | | **160 i VDE**<br>1x 0,6x3,5x100 [1]; 1x 1,0x5,5x125 | |
| | | | **168 i VDE**<br>1x # 1x80; 1x # 2x100 | |

[1] without Lasertip

## 160 i/162 i/167 i/9 Screwdriver set Kraftform Plus Series 100

| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 05**133355**001 | *160065* | | | 1 |
| | | | **162 i PH VDE** 1x PH 2x100 | |
| | | | **165 i PZ VDE** 1x PZ 2x100 | |
| | | | **165 i PZ/S VDE** 1x # 1x80; 1x # 2x100 | |
| | | | **167 i TORX® VDE**<br>1x TX 15x80; 1x TX 20x80; 1x TX 25x100 | |
| | | | **160 i VDE**<br>1x 0,4x2,5x80 [1]; 1x 1,0x5,5x125 | |

[1] without Lasertip

## 165 iS PZ/S # 1 + 2 Screwdriver set Kraftform Plus series 100. With reduced blade diameter

- Reduced shaft diameter: combination profile - Pozidriv / slotted
- Allows screwdriving even in confined situations
- Low-lying screw and spring elements can be reached and actuated

### 165 iS PZ/S # 1 + 2 Screwdriver set Kraftform Plus series 100. With reduced blade diameter



| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 05**006470**001 | *214317* | | | 1 |
| | | | **165 iS PZ/S**<br>1x # 1x80; 1x # 2x100 | |

## Kraftform Kompakt VDE Safe-Torque Speed control cabinet Set 1

23-piece Kraftform Kompakt VDE set.

One Safe-Torque Speed 7508 VDE torque wrench with five selectable maximum tightening torques (0.4; 0.8; 1.2; 1.6; 2.0 Nm), one 7516 VDE Safe-Torque Speed torque wrench with five selectable maximum tightening torques (0.4; 0.8; 1.2; 1.6; 2.0 Nm), each with a fixed position (Torque Lock) for unlimited loosening and tightening moments, digital torque value display, reliable slip-over mechanism when the set torque is reached, one 817 VDE bitholding screwdriver.

Torque wrenches and bitholding screwdriver solely for Wera VDE blades.

20 VDE blades (each 157 mm length) with Take it easy Tool Finder: colour coding by profile and laser-engraved size indication, most of which with reduced blade diameter, so that even low-lying screw and spring elements can be easily reached and operated.

In a robust textile box for neat storage and convenient transport.

- Individually tested tools as per IEC 60900
- VDE bitholding torque screwdriver 7508 VDE with 5 pre-set values (0.4; 0.8; 1.2; 1.6; 2.0 Nm)
- VDE bitholding torque screwdriver 7516 with 5 pre-set values (2.4; 2.8; 3.2; 3.6; 4.0 Nm)
- Speed: Extremely fast setting of desired torque values
- Torque Lock function: for high tightening and loosening moments without torque
- 817 VDE handle for Kraftform Kompakt interchangeable blades
- VDE blades (157 mm length) with practical spinning function, anti-roll protection and Take it easy Tool Finder: colour coding by profile and laser-engraved size indication
- Compact and stable tool box with Wera 2go compatibility

### Kraftform Kompakt VDE Safe-Torque Speed control cabinet Set 1

| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 05**006633**001 | *234261* | | | 1 |
| | | | **7508 VDE**<br>9 mm; 0,4 Nm; 0,8 Nm; 1,2 Nm; 1,6 Nm; 2,0 Nm; 192 mm | |
| | | | **7516 VDE**<br>9 mm; 2,4 Nm; 2,8 Nm; 3,2 Nm; 3,6 Nm; 4,0 Nm; 192 mm | |
| | | | **817 VDE**<br>1x 9x98 | |
| | | | **Kraftform Kompakt VDE 62 iS Take it easy**<br>1x PH 1x157; 1x PH 2x157 | |
| | | | **Kraftform Kompakt VDE 65 iS Take it easy**<br>1x PZ 1x157; 1x PZ 2x157 | |
| | | | **Kraftform Kompakt VDE 62 iS PH/S Take it easy**<br>1x # 1x157; 1x # 2x157 | |
| | | | **Kraftform Kompakt VDE 65 iS PZ/S Take it easy**<br>1x # 1x157; 1x # 2x157 | |
| | | | **Kraftform Kompakt VDE 67 iS TORX® Take it easy**<br>1x TX 15x157; 1x TX 20x157; 1x TX 25x157 | |
| | | | **Kraftform Kompakt VDE 67 i TORX® Take it easy**<br>1x TX 10x157; 1x TX 30x157 | |
| | | | **Kraftform Kompakt VDE 64 i Take it easy**<br>1x 2.5x157; 1x 3.0x157; 1x 4.0x157; 1x 5.0x157 | |
| | | | **Kraftform Kompakt VDE 60 iS Take it easy**<br>1x 0.6x3.5x157; 1x 0.8x4.0x157; 1x 1.0x5.5x157 | |

## 7508 VDE Kraftform Safe-Torque Speed Torque screwdriver, 0.4-2.0 Nm

- VDE bladeholding torque screwdriver 7508 VDE with 5 pre-set values (0.4; 0.8; 1.2; 1.6; 2.0 Nm)
- Speed: Extremely fast setting of desired torque values
- Safe: Slip-over torque function which can not be overtightened - for clockwise/counterclockwise torque operation
- Torque Lock function: for high tightening and loosening moments without torque
- With fast-rotating sleeve and mounting for Wera VDE interchangeable blades

### 7508 VDE Kraftform Safe-Torque Speed Torque screwdriver, 0.4-2.0 Nm

| | EAN | | | | | | | |
|---|---|---|---|---|---|---|---|---|
| Code | 4013288 | mm | Nm | Nm | Nm | Nm | Nm | |
| 05**075870**001 | *233578* | 9 | 0,4 | 0,8 | 1,2 | 1,6 | 2,0 | 1 |

## 7516 VDE Kraftform Safe-Torque Speed Torque screwdriver, 2.4-4.0 Nm

- VDE bladeholding torque screwdriver 7516 with 5 pre-set values (2.4; 2.8; 3.2; 3.6; 4.0 Nm)

### 7516 VDE Kraftform Safe-Torque Speed Torque screwdriver, 2.4-4.0 Nm

| | EAN | | | | | | | |
|---|---|---|---|---|---|---|---|---|
| Code | 4013288 | mm | Nm | Nm | Nm | Nm | Nm | |
| 05**075876**001 | *233585* | 9 | 2,4 | 2,8 | 3,2 | 3,6 | 4,0 | 1 |

## Kraftform Kompakt VDE Stainless 17 extra slim 1 Tool finder

2x 3817 Kraftform VDE bitholding screwdrivers for ergonomic screwdriving. 15 VDE stainless blades, some of which with reduced blade diameter (iS), so that even low-lying screw and spring elements can be easily reached and operated; with Take it easy Tool finder: Colour coding by profile and laser-engraved size indication - for quick and easy identification of the required tool. Individually tested at 10.000 V for safe working at the approved voltage of 1.000 V.

Wera's stainless steel tools are vacuum ice tempered and therefore have the hardness and strength properties required for screw connections. Industrial use is possible without restrictions. In a robust belt pouch.

The pouch is suitable for attachment to walls, shelves, workshop trolleys and the Wera 2go system thanks to the hook and loop fastener system on the back.

### Kraftform Kompakt VDE Stainless 17 extra slim 1 Tool finder

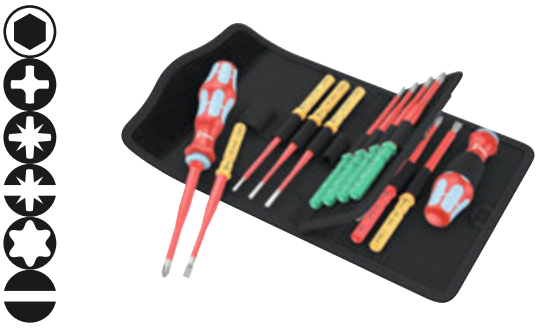

| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 05**006631**001 | *230034* | | | 1 |
| | | | **3817 VDE Stainless**<br>2x 9x98 | |
| | | | **Kraftform Kompakt VDE 3062 iS Take it easy**<br>1x PH 1x157; 1x PH 2x157 | |
| | | | **Kraftform Kompakt VDE 3065 iS PZ Take it easy**<br>1x PZ 1x157; 1x PZ 2x157 | |
| | | | **Kraftform Kompakt VDE 3065 iS PZ/S Take it easy**<br>1x # 1x157; 1x # 2x157 | |
| | | | **Kraftform Kompakt VDE 3067 i Take it easy**<br>1x TX 10x157 | |
| | | | **Kraftform Kompakt VDE 3067 iS Take it easy**<br>1x TX 15x157; 1x TX 20x157; 1x TX 25x157 | |
| | | | **Kraftform Kompakt VDE 3060 i Take it easy**<br>1x 0,4x2,5x157; 1x 1,2x6,5x157 | |
| | | | **Kraftform Kompakt VDE 3060 iS Take it easy**<br>1x 0,6x3,5x157; 1x 0,8x4,0x157; 1x 1,0x5,5x157 | |
| | | | **Hook and Loop Fastener Strip 70**<br>1x 50,0x70,0 | |

## Kraftform Kompakt VDE Stainless 8 extra slim 1 Tool finder

One 3817 VDE Kraftform bitholding screwdriver for ergonomic screwdriving. 7 VDE stainless blades, some of which with reduced blade diameter (iS), so that even low-lying screw and spring elements can be easily reached and operated; with Take it easy Tool finder: Colour coding by profile and laser-engraved size indication - for quick and easy identification of the required tool. Individually tested at 10,000 V for safe working at the approved voltage of 1,000 V.

Wera's stainless steel tools are vacuum ice tempered and therefore have the hardness and strength properties required for screw connections. Industrial use is possible without restrictions.

In a robust belt pouch. The pouch is suitable for attachment to walls, shelves, workshop trolleys and the Wera 2go system thanks to the hook and loop fastener system on the back.

### Kraftform Kompakt VDE Stainless 8 extra slim 1 Tool finder

| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 05**006630**001 | *229656* | | | 1 |
| | | | **3817 VDE Stainless**<br>1x 9x98 | |
| | | | **Kraftform Kompakt VDE 3067 i Take it easy**<br>1x TX 8x157; 1x TX 9x157; 1x TX 10x157;<br>1x TX 30x157 | |
| | | | **Kraftform Kompakt VDE 3067 iS Take it easy**<br>1x TX 15x157; 1x TX 20x157; 1x TX 25x157 | |
| | | | **Hook and Loop Fastener Strip 70**<br>1x 50,0x70,0 | |

## 3817 VDE Kraftform Stainless blade-holding handle SB

Premium VDE bitholding screwdriver solely for Wera VDE stainless blades. The handle/blade system allows for lightning-fast change of the required blade and thus a wide range of applications.

Kraftform Plus handle for comfortable ergonomic screwdriving, which avoids blisters and calluses. Hard handle zones for high working speeds, while soft handle zones guarantee a high torque transfer.

- Kraftform Kompakt VDE Stainless bitholding handle
- Smooth hard zones for high speed turning, soft grip zones for high torque transfer

### 3817 VDE Kraftform Stainless blade-holding handle SB

| Code | EAN 4013288 | mm | mm | | | | | |
|---|---|---|---|---|---|---|---|---|
| 05**003991**001 | *220189* | 9 | 98 | | | | | 1 |

## Kraftform Kompakt VDE 3060 i Take it easy SB, stainless steel

VDE stainless blade for the Kraftform Kompakt handle/blade system for lightning-fast blade changes without special tools. Individually tested tools as per IEC 60900. Individually tested at 10,000 V for safe working at the approved voltage of 1,000 V.

Wera's stainless steel tools are vacuum ice hardened and therefore have the hardness and strength properties required for screw connections. Industrial use is possible without restrictions.

- Kraftform Kompakt VDE interchangeable blades for slotted screws
- Insulated, individually tested as per IEC 60900
- Blades made of stainless steel to prevent extraneous rust
- Vacuum ice-hardening provides the required hardness and strength
- 9 mm hex drive with with entry chamfer
- Take it easy Tool Finder: Colour coding by profile and laser-engraved size indication

### Kraftform Kompakt VDE 3060 i Take it easy SB, stainless steel

| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 05**006575**001 | *229236* | | **Kraftform Kompakt VDE 3060 i Take it easy** 1x 0.4x2.5x157 | 5 |
| 05**006576**001 | *229243* | | **Kraftform Kompakt VDE 3060 i Take it easy** 1x 1.2x6.5x157 | 5 |

## Kraftform Kompakt VDE 3060 iS Take it easy SB, stainless steel

- Reduced shaft diameter and integrated insulation protection
- This means that low-lying screws and spring elements can be accessed and actuated
- Take it easy Tool Finder: Colour coding by profile and aser-engraved size indication

### Kraftform Kompakt VDE 3060 iS Take it easy SB, stainless steel

| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 05**006577**001 | *229250* | | **Kraftform Kompakt VDE 3060 iS Take it easy** 1x 0.6x3.5x157 | 5 |
| 05**006578**001 | *229274* | | **Kraftform Kompakt VDE 3060 iS Take it easy** 1x 0.8x4.0x157 | 5 |
| 05**006579**001 | *229281* | | **Kraftform Kompakt VDE 3060 iS Take it easy** 1x 1.0x5.5x157 | 5 |

## Kraftform Kompakt VDE 3062 iS Take it easy SB, stainless steel

- Reduced shaft diameter and integrated insulation protection
- In this way, low-lying PH screws can be accessed and actuated Take it easy Tool Finder: Colour coding by profile and aser-engraved size indication

### Kraftform Kompakt VDE 3062 iS Take it easy SB, stainless steel

| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 05**006580**001 | *229304* | | **Kraftform Kompakt VDE 3062 iS Take it easy** 1x PH 1x157 | 5 |
| 05**006581**001 | *229427* | | **Kraftform Kompakt VDE 3062 iS Take it easy** 1x PH 2x157 | 5 |

## Kraftform Kompakt VDE 3065 iS PZ Take it easy SB, stainless steel

- Reduced shaft diameter and integrated insulation protection
- In this way, low-lying PZ screws can be accessed and actuated
- Take it easy Tool Finder: Colour coding by profile and laser-engraved size indication

### Kraftform Kompakt VDE 3065 iS PZ Take it easy SB, stainless steel

| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 05006582001 | *229533* | | **Kraftform Kompakt VDE 3065 iS PZ Take it easy**<br>1x PZ 1x157 | 5 |
| 05006583001 | *229540* | | **Kraftform Kompakt VDE 3065 iS PZ Take it easy**<br>1x PZ 2x157 | 5 |

## Kraftform Kompakt VDE 3065 iS PZ/S Take it easy SB, stainless steel

- Reduced shaft diameter and integrated insulation protection
- In this way, low-lying PlusMinus screws can be accessed and actuated
  Take it easy Tool Finder: Colour coding by profile and laser-engraved size indication

### Kraftform Kompakt VDE 3065 iS PZ/S Take it easy SB, stainless steel

| | | | | |
|---|---|---|---|---|
| 05006584001 | *229502* | | **Kraftform Kompakt VDE 3065 iS PZ/S Take it easy**<br>1x # 1x157 | 5 |
| 05006585001 | *229526* | | **Kraftform Kompakt VDE 3065 iS PZ/S Take it easy**<br>1x # 2x157 | 5 |

## Kraftform Kompakt VDE 3067 iS TORX® Take it easy SB, stainless steel

- Reduced shaft diameter and integrated insulation protection
- In this way, low-lying TORX® screws can be accessed and actuated
- Take it easy Tool Finder: Colour coding by profile and laser-engraved size indication

### Kraftform Kompakt VDE 3067 iS TORX® Take it easy SB, stainless steel

| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 05006590001 | *229472* | | **Kraftform Kompakt VDE 3067 iS Take it easy**<br>1x TX 15x157 | 5 |
| 05006591001 | *229489* | | **Kraftform Kompakt VDE 3067 iS Take it easy**<br>1x TX 20x157 | 5 |
| 05006592001 | *229496* | | **Kraftform Kompakt VDE 3067 iS Take it easy**<br>1x TX 25x157 | 5 |

## Kraftform Kompakt VDE 3067 i TORX® Take it easy SB, stainless steel

- Kraftform Kompakt VDE interchangeable blade for TORX® screws
- Take it easy Tool Finder: Colour coding by profile and laser-engraved size indication

### Kraftform Kompakt VDE 3067 i TORX® Take it easy SB, stainless steel

| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 05**006586**001 | *229434* | | **Kraftform Kompakt VDE 3067 i Take it easy** 1x TX 8x157 | 5 |
| 05**006587**001 | *229441* | | **Kraftform Kompakt VDE 3067 i Take it easy** 1x TX 9x157 | 5 |
| 05**006588**001 | *229458* | | **Kraftform Kompakt VDE 3067 i Take it easy** 1x TX 10x157 | 5 |
| 05**006589**001 | *229465* | | **Kraftform Kompakt VDE 3067 i Take it easy** 1x TX 30x157 | 5 |

## 837 i RA Kraftform Blade-holding screwdriver with ratchet functionality

Bitholding screwdriver for Wera Kraftform Kompakt VDE blades with ratchet with fine toothing integrated in the handle (40 teeth/ return angle 9°). The ratchet accelerates screwdriving without having to reposition the tool.

The ratchet mechanism completely embedded in the handle ensures very handy and comfortable work. The handle/blade system allows for lightning-fast change of the required blade and thus a wide range of applications.

- Kraftform Kompakt VDE Kraftform blade-holding screwdriver with ratchet functionality
- The integrated ratchet with fine toothing ensures fast and safe working
- High working speed: The ratchet allows to “spin” when screwdriving
- Ergonomic intuitive switching to clockwise/counterclockwise or position 0
- Kraftform Plus handle for comfortable ergonomic work

### 837 i RA Kraftform Blade-holding screwdriver with ratchet functionality

| Code | EAN 4013288 | mm | mm | | | | | |
|---|---|---|---|---|---|---|---|---|
| 05**057490**001 | *229700* | 9 | 115 | | | | | 1 |

## Kraftform Kompakt VDE 24 Allrounder Set 1

The all-rounder set for VDE applications. Two bladeholding screwdrivers 837 i RA and 817 VDE for Kraftform Kompakt VDE blades (837 i RA with ratchet functionality for accelerated screwdriving).

11 Kraftform Kompakt blades for slotted screws, Phillips-head screws (Phillips and Pozidriv) and TORX® screws. Even low-lying screw and spring elements can be reached thanks to the reduced blade diameter. The Take it easy Tool Finder (colour coding by profile as well as laser-engraved size indication) makes it easy to reach for the required blade.

One T-handle with ratchet functionality for 1/4" sockets. The recesses in the fast-rotating sleeve on the blade allow resistance to be generated by finger force which allows the ratchet mechanism to be used even at low resistance of the screw.

9 sockets offer increased safety thanks to the 2-component insulation with a yellow insulation core under an outer red insulation layer. The inner yellow insulation layer becomes visible if the outer red VDE insulation layer is damaged.

All tools are individually tested at 10,000 Volt as per IEC 60900. Space-saving and safe storage in a textile box. The textile box can be docked directly onto the Wera 2go transport system or attached to the workshop trolley, tool wall, etc with the included hook and loop fastener strip.

- Individually tested tools as per IEC 60900
- One Kraftform Kompakt VDE 837 i RA bladeholding screwdriver with ratchet functionality (40 teeth, 9° return angle) for interchangeable blades, one 817 VDE bladeholding screwdriver for interchangeable blades
- One 410 i VDE A RA T-handle adapter screwdriver with ratchet functionality for 1/4" sockets and 1/4" bit sockets
- One Kraftform Kompakt A VDE 712 i adapter blade (1/4" external hexagon to 9 mm external hexagon) for 1/4" sockets and bit sockets
- VDE blades (157 mm length) with practical spinning function, anti-roll protection and Take it easy Tool Finder: colour coding by profile and laser-engraved size indication
- 9 Zyklop sockets with 2-component insulation (yellow insulation core, which becomes visible if the outer red VDE insulation layer is damaged)
- Space-saving and safe storage in a textile box, which can also be docked onto the Wera 2go system

### Kraftform Kompakt VDE 24 Allrounder Set 1

| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 05**006632**001 | *234148* | | | 1 |
| | | | **837 i RA**<br>1x 9x115 | |
| | | | **817 VDE**<br>1x 9x98 | |
| | | | **410 i VDE A RA**<br>1x 1/4"x130 | |
| | | | **Kraftform Kompakt VDE 60 i Take it easy**<br>1x 0.4x2.5x157; 1x 1.2x6.5x157 | |
| | | | **Kraftform Kompakt VDE 60 iS Take it easy**<br>1x 0.6x3.5x157; 1x 0.8x4.0x157 | |
| | | | **Kraftform Kompakt VDE 62 iS Take it easy**<br>1x PH 1x157; 1x PH 2x157 | |
| | | | **Kraftform Kompakt VDE 65 iS Take it easy**<br>1x PZ 1x157; 1x PZ 2x157 | |
| | | | **Kraftform Kompakt VDE 67 iS TORX® Take it easy**<br>1x TX 15x157; 1x TX 20x157; 1x TX 25x157 | |
| | | | **Kraftform Kompakt A VDE 712 i**<br>1x 1/4"x154 | |
| | | | **8790 A VDE**<br>1x 5.0x41.0; 1x 5.5x41.0; 1x 6.0x41.0; 1x 7.0x41.0; 1x 8.0x41.0; 1x 10.0x41.0; 1x 11.0x41.0; 1x 12.0x41.0; 1x 13.0x41.0 | |
| | | | **9575**<br>1x 230.0x105.0x50.0 | |

## Kraftform Kompakt VDE 17 RA 1

17-piece Kraftform Kompakt VDE set. One 837 i RA blade-holding screwdriver with ratchet functionality (40 teeth, 9° return angle), one 817 VDE bitholding screwdriver, 15 VDE blades with Take it easy Tool finder: Colour coding by profile and laser-engraved size indication. Individually tested tools as per IEC 60900.

Individually tested in a water quench at 10,000 V for safe working at the approved voltage of 1,000 V. In a robust belt pouch.

- One Kraftform Kompakt VDE Kraftform 837 i RA blade-holding screwdriver with ratchet functionality (40 teeth, 9° return angle) for blades, one 817 VDE bitholding screwdriver for blades
- The 837 i RA bitholding screwdriver with ratchet integrated in the handle ensures fast and safe working
- High working speed: The ratchet allows to “spin” when screwdriving
- Ergonomic intuitive switching to clockwise/counterclockwise or position 0
- VDE blades (157 mm length) with practical spinning function, anti-roll protection and Take it easy Tool finder: Colour coding by profile and laser-engraved size indication
- Individually tested tools as per IEC 60900
- In robust pouch
- Suitable for Wera 2go

### Kraftform Kompakt VDE 17 RA 1

| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 05**006618**001 | *229694* | | | 1 |
| | | | **837 i RA**<br>1x 9x115 | |
| | | | **817 VDE**<br>1x 9x98 | |
| | | | **Kraftform Kompakt VDE 62 i Take it easy**<br>1x PH 1x157; 1x PH 2x157 | |
| | | | **Kraftform Kompakt VDE 65 i Take it easy**<br>1x PZ 1x157; 1x PZ 2x157 | |
| | | | **Kraftform Kompakt VDE 65 i PZ/S Take it easy**<br>1x # 1x157; 1x # 2x157 | |
| | | | **Kraftform Kompakt VDE 67 i Take it easy**<br>1x TX 10x157; 1x TX 15x157; 1x TX 20x157; 1x TX 25x157 | |
| | | | **Kraftform Kompakt VDE 60 i Take it easy**<br>1x 0,4x2,5x157; 1x 0,8x4,0x157; 1x 1,0x5,5x157; 1x 1,2x6,5x157 | |
| | | | **Kraftform Kompakt VDE 60 iS Take it easy**<br>1x 0,6x3,5x157 | |

### Kraftform Kompakt VDE 17 RA Imperial 1

| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 05**006619**001 | *229885* | | | 1 |
| | | | **837 i RA**<br>1x 9x115 | |
| | | | **817 VDE**<br>1x 9x98 | |
| | | | **Kraftform Kompakt VDE 62 i Take it easy**<br>1x PH 1x157; 1x PH 2x157 | |
| | | | **Kraftform Kompakt VDE 65 i PZ/S Take it easy**<br>1x # 1x157; 1x # 2x157 | |
| | | | **Kraftform Kompakt VDE 67 i Take it easy**<br>1x TX 10x157; 1x TX 15x157; 1x TX 20x157; 1x TX 25x157 | |
| | | | **Kraftform Kompakt VDE 60 i Take it easy**<br>1x 0,4x2,5x157; 1x 0,8x4,0x157; 1x 1,0x5,5x157; 1x 1,2x6,5x157 | |
| | | | **Kraftform Kompakt VDE 60 iS Take it easy**<br>1x 0,6x3,5x157 | |
| | | | **Kraftform Kompakt VDE 68 i Take it easy**<br>1x # 1x157; 1x # 2x157 | |

## Kraftform Kompakt & VDE - every size always available

### Kraftform Kompakt VDE 16 Torque 1.2-3.0 Nm extra slim 1 Tool finder

16-piece torque VDE blade set. Includes 14 blades (12 of which with reduced blade diameter) with integrated protective insulation.

With Take it easy Tool finder: Colour coding by profile and laser-engraved size indication - for quick and easy identification of the required tool. Torque VDE bitholding screwdriver with adjustable torque value from 1.2-3.0 Nm and 817 VDE bitholding screwdriver.

Both with ergonomic Kraftform Plus handle, with hard handle zones ensuring high working speeds while soft handle zones guarantee a high torque transfer.

### Kraftform Kompakt VDE 16 Torque 1.2-3.0 Nm extra slim 1 Tool finder

VDE TOOL · TORQUE TOOL · ADJUSTABLE · TAKE IT EASY TOOL FINDER · EXTRA SLIM · KRAFTFORM ERGONOMICS

| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 05**006609**001 | *229953* | | | 1 |
| | | | **7400 VDE**<br>1x 7441 VDE, 1,2-3,0 Nm | |
| | | | **817 VDE**<br>1x 9x98 | |
| | | | **Kraftform Kompakt VDE 62 iS Take it easy**<br>1x PH 1x157; 1x PH 2x157 | |
| | | | **Kraftform Kompakt VDE 65 iS Take it easy**<br>1x PZ 1x157; 1x PZ 2x157 | |
| | | | **Kraftform Kompakt VDE 65 iS PZ/S Take it easy**<br>1x # 1x157; 1x # 2x157 | |
| | | | **Kraftform Kompakt VDE 67 i Take it easy**<br>1x TX 10x157 | |
| | | | **Kraftform Kompakt VDE 67 iS Take it easy**<br>1x TX 15x157; 1x TX 20x157; 1x TX 25x157 | |
| | | | **Kraftform Kompakt VDE 60 i Take it easy**<br>1x 0,4x2,5x157 | |
| | | | **Kraftform Kompakt VDE 60 iS Take it easy**<br>1x 0,6x3,5x157; 1x 0,8x4,0x157; 1x 1,0x5,5x157 | |
| | | | **Hook and Loop Fastener Strip 70**<br>1x 50,0x70,0 | |

### Kraftform Kompakt VDE 15 Torque 1.2-3.0 Nm extra slim 1 Tool finder

15-piece torque VDE blade set. One torque VDE bitholding screwdriver with adjustable torque value from 1.2-3.0 Nm.

With ergonomic Kraftform Plus handle, with hard handle zones ensuring high working speeds while soft handle zones guarantee a high torque transfer. Includes 14 blades (12 of which with reduced blade diameter) with integrated protective insulation.

With Take it easy Tool finder: Colour coding by profile and laser-engraved size indication - for quick and easy identification of the required tool.

In a robust belt pouch. The textile box features a fleece zone at the back. Using the provided self-adhesive hook and loop fastener strips, the textile box can be attached to the Wera 2go components. Or to the wall, shelf or workshop trolley.

### Kraftform Kompakt VDE 15 Torque 1.2-3.0 Nm extra slim 1 Tool finder

VDE TOOL · TORQUE TOOL · ADJUSTABLE · TAKE IT EASY TOOL FINDER · EXTRA SLIM · KRAFTFORM ERGONOMICS · WERA 2GO COMPATIBLE

| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 05**006605**001 | *229915* | | | 1 |
| | | | **7400 VDE**<br>1x 7441 VDE, 1,2-3,0 Nm | |
| | | | **Kraftform Kompakt VDE 62 iS Take it easy**<br>1x PH 1x157; 1x PH 2x157 | |
| | | | **Kraftform Kompakt VDE 65 iS Take it easy**<br>1x PZ 1x157; 1x PZ 2x157 | |
| | | | **Kraftform Kompakt VDE 65 iS PZ/S Take it easy**<br>1x # 1x157; 1x # 2x157 | |
| | | | **Kraftform Kompakt VDE 67 i Take it easy**<br>1x TX 10x157 | |
| | | | **Kraftform Kompakt VDE 67 iS Take it easy**<br>1x TX 15x157; 1x TX 20x157; 1x TX 25x157 | |
| | | | **Kraftform Kompakt VDE 60 i Take it easy**<br>1x 0,4x2,5x157 | |
| | | | **Kraftform Kompakt VDE 60 iS Take it easy**<br>1x 0,6x3,5x157; 1x 0,8x4,0x157; 1x 1,0x5,5x157 | |
| | | | **Hook and Loop Fastener Strip 70**<br>1x 50,0x70,0 | |

## Kraftform Kompakt VDE Big Pack 1

26-piece Kraftform Kompakt VDE set, 2x 817 VDE Kraftform blade-holding screwdrivers, 24 VDE blades (each 157 mm length) most of them with reduced blade diameter (iS), so that even low-lying screw and spring elements can be easily reached and operated. Individually tested as per IEC 60900 at 10,000 V for safe working at the approved voltage of 1,000 V.

Take it easy Tool finder with colour coding by profile and laser-engraved size indication - for quick and easy identification of the required tool. Kraftform Plus handle for comfortable ergonomic screwdriving, avoiding blisters and calluses. Hard handle zones for high working speeds, while soft handle zones guarantee a high torque transfer. The anti-roll protection avoids bits from rolling away annoyingly at the workplace.

- 2 VDE-insulated Kraftform 817 VDE blade-holding screwdrivers with anti-roll protection
- VDE blades (157 mm length) with practical spinning function, anti-roll protection and Take it easy Tool finder: Colour coding by profile and laser-engraved size indication
- Insulated tools, blades partly with reduced diameter for safe working at up to 1,000 Volt
- Individually tested tools as per IEC 60900
- In robust pouch
- Suitable for Wera 2go

### Kraftform Kompakt VDE Big Pack 1

| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 05**006617**001 | *229557* | | | 1 |
| | | | **817 VDE**<br>2x 9x98 | |
| | | | **Kraftform Kompakt VDE 62 iS Take it easy**<br>1x PH 1x157; 1x PH 2x157 | |
| | | | **Kraftform Kompakt VDE 65 iS Take it easy**<br>1x PZ 1x157; 1x PZ 2x157 | |
| | | | **Kraftform Kompakt VDE 62 iS PH/S Take it easy**<br>1x # 1x157; 1x # 2x157 | |
| | | | **Kraftform Kompakt VDE 65 iS PZ/S Take it easy**<br>1x # 1x157; 1x # 2x157 | |
| | | | **Kraftform Kompakt VDE 67 i Take it easy**<br>1x TX 8x157; 1x TX 9x157; 1x TX 10x157; 1x TX 30x157 | |
| | | | **Kraftform Kompakt VDE 67 iS Take it easy**<br>1x TX 15x157; 1x TX 20x157; 1x TX 25x157 | |
| | | | **Kraftform Kompakt VDE 64 i Take it easy**<br>1x 2,5x157; 1x 3,0x157; 1x 4,0x157; 1x 5,0x157 | |
| | | | **Kraftform Kompakt VDE 60 i Take it easy**<br>1x 0,4x2,5x157; 1x 1,2x6,5x157 | |
| | | | **Kraftform Kompakt VDE 60 iS Take it easy**<br>1x 0,6x3,5x157; 1x 0,8x4,0x157; 1x 1,0x5,5x157 | |

## Kraftform Kompakt VDE 18 Universal 1 Tool finder

One 817 VDE Kraftform bitholding screwdriver, 12 VDE blades with Take it easy Tool finder: Colour coding by profile and laser-engraved size indication - for quick and easy identification of the required tool, 4 control cabinet keys, one single-pole phase tester. Individually tested at 10,000 V for safe working at the approved voltage of 1,000 V.

In a robust belt pouch. The textile box features a fleece zone at the back. Using the provided self-adhesive hook and loop fastener strips, the textile box can be attached to the Wera 2go components. Or to the wall, shelf or workshop trolley.

- VDE blades (157 mm length) with practical spinning function, anti-roll protection and Take it easy Tool finder: Colour coding by profile and laser-engraved size indication

### Kraftform Kompakt VDE 18 Universal 1 Tool finder

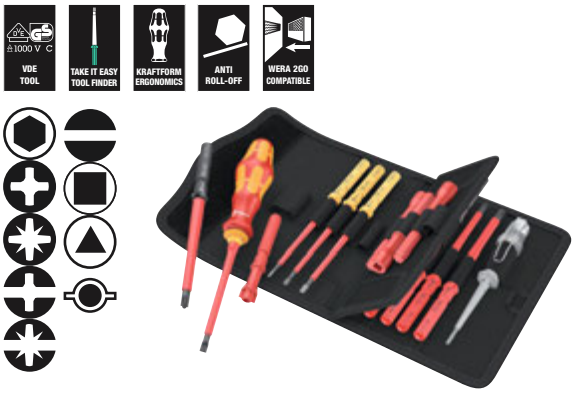

| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 05**006613**001 | *229991* | | | 1 |
| | | | **817 VDE**<br>1x 9x98 | |
| | | | **Kraftform Kompakt VDE 62 i Take it easy**<br>1x PH 1x157; 1x PH 2x157 | |
| | | | **Kraftform Kompakt VDE 65 i Take it easy**<br>1x PZ 1x157; 1x PZ 2x157 | |
| | | | **Kraftform Kompakt VDE 62 i PH/S Take it easy**<br>1x # 1x157; 1x # 2x157 | |
| | | | **Kraftform Kompakt VDE 65 i PZ/S Take it easy**<br>1x # 1x157; 1x # 2x157 | |
| | | | **Kraftform Kompakt VDE 60 i Take it easy**<br>1x 0,4x2,5x157; 1x 0,6x3,5x157;<br>1x 0,8x4,0x157; 1x 1,0x5,5x157 | |
| | | | **Kraftform Kompakt 96 VK 6,3**<br>1x 6,3x89 | |
| | | | **Kraftform Kompakt 97 VK 8,1**<br>1x 8,1x89 | |
| | | | **Kraftform Kompakt 98 DK**<br>1x 89 | |
| | | | **Kraftform Kompakt 99 FL**<br>1x 89 | |
| | | | **247**<br>1x 0,5x3,0x70 | |
| | | | **Hook and Loop Fastener Strip 70**<br>1x 50,0x70,0 | |

*) Product not available in the USA and Canada.

### Kraftform Kompakt VDE 18 Imperial 1 Tool finder

| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 05**006616**001 | *230027* | | | 1 |
| | | | **817 VDE**<br>2x 9x98 | |
| | | | **Kraftform Kompakt VDE 62 i Take it easy**<br>1x PH 1x157; 1x PH 2x157 | |
| | | | **Kraftform Kompakt VDE 62 i PH/S Take it easy**<br>1x # 1x157; 1x # 2x157 | |
| | | | **Kraftform Kompakt VDE 65 i PZ/S Take it easy**<br>1x # 1x157; 1x # 2x157 | |
| | | | **Kraftform Kompakt VDE 60 i Take it easy**<br>1x 0,4x2,5x157; 1x 0,6x3,5x157;<br>1x 0,8x4,0x157; 1x 1,0x5,5x157 | |
| | | | **Kraftform Kompakt VDE 68 i Take it easy**<br>1x # 1x157; 1x # 2x157 | |
| | | | **Kraftform Kompakt 96 VK 6,3**<br>1x 6,3x89 | |
| | | | **Kraftform Kompakt 97 VK 8,1**<br>1x 8,1x89 | |
| | | | **Kraftform Kompakt 98 DK**<br>1x 89 | |
| | | | **Kraftform Kompakt 99 FL**<br>1x 89 | |
| | | | **Hook and Loop Fastener Strip 70**<br>1x 50,0x70,0 | |

## Kraftform Kompakt VDE 18 Universal 2 Tool finder

VDE TOOL · TAKE IT EASY TOOL FINDER · KRAFTFORM ERGONOMICS · ANTI ROLL-OFF · WERA 2GO COMPATIBLE

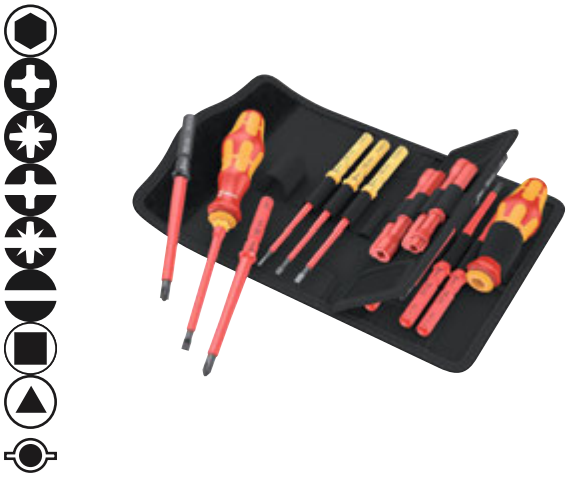

| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 05**006614**001 | *230010* | | | 1 |
| | | | **817 VDE**<br>2x 9x98 | |
| | | | **Kraftform Kompakt VDE 62 i Take it easy**<br>1x PH 1x157; 1x PH 2x157 | |
| | | | **Kraftform Kompakt VDE 65 i Take it easy**<br>1x PZ 1x157; 1x PZ 2x157 | |
| | | | **Kraftform Kompakt VDE 62 i PH/S Take it easy**<br>1x # 1x157; 1x # 2x157 | |
| | | | **Kraftform Kompakt VDE 65 i PZ/S Take it easy**<br>1x # 1x157; 1x # 2x157 | |
| | | | **Kraftform Kompakt VDE 60 i Take it easy**<br>1x 0,4x2,5x157; 1x 0,6x3,5x157;<br>1x 0,8x4,0x157; 1x 1,0x5,5x157 | |
| | | | **Kraftform Kompakt 96 VK 6,3**<br>1x 6,3x89 | |
| | | | **Kraftform Kompakt 97 VK 8,1**<br>1x 8,1x89 | |
| | | | **Kraftform Kompakt 98 DK**<br>1x 89 | |
| | | | **Kraftform Kompakt 99 FL**<br>1x 89 | |
| | | | **Hook and Loop Fastener Strip 70**<br>1x 50,0x70,0 | |

## Kraftform Kompakt VDE 17 extra slim 1 Tool finder

- Individually tested VDE interchangeable blades with reduced blade diameters
- 2 multi-component, ergonomic Kraftform VDE hand-holders with anti-roll protection
- In a robust textile box
- Multifunctional pliers for electrical installation: cable cutting, stripping, gripping, bending, deburring, crimping of wire end ferrules
- Pliers including cable shears with precision cutting edges (inductively hardened) for Cu and Al cables up to 5 x 2.5mm² / Ø 15 mm
- VDE blades (157 mm length) with practical spinning function, anti-roll protection and Take it easy Tool finder: Colour coding by profile and laser-engraved size indication

## Kraftform Kompakt VDE 17 extra slim 1 Tool finder

VDE TOOL · TAKE IT EASY TOOL FINDER · EXTRA SLIM · KRAFTFORM ERGONOMICS · ANTI ROLL-OFF · WERA 2GO COMPATIBLE

| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 05**006612**001 | *229977* | | | 1 |
| | | | **817 VDE**<br>2x 9x98 | |
| | | | **Kraftform Kompakt VDE 62 iS Take it easy**<br>1x PH 1x157; 1x PH 2x157 | |
| | | | **Kraftform Kompakt VDE 65 iS Take it easy**<br>1x PZ 1x157; 1x PZ 2x157 | |
| | | | **Kraftform Kompakt VDE 65 iS PZ/S Take it easy**<br>1x # 1x157; 1x # 2x157 | |
| | | | **Kraftform Kompakt VDE 67 i Take it easy**<br>1x TX 10x157 | |
| | | | **Kraftform Kompakt VDE 67 iS Take it easy**<br>1x TX 15x157; 1x TX 20x157; 1x TX 25x157 | |
| | | | **Kraftform Kompakt VDE 60 i Take it easy**<br>1x 0,4x2,5x157 | |
| | | | **Kraftform Kompakt VDE 60 iS Take it easy**<br>1x 0,6x3,5x157; 1x 0,8x4,0x157;<br>1x 1,0x5,5x157 | |
| | | | **KNIPEX 13 96 200** | |
| | | | **Hook and Loop Fastener Strip 70**<br>1x 50,0x70,0 | |

## Kraftform Kompakt VDE 17 extra slim 2 Tool finder

- The 837 i RA bladeholding screwdriver with a ratchet integrated in the handle ensures fast and safe working
- 817 VDE handle for Kraftform Kompakt interchangeable blades
- 1x Knipex needle-nose combination pliers, 185 mm long

### Kraftform Kompakt VDE 17 extra slim 2 Tool finder

| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 05**006610**001 | *234131* | | | 1 |
| | | | **837 i RA**<br>1x 9x115 | |
| | | | **817 VDE**<br>1x 9x98 | |
| | | | **Kraftform Kompakt VDE 62 iS Take it easy**<br>1x PH 1x157; 1x PH 2x157 | |
| | | | **Kraftform Kompakt VDE 65 iS Take it easy**<br>1x PZ 1x157; 1x PZ 2x157 | |
| | | | **Kraftform Kompakt VDE 65 iS PZ/S Take it easy**<br>1x # 1x157; 1x # 2x157 | |
| | | | **Kraftform Kompakt VDE 67 i TORX® Take it easy**<br>1x TX 10x157 | |
| | | | **Kraftform Kompakt VDE 67 iS TORX® Take it easy**<br>1x TX 15x157; 1x TX 20x157; 1x TX 25x157 | |
| | | | **Kraftform Kompakt VDE 60 i Take it easy**<br>1x 0.4x2.5x157 | |
| | | | **Kraftform Kompakt VDE 60 iS Take it easy**<br>1x 0.6x3.5x157; 1x 0.8x4.0x157;<br>1x 1.0x5.5x157 | |
| | | | **KNIPEX Needle-nose combination pliers 08 26 185** | |
| | | | **Hook and Loop Fastener Strip 70**<br>1x 50.0x70.0 | |

## Kraftform Kompakt VDE 17 Universal 1 Tool finder

- 17-piece set
- 2 VDE-insulated Kraftform 817 VDE blade-holding screwdrivers with anti-roll protection
- VDE blades (157 mm length) with practical spinning function, anti-roll protection and Take it easy Tool finder: Colour coding by profile and laser-engraved size indication
- Individually tested tools as per IEC 60900
- In robust pouch
- Suitable for Wera 2go

### Kraftform Kompakt VDE 17 Universal 1 Tool finder

| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 05**006611**001 | *229564* | | | 1 |
| | | | **817 VDE**<br>2x 9x98 | |
| | | | **Kraftform Kompakt VDE 62 i Take it easy**<br>1x PH 1x157; 1x PH 2x157 | |
| | | | **Kraftform Kompakt VDE 65 i Take it easy**<br>1x PZ 1x157; 1x PZ 2x157 | |
| | | | **Kraftform Kompakt VDE 65 i PZ/S Take it easy**<br>1x # 1x157; 1x # 2x157 | |
| | | | **Kraftform Kompakt VDE 67 i Take it easy**<br>1x TX 10x157; 1x TX 15x157; 1x TX 20x157;<br>1x TX 25x157 | |
| | | | **Kraftform Kompakt VDE 60 i Take it easy**<br>1x 0,4x2,5x157; 1x 0,8x4,0x157;<br>1x 1,0x5,5x157; 1x 1,2x6,5x157 | |
| | | | **Kraftform Kompakt VDE 60 iS Take it easy**<br>1x 0,6x3,5x157 | |
| | | | **Hook and Loop Fastener Strip 70**<br>1x 50,0x70,0 | |

## Kraftform Kompakt VDE 16 extra slim 1 Tool finder

- VDE interchangeable blade with reduced shaft diameter
- Allows screwdriving even in confined situations
- Low-lying screw and spring elements can be reached and actuated
- VDE blades (157 mm length) with practical spinning function, anti-roll protection and Take it easy Tool finder: Colour coding by profile and laser-engraved size indication

### Kraftform Kompakt VDE 16 extra slim 1 Tool finder

| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 05**006608**001 | *229946* | | | 1 |
| | | | **817 VDE**<br>1x 9x98 | |
| | | | **Kraftform Kompakt VDE 62 iS Take it easy**<br>1x PH 1x157; 1x PH 2x157 | |
| | | | **Kraftform Kompakt VDE 65 iS Take it easy**<br>1x PZ 1x157; 1x PZ 2x157 | |
| | | | **Kraftform Kompakt VDE 65 iS PZ/S Take it easy**<br>1x # 1x157; 1x # 2x157 | |
| | | | **Kraftform Kompakt VDE 67 i Take it easy**<br>1x TX 10x157 | |
| | | | **Kraftform Kompakt VDE 67 iS Take it easy**<br>1x TX 15x157; 1x TX 20x157; 1x TX 25x157 | |
| | | | **Kraftform Kompakt VDE 60 i Take it easy**<br>1x 0,4x2,5x157 | |
| | | | **Kraftform Kompakt VDE 60 iS Take it easy**<br>1x 0,6x3,5x157; 1x 0,8x4,0x157;<br>1x 1,0x5,5x157 | |
| | | | **247**<br>1x 0,5x3,0x70 | |
| | | | **Hook and Loop Fastener Strip 70**<br>1x 50,0x70,0 | |

*) Product not available in the USA and Canada.

### Kraftform Kompakt VDE 16 Universal 1 Tool finder

| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 05**006607**001 | *229922* | | | 1 |
| | | | **817 VDE**<br>1x 9x98 | |
| | | | **Kraftform Kompakt VDE 62 i Take it easy**<br>1x PH 1x157; 1x PH 2x157 | |
| | | | **Kraftform Kompakt VDE 65 i Take it easy**<br>1x PZ 1x157; 1x PZ 2x157 | |
| | | | **Kraftform Kompakt VDE 65 i PZ/S Take it easy**<br>1x # 1x157; 1x # 2x157 | |
| | | | **Kraftform Kompakt VDE 67 i Take it easy**<br>1x TX 10x157; 1x TX 15x157; 1x TX 20x157;<br>1x TX 25x157 | |
| | | | **Kraftform Kompakt VDE 60 i Take it easy**<br>1x 0,4x2,5x157; 1x 0,6x3,5x157;<br>1x 0,8x4,0x157; 1x 1,0x5,5x157 | |
| | | | **247**<br>1x 0,5x3,0x70 | |
| | | | **Hook and Loop Fastener Strip 70**<br>1x 50,0x70,0 | |

*) Product not available in the USA and Canada.

## Kraftform Kompakt VDE 7 extra slim 1 Tool finder

- Individually tested VDE interchangeable blades with reduced blade diameters
- In robust folding pouch with Wera 2go compatibility
- VDE blades (157 mm length) with practical spinning function, anti-roll protection and Take it easy Tool finder: Colour coding by profile and laser-engraved size indication

### Kraftform Kompakt VDE 7 extra slim 1 Tool finder

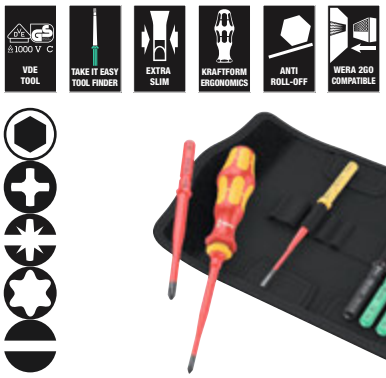

| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 05**006603**001 | *229687* | | | 1 |
| | | | **817 VDE**<br>1x 9x98 | |
| | | | **Kraftform Kompakt VDE 62 iS Take it easy**<br>1x PH 1x157; 1x PH 2x157 | |
| | | | **Kraftform Kompakt VDE 65 iS PZ/S Take it easy**<br>1x # 2x157 | |
| | | | **Kraftform Kompakt VDE 67 iS Take it easy**<br>1x TX 15x157; 1x TX 20x157 | |
| | | | **Kraftform Kompakt VDE 60 iS Take it easy**<br>1x 0,6x3,5x157 | |
| | | | **Hook and Loop Fastener Strip 70**<br>1x 50,0x70,0 | |

## Kraftform Kompakt VDE 7 Universal 1 Tool finder

One 817 VDE Kraftform bitholding screwdriver and 6 VDE blades with Take it easy Tool finder: Colour coding and laser-engraved size indication. Individually tested at 10,000 V for safe working at the approved voltage of 1,000 V.

In a robust belt pouch. The textile box features a fleece zone at the back. Using the provided self-adhesive hook and loop fastener strips, the textile box can be attached to the Wera 2go components. Or to the wall, shelf or workshop trolley.

- VDE blades (157 mm length) with practical spinning function, anti-roll protection and Take it easy Tool finder: Colour coding by profile and laser-engraved size indication

### Kraftform Kompakt VDE 7 Universal 1 Tool finder

| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 05**006600**001 | *229663* | | | 1 |
| | | | **817 VDE**<br>1x 9x98 | |
| | | | **Kraftform Kompakt VDE 62 i Take it easy**<br>1x PH 1x157; 1x PH 2x157 | |
| | | | **Kraftform Kompakt VDE 60 i Take it easy**<br>1x 0,4x2,5x157; 1x 0,6x3,5x157;<br>1x 0,8x4,0x157; 1x 1,0x5,5x157 | |
| | | | **Hook and Loop Fastener Strip 70**<br>1x 50,0x70,0 | |

### Kraftform Kompakt VDE 7 Imperial 1 Tool finder

| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 05**006604**001 | *229892* | | | 1 |
| | | | **817 VDE**<br>1x 9x98 | |
| | | | **Kraftform Kompakt VDE 62 i Take it easy**<br>1x PH 1x157; 1x PH 2x157 | |
| | | | **Kraftform Kompakt VDE 60 i Take it easy**<br>1x 0,6x3,5x157; 1x 1,0x5,5x157 | |
| | | | **Kraftform Kompakt VDE 68 i Take it easy**<br>1x # 1x157; 1x # 2x157 | |
| | | | **Hook and Loop Fastener Strip 70**<br>1x 50,0x70,0 | |

## Kraftform Kompakt VDE 7 Universal 2 Tool finder

| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 05**006601**001 | *229670* | | | 1 |
| | | | **817 VDE**<br>1x 9x98 | |
| | | | **Kraftform Kompakt VDE 65 i Take it easy**<br>1x PZ 1x157; 1x PZ 2x157 | |
| | | | **Kraftform Kompakt VDE 60 i Take it easy**<br>1x 0,4x2,5x157; 1x 0,6x3,5x157;<br>1x 0,8x4,0x157; 1x 1,0x5,5x157 | |
| | | | **Hook and Loop Fastener Strip 70**<br>1x 50,0x70,0 | |

## Series 7400 VDE Kraftform adjustable torque handle (0.3-3.5 Nm)

- Adjustable Kraftform VDE torque holder
- Adjustable torque from 0.3-1.2
- Distinct audible and perceivable excess load signal when the pre-set torque value is reached
- Suitable for Kraftform Kompakt VDE blades
- Rapid exchange of the interchangeable blades

## Series 7400 VDE Kraftform adjustable torque handle (0.3-3.5 Nm)

| Code | EAN 4013288 | Art.No. | mm | Nm | Nm | mm | | |
|---|---|---|---|---|---|---|---|---|
| 05**074752**001 | *179111* | 7440 VDE | 9 | 0,3-1,2 | 0,05 | 192 | 7 9/16" | 1 |
| 05**074750**001 | *168535* | 7441 VDE | 9 | 1,2-3,0 | 0,10 | 192 | 7 9/16" | 1 |
| 05**074757**001 | *184412* | 7444 VDE | 9 | 1,7-3,5 | 0,10 | 192 | 7 9/16" | 1 |

## Kraftform Kompakt A VDE 712 i Adapter blade, insulated, for 1/4" sockets

- The blade adapts from 9 mm external hexagon to 1/4" external square head
- Suitable for the insulated Wera Kraftform Kompakt VDE bladeholding screwdrivers with 9 mm hexagonal mounting
- For insulated Wera 1/4" sockets and 1/4" bit sockets

## Kraftform Kompakt A VDE 712 i Adapter blade, insulated, for 1/4" sockets

| Code | EAN 4013288 | | mm | mm | | | | |
|---|---|---|---|---|---|---|---|---|
| 05**006642**001 | *234155* | 1/4" | 9 | 154 | 6" | | | 2 |

## Kraftform Kompakt A VDE 712 i SB Adapter blade, insulated, for 1/4" sockets

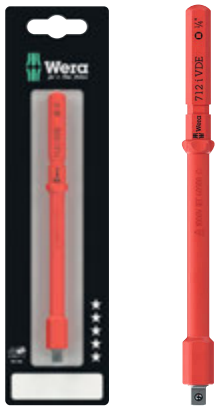

| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 05**073702**001 | *234162* | | **Kraftform Kompakt A VDE 712 i**<br>1x 1/4"x154 | 3 |

## Kraftform Kompakt Turbo i 1 Tool finder

Many users wish to carry out screwdriving operations faster without compromises. With a screwdriver which is precise, allows powerful end screwdriving and is also much faster than a conventional screwdriver. The solution: A planetary drive that can be switched on and off: Integrated in the handle it quadruples the working speed in smooth couplings all mechanically. One hand holds the front part of the handle, the second hand turns the back part of the handle.

The turbo function can be switched on and off at the push of a button. Turning it off is recommended for tightening and loosening with high torque as well as for fine adjustments. Robust, maintenance-free steel drive with maximum torque of 14 Nm when the turbo function is deactivated.

In the VDE version, the 827 T i Kraftform Turbo bitholding screwdriver with the Wera VDE blades individually tested as per IEC 60900 ensures fast and safe working even under tension (up to 1,000 volt). VDE blades with Take it easy Tool finder: Colour coding by profile and laser-engraved size indication - for quick and easy identification of the required tool. In a robust belt pouch. The textile box features a fleece zone at the back. Using the provided self-adhesive hook and loop fastener strips, the textile box can be attached to the Wera 2go components. Or to the wall, shelf or workshop trolley.

- 4 times the screwdriving speed thanks to the turbo function (purely mechanical - without battery)
- Activate and deactivate the turbo function by a simple push of a button
- Turbo function especially for smooth couplings
- Can be used without the turbo function like a normal screwdriver for couplings with steadily increasing torque
- Robust, maintenance-free gear made of steel

### Kraftform Kompakt Turbo i 1 Tool finder

| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 05**006640**001 | *230041* | | | 1 |
| | | | **827 T Kraftform Turbo**<br>1x 9x125 | |
| | | | **817 VDE**<br>1x 9x98 | |
| | | | **Kraftform Kompakt VDE 62 iS Take it easy**<br>1x PH 1x157; 1x PH 2x157 | |
| | | | **Kraftform Kompakt VDE 65 iS Take it easy**<br>1x PZ 1x157; 1x PZ 2x157 | |
| | | | **Kraftform Kompakt VDE 65 iS PZ/S Take it easy**<br>1x # 1x157; 1x # 2x157 | |
| | | | **Kraftform Kompakt VDE 67 i Take it easy**<br>1x TX 10x157 | |
| | | | **Kraftform Kompakt VDE 67 iS Take it easy**<br>1x TX 15x157; 1x TX 20x157; 1x TX 25x157 | |
| | | | **Kraftform Kompakt VDE 60 i Take it easy**<br>1x 0,4x2,5x157 | |
| | | | **Kraftform Kompakt VDE 60 iS Take it easy**<br>1x 0,6x3,5x157; 1x 0,8x4,0x157;<br>1x 1,0x5,5x157 | |
| | | | **Hook and Loop Fastener Strip 120**<br>1x 50,0x120,0 | |

## 817 VDE Kraftform blade-holding handle

- Kraftform Kompakt VDE Kraftform handle
- Exclusively for Wera VDE interchangeable blades
- Smooth hard zones for high speed turning, soft grip zones for high torque transfer
- Hexagonal anti-roll feature against rolling away

### 817 VDE Kraftform blade-holding handle

| Code | EAN 4013288 | mm | mm | | | | | |
|---|---|---|---|---|---|---|---|---|
| 05**003990**001 | *104359* | 9 | 102 | | | | | 1 |

## Kraftform Kompakt Turbo i Imperial 1 Tool finder

| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 05**006641**001 | *230058* | | | 1 |
| | | | **827 T Kraftform Turbo**<br>1x 9x125 | |
| | | | **817 VDE**<br>1x 9x98 | |
| | | | **Kraftform Kompakt VDE 62 iS Take it easy**<br>1x PH 1x157; 1x PH 2x157 | |
| | | | **Kraftform Kompakt VDE 62 iS PH/S Take it easy**<br>1x # 1x157; 1x # 2x157 | |
| | | | **Kraftform Kompakt VDE 67 i Take it easy**<br>1x TX 10x157 | |
| | | | **Kraftform Kompakt VDE 67 iS Take it easy**<br>1x TX 15x157; 1x TX 20x157; 1x TX 25x157 | |
| | | | **Kraftform Kompakt VDE 60 i Take it easy**<br>1x 0,4x2,5x157 | |
| | | | **Kraftform Kompakt VDE 60 iS Take it easy**<br>1x 0,6x3,5x157; 1x 0,8x4,0x157;<br>1x 1,0x5,5x157 | |
| | | | **Kraftform Kompakt VDE 68 iS Take it easy**<br>1x # 1x157; 1x # 2x157 | |
| | | | **Hook and Loop Fastener Strip 120**<br>1x 50,0x120,0 | |

## 827 T i Kraftform Turbo hand holder

| Code | EAN 4013288 | mm | mm | | | | | |
|---|---|---|---|---|---|---|---|---|
| 05**057481**001 | *214607* | 9 | 125 | | | | | 1 |

## Kraftform Kompakt VDE 60 i Take it easy

VDE blades for Kraftform Kompakt handle/interchangeable blade system for rapid exchange of the blades without any special tools. Individually tested as per IEC 60900. Individual testing at 10,000 volts so as to ensure safe working at the permitted voltage of 1,000 volts.

- Take it easy Tool Finder: Colour coding by profile and laser-engraved size indication

## Kraftform Kompakt VDE 60 i Take it easy

| Code | EAN 4013288 | mm | mm | mm | | | | |
|---|---|---|---|---|---|---|---|---|
| 05**006500**001 | *228420* | 0,4 | 2,5 | 157 | 3/32" | 6 3/16" | | 5 |
| 05**006501**001 | *228437* | 0,5 | 3,0 | 157 | 1/8" | 6 3/16" | | 5 |
| 05**006502**001 | *228444* | 0,6 | 3,5 | 157 | 9/64" | 6 3/16" | | 5 |
| 05**006503**001 | *228451* | 0,8 | 4,0 | 157 | 5/32" | 6 3/16" | | 5 |
| 05**006504**001 | *228468* | 1,0 | 5,5 | 157 | 7/32" | 6 3/16" | | 5 |
| 05**006505**001 | *228475* | 1,2 | 6,5 | 157 | 1/4" | 6 3/16" | | 5 |

## Kraftform Kompakt VDE 60 i Take it easy SB

| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 05**006550**001 | *228925* | | **Kraftform Kompakt VDE 60 i Take it easy**<br>1x 0.4x2.5x157 | 5 |
| 05**006551**001 | *228932* | | **Kraftform Kompakt VDE 60 i Take it easy**<br>1x 0.5x3.0x157 | 5 |
| 05**006552**001 | *229007* | | **Kraftform Kompakt VDE 60 i Take it easy**<br>1x 0.6x3.5x157 | 5 |
| 05**006553**001 | *229014* | | **Kraftform Kompakt VDE 60 i Take it easy**<br>1x 0.8x4.0x157 | 5 |
| 05**006554**001 | *229021* | | **Kraftform Kompakt VDE 60 i Take it easy**<br>1x 1.0x5.5x157 | 5 |
| 05**006555**001 | *229038* | | **Kraftform Kompakt VDE 60 i Take it easy**<br>1x 1.2x6.5x157 | 5 |

## Kraftform Kompakt VDE 60 iS Take it easy

- Reduced shaft diameter and integrated insulation protection
- Allows screwdriving even in confined situations
- Low-lying screw and spring elements can be reached and actuated
- Take it easy tool finder: Colour coding by profile and laser-engraved size indication

### Kraftform Kompakt VDE 60 iS Take it easy

| Code | EAN 4013288 | mm | mm | mm | | | | |
|---|---|---|---|---|---|---|---|---|
| 05**006506**001 | *228482* | 0,6 | 3,5 | 157 | 9/64" | 6 3/16" | | 5 |
| 05**006507**001 | *228499* | 0,8 | 4,0 | 157 | 5/32" | 6 3/16" | | 5 |
| 05**006508**001 | *228505* | 1,0 | 5,5 | 157 | 7/32" | 6 3/16" | | 5 |

### Kraftform Kompakt VDE 60 iS Take it easy SB

| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 05**006556**001 | *229045* | | **Kraftform Kompakt VDE 60 iS Take it easy** 1x 0.6x3.5x157 | 5 |
| 05**006557**001 | *229052* | | **Kraftform Kompakt VDE 60 iS Take it easy** 1x 0.8x4.0x157 | 5 |
| 05**006558**001 | *229069* | | **Kraftform Kompakt VDE 60 iS Take it easy** 1x 1.0x5.5x157 | 5 |

### Kraftform Kompakt VDE 62 i Take it easy

| Code | EAN 4013288 | | mm | | | | | |
|---|---|---|---|---|---|---|---|---|
| 05**006509**001 | *228512* | PH 0 | 157 | 6 3/16" | | | | 5 |
| 05**006510**001 | *228529* | PH 1 | 157 | 6 3/16" | | | | 5 |
| 05**006511**001 | *228536* | PH 2 | 157 | 6 3/16" | | | | 5 |

## Kraftform Kompakt VDE 62 iS Take it easy

- Reduced shaft diameter and integrated insulation protection
- Allows screwdriving even in confined situations
- Low-lying screw and spring elements can be reached and actuated
- Take it easy tool finder: Colour coding by profile and laser-engraved size indication

### Kraftform Kompakt VDE 62 iS Take it easy

| Code | EAN 4013288 | | mm | | | | | |
|---|---|---|---|---|---|---|---|---|
| 05**006512**001 | *228543* | PH 1 | 157 | 6 3/16" | | | | 5 |
| 05**006513**001 | *228550* | PH 2 | 157 | 6 3/16" | | | | 5 |

### Kraftform Kompakt VDE 62 iS Take it easy SB

| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 05**006559**001 | *229076* | | **Kraftform Kompakt VDE 62 iS Take it easy** 1x PH 1x157 | 5 |
| 05**006560**001 | *229083* | | **Kraftform Kompakt VDE 62 iS Take it easy** 1x PH 2x157 | 5 |

## Kraftform Kompakt VDE 65 i Take it easy

| | EAN | | | | | | | |
|---|---|---|---|---|---|---|---|---|
| Code | 4013288 | | mm | | | | | |
| 05**006523**001 | *228659* | PZ 0 | 157 | 6 3/16" | | | | 5 |
| 05**006524**001 | *228666* | PZ 1 | 157 | 6 3/16" | | | | 5 |
| 05**006525**001 | *228673* | PZ 2 | 157 | 6 3/16" | | | | 5 |

### Kraftform Kompakt VDE 65 iS Take it easy

- Reduced shaft diameter and integrated insulation protection
- Allows screwdriving even in confined situations
- Low-lying screw and spring elements can be reached and actuated
- Take it easy tool finder: Colour coding by profile and laser-engraved size indication

## Kraftform Kompakt VDE 65 iS Take it easy

| | EAN | | | | | | | |
|---|---|---|---|---|---|---|---|---|
| Code | 4013288 | | mm | | | | | |
| 05**006526**001 | *228680* | PZ 1 | 157 | 6 3/16" | | | | 5 |
| 05**006527**001 | *228697* | PZ 2 | 157 | 6 3/16" | | | | 5 |

## Kraftform Kompakt VDE 65 iS Take it easy SB

| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 05**006566**001 | *229212* | | **Kraftform Kompakt VDE 65 iS Take it easy** 1x PZ 1x157 | 5 |
| 05**006567**001 | *229229* | | **Kraftform Kompakt VDE 65 iS Take it easy** 1x PZ 2x157 | 5 |

### Kraftform Kompakt VDE 62 i PH/S Take it easy

- Kraftform Kompakt VDE interchangeable blade for PlusMinus screws slotted/Phillips
- Particularly for jobs on terminal blocks, fuse boxes, switches and relays
- Take it easy tool finder: Colour coding by profile and laser-engraved size indication

## Kraftform Kompakt VDE 62 i PH/S Take it easy

| | EAN | | | | | | | |
|---|---|---|---|---|---|---|---|---|
| Code | 4013288 | | mm | | | | | |
| 05**006514**001 | *228567* | # 1 | 157 | 6 3/16" | | | | 5 |
| 05**006515**001 | *228574* | # 2 | 157 | 6 3/16" | | | | 5 |

### Kraftform Kompakt VDE 62 iS PH/S Take it easy

- Kraftform Kompakt VDE interchangeable blade for PlusMinus screws slotted/Phillips
- Reduced shaft diameter and integrated insulation protection
- Allows screwdriving even in confined situations
- Low-lying screw and spring elements can be reached and actuated
- Take it easy tool finder: Colour coding by profile and laser-engraved size indication

## Kraftform Kompakt VDE 62 iS PH/S Take it easy

| | EAN | | | | | | | |
|---|---|---|---|---|---|---|---|---|
| Code | 4013288 | | mm | | | | | |
| 05**006516**001 | *228581* | # 1 | 157 | 6 3/16" | | | | 5 |
| 05**006517**001 | *228598* | # 2 | 157 | 6 3/16" | | | | 5 |

## Kraftform Kompakt VDE 65 i PZ/S Take it easy

- Combination profile - Pozidriv/slotted
- Particularly for jobs on terminal blocks, fuse boxes, switches and relays
- Take it easy tool finder: Colour coding by profile and laser-engraved size indication

### Kraftform Kompakt VDE 65 i PZ/S Take it easy

| Code | EAN 4013288 | | mm | | | | | |
|---|---|---|---|---|---|---|---|---|
| 05**006528**001 | *228703* | # 1 | 157 | 6 3/16" | | | | 5 |
| 05**006529**001 | *228710* | # 2 | 157 | 6 3/16" | | | | 5 |

## Kraftform Kompakt VDE 65 iS PZ/S Take it easy

- Combination profile - Pozidriv/slotted
- Reduced shaft diameter and integrated insulation protection
- Allows screwdriving even in confined situations
- Low-lying screw and spring elements can be reached and actuated
- Take it easy tool finder: Colour coding by profile and laser-engraved size indication

### Kraftform Kompakt VDE 65 iS PZ/S Take it easy

| Code | EAN 4013288 | | mm | | | | | |
|---|---|---|---|---|---|---|---|---|
| 05**006530**001 | *228727* | # 1 | 157 | 6 3/16" | | | | 5 |
| 05**006531**001 | *228734* | # 2 | 157 | 6 3/16" | | | | 5 |

### Kraftform Kompakt VDE 65 iS PZ/S Take it easy SB

| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 05**006568**001 | *229199* | | **Kraftform Kompakt VDE 65 i PZ/S Take it easy** 1x # 1x157 | 5 |
| 05**006569**001 | *229205* | | **Kraftform Kompakt VDE 65 iS PZ/S Take it easy** 1x # 2x157 | 5 |

## Kraftform Kompakt VDE 67 i TORX® Take it easy

- Kraftform Kompakt VDE interchangeable blade for hexagon socket screws
- Take it easy tool finder: Colour coding by profile and laser-engraved size indication

### Kraftform Kompakt VDE 67 i TORX® Take it easy

| Code | EAN 4013288 | | mm | | | | | |
|---|---|---|---|---|---|---|---|---|
| 05**006532**001 | *228758* | TX 8 | 157 | 6 3/16" | | | | 5 |
| 05**006533**001 | *228765* | TX 9 | 157 | 6 3/16" | | | | 5 |
| 05**006534**001 | *228772* | TX 10 | 157 | 6 3/16" | | | | 5 |
| 05**006535**001 | *228789* | TX 15 | 157 | 6 3/16" | | | | 5 |
| 05**006536**001 | *228796* | TX 20 | 157 | 6 3/16" | | | | 5 |
| 05**006537**001 | *228802* | TX 25 | 157 | 6 3/16" | | | | 5 |
| 05**006538**001 | *228819* | TX 27 | 157 | 6 3/16" | | | | 5 |
| 05**006539**001 | *228826* | TX 30 | 157 | 6 3/16" | | | | 5 |

## Kraftform Kompakt VDE 67 i TORX® Take it easy SB

| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 05**006570**001 | *229151* | | **Kraftform Kompakt VDE 67 i Take it easy** 1x TX 10x157 | 5 |
| 05**006571**001 | *229144* | | **Kraftform Kompakt VDE 67 i Take it easy** 1x TX 15x157 | 5 |
| 05**006572**001 | *229168* | | **Kraftform Kompakt VDE 67 i Take it easy** 1x TX 20x157 | 5 |
| 05**006573**001 | *229175* | | **Kraftform Kompakt VDE 67 i Take it easy** 1x TX 25x157 | 5 |
| 05**006574**001 | *229182* | | **Kraftform Kompakt VDE 67 i Take it easy** 1x TX 30x157 | 5 |

### Kraftform Kompakt VDE 67 iS TORX® Take it easy

- Reduced shaft diameter and integrated insulation protection
- Allows screwdriving even in confined situations
- Low-lying screw and spring elements can be reached and actuated
- Take it easy tool finder: Colour coding by profile and laser-engraved size indication

## Kraftform Kompakt VDE 67 iS TORX® Take it easy

| Code | EAN 4013288 | | mm | | | | | |
|---|---|---|---|---|---|---|---|---|
| 05**006540**001 | *228833* | TX 15 | 157 | 6 3/16" | | | | 5 |
| 05**006541**001 | *228840* | TX 20 | 157 | 6 3/16" | | | | 5 |
| 05**006542**001 | *228857* | TX 25 | 157 | 6 3/16" | | | | 5 |

## Kraftform Kompakt VDE 68 i Take it easy

| Code | EAN 4013288 | | mm | | | | | |
|---|---|---|---|---|---|---|---|---|
| 05**006543**001 | *228864* | # 1 | 157 | 6 3/16" | | | | 5 |
| 05**006544**001 | *228871* | # 2 | 157 | 6 3/16" | | | | 5 |

### Kraftform Kompakt VDE 68 iS Take it easy

- Reduced shaft diameter and integrated insulation protection
- Allows screwdriving even in confined situations
- Low-lying screw and spring elements can be reached and actuated
- Take it easy tool finder: Colour coding by profile and laser-engraved size indication

## Kraftform Kompakt VDE 68 iS Take it easy

| Code | EAN 4013288 | | mm | | | | | |
|---|---|---|---|---|---|---|---|---|
| 05**006545**001 | *228888* | # 1 | 157 | 6 3/16" | | | | 5 |
| 05**006546**001 | *228895* | # 2 | 157 | 6 3/16" | | | | 5 |

## Kraftform Kompakt VDE 64 i Take it easy

- Kraftform Kompakt VDE interchangeable blade for hexagon socket screws
- With Hex-Plus profile (prevents hexagonal socket screws from cylindrical turning)
- Take it easy tool finder: Colour coding by profile and laser-engraved size indication

### Kraftform Kompakt VDE 64 i Take it easy

| Code | EAN 4013288 | mm | mm | | | | | |
|---|---|---|---|---|---|---|---|---|
| 05**006518**001 | *228604* | 2,5 | 157 | 6 3/16" | | | | 5 |
| 05**006519**001 | *228611* | 3,0 | 157 | 6 3/16" | | | | 5 |
| 05**006520**001 | *228628* | 4,0 | 157 | 6 3/16" | | | | 5 |
| 05**006521**001 | *228635* | 5,0 | 157 | 6 3/16" | | | | 5 |
| 05**006522**001 | *228642* | 6,0 | 157 | 6 3/16" | | | | 5 |

### Kraftform Kompakt VDE 64 i Take it easy SB

| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 05**006561**001 | *229090* | | **Kraftform Kompakt VDE 64 i Take it easy** 1x 2.5x157 | 5 |
| 05**006562**001 | *229106* | | **Kraftform Kompakt VDE 64 i Take it easy** 1x 3.0x157 | 5 |
| 05**006563**001 | *229113* | | **Kraftform Kompakt VDE 64 i Take it easy** 1x 4.0x157 | 5 |
| 05**006564**001 | *229120* | | **Kraftform Kompakt VDE 64 i Take it easy** 1x 5.0x157 | 5 |
| 05**006565**001 | *229137* | | **Kraftform Kompakt VDE 64 i Take it easy** 1x 6.0x157 | 5 |

## Kraftform Kompakt 96 VK 6,3

Glass-fibre reinforced switch cabinet key. Blade for Kraftform Kompakt handle/interchangeable blade system for rapid exchange of the blade without needing any special tools - square socket.

### Kraftform Kompakt 96 VK 6,3

| Code | EAN 4013288 | mm | mm | | | | | |
|---|---|---|---|---|---|---|---|---|
| 05**003460**001 | *105349* | 6,3 | 89 | 3 9/16" | | | | 5 |

## Kraftform Kompakt 97 VK 8,1

- Kraftform Kompakt switch cabinet key 8.1 mm

### Kraftform Kompakt 97 VK 8,1

| Code | EAN 4013288 | mm | mm | | | | | |
|---|---|---|---|---|---|---|---|---|
| 05**003461**001 | *105370* | 8,1 | 89 | 3 9/16" | | | | 5 |

### Kraftform Kompakt 98 DK

| Code | EAN 4013288 | | mm | | | | | |
|---|---|---|---|---|---|---|---|---|
| 05**003462**001 | *105356* | | 89 | 3 9/16" | | | | 5 |

### Kraftform Kompakt 99 FL

| Code | EAN 4013288 | | mm | | | | | |
|---|---|---|---|---|---|---|---|---|
| 05**003463**001 | *105363* | | 89 | 3 9/16" | | | | 5 |

## Kraftform – Series 1000 VDE

Premium Kraftform VDE screwdriver. Multi-component Kraftform handle for fast and gentle work. The Wera Black Point tip and a sophisticated hardening process guarantee a long usability for the tip, increased corrosion protection and exact fitting accuracy.

Individually tested at 10,000 V for safe working at the approved voltage of 1,000 V. The hexagon anti-roll protection avoids bits from rolling away annoyingly at the workplace. Handles marked to find and sort the tools easily.

- Insulated screwdriver for safe working up to 1,000 volts
- Individually tested
- Multi-component Kraftform handle for fast and low-fatigue working
- Handle markings simplify finding and sorting of tools
- The Wera Black Point tip offers an exact fit and optimum corrosion protection

### 1060 i VDE-insulated Kraftform slotted screwdriver

| Code | EAN 4013288 | mm | mm | mm | mm | | | |
|---|---|---|---|---|---|---|---|---|
| 05051580001 | *222268* | 0,4 | 2,5 | 80 | 81 | 3/32" | 3 1/8" | 10 |
| 05051582001 | *222275* | 0,6 | 3,5 | 100 | 81 | 9/64" | 4" | 10 |
| 05051583001 | *222282* | 0,8 | 4,0 | 100 | 98 | 5/32" | 4" | 10 |
| 05051587001 | *222299* | 1,0 | 5,5 | 125 | 98 | 7/32" | 5" | 10 |

### 1062 i PH VDE-insulated Kraftform Phillips-head screwdriver

| Code | EAN 4013288 | | mm | mm | | | | |
|---|---|---|---|---|---|---|---|---|
| 05051601001 | *222220* | PH 1 | 80 | 98 | 3 1/8" | | | 5 |
| 05051603001 | *222237* | PH 2 | 100 | 105 | 4" | | | 5 |

### 1065 i PZ VDE-insulated Kraftform Phillips-head screwdriver

| Code | EAN 4013288 | | mm | mm | | | | |
|---|---|---|---|---|---|---|---|---|
| 05051611001 | *222244* | PZ 1 | 80 | 98 | 3 1/8" | | | 5 |
| 05051613001 | *222251* | PZ 2 | 100 | 105 | 4" | | | 5 |

## 1060 i/1062 i/6 Kraftform VDE screwdriver set

Premium Kraftform VDE screwdriver set. Multi-component Kraftform handle for fast and gentle work. The Wera Black Point tip and a sophisticated hardening process guarantee a long usability for the tip, increased corrosion protection and exact fitting accuracy.

Individually tested at 10,000 V for safe working at the approved voltage of 1,000 V. The hexagon anti-roll protection avoids bits from rolling away annoyingly at the workplace. Handles marked to find and sort the tools easily.

### 1060 i/1062 i/6 Kraftform VDE screwdriver set

| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 05051575001 | *222381* | | | 1 |
| | | | **1062 i PH VDE**<br>1x PH 1x80; 1x PH 2x100 | |
| | | | **1060 i VDE**<br>1x 0,4x2,5x80; 1x 0,6x3,5x100; 1x 0,8x4,0x100; 1x 1,0x5,5x125 | |

## 1060 i/1065 i/6 Kraftform VDE screwdriver set

| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 05**051576**001 | *222374* | | | 1 |
| | | | **1065 i PZ VDE**<br>1x PZ 1x80; 1x PZ 2x100 | |
| | | | **1060 i VDE**<br>1x 0,4x2,5x80; 1x 0,6x3,5x100; 1x 0,8x4,0x100; 1x 1,0x5,5x125 | |

## 410 i VDE A RA VDE-insulated T-handle adapter screwdriver with ratchet functionality for 1/4" sockets

- The fine-toothed ratchet mechanism in the handle ensures fast, powerful and precise working
- The recesses in the fast-rotating sleeve allow resistance to be generated by finger force. This allows the ratchet mechanism to be used even at low resistance of the screw
- Socket mounting with integrated ball lock

## 410 i VDE A RA VDE-insulated T-handle adapter screwdriver with ratchet functionality for 1/4" sockets

| Code | EAN 4013288 | | mm | mm | mm | | | |
|---|---|---|---|---|---|---|---|---|
| 05**005121**001 | *234100* | 1/4" | 130 | 49 | 99 | 5 1/8" | | 1 |

## 410 i VDE B RA VDE-insulated T-handle adapter screwdriver with ratchet functionality for 3/8" sockets

- For 3/8" square head sockets with ball lock

## 410 i VDE B RA VDE-insulated T-handle adapter screwdriver with ratchet functionality for 3/8" sockets

| Code | EAN 4013288 | | mm | mm | mm | | | |
|---|---|---|---|---|---|---|---|---|
| 05**005122**001 | *234117* | 3/8" | 130 | 49 | 99 | 5 1/8" | | 1 |

## 410 i VDE B VDE-insulated T-handle adapter screwdriver for 3/8" sockets

The shape of the T-handle allows a transmission of particularly high tightening and loosening torque. The geometry of the handle fills the hand well and the fingers lie safely in the soft rounded handle recesses.

This ensures optimal, ergonomic power transmission. Individually tested tool as per IEC 60900 at 10,000 V for safe working at the approved voltage of 1,000 V.

Only allowed for 3/8" VDE bit sockets and sockets of the Wera Zyklop VDE series 8740, 8760, 8767, 8790. The coated handle protects even sensitive surfaces from damage.

- 3/8" VDE T-handle screwdriver for the transmission of particularly high tightening and loosening torque
- Ergonomic 2-component T-handle with handle recesses and a pleasant feel for a very high power transmission and fatigue-free working.
- Insulated, individually tested tool as per IEC 60900 for safe working up to 1.000 V
- Only allowed for 3/8" VDE bit sockets and sockets of the Wera Zyklop VDE series 8740, 8760, 8767, 8790

## 410 i VDE B VDE-insulated T-handle adapter screwdriver for 3/8" sockets

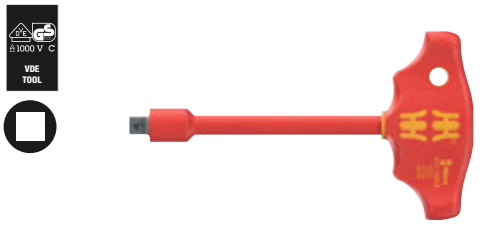


| Code | EAN 4013288 | | mm | mm | mm | | | |
|---|---|---|---|---|---|---|---|---|
| 05**005120**001 | *222664* | 3/8" | 130 | 49 | 99 | 5 1/8" | | 1 |

## 8790 A VDE Zyklop Socket, insulated, with 1/4" drive

- Individually tested tools as per IEC 60900 at 10,000 V
- Increased safety thanks to 2-component insulation with a yellow insulation core under an outer red insulation layer
- Plastic sleeve protects surfaces from damage

### 8790 A VDE Zyklop Socket, insulated, with 1/4" drive

| Code | EAN 4013288 | mm | mm | mm | mm | | | |
|---|---|---|---|---|---|---|---|---|
| 05**005930**001 | *233806* | 4,0 | 41,0 | 11,8 | 18,0 | | | 1 |
| 05**005931**001 | *233813* | 5,0 | 41,0 | 13,0 | 18,0 | | | 1 |
| 05**005932**001 | *233820* | 5,5 | 41,0 | 13,7 | 18,0 | | | 1 |
| 05**005933**001 | *233837* | 6,0 | 41,0 | 14,3 | 18,0 | | | 1 |
| 05**005934**001 | *233844* | 7,0 | 41,0 | 15,8 | 18,0 | | | 1 |
| 05**005935**001 | *233851* | 8,0 | 41,0 | 16,8 | 18,0 | | | 1 |
| 05**005936**001 | *233868* | 10,0 | 41,0 | 19,3 | 18,0 | | | 1 |
| 05**005937**001 | *233875* | 11,0 | 41,0 | 20,8 | 18,0 | | | 1 |
| 05**005938**001 | *233882* | 12,0 | 41,0 | 21,8 | 18,0 | | | 1 |
| 05**005939**001 | *233899* | 13,0 | 41,0 | 22,8 | 18,0 | | | 1 |
| 05**005940**001 | *233905* | 14,0 | 41,0 | 24,7 | 18,0 | | | 1 |

## 8767 A VDE HF TORX® Zyklop Bit socket, insulated, with 1/4" drive, with holding function

- For TORX® socket screws
- Extremely short and compact insulated 1/4" bit socket for easy working even in very confined spaces
- The holding function holds screws securely on the tool

### 8767 A VDE HF TORX® Zyklop Bit socket, insulated, with 1/4" drive, with holding function

| Code | EAN 4013288 | | mm | mm | mm | | | |
|---|---|---|---|---|---|---|---|---|
| 05**005920**001 | *233738* | TX 10 | 36,0 | 18,0 | 9,0 | | | 1 |
| 05**005921**001 | *233745* | TX 15 | 36,0 | 18,0 | 9,0 | | | 1 |
| 05**005922**001 | *233752* | TX 20 | 36,0 | 18,0 | 9,0 | | | 1 |
| 05**005923**001 | *233769* | TX 25 | 36,0 | 18,0 | 9,0 | | | 1 |
| 05**005924**001 | *233776* | TX 27 | 36,0 | 18,0 | 9,0 | | | 1 |
| 05**005925**001 | *233783* | TX 30 | 36,0 | 18,0 | 9,0 | | | 1 |
| 05**005926**001 | *233790* | TX 40 | 36,0 | 18,0 | 9,0 | | | 1 |

## 8740 A VDE HF Zyklop Bit socket, insulated, with 1/4" drive, with holding function for hexagonal socket screws

- For hexagonal socket head screws
- Extremely short and compact insulated 1/4" bit socket for easy working even in very confined spaces
- The holding function holds screws securely on the tool

### 8740 A VDE HF Zyklop Bit socket, insulated, with 1/4" drive, with holding function for hexagonal socket screws

| Code | EAN 4013288 | mm | mm | mm | mm | | | |
|---|---|---|---|---|---|---|---|---|
| 05**005900**001 | *233684* | 3,0 | 45,0 | 18,0 | 9,0 | | | 1 |
| 05**005901**001 | *233691* | 4,0 | 45,0 | 18,0 | 9,0 | | | 1 |
| 05**005902**001 | *233707* | 5,0 | 45,0 | 18,0 | 9,0 | | | 1 |
| 05**005903**001 | *233714* | 6,0 | 45,0 | 18,0 | 9,0 | | | 1 |
| 05**005904**001 | *233721* | 8,0 | 47,0 | 18,0 | 11,0 | | | 1 |

## 8794 SA VDE Zyklop extension, insulated, short, 1/4"

- 1/4" VDE Zyklop extension
- Short design
- Individually tested tools as per IEC 60900 at 10,000 V
- Increased safety thanks to 2-component insulation with a yellow insulation core under an outer red insulation layer
- Plastic sleeve protects surfaces from damage

### 8794 SA VDE Zyklop extension, insulated, short, 1/4"

| | EAN | | | | | | | |
|---|---|---|---|---|---|---|---|---|
| Code | 4013288 | | mm | | | | | |
| 05**005950**001 | *233677* | 1/4" | 91,0 | | | | | 1 |

## 8100 SB VDE 1 Zyklop Ratchet set, insulated, switch lever, 3/8" drive, metric

Incredibly compact set arrangement for a lot of tools in a small space. Individually tested ratchet, sockets and extensions as per IEC 60900 at 10,000V for safe working at the approved voltage of 1,000V.

Textile box with very high robustness and durability can be positioned upright for clear storage in the workshop shelf. Additional surface protection through textile outer material. Low weight and volume for easier mobility. Smooth turning mechanism for secure hold and easy removal of VDE sockets.

- Insulated and 100% individually tested Zyklop ratchets, sockets and extensions for safe working up to 1,000 volts
- Fine-toothed ratchet with 80 teeth for a short return angle of 4.5°
- Extremely slim design with a soft, ergonomic grip zone for easy work even in very confined spaces
- Robust and extremely compact textile box with socket holders, which ensure a secure hold and easy socket removal by means of a rotating mechanism
- Tools and textile box protect sensitive surfaces, the box is Wera 2go compatible

### 8100 SB VDE 1 Zyklop Ratchet set, insulated, switch lever, 3/8" drive, metric

| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 05**004970**001 | *190970* | | | 1 |
| | | | **8007 B VDE**<br>1x 3/8"x222,0 | |
| | | | **8790 B VDE**<br>1x 6,0x46,0; 1x 7,0x46,0; 1x 8,0x46,0; 1x 9,0x46,0; 1x 10,0x46,0; 1x 11,0x46,0; 1x 12,0x46,0; 1x 13,0x46,0; 1x 14,0x46,0; 1x 15,0x46,0; 1x 16,0x46,0; 1x 17,0x46,0; 1x 18,0x46,0; 1x 19,0x46,0 | |
| | | | **8794 SB VDE**<br>1x 3/8"x91,0 | |
| | | | **8794 LB VDE**<br>1x 3/8"x166,0 | |

## Belt B VDE 1 Zyklop bit socket set TORX® hexagonal socket with holding function, 3/8" drive

10 Zyklop bit sockets, with 3/8" drive, insulated, individually tested as per IEC 60900. Increased safety due to 2-component isolation with yellow core under red insulation outer layer visible in case of damage to outer red VDE insulation layer. With holding function for TORX® screws to Acument Intellectual Properties specifications or holding function for hexagonal socket screws.

Robust textile belt in the typical Wera design with 10 VDE bit sockets in a compact space. A smooth turning mechanism ensures secure holding and easy removal of the sockets. Includes snap hook for attaching to belt loops or bags. With fleece backing and hook and loop fastener strips for easy attachment e.g. on wall, shelf, workshop trolley and Wera 2go tool transport system.

VDE 3/8" bit socket and holding function for particularly comfortable screwdriving with reduced risk of screw loss when feeding to the component. With increased safety due to yellow insulation core, which becomes visible in case of damage to the outer red VDE insulation layer. Individually tested tool as per IEC 60900 at 10,000 V for safe working at the approved voltage of 1,000 V.

- 10-piece 3/8" socket set on robust textile belt
- Smooth Twist to Unlock mechanism for a secure fit and simple removal of the sockets
- Extremely short and compact 3/8" bit socket for easy work even in very confined spaces
- The holding function holds screws securely on the tool
- Individually tested tool as per IEC 60900 at 10,000 V for safe working at up to 1,000 volts
- Suitable for attachment to a wall, shelf, tool trolley and to the Wera 2go System

### Belt B VDE 1 Zyklop bit socket set TORX® hexagonal socket with holding function, 3/8" drive

| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 05**004930**001 | *210234* | | | 1 |
| | | | **8767 B VDE HF**<br>1x TX 20x55,0; 1x TX 25x55,0; 1x TX 27x55,0; 1x TX 30x55,0; 1x TX 40x55,0; 1x TX 45x59,0 | |
| | | | **8740 B VDE HF**<br>1x 4,0x55,0; 1x 5,0x55,0; 1x 6,0x55,0; 1x 8,0x59,0 | |
| | | | **Belt B VDE 0/10**<br>1x 71,0x209,0 | |
| | | | **K30**<br>1x 30,0x200,0 | |

## 8007 B VDE Zyklop ratchet, insulated, with switch lever, with 3/8" drive

- Insulated and 100% individually tested Zyklop ratchet for safe working up to 1,000 volts
- Fine toothing with 80 teeth for a short return angle of only 4.5°
- Extremely slim design with a soft, ergonomic grip zone for easy work even in very confined spaces
- Safe socket lock via push button, convenient direction change thanks to the reversing lever
- Plastic coating protects surfaces from damage

### 8007 B VDE Zyklop ratchet, insulated, with switch lever, with 3/8" drive

| Code | EAN 4013288 | | mm | | | | | |
|---|---|---|---|---|---|---|---|---|
| 05**004966**001 | *190963* | 3/8" | 222,0 | | | | | 3 |

## 8790 B VDE Zyklop 3/8" socket, insulated

- Individually tested tool as per IEC 60900 at 10,000V
- Increased safety due to 2-component isolation with yellow insulation core under red insulation outer layer
- Plastic coating protects surfaces from damage

### 8790 B VDE Zyklop 3/8" socket, insulated

| | EAN | | | | | | | |
|---|---|---|---|---|---|---|---|---|
| Code | 4013288 | mm | mm | mm | mm | | | |
| 05004950001 | *192936* | 6,0 | 46,0 | 14,8 | 23,0 | | | 1 |
| 05004951001 | *192943* | 7,0 | 46,0 | 15,7 | 23,0 | | | 1 |
| 05004952001 | *192950* | 8,0 | 46,0 | 17,0 | 23,0 | | | 1 |
| 05004953001 | *192967* | 9,0 | 46,0 | 18,2 | 23,0 | | | 1 |
| 05004954001 | *192974* | 10,0 | 46,0 | 19,4 | 23,0 | | | 1 |
| 05004955001 | *192981* | 11,0 | 46,0 | 20,7 | 23,0 | | | 1 |
| 05004956001 | *192998* | 12,0 | 46,0 | 23,0 | 23,0 | | | 1 |
| 05004957001 | *193001* | 13,0 | 46,0 | 23,0 | 23,0 | | | 1 |
| 05004958001 | *193018* | 14,0 | 46,0 | 24,7 | 23,0 | | | 1 |
| 05004959001 | *193025* | 15,0 | 46,0 | 26,0 | 23,0 | | | 1 |
| 05004960001 | *193032* | 16,0 | 46,0 | 26,8 | 23,0 | | | 1 |
| 05004961001 | *193049* | 17,0 | 46,0 | 29,0 | 23,0 | | | 1 |
| 05004962001 | *193056* | 18,0 | 46,0 | 29,6 | 23,0 | | | 1 |
| 05004963001 | *193063* | 19,0 | 46,0 | 30,7 | 23,0 | | | 1 |

## 8767 B VDE HF TORX® Zyklop bit socket, insulated, with holding function, 3/8" drive

- The holding function holds screws securely on the tool
- Extremely short and compact 3/8" bit socket for easy work even in very confined spaces

### 8767 B VDE HF TORX® Zyklop bit socket, insulated, with holding function, 3/8" drive

| | EAN | | | | | | | |
|---|---|---|---|---|---|---|---|---|
| Code | 4013288 | | mm | mm | mm | | | |
| 05004920001 | *210173* | TX 20 | 55,0 | 23,0 | 9,0 | | | 1 |
| 05004921001 | *210180* | TX 25 | 55,0 | 23,0 | 9,0 | | | 1 |
| 05004922001 | *210197* | TX 27 | 55,0 | 23,0 | 9,0 | | | 1 |
| 05004923001 | *210203* | TX 30 | 55,0 | 23,0 | 9,0 | | | 1 |
| 05004924001 | *210210* | TX 40 | 55,0 | 23,0 | 9,0 | | | 1 |
| 05004925001 | *210227* | TX 45 | 59,0 | 23,0 | 13,0 | | | 1 |

## 8740 B VDE HF Zyklop Hex bit socket, insulated, with holding function, 3/8" drive

- The holding function holds screws securely on the tool
- Extremely short and compact 3/8" bit socket for easy work even in very confined spaces

### 8740 B VDE HF Zyklop Hex bit socket, insulated, with holding function, 3/8" drive

| | EAN | | | | | | | |
|---|---|---|---|---|---|---|---|---|
| Code | 4013288 | mm | mm | mm | mm | | | |
| 05004900001 | *210135* | 4,0 | 55,0 | 23,0 | 9,0 | | | 1 |
| 05004901001 | *210142* | 5,0 | 55,0 | 23,0 | 9,0 | | | 1 |
| 05004902001 | *210159* | 6,0 | 55,0 | 23,0 | 9,0 | | | 1 |
| 05004903001 | *210166* | 8,0 | 59,0 | 23,0 | 13,0 | | | 1 |

## 8760 B VDE XZN Zyklop bit socket, insulated, 3/8" drive, for multi-point socket screws

- Extremely short and compact 3/8" bit socket for easy work even in very confined spaces

### 8760 B VDE XZN Zyklop bit socket, insulated, 3/8" drive, for multi-point socket screws

| | EAN | | | | | | | |
|---|---|---|---|---|---|---|---|---|
| Code | 4013288 | | mm | mm | mm | | | |
| 05004940001 | *211453* | M 8 | 59,0 | 23,0 | 13,0 | | | 1 |
| 05004941001 | *211460* | M 10 | 59,0 | 23,0 | 13,0 | | | 1 |
| 05004942001 | *211477* | M 12 | 59,0 | 23,0 | 13,0 | | | 1 |

## 8794 LB VDE Zyklop extension, insulated, long, 3/8"

- 3/8" VDE Zyklop extension
- Individually tested tool as per IEC 60900 at 10,000 V
- Increased safety due to 2-component isolation with yellow insulation core under red insulation outer layer
- Plastic coating protects surfaces from damage
- Long version

### 8794 LB VDE Zyklop extension, insulated, long, 3/8"

| | EAN | | | | | | | |
|---|---|---|---|---|---|---|---|---|
| Code | 4013288 | | mm | | | | | |
| 05**004965**001 | *190956* | 3/8" | 166,0 | | | | | 1 |

## 8794 SB VDE Zyklop extension, insulated, short, 3/8"

- Short version

### 8794 SB VDE Zyklop extension, insulated, short, 3/8"

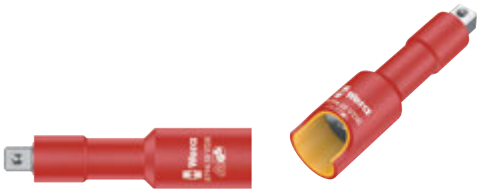

| | EAN | | | | | | | |
|---|---|---|---|---|---|---|---|---|
| Code | 4013288 | | mm | | | | | |
| 05**004964**001 | *190949* | 3/8" | 91,0 | | | | | 1 |

## Socket rail B VDE (textile belt), 10 location, unloaded

- Empty textile belt for 10 VDE socket wrench/bit socket inserts, 3/8"
- Includes a convenient snap hook
- Smooth Twist to Unlock mechanism for a secure fit and simple removal of the sockets
- Suitable for attachment to a wall, shelf, tool trolley and to the Wera 2go System

### Socket rail B VDE (textile belt), 10 location, unloaded

| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 05**003982**001 | *210913* | | | 1 |
| | | | **Belt B VDE 0/10**<br>1x 71,0x209,0 | |
| | | | **K30**<br>1x 30,0x200,0 | |

## 6004 Joker VDE 4 Set 1 VDE-insulated self-setting spanner set

Individually tested tools as per IEC 60900 at 10,000 V for safe working at the approved voltage of 1.000 V. The adjustable VDE spanner continuously and automatically grips all hexagonal sizes in the indicated range of dimensions - metric and imperial.

The integrated lever mechanism securely clamps the hexagon screw or bolt between the jaws, which significantly reduces the risk of slippage or damage. The ratchet feature ensures fast and consistent screwdriving without removing the tool.

By using the corner-width rectangular prisms, a back-pivoting angle of only 30° can be achieved. The single-arm design, in conjunction with the ratchet feature and the corner-width prism, makes it possible to work even in confined spaces.

The adjustable Joker 6004 VDE has a naturally comfortable handle thanks to the 2-component plastic insulation.

Safety is increased by the anti-slip protection at the front end of the handle. The sliding function offers contactless and safe opening of the non-insulated jaws, thereby providing extra protection.

- The compact textile box with four adjustable Joker 6004 VDE covers all metric and imperial dimensions in the field of application from 7 to 19 mm or ¼" to ¾"

### 6004 Joker VDE 4 Set 1 VDE-insulated self-setting spanner set

| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 05**020170**001 | *221803* | | | 1 |
| | | | **6004 Joker VDE XS**<br>1x 7-10 (¹/₄"-³/₈")x119 | |
| | | | **6004 Joker VDE S**<br>1x 10-13 (⁷/₁₆"-¹/₂")x155 | |
| | | | **6004 Joker VDE M**<br>1x 13-16 (¹/₂"-⁵/₈")x190 | |
| | | | **6004 Joker VDE L**<br>1x 16-19 (⁵/₈"-³/₄")x226 | |
| | | | **Hook and Loop Fastener Strip 120**<br>1x 50,0x120,0 | |

## 6004 Joker VDE
## VDE-insulated, self-setting spanner

Individually tested tools as per IEC 60900 at 10,000 V for safe working at the approved voltage of 1.000 V. The adjustable VDE spanner continuously and automatically grips all hexagonal sizes in the indicated range of dimensions – metric and imperial.

The integrated lever mechanism securely clamps the hexagon screw or bolt between the jaws, which significantly reduces the risk of slippage or damage.

The ratchet feature ensures fast and consistent screwdriving without removing the tool. By using the corner-width rectangular prisms, a back-pivoting angle of only 30° can be achieved.

The single-arm design, in conjunction with the ratchet feature and the corner-width prism, makes it possible to work even in confined spaces.

The adjustable Joker 6004 VDE has a naturally comfortable handle thanks to the 2-component plastic insulation. Safety is increased by the anti-slip protection at the front end of the handle.

The sliding function offers contactless and safe opening of the non-insulated jaws, thereby providing extra protection.

- The adjustable Joker 6004 VDE covers all metric and imperial dimensions in the respective field of application
- Individually tested tools with insulated handles for safe working up to 1,000 volt, with anti-slip protection and sliding function for contactless and safe opening of the non-insulated jaws
- Automatic and continuous grip of hexagon screws and bolts
- Lever mechanism when gripping avoids slipping and damage
- Fast and consistent screwdriving without removing the wrench thanks to mechanical ratchet function
- Return angle of only 30° through placement in the corner-width rectangular prisms in the mouth

### 6004 Joker VDE XS VDE-insulated, self-setting spanner

| Code | EAN 4013288 | mm | | mm | mm | | | |
|---|---|---|---|---|---|---|---|---|
| 05**020150**001 | *221797* | 7-10 | ¹/₄"-³/₈" | 119 | 7,7 | | | 3 |

## 6004 Joker VDE S VDE-insulated, self-setting spanner

| | EAN | | | | | | | |
|---|---|---|---|---|---|---|---|---|
| Code | 4013288 | mm | | mm | mm | | | |
| 05**020151**001 | *221766* | 10-13 | 7/16"-1/2" | 155 | 10 | | | 3 |

## 6004 Joker VDE M VDE-insulated, self-setting spanner

| | EAN | | | | | | | |
|---|---|---|---|---|---|---|---|---|
| Code | 4013288 | mm | | mm | mm | | | |
| 05**020152**001 | *221780* | 13-16 | 1/2"-5/8" | 190 | 12,4 | | | 3 |

## 6004 Joker VDE L VDE-insulated self-setting spanner

| | EAN | | | | | | | |
|---|---|---|---|---|---|---|---|---|
| Code | 4013288 | mm | | mm | mm | | | |
| 05**020153**001 | *221773* | 16-19 | 5/8"-3/4" | 226 | 14 | | | 3 |

## 400 i VDE Hex Insulated torque-indicator

Wera VDE torque indicator with fixed torque for hexagon socket screws. Tamper proof. The robust slip clutch generates a clearly audible and tactile trigger that signals when the set torque is reached, making it impossible to apply any further torque. The loosening torque value is significantly higher than the set tightening torque, therefore no additional tools are needed for loosening screw connections. The shape of the handle perfectly fills the whole hand and fingers comfortably lie in the softly rounded recessed grips. This ensures optimal, ergonomic power transfer. Individually tested tool as per IEC 60900 at 10,000 V for safe working at the approved voltage of 1,000 V.

- Insulated, individually tested VDE T-handle torque indicator for safe working up to 1,000V
- T-handle is ideal for transferring controlled tightening torque and high loosening torque
- Error-free screwdriving due to non-slip friction clutch and exact torque transmission
- Distinctly audible and noticeable excess-load signal when the pre-set torque is reached
- Tamper-proof against accidental changing of set torque value

## 400 i VDE Hex Insulated torque-indicator



| | EAN | | | | | | | |
|---|---|---|---|---|---|---|---|---|
| Code | 4013288 | | Nm | mm | mm | mm | | |
| 05**004980**001 | *206398* | 4,0 | 5,0 | 90 | 48 | 100 | 3 1/2" | 1 |
| 05**004981**001 | *206114* | 5,0 | 5,0 | 90 | 48 | 100 | 3 1/2" | 1 |

Wera

# Ratchets & Accessories

## Zyklop Speed - incredibly fast and incredibly flexible

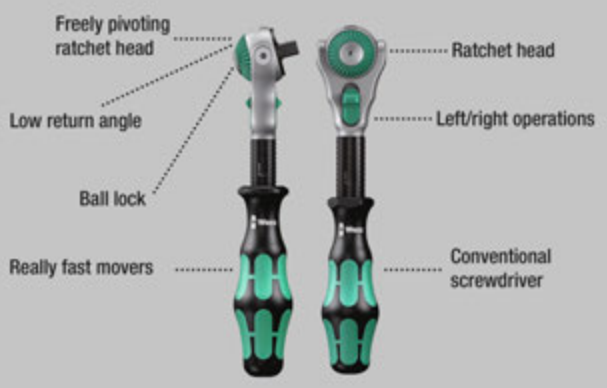


Incredibly compact set arrangement with many tools in a minimum of space. A completely new ratchet set feeling thanks to the unique textile boxes that are very robust and durable.

They can be positioned upright for tidy storage on the workshop shelf. Additional surface protection due to textile outer material. Low weight and volume for simpler mobility. Take it easy Tool Finder with colour coding according to sizes.

- 42-piece ratchet set in robust textile box
- Freely pivoting ratchet head with 5 predefined locking positions
- Bit-sockets with all the advantages of the Wera bit technology
- TORX®, hex plus and hexagon nuts with holding function for screws / nuts
- Take it easy tool finder with colour coding according to sizes
- Suitable for Wera 2go

### 8100 SA All-in Zyklop Speed Ratchet Set, 1/4" drive, with holding function, metric

| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 05**003755**001 | *190994* | | | 1 |
| | | | **8000 A**<br>1x 1/4"x152,0 | |
| | | | **8796 LA**<br>1x 1/4"x150,0 | |
| | | | **8794 A**<br>1x 1/4"x56,0 | |
| | | | **8790 HMA HF**<br>1x 4,0x23,0; 1x 4,5x23,0; 1x 5,0x23,0; 1x 5,5x23,0; 1x 6,0x23,0; 1x 7,0x23,0; 1x 8,0x23,0; 1x 9,0x23,0; 1x 10,0x23,0; 1x 11,0x23,0; 1x 12,0x23,0; 1x 13,0x23,0; 1x 14,0x23,0 | |
| | | | **8767 A HF**<br>1x TX 8x28,0; 1x TX 9x28,0; 1x TX 10x28,0; 1x TX 15x28,0; 1x TX 20x28,0; 1x TX 25x28,0; 1x TX 27x28,0; 1x TX 30x28,0; 1x TX 40x28,0 | |
| | | | **8740 A**<br>1x 2,0x28,0; 1x 2,5x28,0 | |
| | | | **8740 A HF**<br>1x 3,0x28,0; 1x 4,0x28,0; 1x 5,0x28,0; 1x 6,0x28,0; 1x 7,0x28,0; 1x 8,0x28,0 | |
| | | | **8751 A**<br>1x PH 1x28,0; 1x PH 2x28,0; 1x PH 3x28,0 | |
| | | | **8755 A**<br>1x PZ 1x28,0; 1x PZ 2x28,0; 1x PZ 3x28,0 | |
| | | | **8700 A FL**<br>1x 0,8x5,5x28,0; 1x 1,2x6,5x28,0 | |
| | | | **Nut Extractor**<br>1x 14,0x43,0 | |
| | | | **Hook and Loop Fastener Strip 120**<br>1x 50,0x120,0 | |

## 8100 SA 6 Zyklop Speed Ratchet Set, 1/4" drive, metric

- Freely pivoting ratchet head with 5 predefined locking positions
- Fine toothing with 72 teeth
- Small return angle of only 5°
- Free-turning sleeve for high working speeds
- Take it easy tool finder with colour coding according to sizes
- Compact textile box with high robustness, low weight and volume

### 8100 SA 6 Zyklop Speed Ratchet Set, 1/4" drive, metric

| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 05**004016**001 | *174000* | | | 1 |
| | | | **8000 A**<br>1x 1/4"x152,0 | |
| | | | **8790 HMA**<br>1x 5,0x23,0; 1x 5,5x23,0; 1x 6,0x23,0;<br>1x 7,0x23,0; 1x 8,0x23,0; 1x 10,0x23,0;<br>1x 11,0x23,0; 1x 12,0x23,0; 1x 13,0x23,0 | |
| | | | **8794 LA**<br>1x 1/4"x150,0 | |
| | | | **8794 A**<br>1x 1/4"x56,0 | |
| | | | **8784 A1**<br>1x 1/4"x1/4"x37,0 | |
| | | | **851/4 TZ PH**<br>1x PH 1x50; 1x PH 2x50; 1x PH 3x50 | |
| | | | **855/4 TZ PZ**<br>1x PZ 1x50; 1x PZ 2x50 | |
| | | | **867/4 Z TORX®**<br>1x TX 10x50; 1x TX 15x50; 1x TX 20x50;<br>1x TX 25x50; 1x TX 27x50; 1x TX 30x50 | |
| | | | **840/4 Z Hex-Plus**<br>1x 3,0x50; 1x 4,0x50; 1x 5,0x50; 1x 6,0x50 | |
| | | | **Hook and Loop Fastener Strip 120**<br>1x 50,0x120,0 | |

### 8100 SA 9 Zyklop Speed Ratchet Set, 1/4" drive, imperial

| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 05**004019**001 | *173843* | | | 1 |
| | | | **8000 A**<br>1x 1/4"x152,0 | |
| | | | **8790 HMA**<br>1x 3/16"x23,0; 1x 7/32"x23,0; 1x 1/4"x23,0;<br>1x 9/32"x23,0; 1x 5/16"x23,0; 1x 11/32"x23,0;<br>1x 3/8"x23,0; 1x 7/16"x23,0; 1x 1/2"x23,0 | |
| | | | **8794 LA**<br>1x 1/4"x150,0 | |
| | | | **8794 A**<br>1x 1/4"x56,0 | |
| | | | **8784 A1**<br>1x 1/4"x1/4"x37,0 | |
| | | | **851/4 TZ PH**<br>1x PH 1x50; 1x PH 2x50; 1x PH 3x50 | |
| | | | **855/4 TZ PZ**<br>1x PZ 1x50; 1x PZ 2x50 | |
| | | | **867/4 Z TORX®**<br>1x TX 10x50; 1x TX 15x50; 1x TX 20x50;<br>1x TX 25x50; 1x TX 27x50; 1x TX 30x50 | |
| | | | **840/4 Z Hex-Plus**<br>1x 5/32"x50; 1x 3/16"x50; 1x 7/32"x50;<br>1x 1/4"x50 | |
| | | | **Hook and Loop Fastener Strip 120**<br>1x 50,0x120,0 | |

## Kraftform Kompakt Zyklop MS1 Metal/Speed 1/4"

- Incredibly fast 1/4" Zyklop Speed ratchet with pivoting ratchet head and 5 predefined locking positions
- Extremely slim Zyklop Metal ratchet with long lever
- Return angle of only 5°
- Convenient direction change thanks to switchover lever
- Set in robust textile box

### Kraftform Kompakt Zyklop MS1 Metal/Speed 1/4"

| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 05**135949**001 | *178633* | | | 1 |
| | | | **8000 A**<br>1x 1/4"x152,0 | |
| | | | **8004 A**<br>1x 1/4"x141,0 | |
| | | | **8796 LA**<br>1x 1/4"x150,0 | |
| | | | **8794 LA**<br>1x 1/4"x150,0 | |
| | | | **8794 SA**<br>1x 1/4"x75,0 | |
| | | | **8784 A1**<br>1x 1/4"x1/4"x37,0 | |
| | | | **8794 A**<br>1x 1/4"x56,0 | |
| | | | **8795 A**<br>1x 1/4"x35,5 | |

## 8100 SA 2 Zyklop Speed Ratchet Set, 1/4" drive, metric

- 42-piece set in a robust metal case

### 8100 SA 2 Zyklop Speed Ratchet Set, 1/4" drive, metric

| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 05**003533**001 | *121103* | | | 1 |
| | | | **8000 A**<br>1x 1/4"x152,0 | |
| | | | **8790 HMA**<br>1x 4,0x23,0; 1x 4,5x23,0; 1x 5,0x23,0;<br>1x 5,5x23,0; 1x 6,0x23,0; 1x 7,0x23,0;<br>1x 8,0x23,0; 1x 9,0x23,0; 1x 10,0x23,0;<br>1x 11,0x23,0; 1x 12,0x23,0; 1x 13,0x23,0;<br>1x 14,0x23,0 | |
| | | | **8789 A**<br>1x 1/4"x110,0 | |
| | | | **8794 A**<br>1x 1/4"x56,0 | |
| | | | **8795 A**<br>1x 1/4"x35,5 | |
| | | | **8784 A1**<br>1x 1/4"x1/4"x37,0 | |
| | | | **8796 SA**<br>1x 1/4"x75,0 | |
| | | | **8796 LA**<br>1x 1/4"x150,0 | |
| | | | **851/1 Z PH**<br>1x PH 1x25; 1x PH 2x25; 1x PH 3x25 | |
| | | | **855/1 Z PZ**<br>1x PZ 1x25; 1x PZ 2x25; 1x PZ 3x25 | |
| | | | **867/1 Z TORX® BO**<br>1x TX 8x25; 1x TX 9x25; 1x TX 10x25;<br>1x TX 15x25; 1x TX 20x25; 1x TX 25x25;<br>1x TX 30x25; 1x TX 40x25 | |
| | | | **840/1 Z Hex-Plus**<br>1x 3,0x25; 1x 4,0x25; 1x 5,0x25; 1x 6,0x25;<br>1x 8,0x25 | |
| | | | **800/1 Z**<br>1x 0,6x4,5x25; 1x 1,0x5,5x25; 1x 1,2x8,0x25 | |

## 8100 SA 4 Zyklop Speed Ratchet Set, 1/4" drive, imperial

- 41-piece set in a robust metal case

### 8100 SA 4 Zyklop Speed Ratchet Set, 1/4" drive, imperial

| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 05**003535**001 | *121127* | | | 1 |
| | | | **8000 A**<br>1x 1/4"x152,0 | |
| | | | **8790 HMA**<br>1x 3/16"x23,0; 1x 7/32"x23,0; 1x 1/4"x23,0; 1x 9/32"x23,0; 1x 5/16"x23,0; 1x 11/32"x23,0; 1x 3/8"x23,0; 1x 7/16"x23,0; 1x 1/2"x23,0; 1x 9/16"x23,0 | |
| | | | **8789 A**<br>1x 1/4"x110,0 | |
| | | | **8794 A**<br>1x 1/4"x56,0 | |
| | | | **8795 A**<br>1x 1/4"x35,5 | |
| | | | **8784 A1**<br>1x 1/4"x1/4"x37,0 | |
| | | | **8796 SA**<br>1x 1/4"x75,0 | |
| | | | **8796 LA**<br>1x 1/4"x150,0 | |
| | | | **851/1 Z PH**<br>1x PH 1x25; 1x PH 2x25; 1x PH 3x25 | |
| | | | **855/1 Z PZ**<br>1x PZ 1x25; 1x PZ 2x25; 1x PZ 3x25 | |
| | | | **867/1 Z TORX® BO**<br>1x TX 8x25; 1x TX 9x25; 1x TX 10x25; 1x TX 15x25; 1x TX 20x25; 1x TX 25x25; 1x TX 30x25; 1x TX 40x25 | |
| | | | **840/1 Z Hex-Plus**<br>1x 5/64"x25; 1x 3/32"x25; 1x 1/8"x25; 1x 9/64"x25; 1x 5/32"x25; 1x 3/16"x25; 1x 7/32"x25 | |
| | | | **800/1 Z**<br>1x 0,6x4,5x25; 1x 1,0x5,5x25; 1x 1,2x8,0x25 | |

## 8100 SA/SC 2 Zyklop Speed Ratchet Set, 1/4" drive and 1/2" drive, metric

- 43-piece set in a robust metal case

### 8100 SA/SC 2 Zyklop Speed Ratchet Set, 1/4" drive and 1/2" drive, metric

| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 05**160785**001 | *126610* | | | 1 |
| | | | **8000 A**<br>1x 1/4"x152,0 | |
| | | | **8790 HMA**<br>1x 4,0x23,0; 1x 4,5x23,0; 1x 5,0x23,0; 1x 5,5x23,0; 1x 6,0x23,0; 1x 7,0x23,0; 1x 8,0x23,0; 1x 9,0x23,0; 1x 10,0x23,0; 1x 12,0x23,0; 1x 13,0x23,0 | |
| | | | **8784 A1**<br>1x 1/4"x1/4"x37,0 | |
| | | | **8796 LA**<br>1x 1/4"x150,0 | |
| | | | **8000 C**<br>1x 1/2"x277,0 | |
| | | | **8790 HMC**<br>1x 13,0x37,0; 1x 14,0x37,0; 1x 15,0x37,0; 1x 16,0x37,0; 1x 17,0x37,0; 1x 18,0x37,0; 1x 19,0x37,0; 1x 21,0x37,0; 1x 22,0x37,0; 1x 24,0x37,0 | |
| | | | **8796 LC**<br>1x 1/2"x250,0 | |
| | | | **816 R**<br>1x 1/4"x119 | |
| | | | **800/4 Z**<br>1x 1,0x5,5x89 | |
| | | | **840/4 Z Hex-Plus**<br>1x 3,0x89; 1x 4,0x89; 1x 5,0x89; 1x 6,0x89 | |
| | | | **851/4 Z PH**<br>1x PH 1x89; 1x PH 2x89; 1x PH 3x89 | |
| | | | **855/4 Z PZ**<br>1x PZ 1x89; 1x PZ 2x89; 1x PZ 3x89 | |
| | | | **867/4 Z TORX® BO**<br>1x TX 10x89; 1x TX 15x89; 1x TX 20x89; 1x TX 25x89; 1x TX 30x89 | |

## Kraftform Kompakt Zyklop Speed

- Pouch for belt attachment

### Kraftform Kompakt Zyklop Speed

| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 05**051045**001 | *155313* | | | 1 |
| | | | **8000 A**<br>1x 1/4"x152,0 | |
| | | | **8784 A1**<br>1x 1/4"x1/4"x37,0 | |
| | | | **8794 LA**<br>1x 1/4"x150,0 | |
| | | | **851/4 TZ PH**<br>1x PH 1x50; 1x PH 2x50; 1x PH 3x50 | |
| | | | **855/4 TZ PZ**<br>1x PZ 1x50; 1x PZ 2x50 | |
| | | | **867/4 Z TORX®**<br>1x TX 10x50; 1x TX 15x50; 1x TX 20x50;<br>1x TX 25x50; 1x TX 27x50; 1x TX 30x50 | |
| | | | **800/4 Z**<br>1x 1,0x5,5x50 | |
| | | | **840/4 Z Hex-Plus**<br>1x 3,0x50; 1x 4,0x50; 1x 5,0x50; 1x 6,0x50 | |
| | | | **8790 HMA**<br>1x 5,5x23,0; 1x 6,0x23,0; 1x 7,0x23,0;<br>1x 8,0x23,0; 1x 10,0x23,0; 1x 12,0x23,0;<br>1x 13,0x23,0 | |
| | | | **Hook and Loop Fastener Strip 70**<br>1x 50,0x70,0 | |

## 8000 A Zyklop Speed Ratchet with 1/4" drive

- Combines five different types of a ratchet in one
- Flywheel design and easy-to-grip free-turning sleeve for very high working speeds
- Freely pivoting ratchet head, push button release and left/right switchover
- Fine-tooth design allows a small return angle of 5°
- Can also be used as a screwdriver

### 8000 A Zyklop Speed Ratchet with 1/4" drive

| Code | EAN 4013288 | | mm | | | | | |
|---|---|---|---|---|---|---|---|---|
| 05**003500**001 | *121868* | 1/4" | 152,0 | | | | | 1 |

### 8000 A SB Zyklop Speed Ratchet with 1/4" drive

| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 05**073260**001 | *128034* | | **8000 A**<br>1x 1/4"x152.0 | 3 |

## Zyklop Metal with push-through square

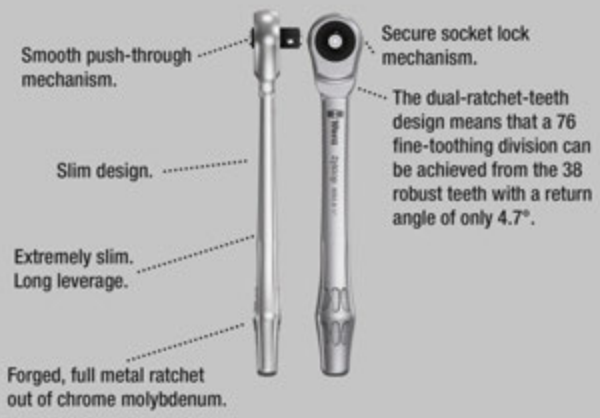


Incredibly compact set arrangement with many tools in a minimum of space. A completely new ratchet set feeling thanks to the unique textile boxes that are very robust and durable. They can be positioned upright for tidy storage on the workshop shelf. Additional surface protection due to textile outer material. Low weight and volume for simpler mobility.

Take it easy Tool Finder with colour coding according to sizes.

- Extremely slim ratchet with long lever
- Return angle of only 4.7°
- Absolutely smooth switchover of the non-detachable push-through square
- Take it easy tool finder system

### 8100 SA 7 Zyklop Metal Ratchet Set with push-through square, 1/4" drive, metric

| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 05**004017**001 | *173898* | | | 1 |
| | | | **8003 A**<br>1x 1/4"x141,0 | |
| | | | **8790 HMA**<br>1x 5,0x23,0; 1x 5,5x23,0; 1x 6,0x23,0;<br>1x 7,0x23,0; 1x 8,0x23,0; 1x 10,0x23,0;<br>1x 11,0x23,0; 1x 12,0x23,0; 1x 13,0x23,0 | |
| | | | **8794 LA**<br>1x 1/4"x150,0 | |
| | | | **8794 A**<br>1x 1/4"x56,0 | |
| | | | **8784 A1**<br>1x 1/4"x1/4"x37,0 | |
| | | | **851/1 Z PH**<br>1x PH 1x25; 1x PH 2x25; 1x PH 3x25 | |
| | | | **855/1 Z PZ**<br>1x PZ 1x25; 1x PZ 2x25 | |
| | | | **867/1 TORX®**<br>1x TX 10x25; 1x TX 15x25; 1x TX 20x25;<br>1x TX 25x25; 1x TX 27x25; 1x TX 30x25 | |
| | | | **840/1 Z Hex-Plus**<br>1x 3,0x25; 1x 4,0x25; 1x 5,0x25; 1x 6,0x25 | |

### 8100 SA 10 Zyklop Metal Ratchet Set with push-through square, 1/4" drive, imperial

| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 05**004020**001 | *173904* | | | 1 |
| | | | **8003 A**<br>1x 1/4"x141,0 | |
| | | | **8790 HMA**<br>1x 3/16"x23,0; 1x 7/32"x23,0; 1x 1/4"x23,0;<br>1x 9/32"x23,0; 1x 5/16"x23,0; 1x 11/32"x23,0;<br>1x 3/8"x23,0; 1x 7/16"x23,0; 1x 1/2"x23,0 | |
| | | | **8794 LA**<br>1x 1/4"x150,0 | |
| | | | **8794 A**<br>1x 1/4"x56,0 | |
| | | | **8784 A1**<br>1x 1/4"x1/4"x37,0 | |
| | | | **851/1 Z PH**<br>1x PH 1x25; 1x PH 2x25; 1x PH 3x25 | |
| | | | **855/1 Z PZ**<br>1x PZ 1x25; 1x PZ 2x25 | |
| | | | **867/1 TORX®**<br>1x TX 10x25; 1x TX 15x25; 1x TX 20x25;<br>1x TX 25x25; 1x TX 27x25; 1x TX 30x25 | |
| | | | **840/1 Z Hex-Plus**<br>1x 5/32"x25; 1x 3/16"x25; 1x 7/32"x25;<br>1x 1/4"x25 | |

## 8003 A Zyklop Metal Ratchet with push-through square and 1/4" drive

- For 1/4" square sockets with ball lock
- Forged, full metal ratchet (chrome-molybdenum); slim design to enable work in very confined spaces
- The dual-ratchet-teeth design means that a 76 fine-toothing division can be achieved from the 38 robust teeth with a return angle of only 4.7°
- Absolutely smooth switchover of the non-detachable push-through square

### 8003 A Zyklop Metal Ratchet with push-through square and 1/4" drive

| Code | EAN 4013288 | | mm | mm | mm | | | |
|---|---|---|---|---|---|---|---|---|
| 05**004003**001 | *174017* | 1/4" | 141,0 | 21 | 22 | | | 3 |

## Zyklop Metal with switch lever

Incredibly compact set arrangement with many tools in a minimum of space. A completely new ratchet set feeling thanks to the unique textile boxes that are very robust and durable.

They can be positioned upright for tidy storage on the workshop shelf. Additional surface protection due to textile outer material. Low weight and volume for simpler mobility.

Take it easy Tool Finder with colour coding according to sizes.

- Convenient direction change thanks to switchover lever
- Extremely slim ratchet with long lever
- Return angle of only 5°

### 8100 SA 8 Zyklop Metal Ratchet Set with switch lever, 1/4" drive, metric

| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 05**004018**001 | *173836* | | | 1 |
| | | | **8004 A**<br>1x 1/4"x141,0 | |
| | | | **8790 HMA**<br>1x 5,0x23,0; 1x 5,5x23,0; 1x 6,0x23,0; 1x 7,0x23,0; 1x 8,0x23,0; 1x 10,0x23,0; 1x 11,0x23,0; 1x 12,0x23,0; 1x 13,0x23,0 | |
| | | | **8794 LA**<br>1x 1/4"x150,0 | |
| | | | **8794 A**<br>1x 1/4"x56,0 | |
| | | | **8784 A1**<br>1x 1/4"x1/4"x37,0 | |
| | | | **851/1 Z PH**<br>1x PH 1x25; 1x PH 2x25; 1x PH 3x25 | |
| | | | **855/1 Z PZ**<br>1x PZ 1x25; 1x PZ 2x25 | |
| | | | **867/1 TORX®**<br>1x TX 10x25; 1x TX 15x25; 1x TX 20x25; 1x TX 25x25; 1x TX 27x25; 1x TX 30x25 | |
| | | | **840/1 Z Hex-Plus**<br>1x 3,0x25; 1x 4,0x25; 1x 5,0x25; 1x 6,0x25 | |
| | | | **Hook and Loop Fastener Strip 120**<br>1x 50,0x120,0 | |

### 8100 SA 11 Zyklop Metal Ratchet Set with switch lever, 1/4" drive, imperial

| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 05**004021**001 | *173850* | | | 1 |
| | | | **8004 A**<br>1x 1/4"x141,0 | |
| | | | **8790 HMA**<br>1x 3/16"x23,0; 1x 7/32"x23,0; 1x 1/4"x23,0; 1x 9/32"x23,0; 1x 5/16"x23,0; 1x 11/32"x23,0; 1x 3/8"x23,0; 1x 7/16"x23,0; 1x 1/2"x23,0 | |
| | | | **8794 LA**<br>1x 1/4"x150,0 | |
| | | | **8794 A**<br>1x 1/4"x56,0 | |
| | | | **8784 A1**<br>1x 1/4"x1/4"x37,0 | |
| | | | **851/1 Z PH**<br>1x PH 1x25; 1x PH 2x25; 1x PH 3x25 | |
| | | | **855/1 Z PZ**<br>1x PZ 1x25; 1x PZ 2x25 | |
| | | | **867/1 TORX®**<br>1x TX 10x25; 1x TX 15x25; 1x TX 20x25; 1x TX 25x25; 1x TX 27x25; 1x TX 30x25 | |
| | | | **840/1 Z Hex-Plus**<br>1x 5/32"x25; 1x 3/16"x25; 1x 7/32"x25; 1x 1/4"x25 | |

## 8100 SA 12 HF Zyklop Metal Ratchet Set with switch lever, 1/4" drive, metric

- Sockets with holding function for screws/bolts/nuts

### 8100 SA 12 HF Zyklop Metal Ratchet Set with switch lever, 1/4" drive, metric

| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 05**003756**001 | *190987* | | | 1 |
| | | | **8004 A**<br>1x 1/4"x141 | |
| | | | **8794 LA**<br>1x 1/4"x150,0 | |
| | | | **8794 A**<br>1x 1/4"x56,0 | |
| | | | **8790 HMA HF**<br>1x 5,0x23,0; 1x 5,5x23,0; 1x 6,0x23,0; 1x 7,0x23,0; 1x 8,0x23,0; 1x 10,0x23,0; 1x 11,0x23,0; 1x 12,0x23,0; 1x 13,0x23,0 | |
| | | | **Nut Extractor**<br>1x 14,0x43,0 | |
| | | | **Hook and Loop Fastener Strip 120**<br>1x 50,0x120,0 | |

## 8004 A Zyklop Metal Ratchet with switch lever and 1/4" drive

- Convenient direction change thanks to switchover lever
- Extremely slim ratchet with long lever
- Return angle of only 5°
- Secure socket locking

### 8004 A Zyklop Metal Ratchet with switch lever and 1/4" drive

| Code | EAN 4013288 | | mm | mm | mm | | | |
|---|---|---|---|---|---|---|---|---|
| 05**004004**001 | *174024* | 1/4" | 141,0 | 19 | 22 | | | 3 |

## 8790 HMA Zyklop 1/4" socket

- 1/4" Zyklop socket
- For manual and power tool operations (non-impact)
- Knurling at lower end to enable easy gripping when used in manual applications
- Equipped with ball stop groove
- Take it easy tool finder with colour coding according to sizes

### 8790 HMA Zyklop 1/4" socket

| Code | EAN 4013288 | | mm | | mm | mm | mm | |
|---|---|---|---|---|---|---|---|---|
| 05003501001 | 120083 | | 4,0 | | 23,0 | 6,9 | 13,0 | 1 |
| 05003502001 | 120106 | | 4,5 | | 23,0 | 7,5 | 13,0 | 1 |
| 05003503001 | 120113 | | 5,0 | | 23,0 | 8,2 | 13,0 | 1 |
| 05003504001 | 120120 | | 5,5 | | 23,0 | 8,8 | 13,0 | 1 |
| 05003505001 | 120137 | | 6,0 | | 23,0 | 9,4 | 13,0 | 1 |
| 05003506001 | 120144 | | 7,0 | | 23,0 | 11,0 | 13,0 | 1 |
| 05003507001 | 120151 | | 8,0 | | 23,0 | 12,0 | 13,0 | 1 |
| 05003508001 | 120090 | | 9,0 | | 23,0 | 13,0 | 14,0 | 1 |
| 05003509001 | 120168 | | 10,0 | | 23,0 | 14,5 | 14,5 | 1 |
| 05003510001 | 120175 | | 11,0 | | 23,0 | 16,0 | 15,0 | 1 |
| 05003511001 | 120182 | | 12,0 | | 23,0 | 17,0 | 16,0 | 1 |
| 05003512001 | 120199 | | 13,0 | | 23,0 | 18,0 | 17,0 | 1 |
| 05003513001 | 120205 | | 14,0 | | 23,0 | 20,0 | 18,0 | 1 |
| 05003499001 | 206862 | | 15,0 | | 23,0 | 21,5 | 19,0 | 1 |
| 05003514001 | 120212 | | | 3/16" | 23,0 | 7,5 | 13,0 | 1 |
| 05003515001 | 120229 | | | 7/32" | 23,0 | 8,8 | 13,0 | 1 |
| 05003516001 | 120236 | | | 1/4" | 23,0 | 11,0 | 13,0 | 1 |
| 05003517001 | 120243 | | | 9/32" | 23,0 | 11,0 | 13,0 | 1 |
| 05003518001 | 120250 | | | 5/16" | 23,0 | 12,0 | 13,0 | 1 |
| 05003519001 | 120267 | | | 11/32" | 23,0 | 13,0 | 14,0 | 1 |
| 05003520001 | 120274 | | | 3/8" | 23,0 | 14,5 | 14,5 | 1 |
| 05003521001 | 120281 | | | 7/16" | 23,0 | 16,0 | 15,0 | 1 |
| 05003522001 | 120298 | | | 1/2" | 23,0 | 18,0 | 17,0 | 1 |
| 05003523001 | 120304 | | | 9/16" | 23,0 | 20,0 | 18,0 | 1 |

## 8790 HMA HF Zyklop socket with 1/4" drive with holding function

- Socket (non-impact) for manual or power tool operations
- The holding function holds screws securely on the tool
- Take it easy tool finder with colour coding according to sizes
- Chrome vanadium steel, matt chrome-plated
- Equipped with ball stop groove, knurling at lower end for better gripping

### 8790 HMA HF Zyklop socket with 1/4" drive with holding function

| Code | EAN 4013288 | | mm | mm | mm | mm | | |
|---|---|---|---|---|---|---|---|---|
| 05003717001 | 185631 | | 4,0 | 23,0 | 7,0 | 11,0 | | 1 |
| 05003718001 | 185648 | | 4,5 | 23,0 | 7,8 | 11,0 | | 1 |
| 05003719001 | 185655 | | 5,0 | 23,0 | 8,9 | 11,0 | | 1 |
| 05003720001 | 185662 | | 5,5 | 23,0 | 9,2 | 11,0 | | 1 |
| 05003721001 | 185679 | | 6,0 | 23,0 | 10,5 | 11,0 | | 1 |
| 05003722001 | 185686 | | 7,0 | 23,0 | 11,9 | 11,0 | | 1 |
| 05003723001 | 185693 | | 8,0 | 23,0 | 12,9 | 11,0 | | 1 |
| 05003724001 | 185709 | | 9,0 | 23,0 | 14,1 | 12,0 | | 1 |
| 05003725001 | 185716 | | 10,0 | 23,0 | 15,6 | 12,5 | | 1 |
| 05003726001 | 185723 | | 11,0 | 23,0 | 17,4 | 13,0 | | 1 |
| 05003727001 | 185730 | | 12,0 | 23,0 | 18,4 | 14,0 | | 1 |
| 05003728001 | 185747 | | 13,0 | 23,0 | 19,5 | 15,0 | | 1 |
| 05003729001 | 185754 | | 14,0 | 23,0 | 20,8 | 16,0 | | 1 |
| 05003010001 | 206855 | | 15,0 | 23,0 | 21,5 | 18,5 | | 1 |

## Belt A 1 Zyklop socket set with holding function, 1/4" drive

Typically Wera designed robust textile belt with 9 sockets taking up minimal space. A smooth Twist to Unlock mechanism ensures a secure fit and simple removal of the sockets.

Comes with Take it easy Tool Finder with colour coding according to size to enable the right tool to be selected easily and quickly. Includes a snap hook for secure fastening to a belt loop or pocket.

Sockets with holding function for particularly convenient screw-driving with reduced risk of losing the screw when approaching the workpiece.

Supplied with a non-woven reverse side and hook and loop strips for simple attachment e.g. to a wall, shelf, tool trolley and to the Wera 2go tool transport system.

- 10-piece socket set on a robust textile belt, 1/4"
- Sockets with holding function for screws/bolts/nuts
- Smooth Twist to Unlock mechanism for a secure fit and simple removal of the sockets
- Take it easy tool finder with colour coding according to sizes
- Suitable for attachment to a wall, shelf, tool trolley and to the Wera 2go System

### Belt A 1 Zyklop socket set with holding function, 1/4" drive

| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 05**003880**001 | *190758* | | | 1 |
| | | ◉ | **8790 HMA HF**<br>1x 4,0x23,0; 1x 4,5x23,0; 1x 5,0x23,0;<br>1x 5,5x23,0; 1x 6,0x23,0; 1x 7,0x23,0;<br>1x 8,0x23,0; 1x 10,0x23,0; 1x 13,0x23,0 | |
| | | | **Nut Extractor**<br>1x 14,0x43,0 | |
| | | | **Belt A 0/9**<br>1x 39,0x238,0 | |
| | | | **Hook and Loop Fastener Strip 30**<br>1x 30,0x200,0 | |

## Nut Extractor

- Simple removal of nuts contained within Wera HF sockets
- For the simple removal of nuts from 1/4", 3/8", 1/2" sockets with holding function
- Hexagonal anti-roll feature against rolling away

### Nut Extractor

| Code | EAN 4013288 | mm | mm | | | | | |
|---|---|---|---|---|---|---|---|---|
| 05**050005**001 | *192554* | 14,0 | 43,0 | | | | | 1 |

## Belt A 4 Zyklop socket set, 1/4" drive

- 9-piece socket set on a robust textile belt, 1/4"
- For manual and power tool operations (non-impact)
- Smooth Twist to Unlock mechanism for a secure fit and simple removal of the sockets
- Take it easy tool finder with colour coding according to sizes
- Suitable for attachment to a wall, shelf, tool trolley and to the Wera 2go System

### Belt A 4 Zyklop socket set, 1/4" drive

| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 05**003883**001 | *190789* | | | 1 |
| | | ◉ | **8790 HMA**<br>1x 5,0x23,0; 1x 5,5x23,0; 1x 6,0x23,0;<br>1x 7,0x23,0; 1x 8,0x23,0; 1x 10,0x23,0;<br>1x 11,0x23,0; 1x 12,0x23,0; 1x 13,0x23,0 | |
| | | | **Belt A 0/9**<br>1x 39,0x238,0 | |
| | | | **Hook and Loop Fastener Strip 30**<br>1x 30,0x200,0 | |

## Magnetic socket rail A 4 Zyklop socket set, 1/4" drive

Socket rail with 9 manual and machine sockets (non-impact), 1/4". A smooth rotary mechanism allows a secure hold and easy access of the sockets.

With Take it easy tool finder with colour coding by size - to help you find the required tool quickly and easily.

The rail allows temporary attachment to metallic surfaces and, with its twist-to-unlock function, ensures secure locking and unlocking of the sockets.

- 9-piece socket set on socket rail, 1/4"
- Rail with secure bit mounting and yet easy removal (twist-to-unlock) for temporary attachment on wall, shelf or workshop trolley
- Smooth Twist to Unlock mechanism for a secure fit and simple removal of the sockets
- With Take it easy tool finder: colour coding by size

### Magnetic socket rail A 4 Zyklop socket set, 1/4" drive

| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 05**005400**001 | *223197* | | | 1 |
| | | ◉ | **8790 HMA**<br>1x 5,0x23,0; 1x 5,5x23,0; 1x 6,0x23,0;<br>1x 7,0x23,0; 1x 8,0x23,0; 1x 10,0x23,0;<br>1x 11,0x23,0; 1x 12,0x23,0; 1x 13,0x23,0 | |
| | | | **9600**<br>1x 30,0x270,0 | |

### Belt A Imperial 1 Zyklop In-Hex-Plus bit socket set with holding function, 1/4" drive

| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 05**003884**001 | *194992* | | | 1 |
| | | ○ | **8740 A**<br>1x 5/64"x28,0; 1x 3/32"x28,0; 1x 7/64"x28,0 | |
| | | ○ | **8740 A HF**<br>1x 1/8"x28,0; 1x 9/64"x28,0; 1x 5/32"x28,0;<br>1x 3/16"x28,0; 1x 7/32"x28,0; 1x 1/4"x28,0 | |
| | | | **Belt A 0/9** 1x 39,0x238,0 | |
| | | | **Hook and Loop Fastener Strip 30** 1x 30,0x200,0 | |

## Magnetic socket rail A Imperial 1 Zyklop socket set, 1/4" drive, imperial

Socket rail with 9 manual and machine sockets (non-impact), 1/4". A smooth rotary mechanism allows a secure hold and easy access of the sockets.

With Take it easy tool finder with colour coding by size - to help you find the required tool quickly and easily.

The rail allows temporary attachment to metallic surfaces and, with its twist-to-unlock function, ensures secure locking and unlocking of the sockets.

- 9-piece socket set on socket rail, 1/4"
- Rail with secure bit mounting and yet easy removal (twist-to-unlock) for temporary attachment on wall, shelf or workshop trolley
- Smooth Twist to Unlock mechanism for a secure fit and simple removal of the sockets
- With Take it easy tool finder: colour coding by size

### Magnetic socket rail A Imperial 1 Zyklop socket set, 1/4" drive, imperial

| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 05**005420**001 | *223227* | | | 1 |
| | | ◉ | **8790 HMA**<br>1x 3/16"x23,0; 1x 7/32"x23,0; 1x 1/4"x23,0;<br>1x 9/32"x23,0; 1x 5/16"x23,0; 1x 11/32"x23,0;<br>1x 3/8"x23,0; 1x 7/16"x23,0; 1x 1/2"x23,0 | |
| | | | **9600** 1x 30,0x270,0 | |

## 8790 HMA Deep 1/4" socket

Long 1/4" hand and machine socket (ISO 2725 part 3) with ball intercept ring; for external hexagonal bolts and sockets.

For use in manual and machine operation (non-impact), even with low-lying screwdriving and protruding threaded rods.

With Take it easy tool finder with colour coding by size - for easy and fast location of the required tool. Easy to grasp even with oily hands.

The hexagon profile allows the transmission of high forces and puts less strain on the edges of bolts or screw heads than a double hexagon profile.

Fine-toothed ratchets also make the use of a double hexagon profile superfluous, even in confined spaces, thanks to their small back-pivoting angle.

- Long sockets for low-lying screwdriving, often even with protruding threaded rods in small spaces
- Hexagonal profile enables precise bolting with high power transmission and preserves the profile
- Take it easy tool finder with colour coding according to sizes
- Knurling on lower end for more grip when used manually
- For manual and machine operation (non-impact), ball intercept ring
- Made of matt chromed chrome-vanadium

### 8790 HMA Deep 1/4" socket

| Code | EAN 4013288 | | mm | mm | mm | mm | | |
|---|---|---|---|---|---|---|---|---|
| 05**004500**001 | *210258* | | 4,0 | 50,0 | 6,7 | 11,8 | | 1 |
| 05**004501**001 | *210128* | | 5,0 | 50,0 | 8,0 | 11,8 | | 1 |
| 05**004502**001 | *210241* | | 5,5 | 50,0 | 8,6 | 11,8 | | 1 |
| 05**004503**001 | *210265* | | 6,0 | 50,0 | 9,2 | 11,8 | | 1 |
| 05**004504**001 | *210272* | | 7,0 | 50,0 | 10,8 | 11,8 | | 1 |
| 05**004505**001 | *210289* | | 8,0 | 50,0 | 11,8 | 11,0 | | 1 |
| 05**004506**001 | *210296* | | 9,0 | 50,0 | 12,8 | 12,0 | | 1 |
| 05**004507**001 | *210302* | | 10,0 | 50,0 | 14,7 | 12,8 | | 1 |
| 05**004508**001 | *210319* | | 11,0 | 50,0 | 15,8 | 14,0 | | 1 |
| 05**004509**001 | *210326* | | 12,0 | 50,0 | 16,8 | 15,0 | | 1 |
| 05**004510**001 | *210333* | | 13,0 | 50,0 | 17,8 | 16,0 | | 1 |
| 05**004511**001 | *210340* | | 14,0 | 50,0 | 19,8 | 17,0 | | 1 |
| 05**004512**001 | *210357* | | 15,0 | 50,0 | 20,8 | 18,0 | | 1 |

## Belt A Deep 1 socket set, 1/4" drive

Robust textile belt in the typical Wera design with 9 long 1/4" manual and machine socket inserts (non-impacting) in a confined space. A smoother turning mechanism ensures a secure holding and easy removal of sockets. Includes snap hook for attaching to belt loops or bags.

With fleece backing and hook and loop fastener strips for easy attachment e.g. on wall, shelf, workshop trolley or the Wera 2go tool transport system.

Long 1/4" manual and mechanical socket wrench inserts (ISO 2725 part 3) from Wera for use in manual and machine operation (non-impacting) even with low-lying screwdriving and protruding threaded rods.

With Take it easy tool finder with colour coding by size - for easy and fast location of the required tool. Easy to grasp even with oily hands. With hexagonal profile and ball-catching groove. The hexagon profile allows the transmission of high forces and puts less strain on the edges of bolts or screw heads than a double hexagon profile.

Fine-toothed ratchets also make the use of a double hexagon profile superfluous, even in confined spaces, thanks to their small back-pivoting angle. For external hexagonal bolts and sockets.

- 9-piece socket set on a robust textile belt, 1/4"
- Smooth Twist to Unlock mechanism for a secure fit and simple removal of the sockets
- Long 1/4" socket for low-profile-fitting screw connections in tight construction spaces and for protruding threaded rods
- Hexagonal profile enables precise and profile-preserving screw-driving with high power transmission
- Take it easy tool finder with colour coding according to sizes

### Belt A Deep 1 socket set, 1/4" drive

| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 05**004525**001 | *210371* | | | 1 |
| | | | **8790 HMA Deep**<br>1x 5,0x50,0; 1x 5,5x50,0; 1x 6,0x50,0;<br>1x 7,0x50,0; 1x 8,0x50,0; 1x 10,0x50,0;<br>1x 11,0x50,0; 1x 12,0x50,0; 1x 13,0x50,0 | |
| | | | **Belt A 0/9**<br>1x 39,0x238,0 | |
| | | | **Hook and Loop Fastener Strip 30**<br>1x 30,0x200,0 | |

## Magnetic socket rail A Deep 1 socket set, 1/4" drive

Socket rail with 9 long manual and machine sockets (non-impact), ¼". A smooth rotary mechanism allows a secure hold and easy access of the sockets.

Long ¼" manual and machine sockets (ISO 2725 part 3) by Wera for manual and (non-impact) machine use even at low lying couplings and protruding thread rods. With Take it easy tool finder with colour coding by size - to help you find the required tool quickly and easily.

Slip-proof for easy grip even with oily hands. With hexagon profile and ball stop groove.

The hexagon profile enables the transmission of high forces and loads the edges of the bolt or the screw head less than a double hexagon profile.

Fine-teethed ratchets also make use of a double hexagon profile superfluous, even in confined spaces, thanks to their small return angle.

For external hexagon bolts and screws. The rail allows temporary attachment to metallic surfaces and, with its twist-to-unlock function, ensures secure locking and unlocking of the sockets.

- 9-piece socket set on socket rail, ¼"
- Rail with secure bit mounting and yet easy removal (twist-to-unlock) for temporary attachment on wall, shelf or workshop trolley
- Smooth Twist to Unlock mechanism for a secure fit and simple removal of the sockets
- Long ¼" socket for low-profile-fitting screw connections in tight construction spaces and for protruding threaded rods
- Hexagonal profile enables precise and profile-preserving screwdriving with high power transmission

### Magnetic socket rail A Deep 1 socket set, 1/4" drive

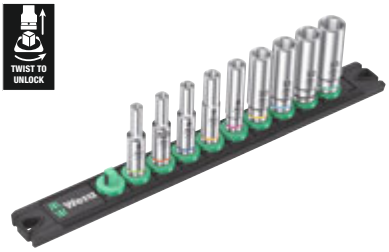

| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 05**005410**001 | *223210* | | | 1 |
| | | ◉ | **8790 HMA Deep**<br>1x 5,0x50,0; 1x 5,5x50,0; 1x 6,0x50,0;<br>1x 7,0x50,0; 1x 8,0x50,0; 1x 10,0x50,0;<br>1x 11,0x50,0; 1x 12,0x50,0; 1x 13,0x50,0 | |
| | | | **9600**<br>1x 30,0x270,0 | |

### 8767 A TORX® Zyklop bit socket with holding function, 1/4" drive

| Code | EAN 4013288 | | | mm | mm | mm | mm | |
|---|---|---|---|---|---|---|---|---|
| 05**003390**001 | *219602* | | TX 10 | 28,0 | 12,0 | 12,5 | 11,0 | 1 |
| 05**003391**001 | *219619* | | TX 20 | 28,0 | 12,0 | 12,5 | 11,0 | 1 |
| 05**003392**001 | *219626* | | TX 25 | 28,0 | 12,0 | 12,5 | 11,0 | 1 |
| 05**003393**001 | *219633* | | TX 30 | 28,0 | 12,0 | 12,5 | 11,0 | 1 |

### 8767 A HF TORX® Zyklop bit socket with holding function, 1/4" drive

- Bit socket (non-impact) for manual or machine tool operations
- The holding function holds screws securely on the tool
- Take it easy tool finder with colour coding according to sizes
- Knurling on lower end for more grip when used manually
- Chrome vanadium steel, matt chrome-plated

### 8767 A HF TORX® Zyklop bit socket with holding function, 1/4" drive

| Code | EAN 4013288 | | | mm | mm | mm | mm | |
|---|---|---|---|---|---|---|---|---|
| 05**003360**001 | *186829* | | TX 8 | 28,0 | 12,0 | 12,5 | 11,0 | 1 |
| 05**003361**001 | *186843* | | TX 9 | 28,0 | 12,0 | 12,5 | 11,0 | 1 |
| 05**003362**001 | *186836* | | TX 10 | 28,0 | 12,0 | 12,5 | 11,0 | 1 |
| 05**003363**001 | *186850* | | TX 15 | 28,0 | 12,0 | 12,5 | 11,0 | 1 |
| 05**003364**001 | *186867* | | TX 20 | 28,0 | 12,0 | 12,5 | 11,0 | 1 |
| 05**003365**001 | *186874* | | TX 25 | 28,0 | 12,0 | 12,5 | 11,0 | 1 |
| 05**003366**001 | *186881* | | TX 25 | 100,0 | 12,0 | 12,5 | 83,0 | 1 |
| 05**003367**001 | *186898* | | TX 27 | 28,0 | 12,0 | 12,5 | 11,0 | 1 |
| 05**003368**001 | *186904* | | TX 27 | 100,0 | 12,0 | 12,5 | 83,0 | 1 |
| 05**003369**001 | *186911* | | TX 30 | 28,0 | 12,0 | 12,5 | 11,0 | 1 |
| 05**003370**001 | *186928* | | TX 30 | 100,0 | 12,0 | 12,5 | 83,0 | 1 |
| 05**003371**001 | *186935* | | TX 40 | 28,0 | 12,0 | 12,5 | 11,0 | 1 |
| 05**003372**001 | *186942* | | TX 40 | 100,0 | 12,0 | 12,5 | 83,0 | 1 |

## Belt A 3 TORX® HF Zyklop bit socket set with holding function, 1/4" drive

Typically Wera designed robust textile belt with 9 sockets taking up minimal space. A smooth Twist to Unlock mechanism ensures a secure fit and simple removal of the sockets.

Comes with Take it easy Tool Finder with colour coding according to size to enable the right tool to be selected easily and quickly. Includes a snap hook for secure fastening to a belt loop or pocket. Especially short, stable bit-sockets with all the advantages of the Wera bit technology.

Bit sockets with holding function for particularly convenient screwdriving with reduced risk of losing the screw when approaching the workpiece. Supplied with a nonwoven reverse side and hook and loop strips for simple attachment e.g. to a wall, shelf, tool trolley and to the Wera 2go tool transport system.

- 9-piece bit-socket set on a robust textile belt, 1/4"
- Bit-sockets with all the advantages of the Wera bit technology
- Bit-sockets with holding function for screws/bolts
- Smooth Twist to Unlock mechanism for a secure fit and simple removal of the sockets
- Suitable for attachment to a wall, shelf, tool trolley and to the Wera 2go System
- Take it easy tool finder with colour coding according to sizes

### Belt A 3 TORX® HF Zyklop bit socket set with holding function, 1/4" drive

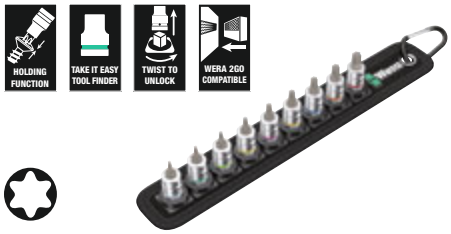


| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 05**003882**001 | *190772* | | | 1 |
| | | | **8767 A HF**<br>1x TX 8x28,0; 1x TX 9x28,0; 1x TX 10x28,0;<br>1x TX 15x28,0; 1x 3,7x3,7xTX 20x28,0;<br>1x 4,1x4,1xTX 25x28,0; 1x 4,8x4,8xTX 27x28,0;<br>1x 5,4x5,4xTX 30x28,0; 1x 6,5x6,5xTX 40x28,0 | |
| | | | **Belt A 0/9**<br>1x 39,0x238,0 | |
| | | | **Hook and Loop Fastener Strip 30**<br>1x 30,0x200,0 | |

## 8767 A TORX® HF 1 Zyklop bit socket set with holding function, 1/4" drive

- Compact textile box with high robustness, low weight and volume
- Bit socket (non-impact) for manual or power tool operations
- The holding function holds screws securely on the tool
- Take it easy tool finder with colour coding according to sizes
- Knurling on lower socket end for more grip when used manually
- Long design

### 8767 A TORX® HF 1 Zyklop bit socket set with holding function, 1/4" drive




| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 05**003375**001 | *191014* | | | 1 |
| | | | **8767 A HF**<br>1x TX 25x100,0; 1x TX 27x100,0;<br>1x TX 30x100,0; 1x TX 40x100,0 | |
| | | | **Hook and Loop Fastener Strip 70**<br>1x 50,0x70,0 | |

## 8740 A HF Zyklop bit socket with holding function, 1/4" drive

- Bit socket (non-impact) for manual or machine tool operations
- The holding function holds screws securely on the tool
- Hex-Plus allows socket head screws to live longer

### 8740 A HF Zyklop bit socket with holding function, 1/4" drive

| Code | EAN 4013288 | | mm | | mm | mm | mm | |
|---|---|---|---|---|---|---|---|---|
| 05003332001 | 187123 | | 3,0 | | 28,0 | 12,0 | 12,5 | 1 |
| 05003333001 | 187178 | | 4,0 | | 28,0 | 12,0 | 12,5 | 1 |
| 05003334001 | 187185 | | 4,0 | | 100,0 | 12,0 | 12,5 | 1 |
| 05003335001 | 187192 | | 5,0 | | 28,0 | 12,0 | 12,5 | 1 |
| 05003336001 | 187208 | | 5,0 | | 100,0 | 12,0 | 12,5 | 1 |
| 05003337001 | 187215 | | 6,0 | | 28,0 | 12,0 | 12,5 | 1 |
| 05003338001 | 187222 | | 6,0 | | 100,0 | 12,0 | 12,5 | 1 |
| 05003341001 | 189547 | | 7,0 | | 28,0 | 12,0 | 12,5 | 1 |
| 05003342001 | 189554 | | 7,0 | | 100,0 | 12,0 | 12,5 | 1 |
| 05003339001 | 187239 | | 8,0 | | 28,0 | 12,0 | 12,5 | 1 |
| 05003340001 | 187246 | | 8,0 | | 100,0 | 12,0 | 12,5 | 1 |
| 05003383001 | 189868 | | | 1/8" | 28,0 | 12,0 | 12,5 | 1 |
| 05003384001 | 189875 | | | 9/64" | 28,0 | 12,0 | 12,5 | 1 |
| 05003385001 | 189882 | | | 5/32" | 28,0 | 12,0 | 12,5 | 1 |
| 05003386001 | 189899 | | | 3/16" | 28,0 | 12,0 | 12,5 | 1 |
| 05003387001 | 189905 | | | 7/32" | 28,0 | 12,0 | 12,5 | 1 |
| 05003388001 | 189912 | | | 1/4" | 28,0 | 12,0 | 12,5 | 1 |
| 05003389001 | 189844 | | | 5/16" | 28,0 | 12,0 | 12,5 | 1 |

## 8740 A Zyklop bit socket, 1/4" drive

- Bit socket (non-impact) for manual or machine tool operations
- Hex-Plus allows socket head screws to live longer

### 8740 A Zyklop bit socket, 1/4" drive

| Code | EAN 4013288 | | mm | | mm | mm | mm | |
|---|---|---|---|---|---|---|---|---|
| 05003330001 | 187154 | | 2,0 | | 28,0 | 12,0 | 12,5 | 1 |
| 05003331001 | 187161 | | 2,5 | | 28,0 | 12,0 | 12,5 | 1 |
| 05003380001 | 189820 | | | 5/64" | 28,0 | 12,0 | 12,5 | 1 |
| 05003381001 | 189837 | | | 3/32" | 28,0 | 12,0 | 12,5 | 1 |
| 05003382001 | 189851 | | | 7/64" | 28,0 | 12,0 | 12,5 | 1 |

## Belt A 2 Zyklop In-Hex-Plus bit socket set with holding function, 1/4" drive

Typically Wera designed robust textile belt with 8 in-hex bit-sockets taking up minimal space.

A smooth Twist to Unlock mechanism ensures a secure fit and simple removal of the sockets.

Comes with Take it easy Tool Finder with colour coding according to size to enable the right tool to be selected easily and quickly. Includes a snap hook for secure fastening to a belt loop or pocket.

Supplied with a nonwoven reverse side and hook and loop strips for simple attachment e.g. to a wall, shelf, tool trolley and to the Wera 2go tool transport system.

- 8-piece bit socket set on a robust textile belt, 1/4"
- Bit-sockets with all the advantages of the Wera bit technology
- Bit sockets with retaining function for hexagon socket screws
- Take it easy tool finder with colour coding according to sizes
- Smooth Twist to Unlock mechanism for a secure fit and simple removal of the sockets
- Suitable for attachment to a wall, shelf, tool trolley and to the Wera 2go System

### Belt A 2 Zyklop In-Hex-Plus bit socket set with holding function, 1/4" drive

| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 05003881001 | 190765 | | | 1 |
| | | | **8740 A**<br>1x 2,0x28,0; 1x 2,5x28,0 | |
| | | | **8740 A HF**<br>1x 3,0x28,0; 1x 4,0x28,0; 1x 5,0x28,0;<br>1x 6,0x28,0; 1x 7,0x28,0; 1x 8,0x28,0 | |
| | | | **Belt A 0/8**<br>1x 39,0x220,0 | |
| | | | **Hook and Loop Fastener Strip 30**<br>1x 30,0x200,0 | |

## 8740 A HF 1 Zyklop bit socket set with holding function, 1/4" drive

- Compact textile box with high robustness, low weight and volume
- Bit socket (non-impact) for manual or power tool operations
- The holding function holds screws securely on the tool
- Take it easy tool finder with colour coding according to sizes
- Knurling on lower socket end for more grip when used manually
- Long design

### 8740 A HF 1 Zyklop bit socket set with holding function, 1/4" drive

| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 05**003345**001 | *191007* | | | 1 |
| | | | **8740 A HF**<br>1x 4,0x100,0; 1x 5,0x100,0; 1x 6,0x100,0; 1x 7,0x100,0; 1x 8,0x100,0 | |
| | | | **Hook and Loop Fastener Strip 70**<br>1x 50,0x70,0 | |

## 8751 A Phillips Zyklop bit socket, 1/4" drive

- Extremely short

### 8751 A Phillips Zyklop bit socket, 1/4" drive

| Code | EAN 4013288 | | mm | mm | mm | mm | | |
|---|---|---|---|---|---|---|---|---|
| 05**003350**001 | *187253* | PH 1 | 28,0 | 12,0 | 11,0 | 12,5 | | 1 |
| 05**003351**001 | *187260* | PH 2 | 28,0 | 12,0 | 11,0 | 12,5 | | 1 |
| 05**003352**001 | *187277* | PH 3 | 28,0 | 12,0 | 11,0 | 12,5 | | 1 |

## 8755 A Pozidriv Zyklop bit socket, 1/4" drive

- Extremely short

### 8755 A Pozidriv Zyklop bit socket, 1/4" drive

| Code | EAN 4013288 | | mm | mm | mm | mm | | |
|---|---|---|---|---|---|---|---|---|
| 05**003353**001 | *187284* | PZ 1 | 28,0 | 12,0 | 11,0 | 12,5 | | 1 |
| 05**003354**001 | *187291* | PZ 2 | 28,0 | 12,0 | 11,0 | 12,5 | | 1 |
| 05**003355**001 | *187307* | PZ 3 | 28,0 | 12,0 | 11,0 | 12,5 | | 1 |

## 8700 A FL Slotted screws Zyklop bit socket, 1/4" drive

- Extremely short

### 8700 A FL Slotted screws Zyklop bit socket, 1/4" drive

| Code | EAN 4013288 | mm | mm | mm | mm | mm | mm | |
|---|---|---|---|---|---|---|---|---|
| 05**003320**001 | *187314* | 0,8 | 5,5 | 28,0 | 12,0 | 11,0 | 11,0 | 1 |
| 05**003321**001 | *187321* | 1,0 | 5,5 | 28,0 | 12,0 | 11,0 | 11,0 | 1 |
| 05**003322**001 | *187338* | 1,2 | 6,5 | 28,0 | 12,0 | 11,0 | 11,0 | 1 |

## 8796 LA Zyklop "flexible-lock" extension with free-turning sleeve, long, 1/4"

- For 1/4" square sockets with ball lock
- Flexible lock system for either locking or rapid exchange of the attached tool
- With free-turning sleeve for rapid tightening and loosening of screws and nuts

### 8796 LA Zyklop "flexible-lock" extension with free-turning sleeve, long, 1/4"

| Code | EAN 4013288 | | mm | | | | | |
|---|---|---|---|---|---|---|---|---|
| 05**003531**001 | *121059* | 1/4" | 150,0 | | | | | 1 |

## 8796 SA Zyklop ”flexible-lock” extension with free-turning sleeve, short, 1/4"

- For 1/4" square sockets with ball lock
- Flexible lock system for either locking or rapid exchange of the attached tool
- With free-turning sleeve for rapid tightening and loosening of screws and nuts

### 8796 SA Zyklop ”flexible-lock” extension with free-turning sleeve, short, 1/4"

| | EAN | | | | | | | |
|---|---|---|---|---|---|---|---|---|
| Code | 4013288 | | mm | | | | | |
| 05**003530**001 | *121042* | 1/4" | 75,0 | | | | | 1 |

## 8794 LA Zyklop extension with free-turning sleeve, long, 1/4"

Wera Zyklop extension with easy-to-grip free-turning sleeve for rapid tightening and loosening of screws and nuts. Out of high quality chrome vanadium steel, matt chrome-plated.

### 8794 LA Zyklop extension with free-turning sleeve, long, 1/4"

| | EAN | | | | | | | |
|---|---|---|---|---|---|---|---|---|
| Code | 4013288 | | mm | | | | | |
| 05**003526**001 | *121073* | 1/4" | 150,0 | | | | | 1 |

## 8794 SA Zyklop extension with free-turning sleeve, short, 1/4"

Wera Zyklop extension with easy-to-grip free-turning sleeve for rapid tightening and loosening of screws and nuts. Out of high quality chrome vanadium steel, matt chrome-plated.

### 8794 SA Zyklop extension with free-turning sleeve, short, 1/4"

| | EAN | | | | | | | |
|---|---|---|---|---|---|---|---|---|
| Code | 4013288 | | mm | | | | | |
| 05**003525**001 | *121066* | 1/4" | 75,0 | | | | | 1 |

## 8789 A Zyklop sliding T-handle, 1/4"

Wera Zyklop T-handle for higher torque transfer. For 1/4" square sockets with ball lock. Adjustable drive, therefore more flexible usage. Out of high quality chrome vanadium steel, matt chrome-plated.

### 8789 A Zyklop sliding T-handle, 1/4"

| | EAN | | | | | | | |
|---|---|---|---|---|---|---|---|---|
| Code | 4013288 | | mm | | | | | |
| 05**003524**001 | *121493* | 1/4" | 110,0 | | | | | 3 |

## 8795 A Zyklop universal joint, 1/4"

Wera Zyklop universal joint for 1/4" square sockets with ball lock.

### 8795 A Zyklop universal joint, 1/4"

| | EAN | | | | | | | |
|---|---|---|---|---|---|---|---|---|
| Code | 4013288 | | mm | | | | | |
| 05**003528**001 | *121509* | 1/4" | 35,5 | | | | | 1 |

## 8784 A1 Zyklop bit adaptor, 1/4"

- 1/4" Zyklop adaptor with quick-release chuck for rapid bit change

### 8784 A1 Zyklop bit adaptor, 1/4"

| | EAN | | | | | | | |
|---|---|---|---|---|---|---|---|---|
| Code | 4013288 | | | mm | | | | |
| 05**003529**001 | *121035* | 1/4" | 1/4" | 37,0 | | | | 1 |

## 8794 A Zyklop wobble extension, 1/4"

Wobble extension for the Wera Zyklop. Swivel angle of 15° in all directions. This ensures rapid and precise work even in confined working situations.

### 8794 A Zyklop wobble extension, 1/4"

| | EAN | | | | | | | |
|---|---|---|---|---|---|---|---|---|
| Code | 4013288 | | mm | | | | | |
| 05**003527**001 | *121080* | 1/4" | 56,0 | | | | | 1 |

### Socket rail A (textile belt), 9 location, unloaded

| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 05**003891**001 | *192424* | | | 1 |
| | | | **Belt A 0/9**<br>1x 39,0x238,0 | |
| | | | **Hook and Loop Fastener Strip 30**<br>1x 30,0x200,0 | |

### Socket rail A (textile belt), 8 location, unloaded

| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 05**003890**001 | *192417* | | | 1 |
| | | | **Belt A 0/8**<br>1x 39,0x220,0 | |
| | | | **Hook and Loop Fastener Strip 30**<br>1x 30,0x200,0 | |

## 9600 Magnetic socket rail, 1/4", empty

1 socket rail, empty. For up to 10 sockets and/or bit sockets with 1/4" drive.

The rail allows temporary attachment to metallic surfaces and, with its twist-to-unlock function, ensures secure locking and unlocking of the sockets.

- Rail with secure bit mounting and yet easy removal (twist-to-unlock) for temporary attachment on wall, shelf or workshop trolley
- Smooth Twist to Unlock mechanism for a secure fit and simple removal of the sockets
- Empty, for up to 10 sockets, 1/4"

### 9600 Magnetic socket rail, 1/4", empty

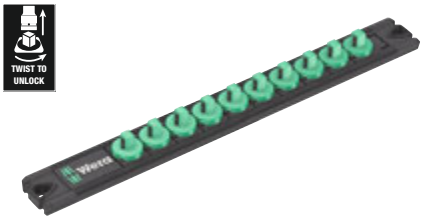

| | EAN | | | | | | | |
|---|---|---|---|---|---|---|---|---|
| Code | 4013288 | mm | mm | | | | | |
| 05**136420**001 | *223326* | 30,0 | 270,0 | | | | | 1 |

## Zyklop Speed - incredibly fast and incredibly flexible

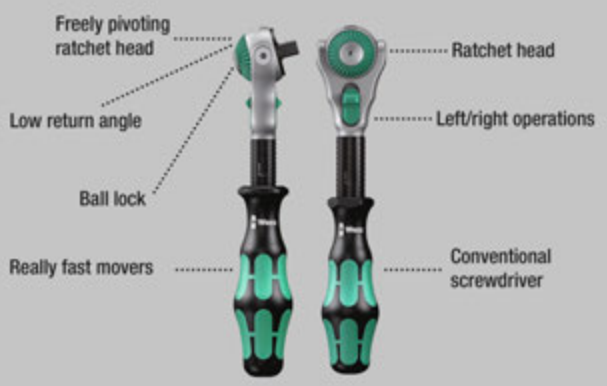


Incredibly compact set arrangement with many tools in a minimum of space. A completely new ratchet set feeling thanks to the unique textile boxes that are very robust and durable.

They can be positioned upright for tidy storage on the workshop shelf. Additional surface protection due to textile outer material. Low weight and volume for simpler mobility.

Take it easy Tool Finder with colour coding according to sizes.

- Freely pivoting ratchet head with 5 predefined locking positions
- Fine toothing with 72 teeth
- Small return angle of only 5°
- Free-turning sleeve for high working speeds
- Take it easy tool finder with colour coding according to sizes
- Compact textile box with high robustness, low weight and volume

## 8100 SB All-in Zyklop Speed ratchet set, 3/8" drive

- Easy removal of the ratchet thanks to Twist-to-unlock system

### 8100 SB All-in Zyklop Speed ratchet set, 3/8" drive

| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 05**003536**001 | *225573* | | | 1 |
| | | | **8000 B**<br>1x 3/8"x199,0 | |
| | | | **8794 B**<br>1x 3/8"x76,0 | |
| | | | **8796 LB**<br>1x 3/8"x200,0 | |
| | | | **8790 HMB HF**<br>1x 6,0x29,0; 1x 7,0x29,0; 1x 8,0x29,0; 1x 9,0x29,0; 1x 10,0x29,0; 1x 11,0x29,0; 1x 12,0x29,0; 1x 13,0x29,0; 1x 14,0x29,0; 1x 15,0x29,0; 1x 16,0x29,0; 1x 17,0x29,0; 1x 18,0x29,0; 1x 19,0x29,0 | |
| | | | **8767 B HF**<br>1x TX 10x35,0; 1x TX 15x35,0; 1x TX 20x35,0; 1x TX 25x35,0; 1x TX 27x35,0; 1x TX 30x35,0; 1x TX 40x35,0; 1x TX 45x38,5; 1x TX 50x38,5 | |
| | | | **8740 B HF**<br>1x 3,0x35,0; 1x 4,0x35,0; 1x 5,0x35,0; 1x 6,0x35,0; 1x 7,0x38,5; 1x 8,0x38,5; 1x 9,0x38,5; 1x 10,0x38,5 | |
| | | | **Nut Extractor**<br>1x 14,0x43,0 | |
| | | | **Hook and Loop Fastener Strip 240**<br>1x 50,0x240,0 | |

## 8100 SB 6 Zyklop Speed Ratchet Set, 3/8" drive, metric

| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 05**004046**001 | *173911* | | | 1 |
| | | | **8000 B**<br>1x 3/8"x199,0 | |
| | | | **8790 HMB**<br>1x 8,0x29,0; 1x 10,0x29,0; 1x 12,0x29,0;<br>1x 13,0x29,0; 1x 15,0x29,0; 1x 16,0x30,0;<br>1x 17,0x30,0; 1x 18,0x30,0; 1x 19,0x30,0 | |
| | | | **8794 LB**<br>1x 3/8"x200,0 | |
| | | | **8794 B**<br>1x 3/8"x76,0 | |
| | | | **8784 B1**<br>1x 1/4"x3/8"x44,0 | |
| | | | **851/4 TZ PH**<br>1x PH 1x50; 1x PH 2x50; 1x PH 3x50 | |
| | | | **855/4 TZ PZ**<br>1x PZ 1x50; 1x PZ 2x50; 1x PZ 3x50 | |
| | | | **867/4 Z TORX®**<br>1x TX 20x50; 1x TX 25x50; 1x TX 27x50;<br>1x TX 30x50; 1x TX 40x50 | |
| | | | **840/4 Z Hex-Plus**<br>1x 4,0x50; 1x 5,0x50; 1x 6,0x50; 1x 8,0x50 | |
| | | | **800/4 Z**<br>1x 1,0x5,5x50 | |

## 8100 SB 9 Zyklop Speed Ratchet Set, 3/8" drive, imperial

| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 05**004049**001 | *173980* | | | 1 |
| | | | **8000 B**<br>1x 3/8"x199,0 | |
| | | | **8790 HMB**<br>1x 1/4"x29,0; 1x 5/16"x29,0; 1x 3/8"x29,0;<br>1x 7/16"x29,0; 1x 1/2"x29,0; 1x 9/16"x29,0;<br>1x 5/8"x30,0; 1x 11/16"x30,0; 1x 3/4"x30,0 | |
| | | | **8794 LB**<br>1x 3/8"x200,0 | |
| | | | **8794 B**<br>1x 3/8"x76,0 | |
| | | | **8784 B1**<br>1x 1/4"x3/8"x44,0 | |
| | | | **851/4 TZ PH**<br>1x PH 1x50; 1x PH 2x50; 1x PH 3x50 | |
| | | | **855/4 TZ PZ**<br>1x PZ 1x50; 1x PZ 2x50; 1x PZ 3x50 | |
| | | | **867/4 Z TORX®**<br>1x TX 20x50; 1x TX 25x50; 1x TX 27x50;<br>1x TX 30x50; 1x TX 40x50 | |
| | | | **840/4 Z Hex-Plus**<br>1x 3/16"x50; 1x 7/32"x50; 1x 1/4"x50;<br>1x 5/16"x50 | |
| | | | **800/4 Z**<br>1x 1,0x5,5x50 | |

## 8100 SB 2 Zyklop Speed Ratchet Set, 3/8" drive, metric

- 43-piece set in a robust metal case

### 8100 SB 2 Zyklop Speed Ratchet Set, 3/8" drive, metric

| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 05**003594**001 | *121141* | | | 1 |
| | | | **8000 B**<br>1x 3/8"x199,0 | |
| | | | **8790 HMB**<br>1x 6,0x29,0; 1x 7,0x29,0; 1x 8,0x29,0;<br>1x 9,0x29,0; 1x 10,0x29,0; 1x 11,0x29,0;<br>1x 12,0x29,0; 1x 13,0x29,0; 1x 14,0x29,0;<br>1x 15,0x29,0; 1x 16,0x30,0; 1x 17,0x30,0;<br>1x 18,0x30,0; 1x 19,0x30,0; 1x 20,0x30,0;<br>1x 21,0x30,0; 1x 22,0x30,0; 1x 24,0x32,0 | |
| | | | **8789 B**<br>1x 3/8"x165,0 | |
| | | | **8794 B**<br>1x 3/8"x76,0 | |
| | | | **8795 B**<br>1x 3/8"x50,0 | |
| | | | **8784 B1**<br>1x 1/4"x3/8"x44,0 | |
| | | | **8796 SB**<br>1x 3/8"x125,0 | |
| | | | **8796 LB**<br>1x 3/8"x200,0 | |
| | | | **851/1 Z PH**<br>1x PH 2x25; 1x PH 3x25 | |
| | | | **855/1 Z PZ**<br>1x PZ 2x25; 1x PZ 3x25 | |
| | | | **867/1 Z TORX® BO**<br>1x TX 10x25; 1x TX 15x25; 1x TX 20x25;<br>1x TX 25x25; 1x TX 27x25; 1x TX 30x25;<br>1x TX 40x25 | |
| | | | **840/1 Z Hex-Plus**<br>1x 3,0x25; 1x 4,0x25; 1x 5,0x25; 1x 6,0x25;<br>1x 8,0x25; 1x 10,0x25 | |
| | | | **800/1 Z**<br>1x 1,0x5,5x25 | |

## 8100 SB 4 Zyklop Speed Ratchet Set, 3/8" drive, imperial

- 38-piece set in a robust metal case

### 8100 SB 4 Zyklop Speed Ratchet Set, 3/8" drive, imperial

| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 05**003596**001 | *121165* | | | 1 |
| | | | **8000 B**<br>1x 3/8"x199,0 | |
| | | | **8790 HMB**<br>1x 1/4"x29,0; 1x 5/16"x29,0; 1x 11/32"x29,0;<br>1x 3/8"x29,0; 1x 7/16"x29,0; 1x 1/2"x29,0;<br>1x 9/16"x29,0; 1x 5/8"x30,0; 1x 11/16"x30,0;<br>1x 3/4"x30,0; 1x 13/16"x30,0; 1x 7/8"x30,0 | |
| | | | **8789 B**<br>1x 3/8"x165,0 | |
| | | | **8794 B**<br>1x 3/8"x76,0 | |
| | | | **8795 B**<br>1x 3/8"x50,0 | |
| | | | **8784 B1**<br>1x 1/4"x3/8"x44,0 | |
| | | | **8796 SB**<br>1x 3/8"x125,0 | |
| | | | **8796 LB**<br>1x 3/8"x200,0 | |
| | | | **851/1 Z PH**<br>1x PH 2x25; 1x PH 3x25 | |
| | | | **855/1 Z PZ**<br>1x PZ 2x25; 1x PZ 3x25 | |
| | | | **867/1 Z TORX® BO**<br>1x TX 10x25; 1x TX 15x25; 1x TX 20x25;<br>1x TX 25x25; 1x TX 27x25; 1x TX 30x25;<br>1x TX 40x25 | |
| | | | **800/1 Z**<br>1x 1,0x5,5x25 | |
| | | | **840/1 Z Hex-Plus**<br>1x 5/64"x25; 1x 3/32"x25; 1x 1/8"x25; 1x 9/64"x25;<br>1x 5/32"x25; 1x 3/16"x25; 1x 7/32"x25 | |

## Zyklop Speed - incredibly fast and incredibly flexible

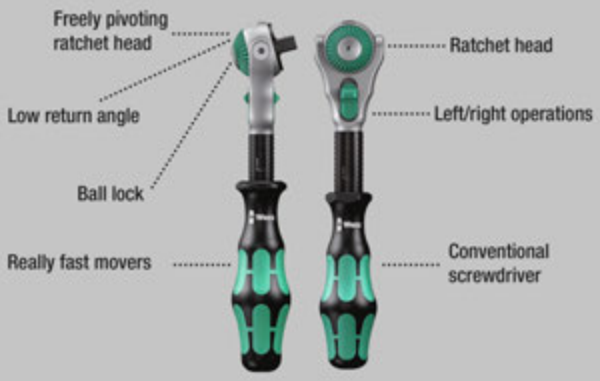


27-piece 3/8" ratchet set for typical bicycle operations with extensive accessories:
1 Zyklop Speed ratchet with 3/8" drive, 10 Zyklop sockets, 2 Zyklop bit sockets with 30mm and extra slim profile area for better accessibility in tight workspaces.

With Take it easy tool finder: Colour coding by size. 1 Zyklop extension (short) with fast-rotating sleeve, 1 Wobble extension, 1 bit adapter, 1 connection part 3/8" external square head to 1/2" external square head, 10 bits, tough, for universal use.

Incredibly compact set arrangement for many tools in a tight space thanks to the highly robust and durable textile box.

Can be placed in an upright position for clearly arranged storage in the workshop shelf. Additional surface protection due to textile outer material. Low weight and small size for better mobility.

- 27-piece 3/8" ratchet set including fine-toothed Zyklop Speed ratchet with swivelling ratchet head, push-button release and right/left switching
- Low return angle of only 5° for working in a small space
- Sockets and bits for the most popular screw profiles for road bikes, mountain bikes and e-bikes
- Assortment in robust textile box with low weight for easy transport
- With adapter from 3/8" square head socket to 1/2" external square head for mounting special bicycle tools

### Bicycle set 7

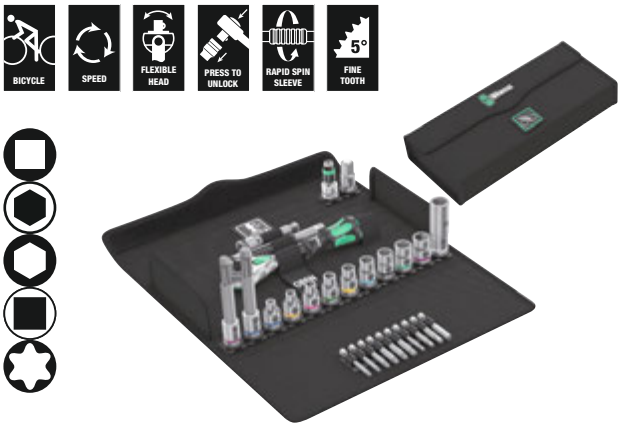


| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 05**004175**001 | *220608* | | | 1 |
| | | | **8000 B**<br>1x 3/8"x199,0 | |
| | | | **8790 HMB**<br>1x 6,0x29,0; 1x 7,0x29,0; 1x 8,0x29,0; 1x 9,0x29,0; 1x 10,0x29,0; 1x 11,0x29,0; 1x 12,0x29,0; 1x 13,0x29,0; 1x 14,0x29,0 | |
| | | | **8790 HMB Deep**<br>1x 15,0x64,0 | |
| | | | **8740 B**<br>1x 8,0x100,0; 1x 10,0x100,0 | |
| | | | **8794 B**<br>1x 3/8"x76,0 | |
| | | | **8784 B1**<br>1x 1/4"x3/8"x44,0 | |
| | | | **8794 SB**<br>1x 3/8"x125,0 | |
| | | | **781 B**<br>1x 781 B/C, 1/2"x36,0x3/8" | |
| | | | **840/4 Z Hex-Plus**<br>1x 3,0x50; 1x 4,0x50; 1x 5,0x50; 1x 6,0x50 | |
| | | | **867/4 Z TORX®**<br>1x TX 10x50; 1x TX 15x50; 1x TX 20x50; 1x TX 25x50; 1x TX 27x50; 1x TX 30x50 | |

### 8000 B Zyklop Speed Ratchet with 3/8" drive

- Combines five different types of a ratchet in one
- Flywheel design and easy-to-grip free-turning sleeve for very high working speeds
- Freely pivoting ratchet head, push button release and left/right switchover
- Fine-tooth design allows a small return angle of 5°
- Can also be used as a screwdriver

### 8000 B Zyklop Speed Ratchet with 3/8" drive

| Code | EAN 4013288 | | mm | | | | | |
|---|---|---|---|---|---|---|---|---|
| 05**003550**001 | *121875* | 3/8" | 199,0 | | | | | 1 |

## 8000 B SB Zyklop Speed Ratchet with 3/8" drive

| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 05**073261**001 | *128041* | | **8000 B**<br>1x 3/8"x199.0 | 3 |

## 8100 SB 12 Zyklop Comfort Ratchet set, reversing lever, 3/8" drive, metric

16-piece Zyklop Comfort ratchet set in a light and robust, durable textile box.

The 2-component plastic sleeve of the Zyklop Comfort ratchet makes working comfortable even in the cold and at the same time protects surfaces against damage.

The Zyklop Impaktor sockets stand out with higher-than-average service life even at extreme requirements.

The required size is easily accessible due to the “Take it easy” Tool finder (colour coding by size). The Zyklop extension also makes it easy to operate hard-to-reach screws and bolts.

## 8100 SB 12 Zyklop Comfort Ratchet set, reversing lever, 3/8" drive, metric

| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 05**005530**001 | *227980* | | | 1 |
| | | | **8010 B**<br>1x 3/8"x230,0 | |
| | | | **8790 B Impaktor**<br>1x 8,0x30,0; 1x 10,0x30,0; 1x 11,0x30,0; 1x 12,0x30,0; 1x 13,0x30,0; 1x 14,0x30,0; 1x 15,0x30,0; 1x 16,0x30,0; 1x 17,0x30,0; 1x 18,0x30,0; 1x 19,0x30,0; 1x 21,0x32,0; 1x 22,0x32,0; 1x 24,0x32,0 | |
| | | | **8798 B**<br>1x 3/8"x152,4 | |

## 8100 SB 13 Zyklop Comfort Ratchet set, reversing lever, 3/8" drive, imperial

- 11-piece Zyklop Comfort ratchet set; imperial sizes

### 8100 SB 13 Zyklop Comfort Ratchet set, reversing lever, 3/8" drive, imperial

| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 05**005531**001 | *227973* | | | 1 |
| | | | **8010 B**<br>1x 3/8"x230,0 | |
| | | | **8790 B Impaktor**<br>1x 1/4"x30,0; 1x 5/16"x30,0; 1x 3/8"x30,0; 1x 7/16"x30,0; 1x 1/2"x30,0; 1x 9/16"x30,0; 1x 5/8"x30,0; 1x 11/16"x30,0; 1x 3/4"x30,0 | |
| | | | **8798 B**<br>1x 3/8"x152,4 | |

## 8010 B Zyklop Comfort Ratchet, with reversing lever, with 3/8" drive

Compelling Wera style Zyklop Comfort ratchet with reversing lever. Comfortable 2-component plastic sleeve. Protects sensitive surfaces. Slim design for working even in very confined spaces.

The fine toothing with 80 teeth allows for a low return angle of only 4.5°. With reversing lever to reverse rotation easily. With safe socket locking via push-button.

### 8010 B Zyklop Comfort Ratchet, with reversing lever, with 3/8" drive

| Code | EAN 4013288 | | mm | | | | | |
|---|---|---|---|---|---|---|---|---|
| 05**005540**001 | *227195* | 3/8" | 230,0 | | | | | 1 |

## Zyklop Metal with push-through square

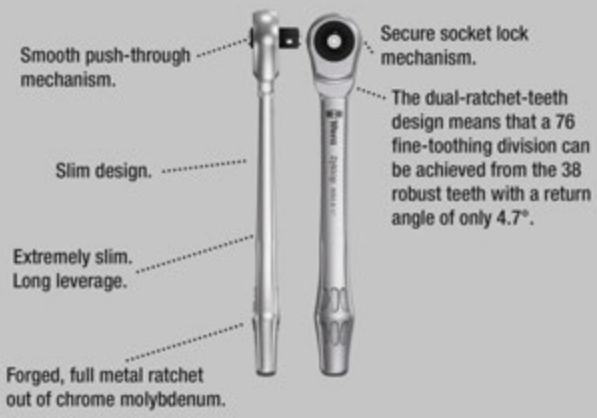


Incredibly compact set arrangement with many tools in a minimum of space. A completely new ratchet set feeling thanks to the unique textile boxes that are very robust and durable.

They can be positioned upright for tidy storage on the workshop shelf. Additional surface protection due to textile outer material. Low weight and volume for simpler mobility. Take it easy Tool Finder with colour coding according to sizes.

- Extremely slim ratchet with long lever
- Return angle of only 4.7°
- Absolutely smooth switchover of the non-detachable push-through square

### 8100 SB 7 Zyklop Metal Ratchet Set with push-through square, 3/8" drive, metric

| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 05**004047**001 | *173867* | | | 1 |
| | | | **8003 B** 1x 3/8"x222,0 | |
| | | | **8790 HMB** 1x 8,0x29,0; 1x 10,0x29,0; 1x 12,0x29,0; 1x 13,0x29,0; 1x 15,0x29,0; 1x 16,0x30,0; 1x 17,0x30,0; 1x 18,0x30,0; 1x 19,0x30,0 | |
| | | | **8794 LB** 1x 3/8"x200,0 | |
| | | | **8794 B** 1x 3/8"x76,0 | |
| | | | **8784 B1** 1x 1/4"x3/8"x44,0 | |
| | | | **851/1 Z PH** 1x PH 1x25; 1x PH 2x25; 1x PH 3x25 | |
| | | | **855/1 Z PZ** 1x PZ 1x25; 1x PZ 2x25 | |
| | | | **867/1 TORX®** 1x TX 15x25; 1x TX 20x25; 1x TX 25x25; 1x TX 27x25; 1x TX 30x25; 1x TX 40x25 | |
| | | | **840/1 Z Hex-Plus** 1x 3,0x25; 1x 4,0x25; 1x 5,0x25; 1x 6,0x25; 1x 8,0x25 | |

## 8100 SB 10 Zyklop Metal Ratchet Set with push-through square, 3/8" drive, imperial

| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 05**004050**001 | *173935* | | | 1 |
| | | | **8003 B**<br>1x 3/8"x222,0 | |
| | | | **8790 HMB**<br>1x 1/4"x29,0; 1x 5/16"x29,0; 1x 3/8"x29,0;<br>1x 7/16"x29,0; 1x 1/2"x29,0; 1x 9/16"x29,0;<br>1x 5/8"x30,0; 1x 11/16"x30,0; 1x 3/4"x30,0 | |
| | | | **8794 LB**<br>1x 3/8"x200,0 | |
| | | | **8794 B**<br>1x 3/8"x76,0 | |
| | | | **8784 B1**<br>1x 1/4"x3/8"x44,0 | |
| | | | **851/1 Z PH**<br>1x PH 1x25; 1x PH 2x25; 1x PH 3x25 | |
| | | | **855/1 Z PZ**<br>1x PZ 1x25; 1x PZ 2x25 | |
| | | | **867/1 TORX®**<br>1x TX 15x25; 1x TX 20x25; 1x TX 25x25;<br>1x TX 27x25; 1x TX 30x25; 1x TX 40x25 | |
| | | | **840/1 Z Hex-Plus**<br>1x 5/32"x25; 1x 3/16"x25; 1x 7/32"x25; 1x 1/4"x25;<br>1x 5/16"x25 | |

## 8003 B Zyklop Metal Ratchet with push-through square and 3/8" drive

- Forged, full metal ratchet (chrome-molybdenum); slim design to enable work in very confined spaces.
- The dual-ratchet-teeth design means that a 76 fine-toothing division can be achieved from the 38 robust teeth with a return angle of only 4.7°.
- Absolutely smooth switchover of the non-detachable push-through square
- For 3/8" square sockets with ball lock

## 8003 B Zyklop Metal Ratchet with push-through square and 3/8" drive

| Code | EAN 4013288 | | mm | mm | mm | | | |
|---|---|---|---|---|---|---|---|---|
| 05**004033**001 | *174031* | 3/8" | 222,0 | 27 | 29 | | | 3 |

## Zyklop Metal with switch lever

Incredibly compact set arrangement with many tools in a minimum of space. A completely new ratchet set feeling thanks to the unique textile boxes that are very robust and durable.

They can be positioned upright for tidy storage on the workshop shelf. Additional surface protection due to textile outer material. Low weight and volume for simpler mobility. Take it easy Tool Finder with colour coding according to sizes.

- Convenient direction change thanks to switchover lever
- Extremely slim ratchet with long lever
- Return angle of only 5°
- Compact textile box with high robustness, low weight and volume

### 8100 SB 8 Zyklop Metal Ratchet Set with switch lever, 3/8" drive, metric

| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 05**004048**001 | *173928* | | | 1 |
| | | | **8004 B**<br>1x 3/8"x222,0 | |
| | | | **8790 HMB**<br>1x 8,0x29,0; 1x 10,0x29,0; 1x 12,0x29,0; 1x 13,0x29,0; 1x 15,0x29,0; 1x 16,0x30,0; 1x 17,0x30,0; 1x 18,0x30,0; 1x 19,0x30,0 | |
| | | | **8794 LB**<br>1x 3/8"x200,0 | |
| | | | **8794 B**<br>1x 3/8"x76,0 | |
| | | | **8784 B1**<br>1x 1/4"x3/8"x44,0 | |
| | | | **851/1 Z PH**<br>1x PH 1x25; 1x PH 2x25; 1x PH 3x25 | |
| | | | **855/1 Z PZ**<br>1x PZ 1x25; 1x PZ 2x25 | |
| | | | **867/1 TORX®**<br>1x TX 15x25; 1x TX 20x25; 1x TX 25x25; 1x TX 27x25; 1x TX 30x25; 1x TX 40x25 | |
| | | | **840/1 Z Hex-Plus**<br>1x 3,0x25; 1x 4,0x25; 1x 5,0x25; 1x 6,0x25; 1x 8,0x25 | |

## 8100 SB 11 Zyklop Metal Ratchet Set with switch lever, 3/8" drive, imperial

| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 05**004051**001 | *173959* | | | 1 |
| | | | **8004 B**<br>1x 3/8"x222,0 | |
| | | | **8790 HMB**<br>1x 1/4"x29,0; 1x 5/16"x29,0; 1x 3/8"x29,0; 1x 7/16"x29,0; 1x 1/2"x29,0; 1x 9/16"x29,0; 1x 5/8"x30,0; 1x 11/16"x30,0; 1x 3/4"x30,0 | |
| | | | **8794 LB**<br>1x 3/8"x200,0 | |
| | | | **8794 B**<br>1x 3/8"x76,0 | |
| | | | **8784 B1**<br>1x 1/4"x3/8"x44,0 | |
| | | | **851/1 Z PH**<br>1x PH 1x25; 1x PH 2x25; 1x PH 3x25 | |
| | | | **855/1 Z PZ**<br>1x PZ 1x25; 1x PZ 2x25 | |
| | | | **867/1 TORX®**<br>1x TX 15x25; 1x TX 20x25; 1x TX 25x25; 1x TX 27x25; 1x TX 30x25; 1x TX 40x25 | |
| | | | **840/1 Z Hex-Plus**<br>1x 5/32"x25; 1x 3/16"x25; 1x 7/32"x25; 1x 1/4"x25; 1x 5/16"x25 | |

## 8100 SB HF 1 Zyklop Metal Ratchet Set with switch lever, 3/8" drive, with holding function, metric

- Colour coding of the sockets according to size

## 8100 SB HF 1 Zyklop Metal Ratchet Set with switch lever, 3/8" drive, with holding function, metric

| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 05**003785**001 | *195081* | | | 1 |
| | | | **8004 B**<br>1x 3/8"x222,0 | |
| | | | **8790 HMB HF**<br>1x 8,0x29,0; 1x 10,0x29,0; 1x 12,0x29,0; 1x 13,0x29,0; 1x 15,0x29,0; 1x 16,0x29,0; 1x 17,0x29,0; 1x 18,0x29,0; 1x 19,0x29,0 | |
| | | | **8794 LB**<br>1x 3/8"x200,0 | |
| | | | **8794 B**<br>1x 3/8"x76,0 | |
| | | | **Nut Extractor**<br>1x 14,0x43,0 | |
| | | | **Hook and Loop Fastener Strip 240**<br>1x 50,0x240,0 | |

## The Zyklop Metal Ratchets Switch, 3/8"

- Convenient direction change thanks to switchover lever
- Extremely slim ratchet with long lever
- Return angle of only 5°
- Secure socket locking

## 8004 B Zyklop Metal Ratchet with switch lever and 3/8" drive

| Code | EAN 4013288 | | mm | mm | mm | | | |
|---|---|---|---|---|---|---|---|---|
| 05**004034**001 | *174048* | 3/8" | 222,0 | 26 | 29 | | | 3 |

## 8790 B Impaktor socket with 3/8" drive

- For use with electric or pneumatic wrenches with 3/8" drive
- Impaktor technology for above-average service life
- Hexagonal profile enables precise and profile-preserving screwdriving with high power transmission
- With Take it easy tool finder: colour coding by size
- With cross-bore and ring socket for securing locking pin and locking ring of machine-operated tools

### 8790 B Impaktor socket with 3/8" drive

| Code | EAN 4013288 | | mm | | mm | mm | mm | |
|---|---|---|---|---|---|---|---|---|
| 05005500001 | 227218 | | 8,0 | | 30,0 | 14,1 | 19,0 | 1 |
| 05005501001 | 227225 | | 10,0 | | 30,0 | 16,6 | 19,0 | 1 |
| 05005502001 | 227232 | | 11,0 | | 30,0 | 17,8 | 19,0 | 1 |
| 05005503001 | 227249 | | 12,0 | | 30,0 | 18,2 | 19,0 | 1 |
| 05005504001 | 227256 | | 13,0 | | 30,0 | 20,0 | 22,0 | 1 |
| 05005505001 | 227263 | | 14,0 | | 30,0 | 21,0 | 22,0 | 1 |
| 05005506001 | 227270 | | 15,0 | | 30,0 | 22,0 | 22,0 | 1 |
| 05005507001 | 227287 | | 16,0 | | 30,0 | 22,0 | 24,0 | 1 |
| 05005508001 | 227294 | | 17,0 | | 30,0 | 23,0 | 25,0 | 1 |
| 05005509001 | 227300 | | 18,0 | | 30,0 | 23,0 | 26,0 | 1 |
| 05005510001 | 227317 | | 19,0 | | 30,0 | 25,0 | 27,8 | 1 |
| 05005511001 | 227324 | | 21,0 | | 32,0 | 27,0 | 30,0 | 1 |
| 05005512001 | 227331 | | 22,0 | | 32,0 | 28,0 | 32,0 | 1 |
| 05005513001 | 227348 | | 24,0 | | 32,0 | 30,0 | 34,0 | 1 |
| 05005514001 | 227362 | | | 1/4" | 30,0 | 11,0 | 19,0 | 1 |
| 05005515001 | 227379 | | | 5/16" | 30,0 | 14,1 | 19,0 | 1 |
| 05005516001 | 227386 | | | 3/8" | 30,0 | 16,6 | 19,0 | 1 |
| 05005517001 | 227393 | | | 7/16" | 30,0 | 17,8 | 19,0 | 1 |
| 05005518001 | 227416 | | | 1/2" | 30,0 | 20,0 | 22,0 | 1 |
| 05005519001 | 227423 | | | 9/16" | 30,0 | 21,0 | 22,0 | 1 |
| 05005520001 | 227430 | | | 5/8" | 30,0 | 22,0 | 24,0 | 1 |
| 05005521001 | 227447 | | | 11/16" | 30,0 | 23,0 | 25,0 | 1 |
| 05005522001 | 227454 | | | 3/4" | 30,0 | 25,0 | 28,0 | 1 |
| 05005523001 | 227461 | | | 13/16" | 32,0 | 27,0 | 30,0 | 1 |
| 05005524001 | 227478 | | | 7/8" | 32,0 | 28,0 | 32,0 | 1 |
| 05005525001 | 227485 | | | 15/16" | 32,0 | 30,0 | 34,0 | 1 |
| 05005526001 | 227492 | | | 1" | 32,0 | 32,0 | 36,0 | 1 |

## 8790 B Impaktor Deep Socket with 3/8" drive

- Robust Impaktor sockets for extremely high stress; for use with electric or pneumatic wrenches with 3/8" drive
- Long sockets for low lying couplings, also suitable for fitting, protruding thread rods in confined spaces
- Hexagon profile for precise and profile-friendly screwdriving at high power transmission
- With Take it easy tool finder: colour coding by size
- With cross hole and ring socket to attach the safety pin and safety ring of machine operated tools

### 8790 B Impaktor Deep Socket with 3/8" drive

| Code | EAN 4013288 | | mm | | mm | mm | mm | |
|---|---|---|---|---|---|---|---|---|
| 05005550001 | 233080 | | 8,0 | | 63,0 | 14,1 | 19,0 | 1 |
| 05005551001 | 233097 | | 10,0 | | 63,0 | 16,6 | 19,0 | 1 |
| 05005552001 | 233103 | | 11,0 | | 63,0 | 17,8 | 20,0 | 1 |
| 05005553001 | 233110 | | 12,0 | | 63,0 | 18,2 | 20,0 | 1 |
| 05005554001 | 233127 | | 13,0 | | 63,0 | 20,0 | 22,0 | 1 |
| 05005555001 | 233134 | | 14,0 | | 63,0 | 21,0 | 22,0 | 1 |
| 05005556001 | 233141 | | 15,0 | | 63,0 | 22,0 | 22,0 | 1 |
| 05005557001 | 233158 | | 16,0 | | 63,0 | 25,0 | 22,0 | 1 |
| 05005558001 | 233165 | | 17,0 | | 63,0 | 26,0 | 23,0 | 1 |
| 05005559001 | 233172 | | 18,0 | | 63,0 | 28,0 | 23,0 | 1 |
| 05005560001 | 233189 | | 19,0 | | 63,0 | 27,0 | 25,0 | 1 |
| 05005561001 | 233196 | | 21,0 | | 63,0 | 30,0 | 27,0 | 1 |
| 05005562001 | 233202 | | 22,0 | | 63,0 | 32,0 | 28,0 | 1 |
| 05005563001 | 233219 | | 24,0 | | 63,0 | 34,0 | 30,0 | 1 |
| 05005564001 | 233394 | | | 1/4" | 63,0 | 11,0 | 19,0 | 1 |
| 05005565001 | 233400 | | | 5/16" | 63,0 | 14,1 | 19,0 | 1 |
| 05005566001 | 233417 | | | 3/8" | 63,0 | 16,6 | 19,0 | 1 |
| 05005567001 | 233424 | | | 7/16" | 63,0 | 17,8 | 19,0 | 1 |
| 05005568001 | 233431 | | | 1/2" | 63,0 | 20,0 | 22,0 | 1 |
| 05005569001 | 233448 | | | 9/16" | 63,0 | 21,0 | 22,0 | 1 |
| 05005570001 | 233486 | | | 5/8" | 63,0 | 24,0 | 22,0 | 1 |
| 05005571001 | 233493 | | | 11/16" | 63,0 | 25,0 | 23,0 | 1 |
| 05005572001 | 233509 | | | 3/4" | 63,0 | 28,0 | 25,0 | 1 |
| 05005573001 | 233516 | | | 13/16" | 63,0 | 30,0 | 27,0 | 1 |
| 05005574001 | 233523 | | | 7/8" | 63,0 | 32,0 | 28,0 | 1 |
| 05005575001 | 233530 | | | 15/16" | 63,0 | 34,0 | 30,0 | 1 |
| 05005576001 | 233592 | | | 1" | 63,0 | 36,0 | 32,0 | 1 |

## 8790 HMB Zyklop 3/8" socket

- 3/8" Zyklop socket
- For manual and power tool operations (non-impact)
- Knurling at lower end to enable easy gripping when used in manual applications
- Take it easy tool finder with colour coding according to sizes

### 8790 HMB Zyklop 3/8" socket

| Code | EAN 4013288 | | mm | | mm | mm | mm | |
|---|---|---|---|---|---|---|---|---|
| 05003551001 | 120311 | | 6,0 | | 29,0 | 10,5 | 18,0 | 1 |
| 05003552001 | 120328 | | 7,0 | | 29,0 | 11,0 | 18,0 | 1 |
| 05003553001 | 120335 | | 8,0 | | 29,0 | 12,2 | 18,0 | 1 |
| 05003554001 | 120342 | | 9,0 | | 29,0 | 13,5 | 18,0 | 1 |
| 05003555001 | 120359 | | 10,0 | | 29,0 | 14,5 | 18,0 | 1 |
| 05003556001 | 120366 | | 11,0 | | 29,0 | 16,0 | 18,0 | 1 |
| 05003557001 | 120373 | | 12,0 | | 29,0 | 17,0 | 18,0 | 1 |
| 05003558001 | 120380 | | 13,0 | | 29,0 | 18,5 | 20,0 | 1 |
| 05003559001 | 120397 | | 14,0 | | 29,0 | 19,5 | 22,0 | 1 |
| 05003560001 | 120403 | | 15,0 | | 29,0 | 21,0 | 24,0 | 1 |
| 05003561001 | 120410 | | 16,0 | | 30,0 | 22,0 | 24,0 | 1 |
| 05003562001 | 120427 | | 17,0 | | 30,0 | 23,5 | 24,0 | 1 |
| 05003563001 | 120434 | | 18,0 | | 30,0 | 24,5 | 24,0 | 1 |
| 05003564001 | 120441 | | 19,0 | | 30,0 | 26,0 | 24,0 | 1 |
| 05003565001 | 120458 | | 20,0 | | 30,0 | 28,0 | 25,0 | 1 |
| 05003566001 | 120465 | | 21,0 | | 30,0 | 28,0 | 25,0 | 1 |
| 05003567001 | 120472 | | 22,0 | | 30,0 | 32,0 | 25,0 | 1 |
| 05003568001 | 120489 | | 24,0 | | 32,0 | 32,0 | 25,0 | 1 |
| 05003569001 | 120496 | | | 1/4" | 29,0 | 11,0 | 18,0 | 1 |
| 05003570001 | 120502 | | | 5/16" | 29,0 | 12,2 | 18,0 | 1 |
| 05003571001 | 120519 | | | 11/32" | 29,0 | 13,5 | 18,0 | 1 |
| 05003572001 | 120526 | | | 3/8" | 29,0 | 14,5 | 18,0 | 1 |
| 05003573001 | 120533 | | | 7/16" | 29,0 | 16,0 | 18,0 | 1 |
| 05003574001 | 120649 | | | 1/2" | 29,0 | 18,5 | 20,0 | 1 |
| 05003575001 | 120557 | | | 9/16" | 29,0 | 19,5 | 22,0 | 1 |
| 05003576001 | 120564 | | | 5/8" | 30,0 | 22,0 | 24,0 | 1 |
| 05003577001 | 120571 | | | 11/16" | 30,0 | 23,0 | 24,0 | 1 |
| 05003578001 | 120588 | | | 3/4" | 30,0 | 26,0 | 24,0 | 1 |
| 05003579001 | 120595 | | | 13/16" | 30,0 | 28,0 | 25,0 | 1 |
| 05003580001 | 120601 | | | 7/8" | 30,0 | 32,0 | 25,0 | 1 |

## 8790 HMB HF Zyklop socket with 3/8" drive with holding function

- Socket (non-impact) for manual or power tool operations
- The holding function holds screws securely on the tool
- Take it easy tool finder with colour coding according to sizes
- Chrome vanadium steel, matt chrome-plated
- Equipped with ball stop groove, knurling at lower end for better gripping

### 8790 HMB HF Zyklop socket with 3/8" drive with holding function

| Code | EAN 4013288 | | mm | mm | mm | mm | mm | |
|---|---|---|---|---|---|---|---|---|
| 05003740001 | 193919 | | 6,0 | 29,0 | 12,7 | 17,5 | 6,5 | 1 |
| 05003741001 | 193926 | | 7,0 | 29,0 | 13,2 | 17,5 | 6,5 | 1 |
| 05003742001 | 193933 | | 8,0 | 29,0 | 14,2 | 17,5 | 6,5 | 1 |
| 05003743001 | 193940 | | 9,0 | 29,0 | 15,7 | 17,5 | 6,5 | 1 |
| 05003744001 | 193957 | | 10,0 | 29,0 | 17,0 | 17,5 | 8,0 | 1 |
| 05003745001 | 193964 | | 11,0 | 29,0 | 18,2 | 17,5 | 9,5 | 1 |
| 05003746001 | 193971 | | 12,0 | 29,0 | 19,0 | 17,5 | 9,5 | 1 |
| 05003747001 | 193988 | | 13,0 | 29,0 | 20,4 | 19,5 | 9,5 | 1 |
| 05003748001 | 193995 | | 14,0 | 29,0 | 21,5 | 21,5 | 12,5 | 1 |
| 05003749001 | 194008 | | 15,0 | 29,0 | 23,5 | 23,5 | 12,5 | 1 |
| 05003750001 | 194015 | | 16,0 | 29,0 | 24,2 | 23,5 | 12,5 | 1 |
| 05003751001 | 194022 | | 17,0 | 29,0 | 26,0 | 23,5 | 12,5 | 1 |
| 05003752001 | 194039 | | 18,0 | 29,0 | 26,5 | 23,5 | 12,5 | 1 |
| 05003753001 | 194046 | | 19,0 | 29,0 | 28,0 | 23,5 | 12,5 | 1 |

## 9607 Magnetic rail B Impaktor 1

Socket rail with 10 Impaktor socket wrenches for use with electric or pneumatic wrenches with 3/8" drive. The Impaktor technology ensures a higher-than-average service life even at extreme requirements.

The hexagon profile used allows a high power transmission while simultaneously being precise and protecting the profile. With “Take it easy” Tool finder with colour coding by size - for quick and easy identification of the required tool.

The rail allows temporary attachment to metallic surfaces and, with its twist-to-unlock function, ensures secure locking and unlocking of the sockets.

- 10-piece socket set on socket rail, 3/8"
- Rail with secure socket mounting and yet easy removal (twist-to-unlock) for temporary attachment on wall, shelf or workshop trolley
- Smooth Twist to Unlock mechanism for a secure fit and simple removal of the sockets
- For use with electric or pneumatic wrenches with 3/8" drive
- Impaktor technology for above-average service life
- Hexagonal profile enables precise and profile-preserving screwdriving with high power transmission
- With cross-bore and ring socket for securing locking pin and locking ring of machine-operated tools
- With Take it easy tool finder: colour coding by size

### 9607 Magnetic rail B Impaktor 1

| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 05**005451**001 | *227546* | | | 1 |
| | | | **8790 B Impaktor**<br>1x 10,0x30,0; 1x 13,0x30,0; 1x 15,0x30,0; 1x 16,0x30,0; 1x 17,0x30,0; 1x 18,0x30,0; 1x 19,0x30,0; 1x 21,0x32,0; 1x 22,0x32,0; 1x 24,0x32,0 | |
| | | | **9603**<br>1x 30,0x340,0 | |

## 9608 Magnetic rail B Impaktor Imperial 1

- Imperial

### 9608 Magnetic rail B Impaktor Imperial 1

| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 05**005452**001 | *227553* | | | 1 |
| | | | **8790 B Impaktor**<br>1x 1/4"x30,0; 1x 5/16"x30,0; 1x 3/8"x30,0; 1x 7/16"x30,0; 1x 1/2"x30,0; 1x 9/16"x30,0; 1x 5/8"x30,0; 1x 11/16"x30,0; 1x 3/4"x30,0 | |
| | | | **9601**<br>1x 30,0x340,0 | |

## 9660 Magnetic rail B Impaktor Deep 1 socket set, 3/8" drive

- 10-piece socket set on socket rail, 3/8"
- Magnetic rail with secure socket mounting and yet easy removal (twist-to-unlock) for temporary attachment on wall, shelf or workshop trolley

### 9660 Magnetic rail B Impaktor Deep 1 socket set, 3/8" drive

| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 05**005590**001 | *233554* | | | 1 |
| | | | **8790 B Impaktor Deep**<br>1x 10,0x63,0; 1x 13,0x63,0; 1x 15,0x63,0; 1x 16,0x63,0; 1x 17,0x63,0; 1x 18,0x63,0; 1x 19,0x63,0; 1x 21,0x63,0; 1x 22,0x63,0; 1x 24,0x63,0 | |
| | | | **9601**<br>1x 30,0x340,0 | |

## 9661 Magnetic rail B Impaktor Deep Imperial 1 socket set, 3/8" drive

- Imperial sizes
- 9-piece socket set on socket rail, 3/8"
- Magnetic rail with secure socket mounting and yet easy removal (twist-to-unlock) for temporary attachment on wall, shelf or workshop trolley

### 9661 Magnetic rail B Impaktor Deep Imperial 1 socket set, 3/8" drive

| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 05**005591**001 | *233561* | | | 1 |
| | | | **8790 B Impaktor Deep**<br>1x 1/4"x63,0; 1x 5/16"x63,0; 1x 3/8"x63,0; 1x 7/16"x63,0; 1x 1/2"x63,0; 1x 9/16"x63,0; 1x 5/8"x63,0; 1x 11/16"x63,0; 1x 3/4"x63,0 | |
| | | | **9601**<br>1x 30,0x340,0 | |

### 8790 B Impaktor Deep Set 1

| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 05**005580**001 | *233639* | | | 1 |
| | | | **8790 B Impaktor Deep**<br>1x 8,0x63,0; 1x 10,0x63,0; 1x 11,0x63,0; 1x 12,0x63,0; 1x 13,0x63,0; 1x 14,0x63,0; 1x 15,0x63,0; 1x 16,0x63,0; 1x 17,0x63,0; 1x 18,0x63,0; 1x 19,0x63,0; 1x 21,0x63,0; 1x 22,0x63,0; 1x 24,0x63,0 | |

## 8790 B Impaktor Deep Imperial Set 1

- Imperial sizes

### 8790 B Impaktor Deep Imperial Set 1

| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 05**005581**001 | *233912* | | | 1 |
| | | | **8790 B Impaktor Deep**<br>1x 1/4"x63,0; 1x 5/16"x63,0; 1x 3/8"x63,0; 1x 7/16"x63,0; 1x 1/2"x63,0; 1x 9/16"x63,0; 1x 5/8"x63,0; 1x 11/16"x63,0; 1x 3/4"x63,0; 1x 1 3/16"x63,0; 1x 7/8"x63,0; 1x 1 5/16"x63,0; 1x 1"x63,0 | |

## Belt B 1 Zyklop socket set with holding function, 3/8" drive

Typically Wera designed robust textile belt with 9 sockets taking up minimal space. A smooth Twist to Unlock mechanism ensures a secure fit and simple removal of the sockets. Comes with Take it easy Tool Finder with colour coding according to size to enable the right tool to be selected easily and quickly. Includes a snap hook for secure fastening to a belt loop or pocket.

Sockets with holding function for particularly convenient screw-driving with reduced risk of losing the screw when approaching the workpiece. Supplied with a non-woven reverse side and hook and loop strips for simple attachment e.g. to a wall, shelf, tool trolley and to the Wera 2go tool transport system.

- 10-piece socket set on a robust textile belt, 1/4"
- Sockets with holding function for screws/bolts/nuts
- Smooth Twist to Unlock mechanism for a secure fit and simple removal of the sockets
- Take it easy tool finder with colour coding according to sizes
- Suitable for attachment to a wall, shelf, tool trolley and to the Wera 2go System

### Belt B 1 Zyklop socket set with holding function, 3/8" drive

| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 05**003970**001 | *194947* | | | 1 |
| | | ◉ | **8790 HMB HF**<br>1x 8,0x29,0; 1x 10,0x29,0; 1x 12,0x29,0;<br>1x 13,0x29,0; 1x 15,0x29,0; 1x 16,0x29,0;<br>1x 17,0x29,0; 1x 18,0x29,0; 1x 19,0x29,0 | |
| | | | **Nut Extractor**<br>1x 14,0x43,0 | |
| | | | **Belt B 0/9**<br>1x 45,0x310,0 | |
| | | | **Hook and Loop Fastener Strip 30**<br>1x 30,0x200,0 | |

## Belt B 4 Zyklop socket set, 3/8" drive

- 9-piece socket set on a robust textile belt, 3/8"
- For manual and power tool operations (non-impact)
- Smooth Twist to Unlock mechanism for a secure fit and simple removal of the sockets
- Take it easy tool finder with colour coding according to sizes
- Suitable for attachment to a wall, shelf, tool trolley and to the Wera 2go System

### Belt B 4 Zyklop socket set, 3/8" drive

| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 05**003973**001 | *194978* | | | 1 |
| | | ◉ | **8790 HMB**<br>1x 8,0x29,0; 1x 10,0x29,0; 1x 12,0x29,0;<br>1x 13,0x29,0; 1x 15,0x29,0; 1x 16,0x30,0;<br>1x 17,0x30,0; 1x 18,0x30,0; 1x 19,0x30,0 | |
| | | | **Belt B 0/9**<br>1x 45,0x310,0 | |
| | | | **Hook and Loop Fastener Strip 30**<br>1x 30,0x200,0 | |

## Magnetic socket rail B 4 Zyklop socket set, 3/8" drive

Socket rail with 9 manual and machine sockets (non-impact), 3/8". A smooth rotary mechanism allows a secure hold and easy access of the sockets.

With Take it easy tool finder with colour coding by size - to help you find the required tool quickly and easily.

The rail allows temporary attachment to metallic surfaces and, with its twist-to-unlock function, ensures secure locking and unlocking of the sockets.

- 9-piece socket set on socket rail, 3/8"
- Rail with secure bit mounting and yet easy removal (twist-to-unlock) for temporary attachment on wall, shelf or workshop trolley
- Smooth Twist to Unlock mechanism for a secure fit and simple removal of the sockets
- With Take it easy tool finder: colour coding by size

### Magnetic socket rail B 4 Zyklop socket set, 3/8" drive

| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 05**005430**001 | *223234* | | | 1 |
| | | | **8790 HMB**<br>1x 8,0x29,0; 1x 10,0x29,0; 1x 12,0x29,0; 1x 13,0x29,0; 1x 15,0x29,0; 1x 16,0x30,0; 1x 17,0x30,0; 1x 18,0x30,0; 1x 19,0x30,0 | |
| | | | **9601**<br>1x 30,0x340,0 | |

## Magnetic socket rail B Imperial 1 Zyklop socket set 3/8" drive, imperial

Socket rail with 9 manual and machine sockets (non-impact), 3/8". A smooth rotary mechanism allows a secure hold and easy access of the sockets.

With Take it easy tool finder with colour coding by size - to help you find the required tool quickly and easily. The rail allows temporary attachment to metallic surfaces and, with its twist-to-unlock function, ensures secure locking and unlocking of the sockets.

- 9-piece socket set on socket rail, 3/8"
- Rail with secure bit mounting and yet easy removal (twist-to-unlock) for temporary attachment on wall, shelf or workshop trolley
- Smooth Twist to Unlock mechanism for a secure fit and simple removal of the sockets
- With Take it easy tool finder: colour coding by size

### Magnetic socket rail B Imperial 1 Zyklop socket set 3/8" drive, imperial

| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 05**005450**001 | *223258* | | | 1 |
| | | | **8790 HMB**<br>1x 1/4"x29,0; 1x 5/16"x29,0; 1x 11/32"x29,0; 1x 3/8"x29,0; 1x 7/16"x29,0; 1x 1/2"x29,0; 1x 9/16"x29,0; 1x 5/8"x30,0; 1x 3/4"x30,0 | |
| | | | **9601**<br>1x 30,0x340,0 | |

## 8790 HMB Deep 3/8" socket

Long 3/8" hand and machine socket (ISO 2725 part 3) with ball intercept ring; for external hexagonal bolts and sockets. For use in manual and machine operation (non-impact), even with low-lying screwdriving and protruding threaded rods.

With Take it easy tool finder with colour coding by size - for easy and fast location of the required tool. Easy to grasp even with oily hands. The hexagon profile allows the transmission of high forces and puts less strain on the edges of bolts or screw heads than a double hexagon profile.

Fine-toothed ratchets also make the use of a double hexagon profile superfluous, even in confined spaces, thanks to their small back-pivoting angle.

- Long sockets for low-lying screwdriving, often even with protruding threaded rods in small spaces
- Hexagonal profile enables precise bolting with high power transmission and preserves the profile
- Take it easy tool finder with colour coding according to sizes
- Knurling at lower end to enable easy gripping when used in manual applications
- For manual and machine operation (non-impact), ball intercept ring
- Made of matt chromed chrome-vanadium

### 8790 HMB Deep 3/8" socket

| | EAN | | | | | | | |
|---|---|---|---|---|---|---|---|---|
| Code | 4013288 | | mm | mm | mm | mm | | |
| 05**004530**001 | *210388* | | 8,0 | 64,0 | 12,2 | 17,0 | | 1 |
| 05**004531**001 | *210395* | | 9,0 | 64,0 | 13,5 | 17,0 | | 1 |
| 05**004532**001 | *210401* | | 10,0 | 64,0 | 14,5 | 17,0 | | 1 |
| 05**004533**001 | *210418* | | 11,0 | 64,0 | 15,7 | 17,0 | | 1 |
| 05**004534**001 | *210425* | | 12,0 | 64,0 | 16,5 | 18,0 | | 1 |
| 05**004535**001 | *210432* | | 13,0 | 64,0 | 19,0 | 17,0 | | 1 |
| 05**004536**001 | *210449* | | 14,0 | 64,0 | 20,0 | 18,0 | | 1 |
| 05**004537**001 | *210456* | | 15,0 | 64,0 | 22,0 | 20,0 | | 1 |
| 05**004538**001 | *210463* | | 16,0 | 64,0 | 22,0 | 20,0 | | 1 |
| 05**004539**001 | *210470* | | 17,0 | 64,0 | 24,0 | 22,0 | | 1 |
| 05**004540**001 | *210487* | | 18,0 | 64,0 | 26,0 | 23,0 | | 1 |
| 05**004541**001 | *210494* | | 19,0 | 64,0 | 26,0 | 23,0 | | 1 |
| 05**004542**001 | *210500* | | 20,0 | 64,0 | 28,0 | 25,0 | | 1 |
| 05**004543**001 | *210517* | | 21,0 | 64,0 | 28,0 | 25,0 | | 1 |
| 05**004544**001 | *210524* | | 22,0 | 64,0 | 30,0 | 26,0 | | 1 |

## Belt B Deep 1 socket set, 3/8" drive

Robust textile belt in the typical Wera design with 9 long 3/8" manual and machine socket inserts (non-impacting) in a confined space. A smoother turning mechanism ensures a secure holding and easy removal of sockets. Includes snap hook for attaching to belt loops or bags. With fleece backing and hook and loop fastener strips for easy attachment e.g. on wall, shelf, workshop trolley or the Wera 2go tool transport system.

Long 3/8" manual and mechanical socket wrench inserts (ISO 2725 part 3) from Wera for use in manual and machine operation (non-impacting) even with low-lying screwdriving and protruding threaded rods.

With Take it easy tool finder with colour coding by size - for easy and fast location of the required tool. Easy to grasp even with oily hands. With hexagonal profile and ball-catching groove. The hexagon profile allows the transmission of high forces and puts less strain on the edges of bolts or screw heads than a double hexagon profile.

Fine-toothed ratchets also make the use of a double hexagon profile superfluous, even in confined spaces, thanks to their small back-pivoting angle. For external hexagonal bolts and sockets.

- 9-piece socket set on robust textile belt 3/8"
- Smooth Twist to Unlock mechanism for a secure fit and simple removal of the sockets
- Long 3/8" socket for low-profile-fitting screw connections in tight construction spaces and for protruding threaded rods
- Hexagonal profile enables precise and profile-preserving screwdriving with high power transmission
- Take it easy tool finder with colour coding according to sizes

### Belt B Deep 1 socket set, 3/8" drive

| | | | | |
|---|---|---|---|---|
| Code | EAN 4013288 | | | |
| 05**004545**001 | *210555* | | | 1 |
| | | | **8790 HMB Deep**<br>1x 8,0x64,0; 1x 10,0x64,0; 1x 12,0x64,0; 1x 13,0x64,0; 1x 15,0x64,0; 1x 16,0x64,0; 1x 17,0x64,0; 1x 18,0x64,0; 1x 19,0x64,0 | |
| | | | **Belt B 0/9**<br>1x 45,0x310,0 | |
| | | | **Hook and Loop Fastener Strip 30**<br>1x 30,0x200,0 | |

## Magnetic socket rail B Deep 1 socket set, 3/8" drive

Socket rail with 9 long manual and machine sockets (non-impact), 3/8". A smooth rotary mechanism allows a secure hold and easy access of the sockets.

Long 3/8" manual and machine sockets (ISO 2725 part 3) by Wera for manual and (non-impact) machine use even at low lying couplings and protruding thread rods.

With Take it easy tool finder with colour coding by size - to help you find the required tool quickly and easily.

Slip-proof for easy grip even with oily hands. With hexagon profile and ball stop groove. The hexagon profile enables the transmission of high forces and loads the edges of the bolt or the screw head less than a double hexagon profile.

Fine-teethed ratchets also make use of a double hexagon profile superfluous, even in confined spaces, thanks to their small return angle. For external hexagon bolts and screws.

The rail allows temporary attachment to metallic surfaces and, with its twist-to-unlock function, ensures secure locking and unlocking of the sockets.

- 9-piece socket set on socket rail, 3/8"
- Rail with secure bit mounting and yet easy removal (twist-to-unlock) for temporary attachment on wall, shelf or workshop trolley
- Smooth Twist to Unlock mechanism for a secure fit and simple removal of the sockets
- Long 3/8" socket for low-profile-fitting screw connections in tight construction spaces and for protruding threaded rods
- Hexagonal profile enables precise and profile-preserving screwdriving with high power transmission

### Magnetic socket rail B Deep 1 socket set, 3/8" drive

| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 05**005440**001 | *223241* | | | 1 |
| | | | **8790 HMB Deep**<br>1x 8,0x64,0; 1x 10,0x64,0; 1x 12,0x64,0; 1x 13,0x64,0; 1x 15,0x64,0; 1x 16,0x64,0; 1x 17,0x64,0; 1x 18,0x64,0; 1x 19,0x64,0 | |
| | | | **9601**<br>1x 30,0x340,0 | |

## 8767 B HF TORX® Zyklop bit socket with holding function, 3/8" drive

- Bit socket (non-impact) for manual or machine tool operations
- The holding function holds screws securely on the tool
- Take it easy tool finder with colour coding according to sizes
- Knurling on lower end for more grip when used manually
- Chrome vanadium steel, matt chrome-plated

### 8767 B HF TORX® Zyklop bit socket with holding function, 3/8" drive

| Code | EAN 4013288 | | | mm | mm | mm | | |
|---|---|---|---|---|---|---|---|---|
| 05**003059**001 | *189097* | | TX 10 | 35,0 | 12,0 | 17,5 | | 1 |
| 05**003060**001 | *188830* | | TX 15 | 35,0 | 12,0 | 17,5 | | 1 |
| 05**003061**001 | *188847* | | TX 20 | 35,0 | 12,0 | 17,5 | | 1 |
| 05**003062**001 | *188854* | | TX 25 | 35,0 | 12,0 | 17,5 | | 1 |
| 05**003063**001 | *188861* | | TX 25 | 107,0 | 12,0 | 17,5 | | 1 |
| 05**003064**001 | *188878* | | TX 27 | 35,0 | 12,0 | 17,5 | | 1 |
| 05**003065**001 | *188885* | | TX 27 | 107,0 | 12,0 | 17,5 | | 1 |
| 05**003066**001 | *188892* | | TX 30 | 35,0 | 12,0 | 17,5 | | 1 |
| 05**003067**001 | *188908* | | TX 30 | 107,0 | 12,0 | 17,5 | | 1 |
| 05**003068**001 | *188915* | | TX 40 | 35,0 | 12,0 | 17,5 | | 1 |
| 05**003069**001 | *188922* | | TX 40 | 107,0 | 12,0 | 17,5 | | 1 |
| 05**003070**001 | *188939* | | TX 45 | 38,5 | 12,0 | 17,5 | | 1 |
| 05**003071**001 | *188946* | | TX 45 | 100,0 | 12,0 | 17,5 | | 1 |
| 05**003072**001 | *188953* | | TX 50 | 38,5 | 12,0 | 17,5 | | 1 |
| 05**003073**001 | *188960* | | TX 50 | 100,0 | 12,0 | 17,5 | | 1 |

## 8767 B TORX® Zyklop Bit socket with 3/8" drive, with extra slim profile area

- Bit socket (non-impact) for manual or machine tool operations
- The holding function holds screws securely on the tool
- With Take it easy tool finder: colour coding by size
- Knurling on lower end for more grip when used manually.
- Chrome vanadium steel, matt chrome-plated

### 8767 B TORX® Zyklop Bit socket with 3/8" drive, with extra slim profile area

| | EAN | | | | | | | |
|---|---|---|---|---|---|---|---|---|
| Code | 4013288 | | | mm | mm | mm | mm | |
| 05**003074**001 | *227102* | | TX 25 | 107,0 | 12,0 | 17,5 | 81,5 | 1 |
| 05**003075**001 | *227119* | | TX 30 | 107,0 | 12,0 | 17,5 | 81,5 | 1 |

## Belt B 3 TORX® HF Zyklop bit socket set with holding function, 3/8" drive

Typically Wera designed robust textile belt with 9 sockets taking up minimal space. A smooth Twist to Unlock mechanism ensures a secure fit and simple removal of the sockets.

Comes with Take it easy Tool Finder with colour coding according to size to enable the right tool to be selected easily and quickly. Includes a snap hook for secure fastening to a belt loop or pocket. Especially short, stable bit-sockets with all the advantages of the Wera bit technology.

Bit sockets with holding function for particularly convenient screwdriving with reduced risk of losing the screw when approaching the workpiece. Supplied with a nonwoven reverse side and hook and loop strips for simple attachment e.g. to a wall, shelf, tool trolley and to the Wera 2go tool transport system.

- 9-piece bit-socket set on a robust textile belt, 3/8"
- Bit-sockets with all the advantages of the Wera bit technology
- Bit-sockets with holding function for screws/bolts
- Smooth Twist to Unlock mechanism for a secure fit and simple removal of the sockets
- Suitable for attachment to a wall, shelf, tool trolley and to the Wera 2go System

### Belt B 3 TORX® HF Zyklop bit socket set with holding function, 3/8" drive



| | | | | |
|---|---|---|---|---|
| Code | EAN 4013288 | | | |
| 05**003972**001 | *194961* | | | 1 |
| | | | **8767 B HF**<br>1x TX 10x35,0; 1x TX 15x35,0; 1x TX 20x35,0; 1x TX 25x35,0; 1x TX 27x35,0; 1x TX 30x35,0; 1x TX 40x35,0; 1x TX 45x38,5; 1x TX 50x38,5 | |
| | | | **Belt B 0/9**<br>1x 45,0x310,0 | |
| | | | **Hook and Loop Fastener Strip 30**<br>1x 30,0x200,0 | |

## 8767 B TORX® HF 1 Zyklop bit socket set with holding function, 3/8" drive

- Bit sockets with holding function for TORX® screws
- The holding function holds screws securely on the tool
- Take it easy tool finder with colour coding according to sizes
- Knurling on lower socket end for more grip when used manually

### 8767 B TORX® HF 1 Zyklop bit socket set with holding function, 3/8" drive

| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 05**003185**001 | *195074* | | | 1 |
| | | | **8767 B HF**<br>1x TX 25x107,0; 1x TX 27x107,0;<br>1x TX 30x107,0; 1x TX 40x107,0; 1x TX 45x100,0;<br>1x TX 50x100,0 | |
| | | | **Hook and Loop Fastener Strip 120**<br>1x 50,0x120,0 | |

## 8740 B HF Zyklop bit socket with holding function, 3/8" drive

- Bit socket (non-impact) for manual or machine tool operations
- The holding function holds screws securely on the tool
- Take it easy tool finder with colour coding according to sizes

### 8740 B HF Zyklop bit socket with holding function, 3/8" drive

| Code | EAN 4013288 | | mm | | mm | mm | mm | |
|---|---|---|---|---|---|---|---|---|
| 05**003030**001 | *188557* | | 3,0 | | 35,0 | 12,0 | 17,5 | 1 |
| 05**003031**001 | *188564* | | 4,0 | | 35,0 | 12,0 | 17,5 | 1 |
| 05**003032**001 | *188571* | | 4,0 | | 107,0 | 12,0 | 17,5 | 1 |
| 05**003033**001 | *188649* | | 5,0 | | 35,0 | 12,0 | 17,5 | 1 |
| 05**003034**001 | *188656* | | 5,0 | | 107,0 | 12,0 | 17,5 | 1 |
| 05**003035**001 | *188663* | | 6,0 | | 35,0 | 12,0 | 17,5 | 1 |
| 05**003036**001 | *188731* | | 6,0 | | 107,0 | 12,0 | 17,5 | 1 |
| 05**003037**001 | *188748* | | 7,0 | | 38,5 | 12,0 | 17,5 | 1 |
| 05**003038**001 | *188755* | | 7,0 | | 100,0 | 12,0 | 17,5 | 1 |
| 05**003039**001 | *188779* | | 8,0 | | 38,5 | 12,0 | 17,5 | 1 |
| 05**003040**001 | *188786* | | 8,0 | | 100,0 | 12,0 | 17,5 | 1 |
| 05**003041**001 | *188793* | | 9,0 | | 38,5 | 12,0 | 17,5 | 1 |
| 05**003042**001 | *188809* | | 9,0 | | 100,0 | 12,0 | 17,5 | 1 |
| 05**003043**001 | *188816* | | 10,0 | | 38,5 | 12,0 | 17,5 | 1 |
| 05**003044**001 | *188823* | | 10,0 | | 100,0 | 12,0 | 17,5 | 1 |
| 05**003080**001 | *193407* | | | 1/8" | 35,0 | 12,0 | 17,5 | 1 |
| 05**003081**001 | *193414* | | | 1/8" | 107,0 | 12,0 | 17,5 | 1 |
| 05**003082**001 | *193421* | | | 9/64" | 35,0 | 12,0 | 17,5 | 1 |
| 05**003083**001 | *193438* | | | 5/32" | 35,0 | 12,0 | 17,5 | 1 |
| 05**003084**001 | *193445* | | | 5/32" | 107,0 | 12,0 | 17,5 | 1 |
| 05**003085**001 | *193452* | | | 3/16" | 35,0 | 12,0 | 17,5 | 1 |
| 05**003086**001 | *193551* | | | 3/16" | 107,0 | 12,0 | 17,5 | 1 |
| 05**003087**001 | *193568* | | | 7/32" | 35,0 | 12,0 | 17,5 | 1 |
| 05**003088**001 | *193575* | | | 7/32" | 107,0 | 12,0 | 17,5 | 1 |
| 05**003089**001 | *193612* | | | 1/4" | 35,0 | 12,0 | 17,5 | 1 |
| 05**003090**001 | *193629* | | | 1/4" | 107,0 | 12,0 | 17,5 | 1 |
| 05**003091**001 | *193636* | | | 5/16" | 38,5 | 12,0 | 17,5 | 1 |
| 05**003092**001 | *193643* | | | 5/16" | 100,0 | 12,0 | 17,5 | 1 |
| 05**003093**001 | *193650* | | | 3/8" | 38,5 | 12,0 | 17,5 | 1 |
| 05**003094**001 | *193667* | | | 3/8" | 100,0 | 12,0 | 17,5 | 1 |

## 8740 B Zyklop Bit socket with 3/8" drive, with extra slim profile area

- Bit socket (non-impact) for manual or machine tool operations
- The holding function holds screws securely on the tool
- With Take it easy tool finder: colour coding by size

### 8740 B Zyklop Bit socket with 3/8" drive, with extra slim profile area

| Code | EAN 4013288 | | mm | mm | mm | mm | mm | |
|---|---|---|---|---|---|---|---|---|
| 05**003050**001 | *227058* | | 4,0 | 107,0 | 12,0 | 17,5 | 81,5 | 1 |
| 05**003051**001 | *227065* | | 5,0 | 107,0 | 12,0 | 17,5 | 81,5 | 1 |
| 05**003052**001 | *227072* | | 6,0 | 107,0 | 12,0 | 17,5 | 81,5 | 1 |
| 05**003054**001 | *227089* | | 8,0 | 100,0 | 12,0 | 17,5 | 74,5 | 1 |
| 05**003056**001 | *227096* | | 10,0 | 100,0 | 12,0 | 17,5 | 74,5 | 1 |

## Belt B 2 Zyklop In-Hex-Plus bit socket set with holding function, 3/8" drive

Typically Wera designed robust textile belt with 8 in-hex bit-sockets taking up minimal space. A smooth Twist to Unlock mechanism ensures a secure fit and simple removal of the sockets.

Comes with Take it easy Tool Finder with colour coding according to size to enable the right tool to be selected easily and quickly.

Includes a snap hook for secure fastening to a belt loop or pocket. Supplied with a nonwoven reverse side and hook and loop strips for simple attachment e.g. to a wall, shelf, tool trolley and to the Wera 2go tool transport system.

- 8-piece bit socket set on a robust textile belt, 3/8"
- Bit-sockets with all the advantages of the Wera bit technology
- Bit-sockets with holding function for screws/bolts
- Smooth Twist to Unlock mechanism for a secure fit and simple removal of the sockets
- Suitable for attachment to a wall, shelf, tool trolley and to the Wera 2go System

### Belt B 2 Zyklop In-Hex-Plus bit socket set with holding function, 3/8" drive

| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 05**003971**001 | *194954* | | | 1 |
| | | | **8740 B HF**<br>1x 3,0x35,0; 1x 4,0x35,0; 1x 5,0x35,0; 1x 6,0x35,0; 1x 7,0x38,5; 1x 8,0x38,5; 1x 9,0x38,5; 1x 10,0x38,5 | |
| | | | **Belt B 0/8**<br>1x 45,0x275,0 | |
| | | | **Hook and Loop Fastener Strip 30**<br>1x 30,0x200,0 | |

## 8740 B HF 1 Zyklop bit socket set with holding function, 3/8" drive

- Compact textile box with high robustness, low weight and volume
- Bit socket (non-impact) for manual or power tool operations
- The holding function holds screws securely on the tool
- Take it easy tool finder with colour coding according to sizes
- Knurling on lower socket end for more grip when used manually
- Long design

### 8740 B HF 1 Zyklop bit socket set with holding function, 3/8" drive

| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 05**003180**001 | *195050* | | | 1 |
| | | | **8740 B HF**<br>1x 4,0x107,0; 1x 5,0x107,0; 1x 6,0x107,0; 1x 7,0x100,0; 1x 8,0x100,0; 1x 9,0x100,0; 1x 10,0x100,0 | |
| | | | **Hook and Loop Fastener Strip 120**<br>1x 50,0x120,0 | |

## 8740 B HF Imperial 1 Zyklop bit socket set with holding function, 3/8" drive

- Long version
- Imperial

### 8740 B HF Imperial 1 Zyklop bit socket set with holding function, 3/8" drive

| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 05**003181**001 | *195067* | | | 1 |
| | | | **8740 B HF**<br>1x 1/8"x107,0; 1x 5/32"x107,0; 1x 3/16"x107,0; 1x 7/32"x107,0; 1x 1/4"x107,0; 1x 5/16"x100,0; 1x 3/8"x100,0 | |
| | | | **Hook and Loop Fastener Strip 120**<br>1x 50,0x120,0 | |

## Belt B Imperial 1 Zyklop In-Hex-Plus bit socket set with holding function, 3/8" drive

Typically Wera designed robust textile belt with 8 in-hex bit-sockets taking up minimal space. A smooth Twist to Unlock mechanism ensures a secure fit and simple removal of the sockets.

Comes with Take it easy Tool Finder with colour coding according to size to enable the right tool to be selected easily and quickly.

Includes a snap hook for secure fastening to a belt loop or pocket. Supplied with a nonwoven reverse side and hook and loop strips for simple attachment e.g. to a wall, shelf, tool trolley and to the Wera 2go tool transport system.

- 8-piece bit socket set on a robust textile belt, 3/8"
- Bit-sockets with all the advantages of the Wera bit technology
- Bit-sockets with holding function for screws/bolts
- Smooth Twist to Unlock mechanism for a secure fit and simple removal of the sockets
- Suitable for attachment to a wall, shelf, tool trolley and to the Wera 2go System
- Imperial

### Belt B Imperial 1 Zyklop In-Hex-Plus bit socket set with holding function, 3/8" drive

| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 05**003974**001 | *194985* | | | 1 |
| | | | **8740 B HF**<br>1x 1/8"x35,0; 1x 9/64"x35,0; 1x 5/32"x35,0; 1x 3/16"x35,0; 1x 7/32"x35,0; 1x 1/4"x35,0; 1x 5/16"x38,5; 1x 3/8"x38,5 | |
| | | | **Belt B 0/8**<br>1x 45,0x275,0 | |
| | | | **Hook and Loop Fastener Strip 30**<br>1x 30,0x200,0 | |

## Bicycle set 8

7-piece bit socket set with 3/8" drive for typical bicycle operations. Bit sockets with 30mm long and extra slim profile area for better accessibility in tight workspaces. The knurling facilitates manual screwdriving without slipping.

With Take it easy tool finder with colour coding by size - to help you find the required tool quickly and easily.

- Bit sockets with holding function for the most common TORX® and Hex screws
- The holding function holds screws securely on the tool
- With Take it easy tool finder: colour coding by size
- Knurling on lower socket end for more grip when used manually
- In a robust folding bag for easy transport

### Bicycle set 8

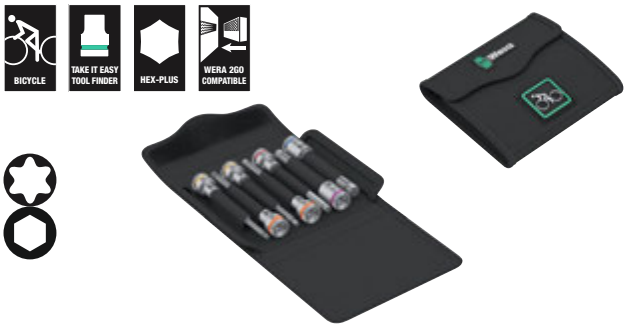


| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 05**004176**001 | *220622* | | | 1 |
| | | | **8767 B**<br>1x TX 25x107,0; 1x TX 30x107,0 | |
| | | | **8740 B**<br>1x 4,0x107,0; 1x 5,0x107,0; 1x 6,0x107,0; 1x 8,0x100,0; 1x 10,0x100,0 | |
| | | | **Hook and Loop Fastener Strip 120**<br>1x 50,0x70,0 | |

## 8796 LB Zyklop „flexible-lock“ extension with free-turning sleeve, long, 3/8"

- For 3/8" square sockets with ball lock
- Flexible lock system for either locking or rapid exchange of the attached tool
- With free-turning sleeve for rapid tightening and loosening of screws and nuts

### 8796 LB Zyklop „flexible-lock“ extension with free-turning sleeve, long, 3/8"

| Code | EAN 4013288 | | mm | | | | | |
|---|---|---|---|---|---|---|---|---|
| 05**003592**001 | *121325* | 3/8" | 200,0 | | | | | 1 |

## 8796 SB Zyklop „flexible-lock“ extension with free-turning sleeve, short, 3/8"

- Flexible lock system for either locking or rapid exchange of the attached tool
- For 3/8" square sockets with ball lock
- With free-turning sleeve for rapid tightening and loosening of screws and nuts

### 8796 SB Zyklop „flexible-lock“ extension with free-turning sleeve, short, 3/8"

| | EAN | | | | | | | |
|---|---|---|---|---|---|---|---|---|
| Code | 4013288 | | mm | | | | | |
| 05**003591**001 | *121318* | 3/8" | 125,0 | | | | | 1 |

## 8794 LB Zyklop extension with free-turning sleeve, long, 3/8"

Wera Zyklop extension with easy-to-grip free-turning sleeve for rapid tightening and loosening of screws and nuts. Out of high quality chrome vanadium steel, matt chrome-plated.

### 8794 LB Zyklop extension with free-turning sleeve, long, 3/8"

| | EAN | | | | | | | |
|---|---|---|---|---|---|---|---|---|
| Code | 4013288 | | mm | | | | | |
| 05**003583**001 | *121288* | 3/8" | 200,0 | | | | | 1 |

## 8794 SB Zyklop extension with free-turning sleeve, short, 3/8"

Wera Zyklop extension with easy-to-grip free-turning sleeve for rapid tightening and loosening of screws and nuts. Out of high quality chrome vanadium steel, matt chrome-plated.

### 8794 SB Zyklop extension with free-turning sleeve, short, 3/8"

| | EAN | | | | | | | |
|---|---|---|---|---|---|---|---|---|
| Code | 4013288 | | mm | | | | | |
| 05**003582**001 | *121271* | 3/8" | 125,0 | | | | | 1 |

## 8795 B Zyklop universal joint, 3/8"

Wera Zyklop universal joint for 3/8" square sockets with ball lock.

### 8795 B Zyklop universal joint, 3/8"

| | EAN | | | | | | | |
|---|---|---|---|---|---|---|---|---|
| Code | 4013288 | | mm | | | | | |
| 05**003585**001 | *121523* | 3/8" | 50,0 | | | | | 1 |

## 8794 B Zyklop wobble extension, 3/8"

Wobble extension for the Wera Zyklop. Swivel angle of 15° in all directions. This ensures rapid and precise work even in confined working situations.

### 8794 B Zyklop wobble extension, 3/8"

| | EAN | | | | | | | |
|---|---|---|---|---|---|---|---|---|
| Code | 4013288 | | mm | | | | | |
| 05**003584**001 | *121295* | 3/8" | 76,0 | | | | | 1 |

## 8784 B1 Zyklop bit adaptor, 3/8"

- 3/8" Zyklop adaptor with quick-release chuck for rapid bit change

### 8784 B1 Zyklop bit adaptor, 3/8"

| | EAN | | | | | | | |
|---|---|---|---|---|---|---|---|---|
| Code | 4013288 | | | mm | | | | |
| 05**003590**001 | *121301* | 1/4" | 3/8" | 44,0 | | | | 1 |

## 8789 B Zyklop sliding T-handle, 3/8"

Wera ZyklopT-handle for higher torque transfer. For 3/8" square sockets with ball lock. Adjustable drive for more flexible usage. Out of high quality chrome vanadium steel, matt chrome-plated.

### 8789 B Zyklop sliding T-handle, 3/8"

| | EAN | | | | | | | |
|---|---|---|---|---|---|---|---|---|
| Code | 4013288 | | mm | | | | | |
| 05**003581**001 | *121516* | 3/8" | 165,0 | | | | | 3 |

## Socket rail B (textile belt), 8 location, unloaded

| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 05**003980**001 | *195005* | | | 1 |
| | | | **Belt B 0/8**<br>1x 45,0x275,0 | |
| | | | **Hook and Loop Fastener Strip 30**<br>1x 30,0x200,0 | |

## Socket rail B (textile belt), 9 location, unloaded

| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 05**003981**001 | *195012* | | | 1 |
| | | | **Belt B 0/9**<br>1x 45,0x310,0 | |
| | | | **Hook and Loop Fastener Strip 30**<br>1x 30,0x200,0 | |

## 9601 Magnetic socket rail, 3/8", empty

1 socket rail, empty. For up to 10 sockets and/or bit sockets with 3/8" drive.

The rail allows temporary attachment to metallic surfaces and, with its twist-to-unlock function, ensures secure locking and unlocking of the sockets.

- Rail with secure bit mounting and yet easy removal (twist-to-unlock) for temporary attachment on wall, shelf or workshop trolley
- Smooth Twist to Unlock mechanism for a secure fit and simple removal of the sockets
- Empty, for up to 10 sockets, 3/8"

## 9601 Magnetic socket rail, 3/8", empty

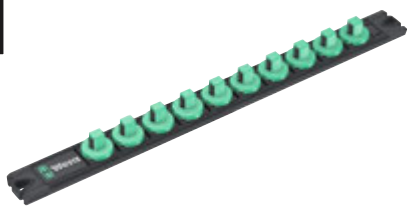

| | EAN | | | | | | | |
|---|---|---|---|---|---|---|---|---|
| Code | 4013288 | mm | mm | | | | | |
| 05**136421**001 | *223333* | 30,0 | 340,0 | | | | | 1 |

## Zyklop Speed - incredibly fast and incredibly flexible

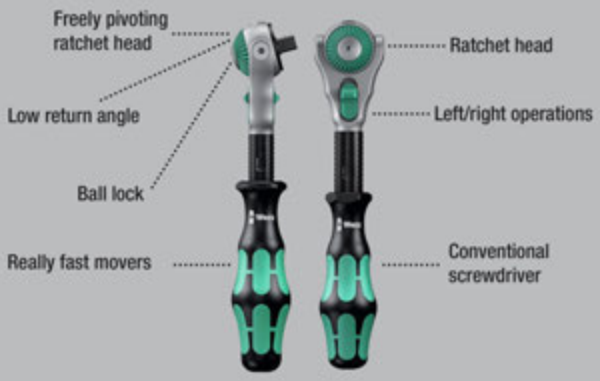


Incredibly compact set arrangement with many tools in a minimum of space. A completely new ratchet set feeling thanks to the unique textile boxes that are very robust and durable.

They can be positioned upright for tidy storage on the workshop shelf. Additional surface protection due to textile outer material. Low weight and volume for simpler mobility. Take it easy Tool Finder with colour coding according to sizes.

- Freely pivoting ratchet head with 5 predefined locking positions
- Fine toothing with 72 teeth
- Small return angle of only 5°
- Free-turning sleeve for high working speeds
- Take it easy tool finder with colour coding according to sizes
- Compact textile box with high robustness, low weight and volume

### 8100 SC 6 Zyklop Speed Ratchet Set, 1/2" drive, metric

| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 05**004076**001 | *173874* | | | 1 |
| | | | **8000 C**<br>1x 1/2"x277,0 | |
| | | | **8790 HMC**<br>1x 10,0x37,0; 1x 11,0x37,0; 1x 12,0x37,0; 1x 13,0x37,0; 1x 14,0x37,0; 1x 15,0x37,0; 1x 16,0x37,0; 1x 17,0x37,0; 1x 18,0x37,0; 1x 19,0x37,0 | |
| | | | **8794 LC**<br>1x 1/2"x250,0 | |
| | | | **8794 C**<br>1x 1/2"x52,0 | |
| | | | **8784 C2**<br>1x 5/16"x1/2"x50,0 | |
| | | | **851/2 Z PH**<br>1x PH 2x32; 1x PH 3x32 | |
| | | | **855/2 Z PZ**<br>1x PZ 2x32; 1x PZ 3x32 | |
| | | | **867/2 Z TORX®**<br>1x TX 20x35; 1x TX 25x35; 1x TX 30x35; 1x TX 40x35; 1x TX 45x35; 1x TX 50x35 | |
| | | | **840/2 Z**<br>1x 5x30; 1x 6x30; 1x 8x30; 1x 10x30 | |

## 8100 SC 9 Zyklop Speed Ratchet Set, 1/2" drive, imperial

| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 05**004079**001 | *173997* | | | 1 |
| | | | **8000 C**<br>1x 1/2"x277,0 | |
| | | | **8790 HMC**<br>1x 3/8"x37,0; 1x 7/16"x37,0; 1x 1/2"x37,0;<br>1x 9/16"x37,0; 1x 19/32"x37,0; 1x 5/8"x37,0;<br>1x 11/16"x37,0; 1x 3/4"x37,0; 1x 25/32"x37,0;<br>1x 13/16"x37,0 | |
| | | | **8794 LC**<br>1x 1/2"x250,0 | |
| | | | **8794 C**<br>1x 1/2"x52,0 | |
| | | | **8784 C2**<br>1x 5/16"x1/2"x50,0 | |
| | | | **851/2 Z PH**<br>1x PH 2x32; 1x PH 3x32 | |
| | | | **855/2 Z PZ**<br>1x PZ 2x32; 1x PZ 3x32 | |
| | | | **867/2 Z TORX®**<br>1x TX 20x35; 1x TX 25x35; 1x TX 30x35;<br>1x TX 40x35; 1x TX 45x35; 1x TX 50x35 | |
| | | | **840/2 Z**<br>1x 7/32"x30; 1x 1/4"x30; 1x 5/16"x30;<br>1x 3/8"x30 | |

## 8100 SC 2 Zyklop Speed Ratchet Set, 1/2" drive, metric

- 37-piece set in a robust metal case

## 8100 SC 2 Zyklop Speed Ratchet Set, 1/2" drive, metric

| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 05**003645**001 | *121189* | | | 1 |
| | | | **8000 C**<br>1x 1/2"x277,0 | |
| | | | **8790 HMC**<br>1x 10,0x37,0; 1x 11,0x37,0; 1x 12,0x37,0;<br>1x 13,0x37,0; 1x 14,0x37,0; 1x 15,0x37,0;<br>1x 16,0x37,0; 1x 17,0x37,0; 1x 18,0x37,0;<br>1x 19,0x37,0; 1x 20,0x37,0; 1x 21,0x37,0;<br>1x 22,0x37,0; 1x 24,0x37,0; 1x 27,0x40,0;<br>1x 30,0x42,0; 1x 32,0x42,0 | |
| | | | **8789 C**<br>1x 1/2"x250,0 | |
| | | | **8794 C**<br>1x 1/2"x52,0 | |
| | | | **8795 C**<br>1x 1/2"x69,0 | |
| | | | **8784 C2**<br>1x 5/16"x1/2"x50,0 | |
| | | | **8796 SC**<br>1x 1/2"x125,0 | |
| | | | **8796 LC**<br>1x 1/2"x250,0 | |
| | | | **851/2 Z PH**<br>1x PH 3x32 | |
| | | | **855/2 Z PZ**<br>1x PZ 3x32 | |
| | | | **867/2 Z TORX®**<br>1x TX 20x35; 1x TX 25x35; 1x TX 30x35;<br>1x TX 40x35; 1x TX 45x35; 1x TX 50x35;<br>1x TX 55x35 | |
| | | | **840/2 Z**<br>1x 5x30; 1x 6x30; 1x 8x30; 1x 10x30 | |

## 8100 SC 4 Zyklop Speed Ratchet Set, 1/2" drive, imperial

- 38-piece set in a robust metal case

### 8100 SC 4 Zyklop Speed Ratchet Set, 1/2" drive, imperial

| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 05**003647**001 | *121202* | | | 1 |
| | | | **8000 C**<br>1x 1/2"x277,0 | |
| | | | **8790 HMC**<br>1x 3/8"x37,0; 1x 7/16"x37,0; 1x 1/2"x37,0; 1x 9/16"x37,0; 1x 19/32"x37,0; 1x 5/8"x37,0; 1x 11/16"x37,0; 1x 3/4"x37,0; 1x 25/32"x37,0; 1x 13/16"x37,0; 1x 7/8"x37,0; 1x 15/16"x37,0; 1x 31/32"x37,0; 1x 1"x40,0; 1x 1 1/16"x40,0; 1x 1 1/8"x40,0; 1x 1 3/16"x42,0; 1x 1 1/4"x42,0 | |
| | | | **8789 C**<br>1x 1/2"x250,0 | |
| | | | **8794 C**<br>1x 1/2"x52,0 | |
| | | | **8795 C**<br>1x 1/2"x69,0 | |
| | | | **8784 C2**<br>1x 5/16"x1/2"x50,0 | |
| | | | **8796 SC**<br>1x 1/2"x125,0 | |
| | | | **8796 LC**<br>1x 1/2"x250,0 | |
| | | | **851/2 Z PH**<br>1x PH 3x32 | |
| | | | **855/2 Z PZ**<br>1x PZ 3x32 | |
| | | | **867/2 Z TORX®**<br>1x TX 20x35; 1x TX 25x35; 1x TX 30x35; 1x TX 40x35; 1x TX 45x35; 1x TX 50x35; 1x TX 55x35 | |
| | | | **840/2 Z**<br>1x 7/32"x30; 1x 1/4"x30; 1x 5/16"x30; 1x 3/8"x30 | |

## 8000 C Zyklop Speed Ratchet with 1/2" drive

- Combines five different types of a ratchet in one
- Flywheel design and easy-to-grip free-turning sleeve for very high working speeds
- Freely pivoting ratchet head, push button release and left/right switchover
- Fine-tooth design allows a small return angle of 5°
- Can also be used as a screwdriver

### 8000 C Zyklop Speed Ratchet with 1/2" drive

| Code | EAN 4013288 | | mm | | | | | |
|---|---|---|---|---|---|---|---|---|
| 05**003600**001 | *121882* | 1/2" | 277,0 | | | | | 1 |

### 8000 C SB Zyklop Speed Ratchet with 1/2" drive

| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 05**073262**001 | *128058* | | **8000 C**<br>1x 1/2"x277.0 | 3 |

## Zyklop Hybrid - longer for more torque

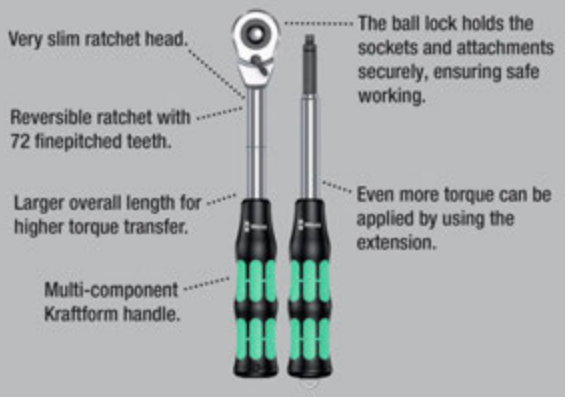


Zyklop Hybrid ratchet set, 1/2" drive, metric. Including Zyklop Hybrid ratchet and Hybrid handle extension.

- Switchover lever for convenient direction change
- Fine-pitched with 72 teeth for a return angle of only 5°
- Compact textile box with high robustness, low weight and volume
- Colour coding of the sockets according to size
- Smooth Twist to Unlock mechanism for a secure fit and simple removal of the sockets

### 8006 SC 1 Zyklop Hybrid Ratchet Set, 1/2" drive, metric

| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 05**004090**001 | *182159* | | | 1 |
| | | | **8006 C**<br>1x 1/2"x281,0 | |
| | | | **8797 C**<br>1x 271,0 | |
| | | | **8794 LC**<br>1x 1/2"x250,0 | |
| | | | **8790 HMC HF**<br>1x 10,0x37,0; 1x 11,0x37,0; 1x 12,0x37,0; 1x 13,0x37,0; 1x 14,0x37,0; 1x 15,0x37,0; 1x 16,0x37,0; 1x 17,0x37,0; 1x 18,0x37,0; 1x 19,0x37,0 | |
| | | | **Hook and Loop Fastener Strip 240**<br>1x 50,0x240,0 | |

## Zyklop Hybrid Set

Zyklop Hybrid ratchet set, 1/2" drive, metric. Including Zyklop Hybrid ratchet and Hybrid handle extension, extension and 10 sockets.

- Zyklop Hybrid ratchet with long overall length (leverage effect) and slim ratchet head
- Fine-pitched with 72 teeth for a return angle of only 5°
- Extension with unlocking pin

### Zyklop Hybrid Set

| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 05**004095**001 | *184320* | | | 1 |
| | | | **8006 C**<br>1x 1/2"x281,0 | |
| | | | **8797 C**<br>1x 271,0 | |

## 8006 C Zyklop Hybrid Ratchet with switch lever and 1/2" drive

Zyklop Hybrid ratchet with switchover lever and 1/2" drive, low weight, ergonomic Kraftform handle with slim head design, long lever and with an extension option.

### 8006 C Zyklop Hybrid Ratchet with switch lever and 1/2" drive

| Code | EAN 4013288 | | mm | mm | mm | | | |
|---|---|---|---|---|---|---|---|---|
| 05**003780**001 | *184214* | 1/2" | 281,0 | 34 | 37 | | | 3 |

## 8797 C Zyklop Hybrid extension

- Can be used with Zyklop Hybrid 8006 C
- To increase the torque to be applied
- Multi-component Kraftform handle optimised to withstand pressure and tensile loads
- With unlocking pin
- Blade out of tough, tempered chrome-molybdenum steel

### 8797 C Zyklop Hybrid extension

| | EAN | | | | | | | |
|---|---|---|---|---|---|---|---|---|
| Code | 4013288 | mm | mm | | | | | |
| 05**003781**001 | *183200* | 271,0 | 134,0 | | | | | 1 |

## Zyklop Metal with push-through square

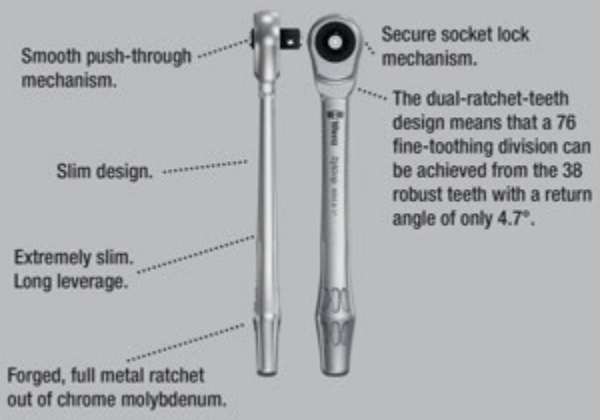


Incredibly compact set arrangement with many tools in a minimum of space. A completely new ratchet set feeling thanks to the unique textile boxes that are very robust and durable.

They can be positioned upright for tidy storage on the workshop shelf. Additional surface protection due to textile outer material. Low weight and volume for simpler mobility.

Take it easy Tool Finder with colour coding according to sizes.

- Extremely slim ratchet with long lever
- Return angle of only 4.7°
- Absolutely smooth switchover of the non-detachable push-through square
- Take it easy tool finder system

### 8100 SC 7 Zyklop Metal Ratchet Set with push-through square, 1/2" drive, metric

| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 05**004077**001 | *173942* | | | 1 |
| | | | **8003 C**<br>1x 1/2"x281,0 | |
| | | | **8790 HMC**<br>1x 10,0x37,0; 1x 11,0x37,0; 1x 12,0x37,0; 1x 13,0x37,0; 1x 14,0x37,0; 1x 15,0x37,0; 1x 16,0x37,0; 1x 17,0x37,0; 1x 18,0x37,0; 1x 19,0x37,0 | |
| | | | **8794 LC**<br>1x 1/2"x250,0 | |
| | | | **8794 C**<br>1x 1/2"x52,0 | |
| | | | **8784 C2**<br>1x 5/16"x1/2"x50,0 | |
| | | | **851/2 Z PH**<br>1x PH 2x32; 1x PH 3x32 | |
| | | | **867/2 Z TORX®**<br>1x TX 20x35; 1x TX 25x35; 1x TX 27x35; 1x TX 30x35; 1x TX 40x35; 1x TX 45x35; 1x TX 50x35; 1x TX 55x35 | |
| | | | **840/2 Z**<br>1x 5x30; 1x 6x30; 1x 8x30; 1x 10x30 | |

## 8100 SC 10 Zyklop Metal Ratchet Set with push-through square, 1/2" drive, imperial

| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 05**004080**001 | *173966* | | | 1 |
| | | | **8003 C** 1x 1/2"x281,0 | |
| | | | **8790 HMC**<br>1x 3/8"x37,0; 1x 7/16"x37,0; 1x 1/2"x37,0;<br>1x 9/16"x37,0; 1x 19/32"x37,0; 1x 5/8"x37,0;<br>1x 11/16"x37,0; 1x 3/4"x37,0; 1x 25/32"x37,0;<br>1x 13/16"x37,0 | |
| | | | **8794 LC** 1x 1/2"x250,0 | |
| | | | **8794 C** 1x 1/2"x52,0 | |
| | | | **8784 C2** 1x 5/16"x1/2"x50,0 | |
| | | | **851/2 Z PH** 1x PH 2x32; 1x PH 3x32 | |
| | | | **867/2 Z TORX®**<br>1x TX 20x35; 1x TX 25x35; 1x TX 27x35;<br>1x TX 30x35; 1x TX 40x35; 1x TX 45x35;<br>1x TX 50x35; 1x TX 55x35 | |
| | | | **840/2 Z**<br>1x 7/32"x30; 1x 1/4"x30; 1x 5/16"x30;<br>1x 3/8"x30 | |

## 8003 C Zyklop Metal Ratchet with push-through square and 1/2" drive

- Forged, full metal ratchet (chrome-molybdenum); slim design to enable work in very confined spaces.
- The dual-ratchet-teeth design means that a 76 fine-toothing division can be achieved from the 38 robust teeth with a return angle of only 4.7°.
- Absolutely smooth switchover of the non-detachable push-through square
- For 1/2" square sockets with ball lock

## 8003 C Zyklop Metal Ratchet with push-through square and 1/2" drive

| Code | EAN 4013288 | | mm | mm | mm | | | |
|---|---|---|---|---|---|---|---|---|
| 05**004063**001 | *174055* | 1/2" | 281,0 | 36 | 37 | | | 3 |

## Zyklop Metal with switch lever

Incredibly compact set arrangement with many tools in a minimum of space. A completely new ratchet set feeling thanks to the unique textile boxes that are very robust and durable.

They can be positioned upright for tidy storage on the workshop shelf. Additional surface protection due to textile outer material. Low weight and volume for simpler mobility.

Take it easy Tool Finder with colour coding according to sizes.

- Convenient direction change thanks to switchover lever
- Extremely slim ratchet with long lever
- Return angle of only 5°

### 8100 SC 8 Zyklop Metal Ratchet Set with switch lever, 1/2" drive, metric

| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 05**004078**001 | *173881* | | | 1 |
| | | | **8004 C** 1x 1/2"x281,0 | |
| | | | **8790 HMC** 1x 10,0x37,0; 1x 11,0x37,0; 1x 12,0x37,0; 1x 13,0x37,0; 1x 14,0x37,0; 1x 15,0x37,0; 1x 16,0x37,0; 1x 17,0x37,0; 1x 18,0x37,0; 1x 19,0x37,0 | |
| | | | **8794 LC** 1x 1/2"x250,0 | |
| | | | **8794 C** 1x 1/2"x52,0 | |
| | | | **8784 C2** 1x 5/16"x1/2"x50,0 | |
| | | | **851/2 Z PH** 1x PH 2x32; 1x PH 3x32 | |
| | | | **867/2 Z TORX®** 1x TX 20x35; 1x TX 25x35; 1x TX 27x35; 1x TX 30x35; 1x TX 40x35; 1x TX 45x35; 1x TX 50x35; 1x TX 55x35 | |
| | | | **840/2 Z** 1x 5x30; 1x 6x30; 1x 8x30; 1x 10x30 | |

## 8100 SC 11 Zyklop Metal Ratchet Set with switch lever, 1/2" drive, imperial

| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 05**004081**001 | *173973* | | | 1 |
| | | | **8004 C**<br>1x 1/2"x281,0 | |
| | | | **8790 HMC**<br>1x 3/8"x37,0; 1x 7/16"x37,0; 1x 1/2"x37,0; 1x 9/16"x37,0; 1x 19/32"x37,0; 1x 5/8"x37,0; 1x 11/16"x37,0; 1x 3/4"x37,0; 1x 25/32"x37,0; 1x 13/16"x37,0 | |
| | | | **8794 LC**<br>1x 1/2"x250,0 | |
| | | | **8794 C**<br>1x 1/2"x52,0 | |
| | | | **8784 C2**<br>1x 5/16"x1/2"x50,0 | |
| | | | **851/2 Z PH**<br>1x PH 2x32; 1x PH 3x32 | |
| | | | **867/2 Z TORX®**<br>1x TX 20x35; 1x TX 25x35; 1x TX 27x35; 1x TX 30x35; 1x TX 40x35; 1x TX 45x35; 1x TX 50x35; 1x TX 55x35 | |
| | | | **840/2 Z**<br>1x 7/32"x30; 1x 1/4"x30; 1x 5/16"x30; 1x 3/8"x30 | |

## 8004 C Zyklop Metal Ratchet with switch lever and 1/2" drive

- Convenient direction change thanks to switchover lever
- Extremely slim ratchet with long lever
- Return angle of only 5°
- Secure socket locking

## 8004 C Zyklop Metal Ratchet with switch lever and 1/2" drive

| Code | EAN 4013288 | | mm | mm | mm | | | |
|---|---|---|---|---|---|---|---|---|
| 05**004064**001 | *174062* | 1/2" | 281,0 | 34 | 37 | | | 3 |

## 8790 C Impaktor socket with 1/2" drive

Impaktor socket for use with electric or pneumatic impact wrenches with 12.5mm = 1/2" drive. The Impaktor technology ensures above-average service life even under extreme conditions.

With Take it easy tool finder with colour coding by size - for easy and fast location of the required tool. With hexagonal profile and grooved socket.

The hexagon profile allows the transmission of high forces and puts less strain on the edges of bolts or screw heads than a double hexagon profile. For hexagon headed bolts, screws and nuts.

- For use with electric or pneumatic powered impact wrenches with 12.5mm = 1/2" drive
- Impaktor technology for above-average service life
- Hexagonal profile enables precise and profile-preserving screwdriving with high power transmission
- With Take it easy tool finder: colour coding by size
- With cross-bore and ring socket for securing locking pin and locking ring of machine-operated tools

## 8790 C Impaktor socket with 1/2" drive

| Code | EAN 4013288 | | mm | mm | mm | mm | | |
|---|---|---|---|---|---|---|---|---|
| 05**004570**001 | *210012* | | 13,0 | 38,0 | 21,0 | 24,0 | | 1 |
| 05**004571**001 | *210029* | | 14,0 | 38,0 | 22,0 | 24,0 | | 1 |
| 05**004572**001 | *210036* | | 15,0 | 38,0 | 24,0 | 24,0 | | 1 |
| 05**004573**001 | *210043* | | 16,0 | 38,0 | 24,0 | 24,0 | | 1 |
| 05**004574**001 | *210050* | | 17,0 | 38,0 | 26,0 | 26,0 | | 1 |
| 05**004575**001 | *210067* | | 18,0 | 38,0 | 28,0 | 28,0 | | 1 |
| 05**004576**001 | *210074* | | 19,0 | 38,0 | 28,0 | 28,0 | | 1 |
| 05**004577**001 | *210081* | | 20,0 | 38,0 | 26,0 | 30,0 | | 1 |
| 05**004578**001 | *210098* | | 21,0 | 38,0 | 26,0 | 30,0 | | 1 |

## Belt C Impaktor 1 socket set, 1/2" drive

Robust textile belt in the typical Wera design with nine Impaktor socket wrench plug-ins for missions in confined spaces. A smooth Twist to Unlock mechanism ensures a secure fit and simple removal of the sockets. Including snap hook for attachment on belt loops or bags.

With fleece backing and hook and loop fastener strips for easy attachment e.g. on wall, shelf, workshop trolley and Wera 2go tool transport system. Impaktor sockets for use with electric or pneumatic powered impact wrenches with 12.5mm = 1/2" drive.

Impaktor technology ensures above-average service life, even under extreme conditions. With Take it easy tool finder with colour coding by size - for easy and fast location of the required tool. With hexagonal profile and grooved socket.

The hexagon profile allows the transmission of high forces and puts less strain on the edges of bolts or screw heads than a double hexagon profile. For external hexagonal bolts and sockets.

- 9-piece socket set on robust textile belt 1/2"
- Smooth Twist to Unlock mechanism for a secure fit and simple removal of the sockets
- Particularly suitable for use with customary impact drivers
- With Take it easy tool finder: colour coding by size
- Suitable for attachment to a wall, shelf, tool trolley and to the Wera 2go System

### Belt C Impaktor 1 socket set, 1/2" drive

| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 05**004580**001 | *210104* | | | 1 |
| | | | **8790 C Impaktor**<br>1x 13,0x38,0; 1x 14,0x38,0; 1x 15,0x38,0; 1x 16,0x38,0; 1x 17,0x38,0; 1x 18,0x38,0; 1x 19,0x38,0; 1x 20,0x38,0; 1x 21,0x38,0 | |
| | | | **Belt C Impaktor 0/9**<br>1x 71,0x210,0 | |
| | | | **Hook and Loop Fastener Strip 30**<br>1x 30,0x200,0 | |

## Magnetic socket rail C Impaktor 1 socket set, 1/2" drive

Socket rail with 9 Impaktor sockets for use with electric or pneumatic wrenches with 12.5 mm = 1/2" drive.

The Impaktor technology ensures a higher-than-average service life even at extreme requirements.

The hexagon profile used allows a high power transmission while simultaneously being precise and protecting the profile.

With Take it easy tool finder with colour coding by size - to help you find the required tool quickly and easily.

The rail allows temporary attachment to metallic surfaces and, with its twist-to-unlock function, ensures secure locking and unlocking of the sockets.

- 9-piece socket set on socket rail, 1/2"
- For use with electric or pneumatic powered impact wrenches with 12.5mm = ½" drive
- Impaktor technology for above-average service life
- Hexagonal profile enables precise and profile-preserving screwdriving with high power transmission
- With cross-bore and ring socket for securing locking pin and locking ring of machine-operated tools

### Magnetic socket rail C Impaktor 1 socket set, 1/2" drive

| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 05**005490**001 | *223289* | | | 1 |
| | | | **8790 C Impaktor**<br>1x 13,0x38,0; 1x 14,0x38,0; 1x 15,0x38,0; 1x 16,0x38,0; 1x 17,0x38,0; 1x 18,0x38,0; 1x 19,0x38,0; 1x 20,0x38,0; 1x 21,0x38,0 | |
| | | | **9602**<br>1x 30,0x370,0 | |

## 8790 C Impaktor Deep socket with 1/2" drive

Long Impaktor socket for use with electric or pneumatic wrenches with 12.5 mm = 1/2" drive. For use even at low lying couplings and protruding thread rods.

The Impaktor technology ensures a higher-than-average service life even at extreme requirements. With Take it easy tool finder with colour coding by size – to help you find the required tool quickly and easily.

With hexagon profile with socket and well. With hexagon profile with socket and well. The hexagon profile enables the transmission of high forces and loads the edges of the bolt or the screw head less than a double hexagon profile. For external hexagon bolts and screws.

- Robust Impaktor sockets for extremely high stress; for use with electric or pneumatic wrenches with 12.5 mm = 1/2" drive
- Long socket wrenches for low lying couplings, also suitable for fitting, protruding thread rods in confined spaces
- With cross-bore and ring socket for securing locking pin and locking ring of machine-operated tools

### 8790 C Impaktor Deep socket with 1/2" drive

| Code | EAN 4013288 | | mm | mm | mm | mm | | |
|---|---|---|---|---|---|---|---|---|
| 05**004830**001 | *221926* | | 13,0 | 83,0 | 21,0 | 24,0 | | 1 |
| 05**004831**001 | *221933* | | 14,0 | 83,0 | 22,0 | 24,0 | | 1 |
| 05**004832**001 | *221940* | | 15,0 | 83,0 | 24,0 | 24,0 | | 1 |
| 05**004833**001 | *221957* | | 16,0 | 83,0 | 24,0 | 24,0 | | 1 |
| 05**004834**001 | *221964* | | 17,0 | 83,0 | 26,0 | 26,0 | | 1 |
| 05**004835**001 | *221995* | | 18,0 | 83,0 | 28,0 | 28,0 | | 1 |
| 05**004836**001 | *222008* | | 19,0 | 83,0 | 28,0 | 28,0 | | 1 |
| 05**004837**001 | *222015* | | 21,0 | 83,0 | 30,0 | 27,0 | | 1 |
| 05**004838**001 | *222107* | | 22,0 | 83,0 | 32,0 | 28,0 | | 1 |
| 05**004839**001 | *222114* | | 24,0 | 83,0 | 34,0 | 30,0 | | 1 |
| 05**004840**001 | *222121* | | 27,0 | 83,0 | 38,0 | 33,0 | | 1 |

## 8790 C Impaktor Deep Set 1

Set with 11 Impaktor Deep sockets for use with electric or pneumatic wrenches with 12.5 mm = 1/2" drive. Long design for low-lying couplings and protruding thread rods.

The Impaktor technology ensures a higher-than-average service life even at extreme requirements.

The hexagon profile used allows a high power transmission while simultaneously being precise and protecting the profile. With Take it easy tool finder with colour coding by size - for quick and easy identification of the required tool .

- Long ½" sockets for low-profile-fitting screw connections in tight construction spaces and for protruding threaded rods
- For use with electric or pneumatic powered impact wrenches with 12.5mm = 1/2" drive
- Impaktor technology for above-average service life
- Hexagonal profile enables precise and profile-preserving screwdriving with high power transmission
- With cross-bore and ring socket for securing locking pin and locking ring of machine-operated tools
- With Take it easy tool finder: colour coding by size
- In a robust textile box

### 8790 C Impaktor Deep Set 1

| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 05**004841**001 | *224088* | | | 1 |
| | | | **8790 C Impaktor Deep**<br>1x 13,0x83,0; 1x 14,0x83,0; 1x 15,0x83,0; 1x 16,0x83,0; 1x 17,0x83,0; 1x 18,0x83,0; 1x 19,0x83,0; 1x 21,0x83,0; 1x 22,0x83,0; 1x 24,0x83,0; 1x 27,0x83,0 | |

## 8790 HMC Zyklop socket with 1/2" drive

- 1/2" inch Zyklop socket
- For manual and power tool operations (non-impact)
- Knurling at lower end to enable easy gripping when used in manual applications
- Equipped with ball stop groove
- Take it easy tool finder with colour coding according to sizes

### 8790 HMC Zyklop socket with 1/2" drive

| Code | EAN 4013288 | | mm | | mm | mm | mm | |
|---|---|---|---|---|---|---|---|---|
| 05003601001 | 120618 | | 10,0 | | 37,0 | 15,5 | 24,0 | 1 |
| 05003602001 | 120625 | | 11,0 | | 37,0 | 16,5 | 24,0 | 1 |
| 05003603001 | 120656 | | 12,0 | | 37,0 | 17,5 | 24,0 | 1 |
| 05003604001 | 120663 | | 13,0 | | 37,0 | 19,0 | 24,0 | 1 |
| 05003605001 | 120670 | | 14,0 | | 37,0 | 20,0 | 24,0 | 1 |
| 05003606001 | 120687 | | 15,0 | | 37,0 | 21,0 | 24,0 | 1 |
| 05003607001 | 120694 | | 16,0 | | 37,0 | 22,5 | 24,0 | 1 |
| 05003608001 | 120700 | | 17,0 | | 37,0 | 24,0 | 26,0 | 1 |
| 05003609001 | 120717 | | 18,0 | | 37,0 | 25,0 | 26,0 | 1 |
| 05003610001 | 120724 | | 19,0 | | 37,0 | 26,5 | 26,0 | 1 |
| 05003611001 | 120731 | | 20,0 | | 37,0 | 28,0 | 26,0 | 1 |
| 05003612001 | 120748 | | 21,0 | | 37,0 | 29,0 | 26,0 | 1 |
| 05003613001 | 120755 | | 22,0 | | 37,0 | 30,5 | 26,0 | 1 |
| 05003614001 | 120762 | | 24,0 | | 37,0 | 33,0 | 28,0 | 1 |
| 05003615001 | 120779 | | 27,0 | | 40,0 | 36,5 | 32,0 | 1 |
| 05003616001 | 120786 | | 30,0 | | 42,0 | 40,0 | 34,0 | 1 |
| 05003617001 | 120793 | | 32,0 | | 42,0 | 42,0 | 36,0 | 1 |
| 05003618001 | 120809 | | | 3/8" | 37,0 | 15,5 | 24,0 | 1 |
| 05003619001 | 120816 | | | 7/16" | 37,0 | 16,5 | 24,0 | 1 |
| 05003620001 | 120823 | | | 1/2" | 37,0 | 19,0 | 24,0 | 1 |
| 05003621001 | 120830 | | | 9/16" | 37,0 | 20,0 | 24,0 | 1 |
| 05003622001 | 120847 | | | 19/32" | 37,0 | 21,0 | 24,0 | 1 |
| 05003623001 | 120854 | | | 5/8" | 37,0 | 22,5 | 24,0 | 1 |
| 05003624001 | 120861 | | | 11/16" | 37,0 | 25,5 | 26,0 | 1 |
| 05003625001 | 120878 | | | 3/4" | 37,0 | 26,5 | 26,0 | 1 |
| 05003626001 | 120885 | | | 25/32" | 37,0 | 28,0 | 26,0 | 1 |
| 05003627001 | 120892 | | | 13/16" | 37,0 | 29,0 | 26,0 | 1 |
| 05003628001 | 120908 | | | 7/8" | 37,0 | 30,5 | 26,0 | 1 |
| 05003629001 | 120915 | | | 15/16" | 37,0 | 33,0 | 28,0 | 1 |
| 05003630001 | 120922 | | | 31/32" | 37,0 | 33,0 | 28,0 | 1 |
| 05003631001 | 120939 | | | 1" | 40,0 | 36,5 | 32,0 | 1 |
| 05003632001 | 120946 | | | 1 1/16" | 40,0 | 36,5 | 32,0 | 1 |
| 05003633001 | 120953 | | | 1 1/8" | 40,0 | 40,0 | 34,0 | 1 |
| 05003634001 | 120960 | | | 1 3/16" | 42,0 | 40,0 | 34,0 | 1 |
| 05003635001 | 120977 | | | 1 1/4" | 42,0 | 42,0 | 36,0 | 1 |

## 8790 HMC HF Zyklop socket with 1/2" drive with holding function

- Socket (non-impact) for manual or power tool operations
- The holding function holds screws securely on the tool
- Take it easy tool finder with colour coding according to sizes
- Chrome vanadium steel, matt chrome-plated
- Equipped with ball stop groove, knurling at lower end for better gripping

### 8790 HMC HF Zyklop socket with 1/2" drive with holding function

| Code | EAN 4013288 | | mm | mm | mm | mm | mm | |
|---|---|---|---|---|---|---|---|---|
| 05003730001 | 180957 | | 10,0 | 37,0 | 17,8 | 23,5 | 10,4 | 1 |
| 05003731001 | 180964 | | 11,0 | 37,0 | 18,8 | 23,5 | 10,4 | 1 |
| 05003732001 | 180971 | | 12,0 | 37,0 | 20,4 | 23,5 | 11,4 | 1 |
| 05003733001 | 181022 | | 13,0 | 37,0 | 21,4 | 23,5 | 11,4 | 1 |
| 05003734001 | 181039 | | 14,0 | 37,0 | 22,6 | 23,5 | 11,4 | 1 |
| 05003735001 | 181046 | | 15,0 | 37,0 | 23,6 | 23,5 | 12,0 | 1 |
| 05003736001 | 181053 | | 16,0 | 37,0 | 25,0 | 23,5 | 12,0 | 1 |
| 05003737001 | 181060 | | 17,0 | 37,0 | 26,8 | 23,5 | 12,5 | 1 |
| 05003738001 | 181077 | | 18,0 | 37,0 | 28,0 | 23,5 | 12,5 | 1 |
| 05003739001 | 181084 | | 19,0 | 37,0 | 29,2 | 23,5 | 14,0 | 1 |

## Belt C 1 Zyklop socket set with holding function, 1/2" drive

Typically Wera designed robust textile belt with 6 sockets taking up minimal space. A smooth Twist to Unlock mechanism ensures a secure fit and simple removal of the sockets.

Comes with Take it easy Tool Finder with colour coding according to size to enable the right tool to be selected easily and quickly.

Includes a snap hook for secure fastening to a belt loop or pocket. Sockets with holding function for particularly convenient screwdriving with reduced risk of losing the screw when approaching the workpiece.

Supplied with a non-woven reverse side and hook and loop strips for simple attachment e.g. to a wall, shelf, tool trolley and to the Wera 2go tool transport system.

- 7-piece socket set on a robust textile belt, 1/2"
- Sockets with holding function for screws/bolts/nuts
- Smooth Twist to Unlock mechanism for a secure fit and simple removal of the sockets
- Take it easy tool finder with colour coding according to sizes
- Suitable for attachment to a wall, shelf, tool trolley and to the Wera 2go System

### Belt C 1 Zyklop socket set with holding function, 1/2" drive

| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 05**003995**001 | *204400* | | | 1 |
| | | ◉ | **8790 HMC HF**<br>1x 10,0x37,0; 1x 13,0x37,0; 1x 15,0x37,0; 1x 16,0x37,0; 1x 17,0x37,0; 1x 19,0x37,0 | |
| | | | **Nut Extractor**<br>1x 14,0x43,0 | |
| | | | **Belt C 0/6**<br>1x 45,0x275,0 | |
| | | | **Hook and Loop Fastener Strip 30**<br>1x 30,0x200,0 | |

## Magnetic socket rail C Imperial 1 Zyklop socket set, 1/2" drive, imperial

Socket rail with 9 manual and machine socket wrench inserts (non-impact), 1/2". A smooth rotary mechanism allows a secure hold and easy access of the sockets.

With Take it easy tool finder with colour coding by size - to help you find the required tool quickly and easily.

The rail allows temporary attachment to metallic surfaces and, with its twist-to-unlock function, ensures secure locking and unlocking of the sockets.

- 9-piece socket set on socket rail, 1/2"
- Rail with secure bit mounting and yet easy removal (twist-to-unlock) for temporary attachment on wall, shelf or workshop trolley
- Smooth Twist to Unlock mechanism for a secure fit and simple removal of the sockets
- With Take it easy tool finder: colour coding by size

### Magnetic socket rail C Imperial 1 Zyklop socket set, 1/2" drive, imperial

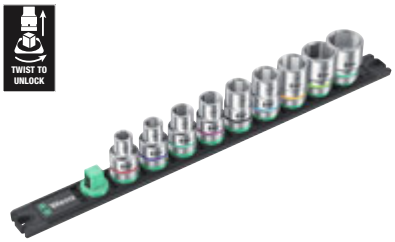

| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 05**005480**001 | *223296* | | | 1 |
| | | ◉ | **8790 HMC**<br>1x 3/8"x37,0; 1x 7/16"x37,0; 1x 1/2"x37,0; 1x 9/16"x37,0; 1x 5/8"x37,0; 1x 11/16"x37,0; 1x 3/4"x37,0; 1x 7/8"x37,0; 1x 1"x40,0 | |
| | | | **9602**<br>1x 30,0x370,0 | |

## 8790 HMC HF 1 Zyklop socket set with 1/2" drive, with holding function

Socket set with holding function for particularly convenient screwdriving with reduced risk of losing the screw when addressing the workpiece.

- Compact textile box with high robustness, low weight and volume
- Bit socket (non-impact) for manual or power tool operations
- The holding function holds screws securely on the tool
- Take it easy tool finder with colour coding according to sizes
- Knurling on lower socket end for more grip when used manually

### 8790 HMC HF 1 Zyklop socket set with 1/2" drive, with holding function

HOLDING FUNCTION | TAKE IT EASY TOOL FINDER | TWIST TO UNLOCK | WERA 260 COMPATIBLE

| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 05**004203**001 | *184238* | | | 1 |
| | | | **8790 HMC HF**<br>1x 10,0x37,0; 1x 11,0x37,0; 1x 12,0x37,0; 1x 13,0x37,0; 1x 14,0x37,0; 1x 15,0x37,0; 1x 16,0x37,0; 1x 17,0x37,0; 1x 18,0x37,0; 1x 19,0x37,0 | |
| | | | **Hook and Loop Fastener Strip 120**<br>1x 50,0x120,0 | |

## 8790 C Wheel Impaktor Socket with 1/2" drive

Impaktor socket, 1/2", for use with impact wrenches, with rotating smooth plastic sleeve for higher working speed, better accuracy during screwdriving and additional rim protection.

- For use with electric or pneumatic impact wrenches with 12.5mm = 1/2" drive
- Robust Impaktor design for extremely high stresses
- Hexagonal profile enables precise and profile-preserving screwdriving with high power transmission
- Take it easy tool finder with colour coding according to sizes

### 8790 C Wheel Impaktor Socket with 1/2" drive

IMPACT PROOF | WHEEL SOCKET | PROTECTIVE INLAY | FREE SPINNING SLEEVE | TAKE IT EASY TOOL FINDER

| Code | EAN 4013288 | | mm | mm | mm | | | |
|---|---|---|---|---|---|---|---|---|
| 05**004590**001 | *210739* | | 17,0 | 85,0 | 30,0 | | | 1 |
| 05**004591**001 | *210746* | | 19,0 | 85,0 | 30,0 | | | 1 |
| 05**004592**001 | *210753* | | 21,0 | 85,0 | 32,0 | | | 1 |

## Wheel Impaktor C Set 1 Socket set, 1/2" drive

Three 1/2" Impaktor socket wrench plug-ins, for use with impact wrenches; with rotating smooth plastic sleeve for higher working speed and additional rim protection. Internal plastic insert to protect the wheel bolt surface.

### Wheel Impaktor C Set 1 Socket set, 1/2" drive

| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 05**004595**001 | *210760* | | | 1 |
| | | | **8790 C Wheel Impaktor**<br>1x 17,0x85,0x30,0; 1x 19,0x85,0x30,0;<br>1x 21,0x85,0x32,0 | |

## 8790 HMC Deep socket with 1/2" drive

Long 1/2" hand and machine socket (ISO 2725 part 3) with ball intercept ring; for external hexagonal bolts and sockets. For use in manual and machine operation (non-impact), even with low-lying screwdriving and protruding threaded rods.

With Take it easy tool finder with colour coding by size - for easy and fast location of the required tool. Easy to grasp even with oily hands.

The hexagon profile allows the transmission of high forces and puts less strain on the edges of bolts or screw heads than a double hexagon profile. Fine-toothed ratchets also make the use of a double hexagon profile superfluous, even in confined spaces, thanks to their small back-pivoting angle.

- Long sockets for low-lying screwdriving, often even with protruding threaded rods in small spaces
- Hexagonal profile enables precise bolting with high power transmission and preserves the profile
- Knurling at lower end to enable easy gripping when used in manual applications
- Made of matt chromed chrome-vanadium

### 8790 HMC Deep socket with 1/2" drive

| Code | EAN 4013288 | | mm | mm | mm | mm | | |
|---|---|---|---|---|---|---|---|---|
| 05**004550**001 | *210562* | | 10,0 | 83,0 | 15,5 | 21,8 | | 1 |
| 05**004551**001 | *210579* | | 11,0 | 83,0 | 16,7 | 22,0 | | 1 |
| 05**004552**001 | *210586* | | 12,0 | 83,0 | 18,0 | 22,0 | | 1 |
| 05**004553**001 | *210593* | | 13,0 | 83,0 | 19,2 | 22,0 | | 1 |
| 05**004554**001 | *210609* | | 14,0 | 83,0 | 20,5 | 22,0 | | 1 |
| 05**004555**001 | *210616* | | 15,0 | 83,0 | 22,0 | 20,7 | | 1 |
| 05**004556**001 | *210623* | | 16,0 | 83,0 | 22,0 | 20,7 | | 1 |
| 05**004557**001 | *210630* | | 17,0 | 83,0 | 24,0 | 22,2 | | 1 |
| 05**004558**001 | *210647* | | 18,0 | 83,0 | 26,0 | 23,2 | | 1 |
| 05**004559**001 | *210654* | | 19,0 | 83,0 | 26,0 | 23,2 | | 1 |
| 05**004560**001 | *210661* | | 20,0 | 83,0 | 28,0 | 25,2 | | 1 |
| 05**004561**001 | *210678* | | 21,0 | 83,0 | 28,0 | 25,2 | | 1 |
| 05**004562**001 | *210685* | | 22,0 | 83,0 | 30,0 | 27,2 | | 1 |
| 05**004563**001 | *210692* | | 24,0 | 83,0 | 32,0 | 28,2 | | 1 |

## Belt C Deep 1 socket set, 1/2" drive

- 6-piece socket set on robust textile belt, 1/2"
- Smooth Twist to Unlock mechanism for a secure fit and simple removal of the sockets
- Long 1/2"socket for low-profile-fitting screw connections in tight construction spaces and for protruding threaded rods
- Hexagonal profile enables precise and profile-preserving screwdriving with high power transmission
- Take it easy tool finder with colour coding according to sizes

### Belt C Deep 1 socket set, 1/2" drive

| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 05**004565**001 | *210708* | | | 1 |
| | | | **8790 HMC Deep**<br>1x 10,0x83,0; 1x 13,0x83,0; 1x 15,0x83,0; 1x 16,0x83,0; 1x 17,0x83,0; 1x 19,0x83,0 | |
| | | | **Belt C 0/6**<br>1x 45,0x275,0 | |
| | | | **Hook and Loop Fastener Strip 30**<br>1x 30,0x200,0 | |

### Magnetic socket rail C Deep 1 socket set, 1/2" drive

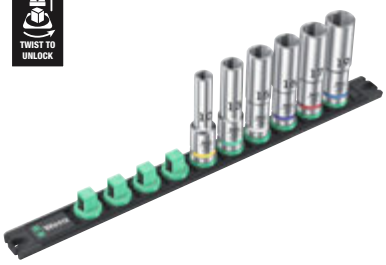

| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 05**005470**001 | *223272* | | | 1 |
| | | | **8790 HMC Deep**<br>1x 10,0x83,0; 1x 13,0x83,0; 1x 15,0x83,0; 1x 16,0x83,0; 1x 17,0x83,0; 1x 19,0x83,0 | |
| | | | **9602**<br>1x 30,0x370,0 | |

## 8790 HMC Deep Socket wrench insert with cutout shaft, with 1/2" drive

Socket for external hexagon bolts and screws, 1/2", long design. Slotted on the side for installing panel connectors.

With ball stop groove. For manual and machine-operated tools (non-impact).

- Slotted on the side for installing top- and side-wired panel connectors

### 8790 HMC Deep Socket wrench insert with cutout shaft, with 1/2" drive

| | EAN | | | | | | | |
|---|---|---|---|---|---|---|---|---|
| Code | 4013288 | mm | mm | mm | mm | mm | | |
| 05**138007**001 | *233547* | 17,0 | 76,0 | 24,0 | 24,0 | 10,0 | | 1 |

## 8767 C HF TORX® Zyklop bit socket with 1/2" drive with holding function

- Bit socket (non-impact) for manual or machine tool operations
- The holding function holds screws securely on the tool
- Take it easy tool finder with colour coding according to sizes
- Knurling on lower end for more grip when used manually
- Chrome vanadium steel, matt chrome-plated

### 8767 C HF TORX® Zyklop bit socket with 1/2" drive with holding function

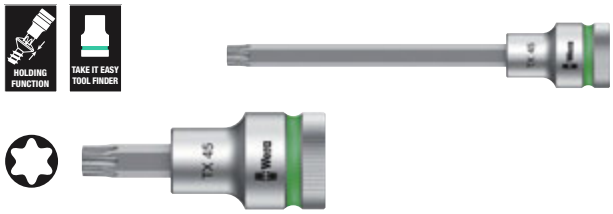


| Code | EAN 4013288 | | | mm | mm | mm | mm | |
|---|---|---|---|---|---|---|---|---|
| 05**003830**001 | *183316* | | TX 20 | 60,0 | 16,4 | 23,5 | 21,5 | 1 |
| 05**003850**001 | *183545* | | TX 20 | 140,0 | 16,4 | 23,5 | 101,5 | 1 |
| 05**003831**001 | *183323* | | TX 25 | 60,0 | 16,4 | 23,5 | 21,5 | 1 |
| 05**003851**001 | *183552* | | TX 25 | 140,0 | 16,4 | 23,5 | 101,5 | 1 |
| 05**003832**001 | *183330* | | TX 27 | 60,0 | 16,4 | 23,5 | 21,5 | 1 |
| 05**003852**001 | *183569* | | TX 27 | 140,0 | 16,4 | 23,5 | 101,5 | 1 |
| 05**003833**001 | *183347* | | TX 30 | 60,0 | 16,4 | 23,5 | 21,5 | 1 |
| 05**003853**001 | *183576* | | TX 30 | 140,0 | 16,4 | 23,5 | 101,5 | 1 |
| 05**003834**001 | *183354* | | TX 40 | 60,0 | 16,4 | 23,5 | 21,5 | 1 |
| 05**003854**001 | *183583* | | TX 40 | 140,0 | 16,4 | 23,5 | 101,5 | 1 |
| 05**003835**001 | *183361* | | TX 45 | 60,0 | 16,4 | 23,5 | 21,5 | 1 |
| 05**003855**001 | *184443* | | TX 45 | 140,0 | 16,4 | 23,5 | 101,5 | 1 |
| 05**003836**001 | *183378* | | TX 50 | 60,0 | 21,4 | 23,5 | 21,5 | 1 |
| 05**003856**001 | *183606* | | TX 50 | 140,0 | 21,4 | 23,5 | 101,5 | 1 |
| 05**003837**001 | *183385* | | TX 55 | 60,0 | 21,4 | 23,5 | 21,5 | 1 |
| 05**003857**001 | *183613* | | TX 55 | 140,0 | 21,4 | 23,5 | 101,5 | 1 |
| 05**003838**001 | *183392* | | TX 60 | 60,0 | 21,4 | 23,5 | 21,5 | 1 |
| 05**003858**001 | *183620* | | TX 60 | 140,0 | 21,4 | 23,5 | 101,5 | 1 |

## Belt C 3 TORX® HF Zyklop bit socket set with holding function, 1/2" drive

Typically Wera designed robust textile belt with 6 in-hex bit-sockets taking up minimal space. A smooth Twist to Unlock mechanism ensures a secure fit and simple removal of the sockets.

Comes with Take it easy Tool Finder with colour coding according to size to enable the right tool to be selected easily and quickly. Includes a snap hook for secure fastening to a belt loop or pocket.

Supplied with a nonwoven reverse side and hook and loop strips for simple attachment e.g. to a wall, shelf, tool trolley and to the Wera 2go tool transport system.

- 6-piece socket set on robust textile belt, 1/2"
- Bit-sockets with all the advantages of the Wera bit technology
- Bit-sockets with holding function for screws/bolts
- Smooth Twist to Unlock mechanism for a secure fit and simple removal of the sockets
- Suitable for attachment to a wall, shelf, tool trolley and to the Wera 2go System

### Belt C 3 TORX® HF Zyklop bit socket set with holding function, 1/2" drive

| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 05**003997**001 | *204882* | | | 1 |
| | | | **8767 C HF**<br>1x TX 25x60,0; 1x TX 30x60,0;<br>1x TX 40x60,0; 1x TX 45x60,0;<br>1x TX 50x60,0; 1x TX 55x60,0 | |
| | | | **Belt C 0/6**<br>1x 45,0x275,0 | |
| | | | **Hook and Loop Fastener Strip 30**<br>1x 30,0x200,0 | |

## Magnetic socket rail C 4 Zyklop socket set, 1/2" drive

Socket rail with 9 manual and machine sockets (non-impact), 1/2". A smooth rotary mechanism allows a secure hold and easy access of the sockets.

With Take it easy tool finder with colour coding by size - to help you find the required tool quickly and easily.

The rail allows temporary attachment to metallic surfaces and, with its twist-to-unlock function, ensures secure locking and unlocking of the sockets.

- 9-piece socket set on socket rail, 1/2"
- Rail with secure bit mounting and yet easy removal (twist-to-unlock) for temporary attachment on wall, shelf or workshop trolley
- Smooth Twist to Unlock mechanism for a secure fit and simple removal of the sockets
- With Take it easy tool finder: colour coding by size

### Magnetic socket rail C 4 Zyklop socket set, 1/2" drive

| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 05**005460**001 | *223265* | | | 1 |
| | | | **8790 HMC**<br>1x 10,0x37,0; 1x 12,0x37,0; 1x 13,0x37,0; 1x 14,0x37,0; 1x 15,0x37,0; 1x 16,0x37,0; 1x 17,0x37,0; 1x 18,0x37,0; 1x 19,0x37,0 | |
| | | | **9602**<br>1x 30,0x370,0 | |

## 8767 C TORX® HF 1 Zyklop bit socket set with 1/2" drive, with holding function

- Compact textile box with high robustness, low weight and volume

### 8767 C TORX® HF 1 Zyklop bit socket set with 1/2" drive, with holding function

| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 05**004202**001 | *184276* | | | 1 |
| | | | **8767 C HF**<br>1x TX 20x60,0; 1x TX 25x60,0; 1x TX 27x60,0; 1x TX 30x60,0; 1x TX 40x60,0; 1x TX 45x60,0; 1x TX 50x60,0; 1x TX 55x60,0; 1x TX 60x60,0 | |

## 8767 C TORX® HF 2 Zyklop bit socket set with 1/2" drive, with holding function

- Compact textile box with high robustness, low weight and volume
- Long version

### 8767 C TORX® HF 2 Zyklop bit socket set with 1/2" drive, with holding function

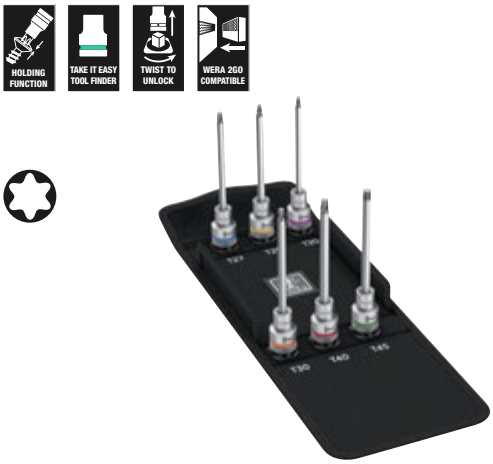


| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 05**004211**001 | *185464* | | | 1 |
| | | | **8767 C HF**<br>1x TX 20x140,0; 1x TX 25x140,0; 1x TX 27x140,0; 1x TX 30x140,0; 1x TX 40x140,0; 1x TX 45x140,0 | |
| | | | **Hook and Loop Fastener Strip 120**<br>1x 50,0x120,0 | |

## 8767 C TORX® HF 3 Zyklop bit socket set with 1/2" drive, with holding function

- Compact textile box with high robustness, low weight and volume
- Long version

### 8767 C TORX® HF 3 Zyklop bit socket set with 1/2" drive, with holding function

| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 05**004212**001 | *185471* | | | 1 |
| | | | **8767 C HF**<br>1x TX 20x140,0; 1x TX 25x140,0;<br>1x TX 27x140,0; 1x TX 30x140,0; 1x TX 40x140,0;<br>1x TX 45x140,0; 1x TX 50x140,0; 1x TX 55x140,0;<br>1x TX 60x140,0 | |
| | | | **Hook and Loop Fastener Strip 120**<br>1x 50,0x120,0 | |

## 8740 C HF Zyklop bit socket with 1/2" drive with holding function

- Bit socket (non-impact) for manual or machine tool operations
- The holding function holds screws securely on the tool
- Take it easy tool finder with colour coding according to sizes
- Knurling on lower end for more grip when used manually
- Chrome vanadium steel, matt chrome-plated

### 8740 C HF Zyklop bit socket with 1/2" drive with holding function

| Code | EAN 4013288 | | mm | mm | mm | mm | mm | |
|---|---|---|---|---|---|---|---|---|
| 05**003820**001 | *183217* | | 4,0 | 60,0 | 14,0 | 21,5 | 21,5 | 1 |
| 05**003840**001 | *183484* | | 4,0 | 140,0 | 14,0 | 21,5 | 101,5 | 1 |
| 05**003821**001 | *183224* | | 5,0 | 60,0 | 14,0 | 21,5 | 21,5 | 1 |
| 05**003841**001 | *183491* | | 5,0 | 140,0 | 14,0 | 21,5 | 101,5 | 1 |
| 05**003822**001 | *183231* | | 6,0 | 60,0 | 14,0 | 21,5 | 21,5 | 1 |
| 05**003842**001 | *183507* | | 6,0 | 140,0 | 14,0 | 21,5 | 101,5 | 1 |
| 05**003823**001 | *183248* | | 7,0 | 60,0 | 14,0 | 23,5 | 21,5 | 1 |
| 05**003843**001 | *183514* | | 7,0 | 140,0 | 14,0 | 23,5 | 101,5 | 1 |
| 05**003824**001 | *183255* | | 8,0 | 60,0 | 16,0 | 23,5 | 21,5 | 1 |
| 05**003844**001 | *183521* | | 8,0 | 140,0 | 16,0 | 23,5 | 101,5 | 1 |
| 05**003825**001 | *183262* | | 10,0 | 60,0 | 16,0 | 23,5 | 21,5 | 1 |
| 05**003845**001 | *183538* | | 10,0 | 140,0 | 16,0 | 23,5 | 101,5 | 1 |
| 05**003826**001 | *183279* | | 12,0 | 60,0 | 21,0 | 23,5 | 23,0 | 1 |
| 05**003827**001 | *183286* | | 14,0 | 60,0 | 22,0 | 23,5 | 23,0 | 1 |
| 05**003828**001 | *183293* | | 17,0 | 60,0 | 24,5 | 25,5 | 23,0 | 1 |
| 05**003829**001 | *183309* | | 19,0 | 60,0 | 26,5 | 27,5 | 23,0 | 1 |

## Belt C 2 Zyklop In-Hex-Plus bit socket set with holding function, 1/2" drive

Typically Wera designed robust textile belt with 6 in-hex bit-sockets taking up minimal space.

A smooth Twist to Unlock mechanism ensures a secure fit and simple removal of the sockets.

Comes with Take it easy Tool Finder with colour coding according to size to enable the right tool to be selected easily and quickly. Includes a snap hook for secure fastening to a belt loop or pocket.

Supplied with a nonwoven reverse side and hook and loop strips for simple attachment e.g. to a wall, shelf, tool trolley and to the Wera 2go tool transport system.

- 6-piece socket set on robust textile belt, 1/2"
- Bit-sockets with all the advantages of the Wera bit technology
- Bit-sockets with holding function for screws/bolts
- Smooth Twist to Unlock mechanism for a secure fit and simple removal of the sockets
- Suitable for attachment to a wall, shelf, tool trolley and to the Wera 2go System

### Belt C 2 Zyklop In-Hex-Plus bit socket set with holding function, 1/2" drive

| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 05**003996**001 | *204424* | | | 1 |
| | | | **8740 C HF**<br>1x 4,0x60,0; 1x 5,0x60,0; 1x 6,0x60,0;<br>1x 7,0x60,0; 1x 8,0x60,0; 1x 10,0x60,0 | |
| | | | **Belt C 0/6**<br>1x 45,0x275,0 | |
| | | | **Hook and Loop Fastener Strip 30**<br>1x 30,0x200,0 | |

## 8740 C HF 1 Zyklop bit socket set with 1/2" drive, with holding function

- Compact textile box with high robustness, low weight and volume

### 8740 C HF 1 Zyklop bit socket set with 1/2" drive, with holding function

| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 05**004201**001 | *184283* | | | 1 |
| | | | **8740 C HF**<br>1x 4,0x60,0; 1x 5,0x60,0; 1x 6,0x60,0;<br>1x 7,0x60,0; 1x 8,0x60,0; 1x 10,0x60,0;<br>1x 12,0x60,0; 1x 14,0x60,0; 1x 17,0x60,0 | |
| | | | **Hook and Loop Fastener Strip 120**<br>1x 50,0x120,0 | |

## 8740 C HF 2 Zyklop bit socket set with 1/2" drive, with holding function

- Compact textile box with high robustness, low weight and volume
- Long version

### 8740 C HF 2 Zyklop bit socket set with 1/2" drive, with holding function

| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 05**004210**001 | *185457* | | | 1 |
| | | | **8740 C HF**<br>1x 4,0x140,0; 1x 5,0x140,0; 1x 6,0x140,0;<br>1x 7,0x140,0; 1x 8,0x140,0; 1x 10,0x140,0 | |
| | | | **Hook and Loop Fastener Strip 120**<br>1x 50,0x120,0 | |

## 9529 C SB 1/2" Step wrench

- 5 steps (3/8", 7/16", 1/2", 16 and 21 mm)
- For 1/2" ratchets
- Chrome vanadium steel

### 9529 C SB 1/2" Step wrench

| | EAN | | | | | | | |
|---|---|---|---|---|---|---|---|---|
| Code | 4013288 | mm | | | | | | |
| 05**136074**001 | *228390* | 88,0 | | | | | | 1 |

## 8796 LC Zyklop „flexible-lock“ extension with free-turning sleeve, long, 1/2"

- For 1/2" square sockets with ball lock
- Flexible lock system for either locking or rapid exchange of the attached tool
- With free-turning sleeve for rapid tightening and loosening of screws and nuts

### 8796 LC Zyklop „flexible-lock“ extension with free-turning sleeve, long, 1/2"

| | EAN | | | | | | | |
|---|---|---|---|---|---|---|---|---|
| Code | 4013288 | | mm | | | | | |
| 05**003643**001 | *121462* | 1/2" | 250,0 | | | | | 1 |

## 8796 SC Zyklop „flexible-lock“ extension with free-turning sleeve, short, 1/2"

- For 1/2" square sockets with ball lock
- Flexible lock system for either locking or rapid exchange of the attached tool
- With free-turning sleeve for rapid tightening and loosening of screws and nuts

### 8796 SC Zyklop „flexible-lock“ extension with free-turning sleeve, short, 1/2"

| | EAN | | | | | | | |
|---|---|---|---|---|---|---|---|---|
| Code | 4013288 | | mm | | | | | |
| 05**003642**001 | *121455* | 1/2" | 125,0 | | | | | 1 |

## 8794 LC Zyklop extension with free-turning sleeve, long, 1/2"

Wera Zyklop extension with easy-to-grip free-turning sleeve for rapid tightening and loosening of screws and nuts. Out of high quality chrome vanadium steel, matt chrome-plated.

### 8794 LC Zyklop extension with free-turning sleeve, long, 1/2"

| | EAN | | | | | | | |
|---|---|---|---|---|---|---|---|---|
| Code | 4013288 | | mm | | | | | |
| 05**003638**001 | *121431* | 1/2" | 250,0 | | | | | 1 |

## 8794 SC Zyklop extension with free-turning sleeve, short, 1/2"

Wera Zyklop extension with easy-to-grip free-turning sleeve for rapid tightening and loosening of screws and nuts. Out of high quality chrome vanadium steel, matt chrome-plated.

### 8794 SC Zyklop extension with free-turning sleeve, short, 1/2"

| | EAN | | | | | | | |
|---|---|---|---|---|---|---|---|---|
| Code | 4013288 | | mm | | | | | |
| 05**003637**001 | *121424* | 1/2" | 125,0 | | | | | 1 |

## 8789 C Zyklop sliding T-handle, 1/2"

Wera Zyklop T-handle for higher torque transfer. For 1/2" square sockets with ball lock. Adjustable drive for more flexible usage. Out of high quality chrome vanadium steel, matt chrome-plated.

### 8789 C Zyklop sliding T-handle, 1/2"

| | EAN | | | | | | | |
|---|---|---|---|---|---|---|---|---|
| Code | 4013288 | | mm | | | | | |
| 05**003636**001 | *121530* | 1/2" | 250,0 | | | | | 3 |

## 8795 C Zyklop universal joint, 1/2"

Wera Zyklop universal joint for 1/2" square sockets with ball lock.

### 8795 C Zyklop universal joint, 1/2"

| | EAN | | | | | | | |
|---|---|---|---|---|---|---|---|---|
| Code | 4013288 | | mm | | | | | |
| 05**003640**001 | *121547* | 1/2" | 69,0 | | | | | 1 |

## 8794 C Zyklop wobble extension, 1/2"

Wobble extension for the Wera Zyklop. Swivel angle of 15° in all directions. This ensures rapid and precise work even in confined working situations.

### 8794 C Zyklop wobble extension, 1/2"

| | EAN | | | | | | | |
|---|---|---|---|---|---|---|---|---|
| Code | 4013288 | | mm | | | | | |
| 05**003639**001 | *121448* | 1/2" | 52,0 | | | | | 1 |

## 8784 C2 Zyklop bit adaptor, 1/2", 5/16"

Adaptor from square to hex. For 5/16" hex bits as per DIN ISO 1173-C 8 and Wera connecting series 2; with quick-release chuck.

### 8784 C2 Zyklop bit adaptor, 1/2", 5/16"

| | EAN | | | | | | | |
|---|---|---|---|---|---|---|---|---|
| Code | 4013288 | | | mm | | | | |
| 05**003641**001 | *119353* | 5/16" | 1/2" | 50,0 | | | | 1 |

## 8009 Zyklop Pocket Set 1

Compact Zyklop ratchet with bit magazine for the pocket. Magnetic direct mounting for ¼" bits and 3/8" sockets. Rapid tool change thanks to the non-locking mounting.

As the head is lockable at 0°, 15° and 90°, the tool can be used as a ratchet and as a ratchet screwdriver. The fine toothing with 72 teeth allows for a low return angle of 5°.

Wide range of applications thanks to 12 bits integrated in the handle. The robust ratchet mechanism allows for ample torque. Perfect combination of a Zyklop ratchet with a 12-piece screw-driver set.

- Compact Zyklop ratchet with integrated bit magazine
- Thanks to it's clever design the ratchet head doubles up as both a 3/8" square drive ratchet for sockets, and integral 1/4" hexagon drive for screwdriver bits
- Freely pivoting ratchet head with 5 predefined locking positions
- Fine tooth reversible ratchet (72 teeth) for a low return angle of only 5°
- Captive and freely swivelling bit magazine for easy removal and secure storage of the bits

### 8009 Zyklop Pocket Set 1

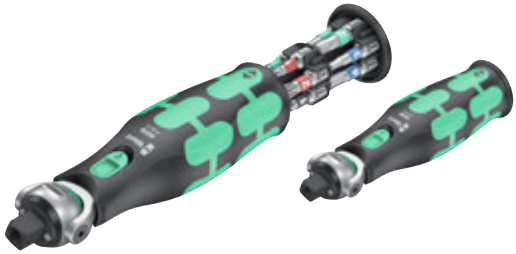

| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 05**004280**001 | *221834* | | | 1 |
| | | | **8009**<br>1x 3/8"x1/4"x133,0 | |
| | | | **851/1 BTZ**<br>1x PH 1x25; 1x PH 2x25 | |
| | | | **855/1 BTZ**<br>1x PZ 1x25; 1x PZ 2x25 | |
| | | | **867/1 TORX® BTZ**<br>1x TX 10x25; 1x TX 15x25; 1x TX 20x25; 1x TX 25x25 | |
| | | | **840/1 BTZ**<br>1x 3,0x25; 1x 4,0x25; 1x 5,0x25; 1x 6,0x25 | |

## 8009 Zyklop Pocket Imperial Set 1

| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 05**004282**001 | *221841* | | | 1 |
| | | | **8009**<br>1x $^{3}/_{8}$"x$^{1}/_{4}$"x133,0 | |
| | | | **851/1 BTZ**<br>1x PH 1x25; 1x PH 2x25 | |
| | | | **867/1 TORX® BTZ**<br>1x TX 10x25; 1x TX 15x25; 1x TX 20x25;<br>1x TX 25x25 | |
| | | | **840/1 Z**<br>1x $^{1}/_{8}$"x25; 1x $^{5}/_{32}$"x25; 1x $^{3}/_{16}$"x25;<br>1x $^{1}/_{4}$"x25 | |
| | | | **868/1 Z**<br>1x # 1x25; 1x # 2x25 | |

## 8009 Zyklop Pocket Set 2

Compact Zyklop ratchet with bit magazine for the pocket. Magnetic direct mounting for ¼" bits and $^{3}/_{8}$" sockets. Rapid tool change thanks to the non-locking mounting. As the head is lockable at 0°, 15° and 90°, the tool can be used as a ratchet and as a ratchet screwdriver.

The fine toothing with 72 teeth allows for a low return angle of 5°. Wide range of applications thanks to 12 bits integrated in the handle. The robust ratchet mechanism allows for ample torque. Perfect combination of a Zyklop ratchet with a 12-piece screwdriver set.

The 75 mm long universal holder for $^{1}/_{4}$" bits can be used as an extension. Including sockets in the commonest dimensions. One robust textile holster 9468 to be attached to the belt and docked onto the Wera 2go system.

- Compact Zyklop ratchet with integrated bit magazine
- The magnetic direct mounting simultaneously turns the $^{3}/_{8}$" ratchet into a bit ratchet screwdriver with $^{1}/_{4}$" bit mounting
- Freely pivoting ratchet head with 5 predefined locking positions
- Fine tooth reversible ratchet (72 teeth) for a low return angle of only 5°
- Captive and freely swivelling bit magazine for easy removal and secure storage of the bits
- Universal holder with stainless steel sleeve and strong permanent magnet, can be used as extension
- Robust textile holster to be attached to the belt and docked onto the Wera 2go system

## 8009 Zyklop Pocket Set 2

| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 05**004281**001 | *223050* | | | 1 |
| | | | **8009**<br>1x 3/8"x1/4"x133,0 | |
| | | | **893/1/1**<br>1x 1/4"x75 | |
| | | | **851/1 BTZ**<br>1x PH 1x25; 1x PH 2x25 | |
| | | | **855/1 BTZ**<br>1x PZ 1x25; 1x PZ 2x25 | |
| | | | **867/1 TORX® BTZ**<br>1x TX 10x25; 1x TX 15x25; 1x TX 20x25;<br>1x TX 25x25 | |
| | | | **840/1 BTZ**<br>1x 3,0x25; 1x 4,0x25; 1x 5,0x25; 1x 6,0x25 | |
| | | | **8790 HMB**<br>1x 8,0x29,0; 1x 10,0x29,0; 1x 13,0x29,0 | |
| | | | **9468**<br>1x 155,0x65,0 | |
| | | | **Hook and Loop Fastener Strip 70**<br>1x 50,0x70,0 | |

## 8009 Zyklop Pocket Imperial Set 2

| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 05**004283**001 | *223067* | | | 1 |
| | | | **8009**<br>1x 3/8"x1/4"x133,0 | |
| | | | **893/1/1**<br>1x 1/4"x75 | |
| | | | **851/1 BTZ**<br>1x PH 1x25; 1x PH 2x25 | |
| | | | **867/1 TORX® BTZ**<br>1x TX 10x25; 1x TX 15x25; 1x TX 20x25;<br>1x TX 25x25 | |
| | | | **840/1 Z**<br>1x 1/8"x25; 1x 5/32"x25; 1x 3/16"x25;<br>1x 1/4"x25 | |
| | | | **868/1 Z**<br>1x # 1x25; 1x # 2x25 | |
| | | | **8790 HMB**<br>1x 5/16"x29,0; 1x 3/8"x29,0; 1x 1/2"x29,0 | |
| | | | **9468**<br>1x 155,0x65,0 | |
| | | | **Hook and Loop Fastener Strip 70**<br>1x 50,0x70,0 | |

## Zyklop Pocket

Comprehensive and space-saving ratchet/screwdriver combination. Compact Zyklop ratchet with bit magazine for the pocket. Magnetic direct mounting for ¼" bits and 3/8" sockets. Rapid tool change thanks to the non-locking mounting. As the head is lockable at 0°, 15° and 90°, the tool can be used as a ratchet and as a ratchet screwdriver. The fine toothing with 72 teeth allows for a low return angle of 5°.

Wide range of applications thanks to 12 bits integrated in the handle. The robust ratchet mechanism allows for ample torque. Perfect combination of a Zyklop ratchet with a 12-piece screwdriver set.

The 75 mm long universal holder for 1/4" bits can be used as an extension. Including sockets in the commonest dimensions. In a textile box, which can be docked onto the Wera 2go system.

- Compact Zyklop ratchet with integrated bit magazine
- The magnetic direct mounting simultaneously turns the 3/8" ratchet into a bit ratchet screwdriver with 1/4" bit mounting
- Freely pivoting ratchet head with 5 predefined locking positions
- Fine tooth reversible ratchet (72 teeth) for a low return angle of only 5°
- Captive and freely swivelling bit magazine for easy removal and secure storage of the bits

### 8009 Zyklop Pocket Set 3

| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 05**004284**001 | *227560* | | | 1 |
| | | | **8009**<br>1x 3/8"x1/4"x133,0 | |
| | | | **8794 SB**<br>1x 3/8"x125,0 | |
| | | | **893/1/1**<br>1x 1/4"x75 | |
| | | | **8790 HMB**<br>1x 6,0x29,0; 1x 7,0x29,0; 1x 8,0x29,0; 1x 9,0x29,0; 1x 10,0x29,0; 1x 11,0x29,0; 1x 12,0x29,0; 1x 13,0x29,0; 1x 14,0x29,0; 1x 15,0x29,0; 1x 16,0x30,0; 1x 17,0x30,0 | |
| | | | **851/1 BTZ**<br>1x PH 1x25; 1x PH 2x25 | |
| | | | **855/1 BTZ**<br>1x PZ 1x25; 1x PZ 2x25 | |
| | | | **867/1 TORX® BTZ**<br>1x TX 10x25; 1x TX 15x25; 1x TX 20x25; 1x TX 25x25 | |
| | | | **840/1 BTZ**<br>1x 3,0x25; 1x 4,0x25; 1x 5,0x25; 1x 6,0x25 | |
| | | | **Hook and Loop Fastener Strip 120**<br>1x 50,0x120,0 | |

## 8009 Zyklop Pocket Set 4

| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 05**004285**001 | *227591* | | | 1 |
| | | | **8009**<br>1x 3/8"x1/4"x133,0 | |
| | | | **8794 SB**<br>1x 3/8"x125,0 | |
| | | | **893/1/1**<br>1x 1/4"x75 | |
| | | | **8790 HMB**<br>1x 8,0x29,0; 1x 9,0x29,0; 1x 10,0x29,0; 1x 12,0x29,0; 1x 14,0x29,0; 1x 16,0x30,0; 1x 1/4"x29,0; 1x 5/16"x29,0; 1x 3/8"x29,0; 1x 7/16"x29,0; 1x 1/2"x29,0; 1x 9/16"x29,0 | |
| | | | **851/1 BTZ**<br>1x PH 1x25; 1x PH 2x25 | |
| | | | **867/1 TORX® BTZ**<br>1x TX 10x25; 1x TX 15x25 | |
| | | | **800/1 BTZ**<br>1x 0,8x5,5x25; 1x 1,2x6,5x25 | |
| | | | **840/1 BTZ**<br>1x 4,0x25; 1x 6,0x25 | |
| | | | **840/1 Z**<br>1x 3/16"x25; 1x 1/4"x25 | |
| | | | **868/1 Z**<br>1x # 1x25; 1x # 2x25 | |
| | | | **Hook and Loop Fastener Strip 120**<br>1x 50,0x120,0 | |

## Koloss - this ratchet is the best!

The ratchet that can also be safely and officially used as a hammer. The Koloss is a reversible, heavy-duty ratchet that can be used with a load of at least 600 Newton metres. The dual ratchet teeth and the minimum return angle of only 6° ensure rapid and precise screwdriving even in confined situations.

And the best thing: absolutely no impact on the hammer faces, however hard, can destroy the ratchet mechanism.

Multi-component Kraftform handle optimised to withstand pressure, impact and tensile loads; take-up for Koloss extension 8780 C and Koloss centring pin 8781 C at end of handle. Also included in the set: 1 pad to protect materials and surface areas, 1 Koloss extension for the transfer of even more torque, 1 unlocking pin and 1 holster – so the Koloss can always be at hand.

- For loads of at least 600 Newton metres
- Push-through square drive for right/left switchover
- Including hammer function
- Multi-component Kraftform handle optimised to withstand pressure, impact and tensile loads
- Fine-pitched ratchet mechanism, small return angle of 6°

## 8002 C Koloss All Inclusive Set with ½" drive

| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 05**133862**001 | *162403* | | | 1 |
| | | | **8002 C**<br>1x 1/2"x341,0 | |
| | | | **8782 C**<br>1x 50,0 | |
| | | | **8780 C**<br>1x 341,0x137 | |
| | | | **8000 E**<br>1x 40,5 | |
| | | | **8000 HLF**<br>1x 175,0x75,0 | |

## 8002 C Koloss ½" with ½" drive

| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 05**003692**001 | *144607* | | | 1 |
| | | | **8002 C**<br>1x ½"x341,0 | |
| | | | **8782 C**<br>1x 50,0 | |
| | | | **8000 HLF**<br>1x 175,0x75,0 | |

## 8780 C Koloss extension

Extension for the Wera Koloss out of tough, tempered chrome-molybdenum steel. Can be used as an extension with the Wera Koloss 8002 C to increase the torque to be applied. Multi-component Kraftform handle optimised to withstand pressure, impact and tensile loads.
Safety instructions laser-engraved for permanent recognition.

## 8780 C Koloss extension

| | EAN | | | | | | | |
|---|---|---|---|---|---|---|---|---|
| Code | 4013288 | mm | mm | | | | | |
| 05**003695**001 | *144614* | 341,0 | 137 | | | | | 1 |

## 8781 C Koloss centring pin

Centring pin for the Wera Koloss. To align lugs or drill holes. Conical pin, tough, hardened chrome-molybdenum steel.

## 8781 C Koloss centring pin

| | EAN | | | | | | | |
|---|---|---|---|---|---|---|---|---|
| Code | 4013288 | mm | mm | | | | | |
| 05**003696**001 | *144683* | 50 | 135,0 | | | | | 1 |

## 8782 C Koloss pad set

Protective pads for the Wera Koloss. To protect materials and surfaces of workpieces. Flexible thermoplastic, elastomer material offering permanent elasticity and maximum protection.

## 8782 C Koloss pad set

| | EAN | | | | | | | |
|---|---|---|---|---|---|---|---|---|
| Code | 4013288 | # | mm | | | | | |
| 05**003697**001 | *144690* | 2 | 50,0 | | | | | 1 |

## 8000 E Unlocking pin

| | EAN | | | | | | | |
|---|---|---|---|---|---|---|---|---|
| Code | 4013288 | mm | | | | | | |
| 05**136400**001 | *194633* | 40,5 | | | | | | 1 |

## Socket rail C (textile belt), 6 location, unloaded

- Empty socket belt for 6 sockets/bit sockets, ½"
- Includes a convenient snap hook
- Smooth Twist to Unlock mechanism for a secure fit and simple removal of the sockets
- Suitable for attachment to a wall, shelf, tool trolley and to the Wera 2go System

### Socket rail C (textile belt), 6 location, unloaded

| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 05**003892**001 | *205797* | | | 1 |
| | | | **Belt C 0/6**<br>1x 45,0x275,0 | |
| | | | **Hook and Loop Fastener Strip 30**<br>1x 30,0x200,0 | |

## 9602 Magnetic socket rail, 1/2", empty

1 socket rail, empty. For up to 10 sockets and/or bit sockets with 1/2" drive.

The rail allows temporary attachment to metallic surfaces and, with its twist-to-unlock function, ensures secure locking and unlocking of the sockets.

- Rail with secure bit mounting and yet easy removal (twist-to-unlock) for temporary attachment on wall, shelf or workshop trolley
- Smooth Twist to Unlock mechanism for a secure fit and simple removal of the sockets
- Empty, for up to 10 sockets, 1/2"

### 9602 Magnetic socket rail, 1/2", empty

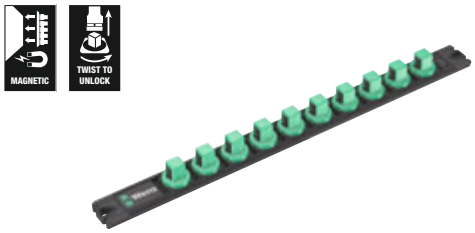


| Code | EAN 4013288 | mm | mm | | | | | |
|---|---|---|---|---|---|---|---|---|
| 05**136422**001 | *223340* | 30,0 | 370,0 | | | | | 1 |

### Socket rail C Impaktor (textile belt), 9 location, unloaded

| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 05**003893**001 | *211484* | | | 1 |
| | | | **Belt C Impaktor 0/9**<br>1x 71,0x210,0 | |
| | | | **Hook and Loop Fastener Strip 30**<br>1x 30,0x200,0 | |

## Zyklop Mini - beauty in strength

Zyklop Mini 1
¼" bit ratchet.

Zyklop Mini 2
The Zyklop Mini 2 is suitable for the direct attachment of the special Wera Zyklop sockets 8790 FA. These sockets feature a very low height, ideal for confined working spaces.

Zyklop Mini 3
Mini ratchet suitable for direct mounting of ¼" sockets.

Zyklop Mini 1 & 2 & 3
Fine tooth mechanism (60 teeth), small return angle of only 6° – ideal for precision work.

Zyklop Mini 1 & 2 & 3
Easy switching between left/right operations.

Zyklop Mini 1 & 2 & 3
Its slim design makes it ideal for all particularly confined working situations.

Wera Zyklop Mini 1: a symbiosis of strength and stylishness. Incredibly robust due to its drop-forged, full-steel design. Can withstand torque forces up to 65 Nm.

The petite sizing is particularly suited for work in confined spaces. The thumbwheel allows fast screwdriving. Comes in a set in the proven Wera Bit-Check with socket adaptor and belt clip. Simple tool removal and reinsertion is ensured, very robust and durable.

- Bit-Checks convince due to their functionality in a minimum of space
- Wera Mini ratchet for particularly fast screwdriving even in confined spaces
- Ideal for working in confined spaces
- Tough viscous bits for universal use
- In handy and robust Bit-Check

### Bit-Check 30 Zyklop Mini 1

SWITCH · FINE TOOTH · FULL STEEL · RAPIDAPTOR TECHNOLOGY · HEX-PLUS

| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 05**073640**001 | *144652* | | | 1 |
| | | | **8001 A**<br>1x ¼"x87,0 | |
| | | | **870/1**<br>1x ¼"x25 [1] | |
| | | | **889/4/1 K**<br>1x ¼"x50 | |
| | | | **851/1 TZ PH**<br>2x PH 1x25; 3x PH 2x25; 1x PH 3x25 | |
| | | | **855/1 TH PZ**<br>1x PZ 1x25; 3x PZ 2x25; 1x PZ 3x25 | |
| | | | **867/1 TZ TORX®**<br>1x TX 10x25; 1x TX 15x25; 1x TX 20x25; 1x TX 25x25; 1x TX 30x25; 1x TX 40x25 | |
| | | | **867/1 Z TORX® BO**<br>1x TX 10x25; 1x TX 15x25; 1x TX 20x25; 1x TX 25x25; 1x TX 30x25 | |
| | | | **800/1 TZ**<br>1x 1,0x5,5x25 | |
| | | | **840/1 Z Hex-Plus**<br>1x 3,0x25; 1x 4,0x25; 1x 5,0x25; 1x 6,0x25; 1x 8,0x25 | |

[1] With friction ball; for manual nut spinner sockets

## Bit-Check 30 Zyklop Mini 2

| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 05**346293**001 | *145765* | | | 1 |
| | | | **8001 A**<br>1x 1/4"x87,0 | |
| | | | **889/4/1 K**<br>1x 1/4"x50 | |
| | | | **870/1**<br>1x 1/4"x25 [1] | |
| | | | **851/1 TZ PH**<br>2x PH 1x25; 3x PH 2x25; 1x PH 3x25 | |
| | | | **867/1 TZ TORX®**<br>1x TX 10x25; 1x TX 15x25; 1x TX 20x25;<br>1x TX 25x25; 1x TX 30x25; 1x TX 40x25 | |
| | | | **867/1 Z TORX® BO**<br>1x TX 10x25; 1x TX 15x25; 1x TX 20x25;<br>1x TX 25x25; 1x TX 30x25 | |
| | | | **840/1 Z Hex-Plus**<br>1x 3/32"x25; 1x 1/8"x25; 1x 5/32"x25; 1x 3/16"x25;<br>1x 1/4"x25 | |
| | | | **800/1 TZ**<br>1x 1,0x5,5x25 | |
| | | | **868/1 Z**<br>1x # 1x25; 3x # 2x25; 1x # 3x25 | |

[1] With friction ball; for manual nut spinner sockets

## Kraftform Kompakt Zyklop Mini 2

Ratchets and screws in a Kraftform Kompakt format. These drop-forged, full-steel ratchets, Zyklop Mini 1 and 2, combine filigree design with incredible robustness.

For particularly rapid screwdriving in confined working situations. Zyklop Mini 1 or Zyklop Mini 2 can be used whenever screwdriving with power tools or conventional hand tools is unfeasible for lack of space. 1 bit ratchet Zyklop Mini 1; suitable for the take-up of bits with ¼" hexagon head drive as per DIN ISO 1173-C 6.3 and E 6.3 and Wera connecting series 1 and 4; also possible to use ¼" sockets by attaching the Wera adaptor 870/1. 1 socket ratchet Zyklop Mini 2; suitable for the direct attachment of Wera Zyklop special sockets 8790 FA.

## Kraftform Kompakt Zyklop Mini 2

| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 05**135918**001 | *182180* | | | 1 |
| | | | **8001 A**<br>1x 1/4"x87,0 | |
| | | | **8005 Zyklop Mini 2 Ratchet**<br>1x 107 | |
| | | | **813**<br>1x 1/4"x78 | |
| | | | **870/1**<br>1x 1/4"x25 [1] | |
| | | | **851/1 Z PH**<br>1x PH 1x25; 1x PH 2x25 | |
| | | | **855/1 Z PZ**<br>1x PZ 1x25; 1x PZ 2x25 | |
| | | | **867/1 TORX®**<br>1x TX 10x25; 1x TX 15x25; 1x TX 20x25;<br>1x TX 25x25; 1x TX 30x25; 1x TX 40x25 | |
| | | | **840/1 Z Hex-Plus**<br>1x 3,0x25; 1x 4,0x25; 1x 5,0x25; 1x 6,0x25 | |
| | | | **8790 FA**<br>1x 4,0; 1x 5,0; 1x 5,5; 1x 6,0; 1x 7,0; 1x 8,0;<br>1x 10,0; 1x 12,0; 1x 13,0 | |
| | | | **Hook and Loop Fastener Strip 120**<br>1x 50,0x120,0 | |

[1] With friction ball; for manual nut spinner sockets

## Bit-Check 10 Zyklop Mini BiTorsion 1

Many tools in a minimum of space. The sorting according to drive and size allows rapid accessing of the bits.

The Wera Mini ratchet: drop-forged, full-steel design. Fine-pitched mechanism with 60 teeth that allows a small return angle of only 6° for precise work. Simple left/right switchover. Ergonomically-designed ratchet head and lever.

- 1/4" Mini ratchet and tough viscous bits

### Bit-Check 10 Zyklop Mini BiTorsion 1

| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 05**057418**001 | *195951* | | | 1 |
| | | | **8001 A**<br>1x 1/4"x87,0 | |
| | | | **851/1 BTZ PH**<br>1x PH 1x25; 1x PH 2x25 | |
| | | | **855/1 BTZ PZ**<br>1x PZ 1x25; 1x PZ 2x25 | |
| | | | **867/1 TORX® BTZ**<br>1x TX 15x25; 1x TX 20x25; 1x TX 25x25 | |
| | | | **840/1 BTZ Hex-Plus**<br>1x 4,0x25; 1x 5,0x25 | |

## Bit-Check 10 Zyklop Mini 1

Many tools in a minimum of space. The sorting according to drive and size allows rapid accessing of the bits. The Wera Mini ratchet: drop-forged, full-steel design.

Fine-pitched mechanism with 60 teeth that allows a small return angle of only 6° for precise work. Simple left/right switchover. Ergonomically-designed ratchet head and lever.

- Tough viscous bits for universal use

### Bit-Check 10 Zyklop Mini 1

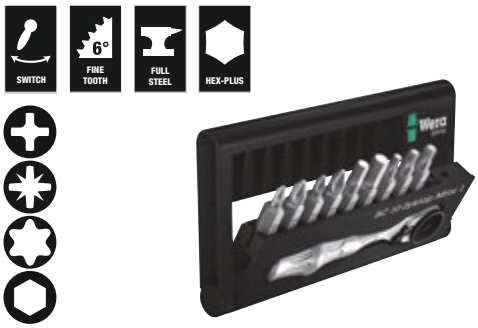


| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 05**073645**001 | *168115* | | | 1 |
| | | | **8001 A**<br>1x 1/4"x87,0 | |
| | | | **851/1 Z PH**<br>1x PH 1x25; 1x PH 2x25 | |
| | | | **855/1 Z PZ**<br>1x PZ 1x25; 1x PZ 2x25 | |
| | | | **867/1 TORX®**<br>1x TX 15x25; 1x TX 20x25; 1x TX 25x25 | |
| | | | **840/1 Z Hex-Plus**<br>1x 4,0x25; 1x 5,0x25 | |

## Bicycle Set 1

Bicycle repair shops and passionate cyclists love screwdriving on a bicycle. With their Bicycle Set 1, the screwdriving tool specialist Wera offers an assortment of tools that is very mobile thanks to its compact and design-oriented textile folding bag, and offers solutions for the most common screwdriving situations when working with bicycles.

The sturdy bag contains the bit ratchet Zyklop Mini 1 and 10 bits with all the benefits of Wera-Bit technology, specially adapted to the most common screw connections on a bicycle.

With the glass fibre reinforced plastic tyre levers, the tyres can be safely levered off the rim without damaging the rim.

- Compact 14-piece screwdriving tool set for bicycle applications, also for mobile use
- Practical range for DIY assembly work and repairs
- Suitable tools for the most common bolt profiles on road bikes, mountain bikes and e-bikes
- Robust, surface-friendly, compact textile folding bag
- Set including Mini bit ratchet, extension and two tyre levers with additional functions

### Bicycle Set 1

| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 05**004170**001 | *207623* | | | 1 |
| | | | **8001 A**<br>1x ¼"x87,0 | |
| | | | **3899/4/1**<br>1x ¼"x100 | |
| | | | **851/1 Z PH**<br>1x PH 2x25 | |
| | | | **867/1 TORX®**<br>1x TX 10x25; 1x TX 25x25 | |
| | | | **840/1 Z Hex-Plus**<br>1x 2,0x25; 1x 2,5x25; 1x 3,0x25; 1x 4,0x25; 1x 5,0x25; 1x 6,0x25; 1x 8,0x25 | |
| | | | **9502**<br>1x 105.0 | |
| | | | **9503**<br>1x 105.0 | |
| | | | **Hook and Loop Fastener Strip 70**<br>1x 50,0x70,0 | |

## Bicycle Set 9

A lot of bicycle tools in a small space. The sorting of the 9 stainless steel bits by profile and size allows quick access to the right tool. With one Wera Zyklop Mini 1 bit ratchet in a drop-forged solid steel design.

The fine toothing mechanism with 60 teeth allows a small return angle of 6° for precise working. The knurl allows fast screwdriving in cramped situations, when there is no space for ratcheting. Easy left/right switching.

Ergonomically shaped ratchet head and lever. With Take it easy tool finder with colour coding by size - to help you find the required tool quickly and easily.

- 10-piece Zyklop Mini set
- Mini ratchet suitable for direct mounting of ¼" nuts
- Drop-forged full steel design for torques exceeding 65 Nm
- Fine-pitched ratchet mechanism and small return angle of 6°
- Stainless Steel Bits

### Bicycle Set 9

| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 05**004177**001 | *220646* | | | 1 |
| | | | **8001 A**<br>1x ¼"x87,0 | |
| | | | **3851/1 TS PH**<br>1x PH 2x25 | |
| | | | **3867/1 TS TORX®**<br>1x TX 10x25; 1x TX 25x25 | |
| | | | **3840/1 TS**<br>1x 2,0x25; 1x 2,5x25; 1x 3,0x25; 1x 4,0x25; 1x 5,0x25; 1x 6,0x25 | |

## 8001 A Zyklop Mini 1 Bit Ratchet ¼" SB with ¼" drive

The Wera Mini ratchet. Simple operation, even with just one hand, in confined working spaces. Drop-forged, full-steel design and fine-pitched mechanism with 60 teeth that allows a small return angle of 6° for precise working.

The thumbwheel allows rapid fastening in confined situations when there is no space for ratcheting.

Easy left/right switchover. Ergonomically designed ratchet head and lever. Suitable for 1/4" bit and socket take-up.

- Suitable for direct take-up of bits with 1/4" hex head drive
- Drop-forged, full-steel design
- Torque of over 65 Nm
- Fine-pitched ratchet mechanism and small return angle of 6°
- Ideal for working in confined spaces

### 8001 A Zyklop Mini 1 Bit Ratchet ¼" SB with ¼" drive

| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 05**073230**001 | *144638* | | | 1 |
| | | | **8001 A** 1x 1/4"x87,0 | |
| | | | **870/1** 1x 1/4"x25 [1] | |

[1] With friction ball; for manual nut spinner sockets

## 8011 Zyklop Mini 4 Bit ratchet, 1/4"

- For bitholding screwdrivers with 1/4" bit mounting

### 8011 Zyklop Mini 4 Bit ratchet, 1/4"

| Code | EAN 4013288 | | mm | | | | | |
|---|---|---|---|---|---|---|---|---|
| 05**003662**001 | *234650* | 1/4" | 50,0 | | | | | 1 |

## 8005 Zyklop Mini 2 Ratchet

Zyklop Mini 2 for the direct take-up of special Wera Zyklop sockets. Combines filigree design with incredible robustness. For particularly rapid screwdriving even in confined working spaces. The Zyklop Mini 2 is the preferred choice whenever fastening with a power tool or conventional hand tool is impossible due to a lack of space.

- Direct attachment of special Zyklop sockets
- Small return angle of 6° for precise working
- Simple left/right switchover
- Ideal for confined working situations

### 8005 Zyklop Mini 2 Ratchet

| Code | EAN 4013288 | mm | | | | | | |
|---|---|---|---|---|---|---|---|---|
| 05**003660**001 | *179616* | 107 | | | | | | 1 |

## 8008 A Zyklop Mini 3 Ratchet with 1/4" drive

The Wera Zyklop Mini 3 ratchet for ¼" sockets. Simplest operation even with just one hand in confined screwdriving challenges. Drop-forged full steel design.

Fine tooth mechanism with 60 teeth allows a small return angle of 6° for precise work.

The knurled wheel allows fast screwdriving in tight spaces when there is no room for ratcheting. Simple left/right switching. Ergonomically shaped ratchet head and lever.

- Mini ratchet suitable for direct mounting of 1/4" nuts
- Drop-forged full steel design for torques exceeding 65 Nm
- Fine-pitched ratchet mechanism and small return angle of 6°
- Simple left/right switchover
- Ideal for working in confined spaces

### 8008 A Zyklop Mini 3 Ratchet with 1/4" drive

| | EAN | | | | | | | |
|---|---|---|---|---|---|---|---|---|
| Code | 4013288 | | mm | | | | | |
| 05**003793**001 | *211699* | 1/4" | 87,0 | | | | | 1 |

## 8790 FA Zyklop socket with 1/4" and Hexagon 11 drive

Zyklop socket with 1/4" and hex drive for manual jobs with a 1/4" ratchet.

### 8790 FA Zyklop socket with 1/4" and Hexagon 11 drive

| | EAN | | | | | | | |
|---|---|---|---|---|---|---|---|---|
| Code | 4013288 | mm | mm | mm | mm | mm | | |
| 05**003665**001 | *179623* | 4,0 | 9,5 | 6,4 | 11,8 | 18,0 | | 1 |
| 05**003666**001 | *179630* | 4,5 | 9,5 | 7,0 | 11,8 | 18,0 | | 1 |
| 05**003667**001 | *179647* | 5,0 | 9,5 | 7,6 | 11,8 | 18,0 | | 1 |
| 05**003668**001 | *179654* | 5,5 | 9,5 | 8,2 | 11,8 | 18,0 | | 1 |
| 05**003669**001 | *179661* | 6,0 | 9,5 | 9,2 | 11,8 | 18,0 | | 1 |
| 05**003670**001 | *183408* | 7,0 | 9,5 | 10,4 | 11,8 | 18,0 | | 1 |
| 05**003675**001 | *179678* | 8,0 | 9,5 | 11,5 | 11,8 | 18,0 | | 1 |
| 05**003690**001 | *179685* | 10,0 | 9,5 | 13,8 | 11,8 | 18,0 | | 1 |
| 05**003684**001 | *183415* | 12,0 | 9,5 | 16,8 | 11,8 | 18,0 | | 1 |
| 05**003685**001 | *179692* | 13,0 | 9,5 | 17,8 | 11,8 | 18,0 | | 1 |

Tool-Check PLUS 1
Wera
5.5
6
7
8
10
12
13
Wera

# Tool-Check

## The Tool-Check Modular system
## Combine & expand - always the perfect fit!

### Tool-Check Modular 1

Very compact 21-piece tool set.

One Kraftform 815/1 bitholding screwdriver, suitable for mounting bits with 1/4" external hexagon drive, one 8011 Zyklop Mini 4 bit ratchet (1/4"), also suitable for 1/4" sockets using the included 870/1 adapter (1/4" external hexagon to 1/4" external square head), one magnetic 899/4/1 bit holder for screwdriver machines, 13 bits with 1/4" external hexagon drive for Phillips-head screws (Phillips and Pozidriv), TORX®, hexagonal socket and slotted screws. BiTorsion (BTZ) for longer tool life, 4 Zyklop 8790 HMA sockets, 1/4".

In the compact Tool-Check Modular 1. Tools can be connected to other components of the Tool-Check Modular system using the rigid Tool-Check Modular adapter 9549 or the flexible Tool-Check Modular hinge 9550.

- Tool-Check Modular: individual combination of different Tool-Check Modular components
- Very compact 21-piece tool set for manual and machine-operated screwdriving
- Perfect for a wide variety of screw connections with ¼" ratchet, hand or machine
- 1/4" 8011 Zyklop Mini 4 bit ratchet for handles with 1/4" bit mounting
- Magnetic 899/4/1 K bit holder for 1/4" hex drive bits; and machine use
- 13 BiTorsion bits (BTZ) for cross recess (Phillips and Pozidriv), TORX®, slotted and hexagonal socket; 25 mm and 50 mm length
- 4x 8790 HMA sockets, 1/4"; one 870/1 adapter (1/4" external hexagon to 1/4" external square head)

### Tool-Check Modular 1

MODULAR | KRAFTFORM ERGONOMICS | ANTI ROLL-OFF | FULL STEEL | 6° FINE TOOTH | TAKE IT EASY TOOL FINDER

| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 05**049000**001 | *234230* | | | 1 |
| | | | **815/1**<br>1x 1/4"x78 | |
| | | | **8011 A**<br>1x 1/4"x50,0 | |
| | | | **870/1**<br>1x 1/4"x25 [1] | |
| | | | **899/4/1**<br>1x 1/4"x50 | |
| | | | **851/1 BTZ**<br>1x PH 1x25 | |
| | | | **851/4 BTZ**<br>1x PH 2x50 | |
| | | | **855/1 BTZ**<br>1x PZ 1x25 | |
| | | | **855/4 BTZ**<br>1x PZ 2x50 | |
| | | | **867/1 TORX® BTZ**<br>1x TX 10x25; 1x TX 15x25 | |
| | | | **867/4 TORX® BTZ**<br>1x TX 20x50; 1x TX 25x50 | |
| | | | **800/4 BTZ**<br>1x 0,8x5,5x50 | |
| | | | **840/1 BTZ**<br>1x 3,0x25; 1x 4,0x25; 1x 5,0x25; 1x 6,0x25 | |
| | | | **8790 HMA**<br>1x 7,0x23,0; 1x 8,0x23,0; 1x 10,0x23,0; 1x 13,0x23,0 | |

[1] With friction ball; for manual nut spinner sockets

## Tool-Check Modular Imperial 1

- 4x 8790 HMA sockets, 1/4", imperial sizes; one adapter 1/4" external hexagon to 1/4" external square head
- 9 BiTorsion bits (BTZ) for Phillips, TORX®, slotted and square head, 4 tough bits (Z) for hexagonal socket screws; 25 mm and 50 mm length

### Tool-Check Modular Imperial 1

| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 05**049001**001 | *234674* | | | 1 |
| | | | **815/1**<br>1x 1/4"x78 | |
| | | | **8011 A**<br>1x 1/4"x50,0 | |
| | | | **870/1**<br>1x 1/4"x25 [1] | |
| | | | **899/4/1**<br>1x 1/4"x50 | |
| | | | **851/4 BTZ**<br>1x PH 1x50; 1x PH 2x50 | |
| | | | **867/1 TORX® BTZ**<br>1x TX 10x25; 1x TX 15x25; 1x TX 20x25; 1x TX 25x25 | |
| | | | **800/4 BTZ**<br>1x 0,8x5,5x50 | |
| | | | **840/1 Z**<br>1x 3/32"x25; 1x 1/8"x25; 1x 5/32"x25; 1x 3/16"x25 | |
| | | | **868/4 BTZ**<br>1x #1x50; 1x #2x50 | |
| | | | **8790 HMA**<br>1x 3/8"x23,0; 1x 7/16"x23,0; 1x 1/2"x23,0; 1x 9/16"x23,0 | |

[1] With friction ball; for manual nut spinner sockets

## Tool-Check Modular L-keys Hex-Plus 1

Very compact 7-piece L-key set for hexagonal socket screws.

The Hex-Plus profile offers larger contact surfaces in the screw head. The notch effect is reduced to a minimum and the destruction of the screw head is almost eliminated. The thoroughly chrome-plated design guarantees high corrosion protection. All L-keys are easily accessible due to their laser-engraved size markings.

One adapter 9549 for Tool-Check Modular, which connects different Tool-Check Modular components.

In the compact Tool-Check Modular.

- L-key set for hexagonal socket screws; the Hex-Plus profile reduces cylindrical turning of hexagonal socket screws
- Chrome-plated hexagon L-keys for outstanding surface protection and long service life. High corrosion protection.
- Laser-engraved and thereby wear-resistant size markings on the L-keys
- Adapter 9549: Rigid component to connect further Tool-Check Modular products

### Tool-Check Modular L-keys Hex-Plus 1

| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 05**049003**001 | *234254* | | | 1 |
| | | | **950**<br>1x 1,5x45 [1]; 1x 2,0x50; 1x 2,5x56; 1x 3,0x63; 1x 4,0x70; 1x 5,0x80; 1x 6,0x90 | |
| | | | **9549 Adapter**<br>1x 10,5x47,0x16,5 | |

[1] Regular hexagon.

## Tool-Check Modular Micro 1

Very compact 21-piece tool set for precision mechanical couplings.

One Kraftform Micro 1014 bitholding screwdriver, suitable for mounting bits with 4 mm external hexagon drive, 20 bits with 4 mm external hexagon drive for Phillips-head screws (Phillips and Pozidriv), TORX®, hexagonal socket and slotted screws.

Tough for universal use, one adapter 9549, which connects different Tool-Check Modular components.

In the compact Tool-Check Modular Micro 1.

- Very compact 21-piece tool set for precision mechanical couplings
- Bitholding screwdriver for bits with 4 mm external hexagon drive
- Multi-component Kraftform Micro handle with anti-roll feature and rotating cap
- 20 bits (4 mm external hexagon drive) for Phillips-head (Phillips and Pozidriv), TORX®, hexagonal socket and slotted
- Adapter 9549: Rigid component to connect further Tool-Check Modular products

### Tool-Check Modular Micro 1

| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 05**049002**001 | *234247* | | | 1 |
| | | | **1014**<br>1x 4x80,0 | |
| | | | **851/0 Micro**<br>1x PH 000x30; 1x PH 00x30; 1x PH 0x30 [1]; 1x PH 1x30 | |
| | | | **855/0 Micro**<br>1x PZ 0x30; 1x PZ 1x30 | |
| | | | **867/0 Micro TORX®**<br>1x TX 3x30; 1x TX 4x30; 1x TX 5x30; 1x TX 6x30; 1x TX 8x30; 1x TX 10x30 | |
| | | | **840/0 Micro**<br>1x 0,9x30; 1x 1,3x30; 1x 1,5x30; 1x 2,0x30; 1x 2,5x30 | |
| | | | **800/0 Micro**<br>1x 0,3x1,5x30; 1x 0,40x2,5x30; 1x 0,50x3,0x30 | |
| | | | **9549 Adapter**<br>1x 10,5x47,0x16,5 | |

## Tool-Check Modular Set 1

Very compact tool set: Tool-Check Modular Set 1.

Includes: one Tool-Check Modular 1, one Tool-Check Modular Micro 1, one Tool-Check Modular L-key Hex-Plus 1, one adapter 9549 and one flexible hinge 9550 (adapter and hinge for connecting Tool-Check Modular products).

## Tool-Check Modular Set 1

| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 05**049020**001 | *234766* | | | 1 |
| | | | **1x Tool-Check Modular 1** | |
| | | | **815/1**<br>1x 1/4"x78 | |
| | | | **8011 A**<br>1x 1/4"x50.0 | |
| | | | **870/1**<br>1x 1/4"x25 [1] | |
| | | | **899/4/1**<br>1x 1/4"x50 | |
| | | | **851/1 BTZ**<br>1x PH 1x25 | |
| | | | **851/4 BTZ**<br>1x PH 2x50 | |
| | | | **855/1 BTZ**<br>1x PZ 1x25 | |
| | | | **855/4 BTZ**<br>1x PZ 2x50 | |
| | | | **867/1 TORX® BTZ**<br>1x TX 10x25; 1x TX 15x25 | |
| | | | **867/4 TORX® BTZ**<br>1x TX 20x50; 1x TX 25x50 | |
| | | | **800/4 BTZ**<br>1x 0.8x5.5x50 | |
| | | | **840/1 BTZ**<br>1x 3.0x25; 1x 4.0x25; 1x 5.0x25; 1x 6.0x25 | |
| | | | **8790 HMA**<br>1x 7.0x23.0; 1x 8.0x23.0; 1x 10.0x23.0; 1x 13.0x23.0 | |
| | | | **1x Tool-Check Modular Hex-Plus 1** | |
| | | | **950**<br>1x 1.5x45 [2]; 1x 2.0x50; 1x 2.5x56; 1x 3.0x63; 1x 4.0x70; 1x 5.0x80; 1x 6.0x90 | |
| | | | **1x Tool-Check Modular Micro 1** | |
| | | | **1014**<br>1x 4x80.0 | |
| | | | **851/0 Micro**<br>1x PH 000x30; 1x PH 00x30; 1x PH 0x30 [3]; 1x PH 1x30 | |
| | | | **855/0 Micro**<br>1x PZ 0x30; 1x PZ 1x30 | |
| | | | **867/0 Micro TORX®**<br>1x TX 3x30; 1x TX 4x30; 1x TX 5x30; 1x TX 6x30; 1x TX 8x30; 1x TX 10x30 | |
| | | | **840/0 Micro**<br>1x 0.9x30; 1x 1.3x30; 1x 1.5x30; 1x 2.0x30; 1x 2.5x30 | |
| | | | **800/0 Micro**<br>1x 0.3x1.5x30; 1x 0.40x2.5x30; 1x 0.50x3.0x30 | |
| | | | **1x 9550 Hinge** | |
| | | | 1x 67.5x91.0x22.0 | |
| | | | **1x 9549 Adapter** | |
| | | | 1x 10.5x47.0x16.5 | |

[1] With friction ball; for manual nut spinner sockets
[2] Regular hexagon
[3] Size 0 modified according to JCIS 0 (Japanese Camera Industrial Standard)

## Tool-Check Modular Set Imperial 1

| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 05**049025**001 | *234773* | | | 1 |
| | | | **1x Tool-Check Modular Imperial 1** | |
| | | | **815/1**<br>1x 1/4"x78 | |
| | | | **8011 A**<br>1x 1/4"x50.0 | |
| | | | **870/1**<br>1x 1/4"x25 [1] | |
| | | | **899/4/1**<br>1x 1/4"x50 | |
| | | | **851/4 BTZ**<br>1x PH 1x50; 1x PH 2x50 | |
| | | | **867/1 TORX® BTZ**<br>1x TX 10x25; 1x TX 15x25; 1x TX 20x25; 1x TX 25x25 | |
| | | | **800/4 BTZ**<br>1x 0.8x5.5x50 | |
| | | | **840/1 Z**<br>1x 3/32"x25; 1x 1/8"x25; 1x 5/32"x25; 1x 3/16"x25 | |
| | | | **868/4 BTZ**<br>1x #1x50; 1x #2x50 | |
| | | | **8790 HMA**<br>1x 3/8"x23.0; 1x 7/16"x23.0; 1x 1/2"x23.0; 1x 9/16"x23.0 | |
| | | | **1x Tool-Check Modular Micro 1** | |
| | | | **1014**<br>1x 4x80.0 | |
| | | | **851/0 Micro**<br>1x PH 000x30; 1x PH 00x30; 1x PH 0x30 [2]; 1x PH 1x30 | |
| | | | **855/0 Micro**<br>1x PZ 0x30; 1x PZ 1x30 | |
| | | | **867/0 Micro TORX®**<br>1x TX 3x30; 1x TX 4x30; 1x TX 5x30; 1x TX 6x30; 1x TX 8x30; 1x TX 10x30 | |
| | | | **840/0 Micro**<br>1x 0.9x30; 1x 1.3x30; 1x 1.5x30; 1x 2.0x30; 1x 2.5x30 | |
| | | | **800/0 Micro**<br>1x 0.3x1.5x30; 1x 0.40x2.5x30; 1x 0.50x3.0x30 | |
| | | | **1x Tool-Check Modular Hex-Plus 1** | |
| | | | **950**<br>1x 1.5x45 [3]; 1x 2.0x50; 1x 2.5x56; 1x 3.0x63; 1x 4.0x70; 1x 5.0x80; 1x 6.0x90 | |
| | | | **1x 9550 Hinge** | |
| | | | 1x 67.5x91.0x22.0 | |
| | | | **1x 9549 Adapter** | |
| | | | 1x 10.5x47.0x16.5 | |

[1] With friction ball; for manual nut spinner sockets
[2] Regular hexagon
[3] Size 0 modified according to JCIS 0 (Japanese Camera Industrial Standard)

## 9549 Adapter for Tool-Check Modular

- Tool-Check Modular: individual combination of different Tool-Check Modular components
- The adapter allows for a compact connection of two Tool-Check Modular components

### 9549 Adapter for Tool-Check Modular

| Code | EAN 4013288 | mm | mm | mm | | | | |
|---|---|---|---|---|---|---|---|---|
| 05**049005**001 | *234681* | 10,5 | 47,0 | 16,5 | | | | 1 |

## 9550 Hinge for Tool-Check Modular

- Tool-Check Modular: individual combination of different Tool-Check Modular components
- Flexible connection of two Tool-Check Modular components with the hinge
- The hinge allows compact folding up of two Tool-Check Modular components

### 9550 Hinge for Tool-Check Modular

| Code | EAN 4013288 | mm | mm | mm | | | | |
|---|---|---|---|---|---|---|---|---|
| 05**049004**001 | *234667* | 67,5 | 91,0 | 22,0 | | | | 1 |

## Tool-Check PLUS 1

39-piece set. Very compact tool set for manual and machine use.

The green locking elements of the Tool-Check secure the tools during transport.

Includes one 1/4" bit ratchet in drop-forged solid steel design. Fine toothing mechanism (60 teeth) for a small return angle of 6° for precise working. Easy clockwise/counterclockwise switching. Ergonomically shaped ratchet head and lever. 1/4" sockets can also be used with the Wera 870/1 adapter (1/4" external hexagon to 1/4" external square head) included in the set.

7 Zyklop sockets (1/4") for manual and machine-operated tools; with ball stop groove. Knurling at the rear end for manageability during manual screwdriving. With Take it easy tool finder: colour coding by size – for quick and easy identification of the required tool. Made of matt chrome-plated chrome-vanadium.

28 bits, BTZ and BTH design with BiTorsion zone (prevents the bit from breaking prematurely) and Take it easy tool finder: colour coding by profile and size stamping, tough design (Z) for universal use, Phillips and Pozidriv, TORX®, TORX® BO, slotted and hexagonal socket. In the very compact, functional Tool-Check.

- Very compact 39-piece tool set for manual and machine use
- Perfect for a wide variety of screw connections with Zyklop Mini with 1/4" bit mounting, bitholding screwdriver or bit holder
- Green locking components to secure the tools
- Ideal for mobile use
- 1/4" bit ratchet, Kraftform bitholding screwdriver, BiTorsion bits (BTZ and BTH), Rapidaptor holder, adapter and 1/4" sockets
- Use of 1/4" sockets also possible with the Wera adaptor 870/1
- Take it easy tool finder system

### Tool-Check PLUS 1

| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 050**49055**001 | *234896* | | | 1 |
| | | | **8001 A**<br>1x 1/4"x87,0 | |
| | | | **813**<br>1x 1/4"x78 | |
| | | | **889/4/1 K**<br>1x 1/4"x50 | |
| | | | **870/1**<br>1x 1/4"x25 [1] | |
| | | | **851/1 BTZ**<br>2x PH 1x25; 3x PH 2x25; 1x PH 3x25 | |
| | | | **855/1 BTH**<br>1x PZ 1x25; 3x PZ 2x25; 1x PZ 3x25 | |
| | | | **867/1 TORX® BTZ**<br>1x TX 10x25; 1x TX 15x25; 1x TX 20x25; 1x TX 25x25; 1x TX 30x25; 1x TX 40x25 | |
| | | | **867/1 Z TORX® BO**<br>1x TX 10x25; 1x TX 15x25; 1x TX 20x25; 1x TX 25x25; 1x TX 30x25 | |
| | | | **800/1 BTZ**<br>1x 1,0x5,5x25 | |
| | | | **840/1 BTZ**<br>1x 3,0x25; 1x 4,0x25; 1x 5,0x25; 1x 6,0x25 | |
| | | | **840/1 Z**<br>1x 8,0x25 | |
| | | | **8790 HMA**<br>1x 5,5x23,0; 1x 6,0x23,0; 1x 7,0x23,0; 1x 8,0x23,0; 1x 10,0x23,0; 1x 12,0x23,0; 1x 13,0x23,0 | |

[1] With friction ball; for manual nut spinner sockets

## Tool-Check PLUS 2

- With Square-Plus bits (Robertson)

### Tool-Check PLUS 2

| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 05**049056**001 | *234902* | | | 1 |
| | | | **8001 A**<br>1x 1/4"x87,0 | |
| | | | **889/4/1 K**<br>1x 1/4"x50 | |
| | | | **813**<br>1x 1/4"x78 | |
| | | | **870/1**<br>1x 1/4"x25 [1] | |
| | | | **851/1 BTZ**<br>2x PH 1x25; 3x PH 2x25; 1x PH 3x25 | |
| | | | **867/1 TORX® BTZ**<br>1x TX 10x25; 1x TX 15x25; 1x TX 20x25;<br>1x TX 25x25; 1x TX 30x25; 1x TX 40x25 | |
| | | | **867/1 Z TORX® BO**<br>1x TX 10x25; 1x TX 15x25; 1x TX 20x25;<br>1x TX 25x25; 1x TX 30x25 | |
| | | | **800/1 BTZ**<br>1x 1,0x5,5x25 | |
| | | | **840/1 BTZ**<br>1x 3,0x25; 1x 4,0x25; 1x 5,0x25; 1x 6,0x25 | |
| | | | **840/1 Z**<br>1x 8,0x25 | |
| | | | **868/1 Z**<br>1x # 1x25; 3x # 2x25; 1x # 3x25 | |
| | | | **8790 HMA**<br>1x 5,5x23,0; 1x 6,0x23,0; 1x 7,0x23,0;<br>1x 8,0x23,0; 1x 10,0x23,0; 1x 12,0x23,0;<br>1x 13,0x23,0 | |

[1] With friction ball; for manual nut spinner sockets

## Tool-Check PLUS Imperial 1

- With Square-Plus bits (Robertson)
- Sockets 8790 HMA , 1/4", imperial sizes

### Tool-Check PLUS Imperial 1

| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 05**049060**001 | *234919* | | | 1 |
| | | | **8001 A**<br>1x 1/4"x87,0 | |
| | | | **889/4/1 K**<br>1x 1/4"x50 | |
| | | | **813**<br>1x 1/4"x78 | |
| | | | **870/1**<br>1x 1/4"x25 [1] | |
| | | | **851/1 BTZ**<br>2x PH 1x25; 3x PH 2x25; 1x PH 3x25 | |
| | | | **867/1 TORX® BTZ**<br>1x TX 10x25; 1x TX 15x25; 1x TX 20x25;<br>1x TX 25x25; 1x TX 30x25; 1x TX 40x25 | |
| | | | **867/1 Z TORX® BO**<br>1x TX 10x25; 1x TX 15x25; 1x TX 20x25;<br>1x TX 25x25; 1x TX 30x25 | |
| | | | **800/1 BTZ**<br>1x 1,0x5,5x25 | |
| | | | **840/1 Z**<br>1x 3/32"x25; 1x 1/8"x25;1x 5/32"x25; 1x 3/16"x25;<br>1x 1/4"x2 | |
| | | | **868/1 Z**<br>1x # 1x25; 3x # 2x25; 1x # 3x25 | |
| | | | **8790 HMA**<br>1x 3/16"x23,0; 1x 1/4"x23,0; 1x 5/16"x23,0;<br>1x 11/32"x23,0; 1x 3/8"x23,0; 1x 7/16"x23,0;<br>1x 1/2"x23,0 | |

[1] With friction ball; for manual nut spinner sockets

## Bicycle Set 3

Bike tool set with ratchet, bits, sockets and a bitholding screwdriver in the very compact Tool-Check. Perfect as a universal companion for a multitude of screwdriving applications.

Premium bitholding screwdriver with Kraftform Plus handle for comfortable ergonomic screwdriving, avoiding blisters and calluses. Hard handle zones for high working speeds, soft handle zones for a high torque transfer.

Bit ratchet for quick working when screwdriving with a machine or conventional hand tool is not possible due to space constraints. Rapid reversing from clockwise to counterclockwise rotation and vice versa via the reversing lever. The knurling on the ratchet head allows for quick rotation (with the thumb). Easiest operation, even with just one hand. Ergonomic ratchet head/lever: Kraftform geometry with perfectly shaped contact surfaces for the fingers. Smallest possible tool design thanks to the direct bit mounting in the ratchet head, perfect for low working heights. Small return angle of 6° for precise working. Robust drop-forged solid steel design. Torques of over 65 Nm.

The Rapidaptor bitholding screwdriver with fast-rotating sleeve: Can be used as an extension, for lightning-fast bit changes of even the smallest bit sizes with just one hand.

Bits (BTZ) with BiTorsion zone to cushion peak loads for universal use; tough bits (Z) for universal use.

Hand and machine sockets for nearly all applications. With Take it easy tool finder: colour coding by size – for quick and easy identification of the required tool. Slip-proof for easy grip even with oily hands. With ball stop groove. For external hexagon bolts and screws. Made of matt chrome-plated chrome-vanadium.

With the glass fibre reinforced plastic tyre levers, the tyres can be safely levered off the rim without damaging the rim.

Take a selection of tools out and about with you in the included Bit-Check. With a robust tool pouch.

- Compact 41-piece screwdriving tool set for bicycle operations, also for mobile use
- Including two tyre levers with additional functionality - allowing the take up of 1/4" screwdriver bits

### Bicycle Set 3

| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 05**004187**001 | **234926** | | | **1** |
| | | | **8001 A**<br>1x 1/4"x87,0 | |
| | | | **813**<br>1x 1/4"x78 | |
| | | | **889/4/1 K**<br>1x 1/4"x50 | |
| | | | **870/1**<br>1x 1/4"x25 [1] | |
| | | | **851/1 BTZ**<br>1x PH 1x25; 2x PH 2x25; 1x PH 3x25 | |
| | | | **867/1 TORX® BTZ**<br>1x TX 10x25; 1x TX 15x25; 2x TX 20x25; 2x TX 25x25; 1x TX 27x25; 1x TX 30x25; 1x TX 40x25 | |
| | | | **800/1 BTZ**<br>1x 0,5x4,0x25; 1x 0,6x4,5x25; 1x 1,0x5,5x25 | |
| | | | **840/1 BTZ**<br>1x 2,0x25; 1x 2,5x25; 1x 3,0x25; 1x 4,0x25; 1x 5,0x25; 1x 6,0x25 | |
| | | | **840/1 Z**<br>1x 8,0x25 | |
| | | | **842/1 Z**<br>1x 2,5x25; 1x 3,0x25; 1x 4,0x25; 1x 5,0x25; 1x 6,0x25 | |
| | | | **8790 HMA**<br>1x 5,5x23,0; 1x 6,0x23,0; 1x 7,0x23,0; 1x 8,0x23,0; 1x 10,0x23,0; 1x 13,0x23,0; 1x 15,0x23,0 | |
| | | | **9502**<br>1x 105,0 | |
| | | | **9503**<br>1x 105,0 | |
| | | | **Hook and Loop Fastener Strip 120**<br>1x 50,0x120,0 | |

[1] With friction ball; for manual nut spinner sockets

## Bicycle Set 3 A

Bike tool set with ratchet, bits, sockets and a bitholding screwdriver in the very compact Tool-Check. Perfect as a universal companion for a multitude of screwdriving applications. An added extra: The set comes with two pouches– a larger pouch for the complete tool set and a small soft pouch to store the tools safely in your shirt pocket when you are on the go. The soft pouch has additional loops for holding two $CO_2$ cartridges (the cartridges are not included).

With useful bike tools (chain riveter and chain fastener) to repair bike chains.

Premium bitholding screwdriver with Kraftform Plus handle for comfortable ergonomic screwdriving.

Bit ratchet for quick working when screwdriving with a machine or conventional hand tool is not possible due to space constraints. Rapid reversing from clockwise to counterclockwise rotation and vice versa via the reversing lever. The knurling on the ratchet head allows for quick rotation (with the thumb). Easiest operation, even with just one hand. Ergonomic ratchet head/lever: Kraftform geometry with perfectly shaped contact surfaces for the fingers. The direct bit mounting in the ratchet head provides small tool design for low working heights. Small return angle of 6° for precise working. Robust drop-forged solid steel design. Torques of over 65 Nm.

The Rapidaptor bitholding screwdriver with fast-rotating sleeve: Can be used as an extension, for lightning-fast bit changes for even very small bit sizes with just one hand and without any extra tools.

Bits (BTZ) with BiTorsion zone to cushion peak loads for universal use; tough bits (Z) for universal use.

Zyklop sockets with colour coding by size as well as size stamping – to help you find the required socket quickly and easily. Slip-proof thanks to the knurling at the rear end for easy handling even with oily hands. With ball stop groove. For external hexagon bolts and screws. Made of matt chrome-plated chrome-vanadium.

With the glass fibre reinforced plastic tyre levers, the tyres can be safely levered off the rim without damaging the rim. One tyre lever with valve ejector, one tyre lever with ¼" bit mounting.

- Compact 38-piece bike tool set in a pouch for the workshop and on tour
- With a small soft pouch to take individual tools with you
- With chain riveter and chain fastener with exchangeable rivet pin for opening and closing bicycle chains. Suitable for single-speed chains, up to 12-speed

### Bicycle Set 3 A

| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 05**004188**001 | *234933* | | | 1 |
| | | | **8001 A**<br>1x ¼"x87,0 | |
| | | | **813**<br>1x ¼"x78 | |
| | | | **3899/4/1**<br>1x ¼"x100 | |
| | | | **889/4/1 K**<br>1x ¼"x50 | |
| | | | **870/1**<br>1x ¼"x25 [1] | |
| | | | **851/1 BTZ**<br>1x PH 1x25; 1x PH 2x25 | |
| | | | **867/1 TORX® BTZ**<br>1x TX 10x25; 1x TX 15x25; 1x TX 20x25; 1x TX 25x25; 1x TX 27x25; 1x TX 30x25 | |
| | | | **800/1 BTZ**<br>1x 0,5x4,0x25; 1x 0,6x4,5x25 | |
| | | | **840/1 BTZ**<br>1x 2,0x25; 1x 2,5x25; 1x 3,0x25; 1x 4,0x25; 1x 5,0x25; 1x 6,0x25 | |
| | | | **840/1 Z**<br>1x 8,0x25 | |
| | | | **842/1 Z**<br>1x 2,5x25; 1x 3,0x25; 1x 4,0x25; 1x 5,0x25; 1x 6,0x25 | |
| | | | **8790 HMA**<br>1x 5,5x23,0; 1x 6,0x23,0; 1x 8,0x23,0; 1x 9,0x23,0; 1x 10,0x23,0; 1x 13,0x23,0; 1x 15,0x23,0 | |
| | | | **9502**<br>1x 105,0 | |
| | | | **9503**<br>1x 105,0 | |
| | | | **9513 Chain Tool** | |
| | | | **9512 Chain-Hook** | |
| | | | **9481**<br>1x 203x85 | |
| | | | **9480**<br>1x 90,0x135,0 | |
| | | | **Hook and Loop Fastener Strip 120**<br>1x 50,0x120,0 | |

[1] With friction ball; for manual nut spinner sockets

## Tool-Check 1

38-piece set. Very compact tool set for manual and machine use. The green locking elements of the Tool-Check secure the tools during transport.

Includes one 1/4" bit ratchet in drop-forged solid steel design. Fine toothing mechanism (60 teeth) for a small return angle of 6° for precise working. Easy clockwise/counterclockwise switching. Ergonomically shaped ratchet head and lever. 1/4" sockets can also be used with the Wera 870/1 adapter (1/4" external hexagon to 1/4" external square head) included in the set.

7 Zyklop sockets (1/4", for manual and machine-operated tools); with ball stop groove. Knurling at the rear end for manageability during manual screwdriving. With Take it easy tool finder: colour coding by size – for quick and easy identification of the required tool. Made of matt chrome-plated chrome-vanadium.

28 tough bits (Phillips and Pozidriv, TORX®, TORX® BO, slotted and hexagonal socket) for universal use. In the very compact, functional Tool-Check.

- Very compact 38-piece tool set for manual and machine use

## Tool-Check 1

| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 05**049050**001 | *234889* | | | 1 |
| | | | **8001 A**<br>1x 1/4"x87,0 | |
| | | | **889/4/1 K**<br>1x 1/4"x50 | |
| | | | **870/1**<br>1x 1/4"x25 [1] | |
| | | | **851/1 TZ**<br>2x PH 1x25; 3x PH 2x25; 1x PH 3x25 | |
| | | | **855/1 TH**<br>1x PZ 1x25; 3x PZ 2x25; 1x PZ 3x25 | |
| | | | **867/1 TZ TORX®**<br>1x TX 10x25; 1x TX 15x25; 1x TX 20x25; 1x TX 25x25; 1x TX 30x25; 1x TX 40x25 | |
| | | | **867/1 Z TORX® BO**<br>1x TX 10x25; 1x TX 15x25; 1x TX 20x25; 1x TX 25x25; 1x TX 30x25 | |
| | | | **800/1 TZ**<br>1x 1,0x5,5x25 | |
| | | | **840/1 Z**<br>1x 3,0x25; 1x 4,0x25; 1x 5,0x25; 1x 6,0x25; 1x 8,0x25 | |
| | | | **8790 HMA**<br>1x 5,5x23,0; 1x 6,0x23,0; 1x 7,0x23,0; 1x 8,0x23,0; 1x 10,0x23,0; 1x 12,0x23,0; 1x 13,0x23,0 | |

[1] With friction ball; for manual nut spinner sockets

## Tool-Check Automotive 1

| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 05**049065**001 | *234827* | | | 1 |
| | | | **8001 A**<br>1x 1/4"x87,0 | |
| | | | **889/4/1 K**<br>1x 1/4"x50 | |
| | | | **870/1**<br>1x 1/4"x25 [1] | |
| | | | **851/1 TZ**<br>1x PH 1x25; 1x PH 2x25; 1x PH 3x25 | |
| | | | **867/1 TZ TORX®**<br>1x TX 10x25; 1x TX 15x25; 1x TX 20x25; 1x TX 25x25; 1x TX 30x25; 1x TX 40x25 | |
| | | | **867/1 Z TORX® BO**<br>1x TX 10x25; 1x TX 15x25; 1x TX 20x25; 1x TX 25x25; 1x TX 30x25 | |
| | | | **800/1 TZ**<br>1x 1,0x5,5x25 | |
| | | | **840/1 Z**<br>1x 3,0x25; 1x 4,0x25; 1x 5,0x25; 1x 6,0x25; 1x 8,0x25 | |
| | | | **873/1 Five Lobe**<br>1x 20x25; 1x 25x25; 1x 27x25; 1x 30x25 | |
| | | | **860/1 XZN**<br>1x M 4x25; 1x M 5x25; 1x M 6x25; 1x M 8x25 | |
| | | | **8790 HMA**<br>1x 5,5x23,0; 1x 6,0x23,0; 1x 7,0x23,0; 1x 8,0x23,0; 1x 10,0x23,0; 1x 12,0x23,0; 1x 13,0x23,0 | |

[1] With friction ball; for manual nut spinner sockets

### Tool-Check Combi 1

40-piece set. Very compact tool set for manual and machine use. The green locking components of the Tool-Check secure the tools during transport.

Includes one 1/4" bit ratchet in drop-forged solid steel design. Fine toothing mechanism (60 teeth) for a small return angle of 6° for precise working. Easy clockwise/counterclockwise switching. Ergonomically shaped ratchet head and lever. 1/4" sockets can also be used with the Wera 870/1 adapter (1/4" external hexagon to 1/4" external square head) included in the set.

7 Zyklop sockets (1/4") for manual and machine-operated tools; with ball stop groove. Knurling at the rear end for manageability during manual screwdriving. With Take it easy tool finder: colour coding by size - for quick and easy identification of the required tool. Made of matt chrome-plated chrome-vanadium.

28 bits, BTZ and BTH design with BiTorsion zone (prevents the bit from breaking prematurely) and Take it easy toolfinder: colour coding by profile and size, tough design (Z) for universal use, Phillips and Pozidriv, TORX®, TORX® BO, slotted and hexagonal socket.

1x KNIPEX Cobra® 87 01 125 high-tech water pump pliers. In the very compact, functional Tool-Check. One robust pouch.

- Very compact 40-piece tool set for manual and machine use
- 1x KNIPEX Cobra® 87 01 125 high-tech water pump pliers

## Tool-Check Combi 1

| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 05**049070**001 | *235060* | | | 1 |
| | | | **8001 A**<br>1x 1/4"x87,0 | |
| | | | **813**<br>1x 1/4"x78 | |
| | | | **889/4/1 K**<br>1x 1/4"x50 | |
| | | | **870/1**<br>1x 1/4"x25 [1] | |
| | | | **851/1 BTZ**<br>2x PH 1x25; 3x PH 2x25; 1x PH 3x25 | |
| | | | **855/1 BTH**<br>1x PZ 1x25; 3x PZ 2x25; 1x PZ 3x25 | |
| | | | **867/1 TORX® BTZ**<br>1x TX 10x25; 1x TX 15x25; 1x TX 20x25;<br>1x TX 25x25; 1x TX 30x25; 1x TX 40x25 | |
| | | | **867/1 Z TORX® BO**<br>1x TX 10x25; 1x TX 15x25; 1x TX 20x25;<br>1x TX 25x25; 1x TX 30x25 | |
| | | | **800/1 BTZ**<br>1x 1,0x5,5x25 | |
| | | | **840/1 BTZ**<br>1x 3,0x25; 1x 4,0x25; 1x 5,0x25; 1x 6,0x25 | |
| | | | **840/1 Z**<br>1x 8,0x25 | |
| | | | **8790 HMA**<br>1x 5,5x23,0; 1x 6,0x23,0; 1x 7,0x23,0;<br>1x 8,0x23,0; 1x 10,0x23,0; 1x 12,0x23,0;<br>1x 13,0x23,0 | |
| | | | **KNIPEX Cobra®**<br>High-Tech Water Pump Pliers 87 01 125 | |

[1] With friction ball; for manual nut spinner sockets

Wera
Wera
A TOOL REBEL

# Joker
# Wrenches & Spanners

## Joker - Can.Do.Everything.Better.

High quality, metric, combination ratchet wrench by Wera. Everything that a wrench has to be able to do. And a whole lot more. Faster, better, stylish. Yes, a real Joker. The new generation of combination ratchet wrenches.

Suitable for hexagon socket screws, bolts or nuts. Comes with holding function, thanks to the metal plate in the jaw, which reduces the risk of dropping nuts and bolts. The replaceable metal plate in the jaw secures nuts and bolts with its extra hard teeth and reduces the danger of slipping.

The integrated limit stop prevents any slipping around the bolt head and allows higher torque to be applied. The double-hex geometry makes for a positive connection with nuts or bolts and reduces the risk of slipping. A return angle of only 30° at the open end prevents any time consuming flipping of the wrench. The ratchet mechanism at the ring end, with an exceptional, fine-tooth mechanism – 80 teeth in all – enables flexibility even in very confined working spaces.

The specially forged geometry ensures high torque transfer and strength. The ratchet is manufactured out of high performance chrome molybdenum steel with nickel-chrome coating for high corrosion protection. Take it easy Tool Finder with colour coding according to sizes.

- Practical holding function thanks to the metal plate in the jaw
- Limit stop prevents any slipping
- The double-hex geometry reduces the risk of slipping
- Return angle of only 30°
- Take it easy tool finder with colour coding according to sizes

### 6000 Joker Ratcheting combination wrenches

| | EAN | | | | | | | |
|---|---|---|---|---|---|---|---|---|
| Code | 4013288 | | mm | mm | mm | mm | mm | |
| 05**073268**001 | *167309* | | 8 | 144 | 20 | 5,5 | 18 | 3 |
| 05**073270**001 | *164360* | | 10 | 159 | 22 | 5,5 | 21 | 3 |
| 05**073271**001 | *167316* | | 11 | 165 | 25 | 6,3 | 22 | 3 |
| 05**073272**001 | *167323* | | 12 | 170,7 | 26,3 | 6,6 | 25 | 3 |
| 05**073273**001 | *164377* | | 13 | 177 | 27,3 | 7 | 25 | 3 |
| 05**073274**001 | *167330* | | 14 | 188 | 29,3 | 7,5 | 28 | 3 |
| 05**073275**001 | *167347* | | 15 | 200 | 32,3 | 7,8 | 28,5 | 3 |
| 05**073276**001 | *167392* | | 16 | 212 | 35 | 8,2 | 32,7 | 3 |
| 05**073277**001 | *164384* | | 17 | 224 | 37,2 | 8,5 | 32,7 | 3 |
| 05**073278**001 | *167408* | | 18 | 235 | 39 | 9 | 33,8 | 3 |
| 05**073279**001 | *164391* | | 19 | 246 | 42 | 9,5 | 34,8 | 3 |

### 6000 Joker Ratcheting combination wrenches, Imperial

| | EAN | | | | | | | |
|---|---|---|---|---|---|---|---|---|
| Code | 4013288 | | | mm | mm | mm | mm | |
| 05**073280**001 | *167354* | | 5/16" | 144 | 20 | 5,5 | 18 | 3 |
| 05**073281**001 | *167361* | | 3/8" | 159 | 22 | 5,5 | 21 | 3 |
| 05**073282**001 | *167378* | | 7/16" | 165 | 25 | 6,3 | 22 | 3 |
| 05**073283**001 | *167385* | | 1/2" | 177 | 27,3 | 7 | 25 | 3 |
| 05**073284**001 | *167415* | | 9/16" | 188 | 29,3 | 7,5 | 28 | 3 |
| 05**073285**001 | *167422* | | 5/8" | 212 | 35 | 8,2 | 32,7 | 3 |
| 05**073286**001 | *167439* | | 11/16" | 235 | 39 | 9 | 33,8 | 3 |
| 05**073287**001 | *167446* | | 3/4" | 246 | 42 | 9,5 | 34,8 | 3 |

## 9630 Magnetic rail 6000 Joker 1 Ratcheting combination wrenches set

- 11-piece set
- With its strong magnet, the rail holds securely to metal surfaces. It can also be bolted to the wall
- The clips hold the tools perfectly

### 9630 Magnetic rail 6000 Joker 1 Ratcheting combination wrenches set

| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 050**20014**001 | *228949* | | | 1 |
| | | | **6000 Joker**<br>1x 8x144; 1x 10x159; 1x 11x165; 1x 12x170,7; 1x 13x177; 1x 14x188; 1x 15x200; 1x 16x212; 1x 17x224; 1x 18x235; 1x 19x246 | |
| | | | **9610**<br>1x 30,0x370,0 | |

## 9631 Magnetic rail 6000 Joker 2 Ratcheting combination wrenches set

- 5-piece set

### 9631 Magnetic rail 6000 Joker 2 Ratcheting combination wrenches set

| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 050**20015**001 | *229847* | | | 1 |
| | | | **6000 Joker**<br>1x 8x144; 1x 10x159; 1x 13x177; 1x 17x224; 1x 19x246 | |
| | | | **9610**<br>1x 30,0x370,0 | |

## 9632 Magnetic rail 6000 Joker Imperial 1 Ratcheting combination wrenches set

- 8-piece set

### 9632 Magnetic rail 6000 Joker Imperial 1 Ratcheting combination wrenches set

| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 050**20016**001 | *229861* | | | 1 |
| | | | **6000 Joker Imperial**<br>1x $^{5}/_{16}$"x144; 1x $^{3}/_{8}$"x159; 1x $^{7}/_{16}$"x165; 1x $^{1}/_{2}$"x177; 1x $^{9}/_{16}$"x188; 1x $^{5}/_{8}$"x212; 1x $^{11}/_{16}$"x235; 1x $^{3}/_{4}$"x246 | |
| | | | **9610**<br>1x 30,0x370,0 | |

## 6000 Joker 11 Set 1 of ratcheting combination wrenches

- In robust pouch

### 6000 Joker 11 Set 1 of ratcheting combination wrenches

| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 05**020013**001 | *167521* | | | 1 |
| | | | **6000 Joker**<br>1x 8x144; 1x 10x159; 1x 11x165; 1x 12x170,7; 1x 13x177; 1x 14x188; 1x 15x200; 1x 16x212; 1x 17x224; 1x 18x235; 1x 19x246 | |

## 6000 Joker 8 Imperial Set 1 Set of ratcheting combination wrenches, Imperial

- In robust pouch

### 6000 Joker 8 Imperial Set 1 Set of ratcheting combination wrenches, Imperial

| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 05**020012**001 | *167514* | | | 1 |
| | | | **6000 Joker Imperial**<br>1x $^{5}/_{16}$"x144; 1x $^{3}/_{8}$"x159; 1x $^{7}/_{16}$"x165; 1x $^{1}/_{2}$"x177; 1x $^{9}/_{16}$"x188; 1x $^{5}/_{8}$"x212; 1x $^{11}/_{16}$"x235; 1x $^{3}/_{4}$"x246 | |

## 6000/6002 Joker 6 Set 1 Set of ratcheting combination / double open-ended wrenches

- The Joker double open-ended wrench is ideally suited for locking down nuts and bolts.
- In robust pouch

### 6000/6002 Joker 6 Set 1 Set of ratcheting combination / double open-ended wrenches

| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 05**020022**001 | *173034* | | | 1 |
| | | | **6000 Joker**<br>1x 10x159; 1x 13x177; 1x 17x224; 1x 19x246 | |
| | | | **6002 Joker Double**<br>1x 10x13x167; 1x 17x19x235 | |

## 6000 Joker 4 Set 1 Set of ratcheting combination wrenches

- In robust pouch

### 6000 Joker 4 Set 1 Set of ratcheting combination wrenches

| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 05**073290**001 | *164407* | | | 1 |
| | | | **6000 Joker**<br>1x 10x159; 1x 13x177; 1x 17x224; 1x 19x246 | |

## 6000 Joker 4 Imperial Set 1 Set of ratcheting combination wrenches, Imperial

- In robust pouch

### 6000 Joker 4 Imperial Set 1 Set of ratcheting combination wrenches, Imperial

| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 05**073295**001 | *167460* | | | 1 |
| | | | **6000 Joker Imperial**<br>1x 7/16"x165; 1x 1/2"x177; 1x 9/16"x188; 1x 3/4"x246 | |
| | | | **Hook and Loop Fastener Strip 120**<br>1x 50,0x120,0 | |

## 6001 Joker Switch

Joker ratcheting combination wrenches with angled ratchet head and switch lever. The metal plate in the jaw provides for the holding function which reduces the risk of losing nuts and bolts.

The integrated limit stop can prevent any slipping from the bolt head downwards and enables higher torque to be applied.

The exchangeable metal plate in the jaw securely holds nuts and bolts with its extra hard teeth and reduces the risk of slipping.

The double-hex geometry delivers a very positive connection with nuts or bolts and again provides for a lower risk of any slipping. The low return angle of only 30° at the jaw end avoids any time-consuming flipping of the wrench when fastening.

The reversible ratchet mechanism at the ring end with its fine toothing (80 teeth) ensures great flexibility even in confined spaces. Audibly precise ratchet mechanism.

Additionally, the robust two-piece locking element provides for an extreme stability. Comes with a 15° angled ratchet end for secure work even at high torque. The special forged geometry allows for high torque transfer and high flexural rigidity. Manufactured out of high-performance chrome-molybdenum steel with a nickel-chromium coating for high corrosion protection.

With Take it easy tool finder: colour coding according to size.

- Practical holding function thanks to the metal plate in the jaw
- Limit stop prevents any slipping
- Very fine toothing and robust locking element
- Ratchet end angled by 15°
- Take it easy tool finder with colour coding according to sizes

### 6001 Joker Switch Ratcheting combination wrenches, with switch lever

| Code | EAN 4013288 | | mm | mm | mm | mm | mm | |
|---|---|---|---|---|---|---|---|---|
| 05**020064**001 | *184696* | | 8 | 144 | 20,3 | 5,5 | 18 | 3 |
| 05**020065**001 | *183903* | | 10 | 159 | 23 | 5,5 | 21,5 | 3 |
| 05**020066**001 | *183910* | | 11 | 165 | 24,3 | 6,3 | 22 | 3 |
| 05**020067**001 | *183927* | | 12 | 171 | 26,3 | 6,6 | 25 | 3 |
| 05**020068**001 | *184702* | | 13 | 179 | 27,3 | 7 | 26 | 3 |
| 05**020069**001 | *184719* | | 14 | 187 | 30 | 7,5 | 28 | 3 |
| 05**020070**001 | *184726* | | 15 | 199 | 32 | 7,8 | 28,8 | 3 |
| 05**020071**001 | *184733* | | 16 | 213 | 35 | 8,2 | 31,7 | 3 |
| 05**020072**001 | *184740* | | 17 | 225 | 37 | 8,5 | 33 | 3 |
| 05**020073**001 | *184757* | | 18 | 234 | 39,5 | 9 | 34 | 3 |
| 05**020074**001 | *184764* | | 19 | 246 | 42 | 9,5 | 34,7 | 3 |

### 6001 Joker Switch Ratcheting combination wrenches, with switch lever, imperial

| Code | EAN 4013288 | | | mm | mm | mm | mm | |
|---|---|---|---|---|---|---|---|---|
| 05**020075**001 | *184788* | | 5/16" | 144 | 20,3 | 5,5 | 18 | 3 |
| 05**020076**001 | *184795* | | 3/8" | 159 | 23 | 5,5 | 21,5 | 3 |
| 05**020077**001 | *184801* | | 7/16" | 165 | 24,3 | 6,3 | 22 | 3 |
| 05**020078**001 | *184818* | | 1/2" | 171 | 26,3 | 6,6 | 25 | 3 |
| 05**020079**001 | *184825* | | 9/16" | 187 | 30 | 7,5 | 28 | 3 |
| 05**020080**001 | *184832* | | 5/8" | 213 | 35 | 8,2 | 31,7 | 3 |
| 05**020081**001 | *184849* | | 11/16" | 234 | 39,5 | 9 | 34 | 3 |
| 05**020082**001 | *184771* | | 3/4" | 246 | 42 | 9,5 | 34,7 | 3 |

## 6001 Joker Switch 11 Set 1 Set of ratcheting combination wrenches

- Compact textile box with high robustness, low weight and volume

### 6001 Joker Switch 11 Set 1 Set of ratcheting combination wrenches

| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 05**020091**001 | *184160* | | | 1 |
| | | | **6001 Joker Switch**<br>1x 8x144; 1x 10x159; 1x 11x165; 1x 12x171; 1x 13x179; 1x 14x187; 1x 15x199; 1x 16x213; 1x 17x225; 1x 18x234; 1x 19x246 | |
| | | | **Hook and Loop Fastener Strip 240**<br>1x 50,0x240,0 | |

## 6001 Joker Switch 8 Imperial Set 1 Set of ratcheting combination wrenches, Imperial

- Compact textile box with high robustness, low weight and volume

### 6001 Joker Switch 8 Imperial Set 1 Set of ratcheting combination wrenches, Imperial

| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 05**020093**001 | *184153* | | | 1 |
| | | | **6001 Joker Switch Imperial**<br>1x $^{5}/_{16}$"x144; 1x $^{3}/_{8}$"x159; 1x $^{7}/_{16}$"x165; 1x $^{1}/_{2}$"x171; 1x $^{9}/_{16}$"x187; 1x $^{5}/_{8}$"x213; 1x $^{11}/_{16}$"x234; 1x $^{3}/_{4}$"x246 | |
| | | | **Hook and Loop Fastener Strip 240**<br>1x 50,0x240,0 | |

## 6001 Joker Switch 4 Set 1 Set of ratcheting combination wrenches

- In robust pouch

### 6001 Joker Switch 4 Set 1 Set of ratcheting combination wrenches

| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 05**020090**001 | *184139* | | | 1 |
| | | | **6001 Joker Switch**<br>1x 10x159; 1x 13x179; 1x 17x225; 1x 19x246 | |
| | | | **Hook and Loop Fastener Strip 120**<br>1x 50,0x120,0 | |

## 6001 Joker Switch 4 Imperial Set 1 Set of ratcheting combination wrenches, Imperial

- In robust pouch

### 6001 Joker Switch 4 Imperial Set 1 Set of ratcheting combination wrenches, Imperial

| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 05**020092**001 | *184146* | | | 1 |
| | | | **6001 Joker Switch Imperial**<br>1x $^{7}/_{16}$"x165; 1x $^{1}/_{2}$"x171; 1x $^{9}/_{16}$"x187; 1x $^{3}/_{4}$"x246 | |
| | | | **Hook and Loop Fastener Strip 120**<br>1x 50,0x120,0 | |

## 6002 Joker Double open-ended wrenches

- Practical holding function thanks to the metal plate in the jaw
- Limit stop prevents any slipping
- The double-hex geometry reduces the risk of slipping
- Return angle of only 30°
- Take it easy tool finder with colour coding according to sizes

### 6002 Joker Double open-ended wrenches

| Code | EAN 4013288 | | mm | mm | mm | mm | mm | |
|---|---|---|---|---|---|---|---|---|
| 05**020259**001 | *219015* | | 8 | 20 | 10 | 23 | 5,5 | 3 |
| 05**003760**001 | *173010* | | 10 | 23 | 13 | 27 | 5,5 | 3 |
| 05**003765**001 | *173027* | | 17 | 37 | 19 | 42 | 8,5 | 3 |
| 05**020260**001 | *212764* | | 20 | 48 | 22 | 51 | 10 | 3 |
| 05**020261**001 | *212771* | | 22 | 48 | 24 | 51 | 10 | 3 |
| 05**020262**001 | *212788* | | 24 | 51 | 27 | 60 | 11 | 3 |
| 05**020263**001 | *212795* | | 27 | 63 | 32 | 66 | 12 | 3 |
| 05**020264**001 | *212801* | | 30 | 63 | 32 | 66 | 12 | 3 |

## 6003 Joker ring spanner

As the installation space becomes increasingly tight during screwdriving, it remains necessary that tools enable users to work successfully.

Narrow spaces require additional placement points of the tool. Can spanners be modified so that the placement possibilities of the tool increase?

The combination of the 7.5° pivoted mouth and the double hexagon geometry doubles the placement points. A repeated 180° turn of the wrench around the longitudinal axis during screwdriving provides four placement possibilities, and bolts or screw heads can be "taken" every 15°.

The Joker 6003 with its smart mouth geometry significantly expands the range of uses in confined spaces. The Joker 6003 will automatically find the respective placement point after every turn.

The slim yet robust ring side is angled by 15° to the tool axis. The high-quality surface treatment achieves a high and long-lasting corrosion protection. With Take it easy tool finder: colour coding by size.

- Especially suitable for tight spaces
- The special mouth geometry expands the placement possibilities of the tool
- The low return angle in the mouth “takes” the screw every 15°
- Slim ring side angled by 15°
- Take it easy tool finder with colour coding according to sizes

### 6003 Joker ring spanner

| Code | EAN 4013288 | | mm | mm | mm | mm | mm | |
|---|---|---|---|---|---|---|---|---|
| 05**020190**001 | *219039* | | 5,5 | 105 | 16 | 4 | 10 | 3 |
| 05**020198**001 | *218780* | | 6 | 105 | 16 | 4 | 10 | 3 |
| 05**020199**001 | *218773* | | 7 | 110 | 17,7 | 4,2 | 11,5 | 3 |
| 05**020200**001 | *212528* | | 8 | 115 | 19 | 4,5 | 12,5 | 3 |
| 05**020219**001 | *220097* | | 9 | 120 | 21 | 4,8 | 13,5 | 3 |
| 05**020201**001 | *212542* | | 10 | 125 | 22 | 5 | 15 | 3 |
| 05**020202**001 | *212559* | | 11 | 135 | 24,5 | 5 | 17 | 3 |
| 05**020203**001 | *212566* | | 12 | 148 | 26 | 5,5 | 18 | 3 |
| 05**020204**001 | *212696* | | 13 | 160 | 27 | 6 | 19 | 3 |
| 05**020205**001 | *212702* | | 14 | 167 | 29 | 6 | 20 | 3 |
| 05**020206**001 | *212719* | | 15 | 174 | 32 | 6 | 22 | 3 |
| 05**020207**001 | *212726* | | 16 | 182 | 35 | 6,5 | 23 | 3 |
| 05**020208**001 | *212733* | | 17 | 190 | 38 | 6,5 | 24,5 | 3 |
| 05**020209**001 | *212740* | | 18 | 210 | 39 | 7,5 | 26 | 3 |
| 05**020210**001 | *212757* | | 19 | 230 | 42 | 7,5 | 27,5 | 3 |
| 05**020500**001 | *218797* | | 20 | 230 | 45 | 7,5 | 29 | 3 |
| 05**020501**001 | *218803* | | 21 | 260 | 47 | 7,5 | 30 | 3 |
| 05**020502**001 | *218841* | | 22 | 260 | 49 | 7,5 | 31,5 | 3 |
| 05**020503**001 | *218858* | | 24 | 280 | 53 | 8 | 36 | 3 |
| 05**020504**001 | *218865* | | 27 | 300 | 60 | 8,5 | 40 | 3 |
| 05**020505**001 | *218872* | | 30 | 330 | 66 | 9 | 43 | 3 |
| 05**020506**001 | *218889* | | 32 | 360 | 70 | 9,5 | 45,5 | 3 |
| 05**020507**001 | *218896* | | 36 | 460 | 80 | 10 | 50,5 | 3 |

### 6003 Joker ring spanner, imperial

| Code | EAN 4013288 | | | mm | mm | mm | mm | |
|---|---|---|---|---|---|---|---|---|
| 05**020220**001 | *219046* | | 1/4" | 105 | 16 | 4 | 10 | 3 |
| 05**020211**001 | *212979* | | 5/16" | 115 | 19 | 4,5 | 12,5 | 3 |
| 05**020212**001 | *212986* | | 3/8" | 125 | 22 | 5 | 15 | 3 |
| 05**020213**001 | *212993* | | 7/16" | 135 | 24,5 | 5 | 17 | 3 |
| 05**020214**001 | *213006* | | 1/2" | 160 | 26 | 6 | 19 | 3 |
| 05**020215**001 | *213013* | | 9/16" | 167 | 29 | 6 | 20 | 3 |
| 05**020216**001 | *213020* | | 5/8" | 182 | 35 | 6,5 | 23 | 3 |
| 05**020217**001 | *213037* | | 11/16" | 210 | 40 | 7,5 | 26 | 3 |
| 05**020218**001 | *213044* | | 3/4" | 230 | 42 | 7,5 | 27,5 | 3 |

## 6003 Joker Pedal ring spanner

The extra thin pedal wrench 6003 Joker Pedal is ideal for narrow installation spaces.

- Especially suitable for tight spaces
- The special mouth geometry expands the placement possibilities of the tool
- The low return angle in the mouth “takes” the screw every 15°
- Slim ring side angled by 15°
- Joker 6003 pedal size 15 with flat mouth to mount and dismount pedals
- With Take it easy tool finder: colour coding by size

### 6003 Joker Pedal ring spanner

| | EAN | | | | | | | |
|---|---|---|---|---|---|---|---|---|
| Code | 4013288 | | mm | mm | mm | mm | mm | |
| 05**020221**001 | *220677* | | 15 | 174 | 32 | 4,5 | 22 | 1 |

## 6003 Joker 22 Set 1 ring spanner set

As the installation space becomes increasingly tight during screwdriving, tools are necessary that enable users to work successfully even in such situations. Narrow spaces require additional placement points of the tool.

Can spanners be modified so that the placement possibilities of the tool increase? The combination of the 7.5° pivoted mouth and the double hexagon geometry doubles the placement points.

A repeated 180° turn of the wrench around the longitudinal axis during screwdriving provides four placement possibilities, and bolts or screw heads can be engaged every 15°. The Joker 6003 with its smart mouth geometry significantly expands the range of uses in confined spaces.

The Joker 6003 will automatically find the respective placement point after every turn. The slim yet robust ring side is angled by 15° to the tool axis. The high-quality surface treatment achieves a high and long-lasting corrosion protection. With tool finder Take it easy: colour coding by size.

- 22-piece ring spanner set - particularly suitable for narrow installation spaces
- The special mouth geometry expands the placement possibilities of the tool
- The low return angle in the mouth “takes” the screw every 15°
- Slim ring side angled by 15°

### 6003 Joker 22 Set 1 ring spanner set

| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 05**020232**001 | *221087* | | | 1 |
| | | | **6003 Joker**<br>1x 5,5x105; 1x 6x105; 1x 7x110; 1x 8x115; 1x 9x120; 1x 10x125; 1x 11x135; 1x 12x148; 1x 13x160; 1x 14x167; 1x 15x174; 1x 16x182; 1x 17x190; 1x 18x210; 1x 19x230; 1x 20x230; 1x 21x260; 1x 22x260; 1x 24x280; 1x 27x300; 1x 30x330; 1x 32x360 | |

## 6003 Joker 15 Set 1 combination wrench set

- In robust pouch

### 6003 Joker 15 Set 1 combination wrench set

| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 05**020302**001 | *222657* | | | 1 |
| | | | **6003 Joker**<br>1x 5,5x105; 1x 6x105; 1x 7x110; 1x 8x115; 1x 9x120; 1x 10x125; 1x 11x135; 1x 12x148; 1x 13x160; 1x 14x167; 1x 15x174; 1x 16x182; 1x 17x190; 1x 18x210; 1x 19x230 | |
| | | | **Hook and Loop Fastener Strip 240**<br>1x 50,0x240,0 | |

## 6003 Joker 11 Set 1 ring spanner set

- In robust pouch

### 6003 Joker 11 Set 1 ring spanner set

| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 05**020231**001 | *214195* | | | 1 |
| | | | **6003 Joker**<br>1x 8x115; 1x 10x125; 1x 11x135; 1x 12x148; 1x 13x160; 1x 14x167; 1x 15x174; 1x 16x182; 1x 17x190; 1x 18x210; 1x 19x230 | |
| | | | **Hook and Loop Fastener Strip 240**<br>1x 50,0x240,0 | |

## 6003 Joker 8 Imperial Set 1 ring spanner set, Imperial

- In robust pouch

### 6003 Joker 8 Imperial Set 1 ring spanner set, Imperial

| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 05**020241**001 | *214201* | | | 1 |
| | | | **6003 Joker Imperial**<br>1x $^{5}/_{16}$"x115; 1x $^{3}/_{8}$"x125; 1x $^{7}/_{16}$"x135; 1x $^{1}/_{2}$"x160; 1x $^{9}/_{16}$"x167; 1x $^{5}/_{8}$"x182; 1x $^{11}/_{16}$"x210; 1x $^{3}/_{4}$"x230 | |
| | | | **Hook and Loop Fastener Strip 240**<br>1x 50,0x240,0 | |

## 6003 Joker 5 Set 1 ring spanner set

- In robust pouch

### 6003 Joker 5 Set 1 ring spanner set

| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 05**020230**001 | *214171* | | | 1 |
| | | | **6003 Joker**<br>1x 8x115; 1x 10x125; 1x 13x160; 1x 17x190; 1x 19x230 | |
| | | | **Hook and Loop Fastener Strip 120**<br>1x 50,0x120,0 | |

## Bicycle set 10

5-piece Joker 6003 spanner set; size 15 in an extra-slim design. As the working space is very narrow when working on your bike, tools are necessary that enable users to work successfully even in such situations. Narrow spaces require additional placement points of the tool.

Can spanners be modified so that the placement possibilities of the tool increase? The combination of the 7.5° pivoted mouth and the double hexagon geometry doubles the placement points. A repeated 180° turn of the wrench around the longitudinal axis during screwdriving provides four placement possibilities, and bolts or screw heads can be engaged every 15°.

The Joker 6003 with its smart mouth geometry significantly expands the range of uses in confined spaces. The Joker 6003 will automatically find the respective placement point after every turn.

The slim yet robust ring side is angled by 15° to the tool axis. The high-quality surface treatment achieves a high and long-lasting corrosion protection. With tool finder Take it easy: colour coding by size.

The Joker bags are suitable for attachment to walls, shelves, workshop trolleys and the Wera 2go system thanks to the hook and loop fastener system on the back.

- Particularly suitable for narrow screwdriving situations on the bike
- The special mouth geometry expands the placement possibilities of the tool
- The low return angle in the mouth "takes" the screw every 15°
- Slim ring side angled by 15°
- Joker 6003 pedal size 15 with flat mouth to mount and dismount pedals

### Bicycle set 10

| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 05**004178**001 | *220653* | | | 1 |
| | | | **6003 Joker**<br>1x 8x115; 1x 9x120; 1x 10x125; 1x 13x160 | |
| | | | **6003 Joker Pedal**<br>1x 15x174 | |
| | | | **Hook and Loop Fastener Strip 120**<br>1x 50,0x120,0 | |

## Bicycle set 12

12-piece Joker 6003 spanner set; size 15 in an extra-slim design. As the working space is very narrow when working on your bike, tools are necessary that enable users to work successfully even in such situations.

Narrow spaces require additional placement points of the tool. Can spanners be modified so that the placement possibilities of the tool increase?

The combination of the 7.5° pivoted mouth and the double hexagon geometry doubles the placement points. A repeated 180° turn of the wrench around the longitudinal axis during screwdriving provides four placement possibilities, and bolts or screw heads can be engaged every 15°.

The Joker 6003 with its smart mouth geometry significantly expands the range of uses in confined spaces. The Joker 6003 will automatically find the respective placement point after every turn. The slim yet robust ring side is angled by 15° to the tool axis. The high-quality surface treatment achieves a high and long-lasting corrosion protection. With tool finder Take it easy: colour coding by size.

The Joker bags are suitable for attachment to walls, shelves, workshop trolleys and the Wera 2go system thanks to the hook and loop fastener system on the back.

- Especially suitable for tight spaces
- The special mouth geometry expands the placement possibilities of the tool
- The low return angle in the mouth “takes” the screw every 15°
- Slim ring side angled by 15°
- Joker 6003 pedal size 15 with flat mouth to mount and dismount pedals
- With Take it easy tool finder: colour coding by size
- In robust pouch

### Bicycle set 12

| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 05**004181**001 | *220721* | | | 1 |
| | | | **6003 Joker**<br>1x 6x105; 1x 7x110; 1x 8x115; 1x 9x120;<br>1x 10x125; 1x 11x135; 1x 12x148; 1x 13x160;<br>1x 14x167; 1x 16x182; 1x 17x190 | |
| | | | **6003 Joker Pedal**<br>1x 15x174 | |

## 6003 Joker 5 Imperial Set 1 ring spanner set, Imperial

- In robust pouch

### 6003 Joker 5 Imperial Set 1 ring spanner set, Imperial

| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 05**020240**001 | *214188* | | | 1 |
| | | | **6003 Joker Imperial**<br>1x $^{5}/_{16}$"x115; 1x $^{3}/_{8}$"x125; 1x $^{1}/_{2}$"x160;<br>1x $^{9}/_{16}$"x167; 1x $^{3}/_{4}$"x230 | |
| | | | **Hook and Loop Fastener Strip 120**<br>1x 50,0x120,0 | |

## 6003 Joker 4 Set 1 Ring spanner set

As the installation space becomes increasingly tight during screwdriving, it is necessary that tools enable users to work successfully even in such situations. Narrow spaces require additional placement points of the tool.

Can spanners be modified to increase the placement possibilities of the tool? The combination of the 7.5° pivoted mouth and the double hexagon geometry doubles the placement points.

A repeated 180° turn of the wrench around the longitudinal axis during screwdriving provides four placement possibilities, and bolts or screw heads can be engaged every 15°.

The Joker 6003 with its smart mouth geometry significantly expands the range of uses in confined spaces.

The Joker 6003 will automatically find the respective placement point after every turn. The slim yet robust ring side is angled by 15° to the tool axis.

The high-quality surface treatment achieves a high and long-lasting corrosion protection.

With Take it easy tool finder: Colour coding by size. The wear-free material of the clip guarantees easy removal and a secure hold of the spanners.

- Joker open-ended and combination wrenches and in a new clip for space-saving storage in the tool bag

### 6003 Joker 4 Set 1 Ring spanner set

| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 05**020228**001 | *225665* | | | 1 |
| | | | **6003 Joker**<br>1x 8x115; 1x 10x125; 1x 12x148; 1x 13x160 | |

## 6003 Joker 4 Set Imperial 1 Ring spanner set

- Joker open-ended and combination wrenches and in a new clip for space-saving storage in the tool bag

### 6003 Joker 4 Set Imperial 1 Ring spanner set

| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 05**020229**001 | *225672* | | | 1 |
| | | | **6003 Joker Imperial**<br>1x $^{5}/_{16}$"x115; 1x $^{3}/_{8}$"x125; 1x $^{7}/_{16}$"x135;<br>1x $^{1}/_{2}$"x160 | |

## 9640 Magnetic rail 6003 Joker 1 Ring spanner set

- 11-piece set
- With its strong magnet, the rail holds securely to metal surfaces. It can also be bolted to the wall
- The clips hold the tools perfectly

### 9640 Magnetic rail 6003 Joker 1 Ring spanner set

| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 05**020233**001 | *228963* | | | 1 |
| | | | **6003 Joker**<br>1x 8x115; 1x 10x125; 1x 11x135; 1x 12x148;<br>1x 13x160; 1x 14x167; 1x 15x174; 1x 16x182;<br>1x 17x190; 1x 18x210; 1x 19x230,0 | |
| | | | **9610**<br>1x 30,0x370,0 | |

## 9641 Magnetic rail 6003 Joker 2 Ring spanner set

- 5-piece set

### 9641 Magnetic rail 6003 Joker 2 Ring spanner set

| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 05**020234**001 | *229854* | | | 1 |
| | | | **6003 Joker**<br>1x 8x115; 1x 10x125; 1x 13x160; 1x 17x190;<br>1x 19x230,0 | |
| | | | **9610**<br>1x 30,0x370,0 | |

## 9642 Magnetic rail 6003 Joker Imperial 1 Ring spanner set

- Imperial
- 8-piece set

### 9642 Magnetic rail 6003 Joker Imperial 1 Ring spanner set

| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 05**020235**001 | *229878* | | | 1 |
| | | | **6003 Joker Imperial**<br>1x $^{5}/_{16}$"x115; 1x $^{3}/_{8}$"x125; 1x $^{7}/_{16}$"x135;<br>1x $^{1}/_{2}$"x160; 1x $^{9}/_{16}$"x167; 1x $^{5}/_{8}$"x182;<br>1x $^{11}/_{16}$"x210; 1x $^{3}/_{4}$"x230,0 | |
| | | | **9610**<br>1x 30,0x370,0 | |

## 6004 Joker self-setting spanner

Many users wish to have a universal screwdriving tool with the widest possible range of applications. It should be a single tool for multiple metric and imperial dimensions.

It should automatically adjust to the different screw sizes. It should be safe to grab without damaging anything and allow for a high working speed. The continuous and parallel jaws replace several single spanner dimensions.

The required size is automatically and continuously set when attaching the tool to the hexagon bolt or screw. The integrated lever mechanism securely clamps the hexagon screw or bolt between the jaws, which significantly reduces the risk of slipping or damage.

The ratchet function ensures fast and consistent screwdriving without removing the tool. Thanks to the corner-width rectangular prisms, a back-pivoting angle of only 30° can be realized.

The single-arm design in conjunction with the ratchet function and the corner-width prism make it possible to work even in confined spaces.

The adjustable Joker 6004 is the universal screwdriving tool. Self-setting. Gripping. Spanning.

- The adjustable Joker 6004 covers all metric and imperial dimensions in the respective field of application
- Automatic and continuous grip of hexagon screws and bolts
- Lever mechanism when gripping avoids slipping and damage
- Fast and consistent screwdriving without removing the wrench thanks to mechanical ratchet function
- Back-pivoting angle of only 30° through placement in the corner-width rectangular prisms in the mouth

### 6004 Joker XS self-setting spanner

| | EAN | | | | | | | |
|---|---|---|---|---|---|---|---|---|
| Code | 4013288 | mm | | mm | mm | | | |
| 05**020099**001 | *216892* | 7-10 | 1/4"-3/8" | 117 | 7,7 | | | 3 |

### 6004 Joker S self-setting spanner

| | EAN | | | | | | | |
|---|---|---|---|---|---|---|---|---|
| Code | 4013288 | mm | | mm | mm | | | |
| 05**020100**001 | *211729* | 10-13 | 7/16"-1/2" | 154 | 10 | | | 3 |

### 6004 Joker M self-setting spanner

| | EAN | | | | | | | |
|---|---|---|---|---|---|---|---|---|
| Code | 4013288 | mm | | mm | mm | | | |
| 05**020103**001 | *216908* | 13-16 | 1/2"-5/8" | 188 | 12,4 | | | 3 |

## 6004 Joker L self-setting spanner

| | EAN | | | | | | | |
|---|---|---|---|---|---|---|---|---|
| Code | 4013288 | mm | | mm | mm | | | |
| 05**020101**001 | *214706* | 16-19 | 5/8"-3/4" | 224 | 14 | | | 3 |

## 6004 Joker XL self-setting spanner

| | EAN | | | | | | | |
|---|---|---|---|---|---|---|---|---|
| Code | 4013288 | mm | | mm | mm | | | |
| 05**020104**001 | *216915* | 19-24 | 3/4"-15/16" | 256 | 16 | | | 2 |

## 6004 Joker XXL self-setting spanner

| | EAN | | | | | | | |
|---|---|---|---|---|---|---|---|---|
| Code | 4013288 | mm | | mm | mm | | | |
| 05**020102**001 | *214713* | 24-32 | 15/16"-1 1/4" | 322 | 20 | | | 3 |

## 6004 Joker 4 set 1 self-setting spanner set

- The compact folding pouch with four adjustable Joker 6004 spanners covers all metric and imperial dimensions in applications from 7 to 19 mm or ¼" to ¾"

## 6004 Joker 4 set 1 self-setting spanner set

| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 05**020110**001 | *217516* | | | 1 |
| | | | **6004 Joker XS**<br>1x 7-10 (1/4"-3/8")x117 | |
| | | | **6004 Joker S**<br>1x 10-13 (7/16"-1/2")x154 | |
| | | | **6004 Joker M**<br>1x 13-16 (1/2"-5/8")x188 | |
| | | | **6004 Joker L**<br>1x 16-19 (5/8"-3/4")x224 | |

## 6005 Joker Double open-ended wrenches

- Double open-ended wrench
- Especially suitable for tight spaces
- The special mouth geometry expands the placement possibilities of the tool
- The low return angle in the mouth “takes” the screw every 15°
- With Take it easy tool finder: colour coding by size

### 6005 Joker Double open-ended wrenches

| Code | EAN 4013288 | | | | | | | |
|---|---|---|---|---|---|---|---|---|
| | | | mm | mm | mm | mm | mm | |
| 05**020310**001 | *224873* | | 6 | 16 | 7 | 17,7 | 4 | 3 |
| 05**020311**001 | *224880* | | 8 | 19 | 9 | 21 | 4,5 | 3 |
| 05**020312**001 | *224897* | | 10 | 23 | 11 | 25 | 5 | 3 |
| 05**020313**001 | *224903* | | 12 | 26 | 13 | 27 | 5,5 | 3 |

## 6005 Joker 4 Set 1 Double open-ended wrench set

- Joker open-ended and combination wrenches and in a new clip for space-saving storage in the tool bag

### 6005 Joker 4 Set 1 Double open-ended wrench set

| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 05**020314**001 | *224750* | | | 1 |
| | | | **6005 Joker Double**<br>1x 6x7x111,8; 1x 8x9x122,2; 1x 10x11x137,3; 1x 12x13x166 | |

## 6006 Joker 2 Set 1 Self-setting double spanner

2-piece set. Self-setting double spanners for hexagon screw heads and bolts with wrench sizes 7-10, 10-13 (metric) or $^1/_4$"-$^3/_8$", $^7/_{16}$"-$^8/_{16}$" (imperial) and 13-16, 16-19 (metric) or $^1/_2$"-$^5/_8$" and $^5/_8$"-$^3/_4$" (imperial). With its continuous and parallel jaws, the tool replaces several single spanner sizes. The required size is automatically and continuously set when attaching the tool to the hexagon bolt or screw. The integrated lever mechanism securely clamps the hexagon screw or bolt between the jaws, which significantly reduces the risk of slippage or damage. The ratchet feature ensures fast and consistent screwdriving without removing the tool. By using the corner-width rectangular prisms, a return angle of only 30° can be achieved.

Ratchet feature and corner-width prism make it possible to work even in confined spaces.

The adjustable Joker 6006 double spanner with ratchet functionality is the universal screwdriving tool. Self-setting. Gripping. Spanning. In a robust pouch.

- Self-setting double spanners
- The self-setting Joker 6006 double spanners cover all metric and imperial dimensions in the respective field of application
- Automatically and continuously gripping hexagon screws and bolts
- Lever mechanism upon gripping prevents slipping and damage
- With mechanical ratchet functionality for fast and consistent screwdriving without removing the spanner
- Return angle of only 30° when using the corner-width rectangular prisms in the jaw
- In a robust folding pouch with Wera 2go compatibility

### 6006 Joker 2 Set 1 Self-setting double spanner

| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 05**020340**001 | *233301* | | | 1 |
| | | | **6006 Joker XS/S**<br>1x 7-10 ($^1/_4$"-$^3/_8$") / 10-13 ($^7/_{16}$"-$^1/_2$") x 161.0 | |
| | | | **6006 Joker M/L**<br>1x 13-16 ($^1/_2$"-$^5/_8$") / 16-19 ($^5/_8$"-$^3/_4$") x 239.4 | |

## 6006 Joker XS/S Self-setting double spanner

| | EAN | | | | | | | |
|---|---|---|---|---|---|---|---|---|
| Code | 4013288 | mm | | mm | | mm | mm | |
| 05**020330**001 | *233288* | 7-10 | 1/4"-3/8" | 10-13 | 7/16"-1/2" | 8,0 | 10,0 | 1 |

## 6006 Joker M/L Self-setting double spanner

| | EAN | | | | | | | |
|---|---|---|---|---|---|---|---|---|
| Code | 4013288 | mm | mm | mm | | mm | mm | |
| 05**020331**001 | *233295* | 13-16 | 1/2"-5/8" | 16-19 | 5/8"-3/4" | 12,4 | 14,0 | 1 |

## 6007 Joker 5 Set 1 Ring ratchet spanner set

5-piece ring ratchet spanner set. Unique combination of jaw and ring ratchet mechanism in a long design. For hexagon screw heads and bolts.

The long lever allows for higher power transmission. The long design also improves accessibility at low-lying couplings. With holding function enabled by a metal plate in the mouth, which reduces the risk of losing screws and sockets.

With its extra hard teeth, the exchangeable metal plate in the mouth secures screws and sockets and reduces the risk of slipping. The integrated end stop can prevent the screw head from slipping down and allows application of high torques. The double hexagon geometry ensures a positive connection with the screw or bolt and thus reduces the risk of slipping.

A return angle of only 30° at the jaw end avoids time-consuming rotating of the tool whilst screwdriving. Ratchet mechanism at the ring side with exceptionally high fine toothing of 80 teeth for flexibility even in confined spaces.

The specially engineered geometry allows high torque transmission and high bending stiffness. Made of high-performance chromium molybdenum steel with nickel-chromium coating for high corrosion protection.

With Take it easy tool finder: colour coding by size and extra laser-engraved size indication. In a robust roll pouch for easy transport and clean storage.

- Unique combination of open end and ring ratchet mechanism in a long design
- Long lever allows for higher power transmission
- Better accessibility at low-lying couplings
- Limit stop prevents any slipping
- With practical holding function by a metal plate in the mouth
- Return angle of only 30° in the open end
- Extremely robust ring ratchet
- Take it easy tool finder: colour coding by size and extra laser-engraved size indication
- In a robust folding pouch with Wera 2go compatibility

## 6007 Joker 5 Set 1 Ring ratchet spanner set

| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 050**20380**001 | *233370* | | | 1 |
| | | | **6007 Joker**<br>1x 8x180; 1x 10x209; 1x 13x245; 1x 17x304,5; 1x 19x334 | |

## 6007 Joker Ring ratchet spanner, long design

- Unique combination of open end and ring ratchet mechanism in a long design
- Practical holding function thanks to the metal plate in the jaw
- Limit stop prevents any slipping
- The double-hex geometry reduces the risk of slipping
- Return angle of only 30°
- With Take it easy tool finder: colour coding by size

## 6007 Joker SB Ring ratchet spanner, long design

| Code | EAN 4013288 | | mm | mm | mm | mm | mm | |
|---|---|---|---|---|---|---|---|---|
| 050**20350**001 | *233318* | | 8 | 180 | 21 | 6 | 18 | 3 |
| 050**20351**001 | *233325* | | 10 | 209 | 24,2 | 6,3 | 21 | 3 |
| 050**20352**001 | *233349* | | 13 | 245 | 29,4 | 8 | 26 | 3 |
| 050**20353**001 | *233356* | | 17 | 304,5 | 39 | 9 | 33,5 | 3 |
| 050**20354**001 | *233332* | | 19 | 334 | 43 | 14 | 36 | 3 |

## 9610 Joker Magnetic rail, for up to 11 spanners, empty

- With its strong magnet, the rail holds securely to metal surfaces. It can also be bolted to the wall
- The clips hold the tools perfectly

## 9610 Joker Magnetic rail, for up to 11 spanners, empty

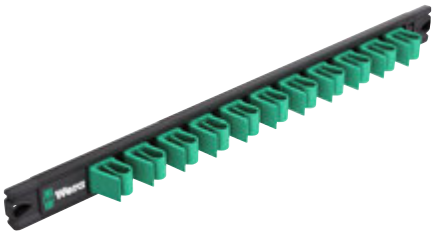

| Code | EAN 4013288 | mm | mm | | | | | |
|---|---|---|---|---|---|---|---|---|
| 051**36413**001 | *228956* | 30,0 | 370,0 | | | | | 1 |

# L-Keys

## Hex-Plus - lets hexagon socket screws last longer

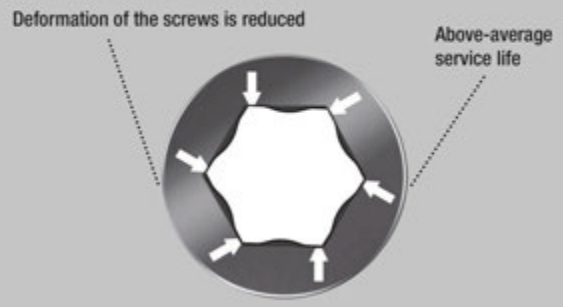


## Kraftform Stainless - stainless steel to prevent rust

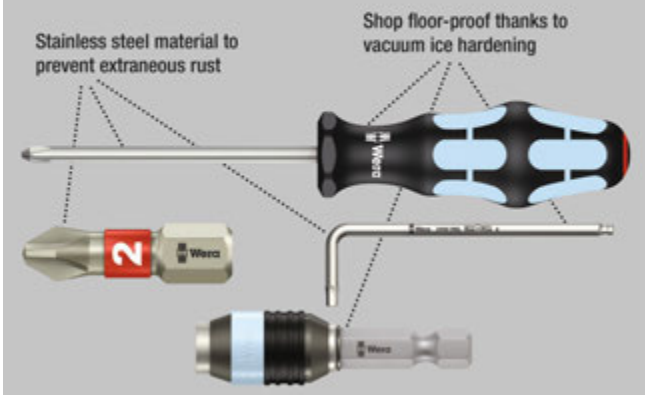


High quality L-key set out of stainless steel for hexagon socket screws by Wera. Stainless steel prevents the transfer of extraneous rust. The Hex-Plus profile offers a greater contact surface in the head of the screw.

The notching effect is therefore reduced to a minimum and damage to the screw head more or less eliminated. Come with hex ballpoint on the long arm: the ballpoint drive profile means that it is possible to swivel the tool axis away from the screwdriving axis, thus enabling “round the corner” screwdriving.
Take it easy Tool Finder: colour coding according to size. In an almost wear-free L-key clip fastener.

- Solution to the extraneous rust problem: fasten stainless screws with stainless tools
- Hex-Plus allows socket head screws to live longer
- Take it easy tool finder with colour coding according to sizes
- Wear-resistant clip material for enhanced durability
- Colour coded, easy-to-grip plastic sleeve, even at low temperatures

## 3950/9 Hex-Plus Multicolour HF Stainless 1 L-key set, metric, stainless steel, with holding function

- From size 3.0, the holding function on the long arm will hold screws securely on the tool

### 3950/9 Hex-Plus Multicolour HF Stainless 1 L-key set, metric, stainless steel, with holding function

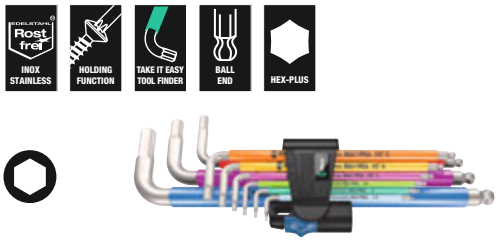

| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 05**022699**001 | *224477* | | | 1 |
| | | ○ | **3950 SPKL Multicolour**<br>1x 1,5x90; 1x 2,0x101; 1x 2,5x112 | |
| | | ○ | **3950 SPKL Multicolour HF**<br>1x 3,0x123; 1x 4,0x137; 1x 5,0x154; 1x 6,0x172; 1x 8,0x195; 1x 10,0x224 | |

### 3950/9 Hex-Plus Multicolour Stainless 1 L-key set, metric, stainless

| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 05**022669**001 | *185211* | | | 1 |
| | | ○ | **3950 SPKL Renkli**<br>1x 1,5x90; 1x 2,0x101; 1x 2,5x112; 1x 3,0x123; 1x 4,0x137; 1x 5,0x154; 1x 6,0x172; 1x 8,0x195; 1x 10,0x224 | |

### 3950/9 Hex-Plus Stainless 1 L-key set, metric, stainless



| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 05**022720**001 | *111364* | | | 10 |
| | | ○ | **3950 PKL**<br>1x 1,5x90; 1x 2,0x101; 1x 2,5x112; 1x 3,0x123; 1x 4,0x137; 1x 5,0x154; 1x 6,0x172; 1x 8,0x195; 1x 10,0x224 | |

### 3950/9 Hex-Plus Stainless 1 SB L-key set, metric, stainless

| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 05**073544**001 | *180377* | ○ | **3950 PKL**<br>1x 1,5x90; 1x 2,0x101; 1x 2,5x112; 1x 3,0x123; 1x 4,0x137; 1x 5,0x154; 1x 6,0x172; 1x 8,0x195; 1x 10,0x224 | 1 |

## 3950/9 Hex-Plus Imperial Stainless 1 L-key set, Imperial, stainless

- In robust pouch

### 3950/9 Hex-Plus Imperial Stainless 1 L-key set, imperial, stainless

| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 05**022721**001 | *117281* | | | 1 |
| | | ○ | **3950 PKL inch**<br>1x 3/32"x112; 1x 7/64"x119; 1x 1/8"x123; 1x 9/64"x130; 1x 5/32"x137; 1x 3/16"x154; 1x 1/4"x185; 1x 5/16"x195; 1x 3/8"x224 | |

## 950/9 Hex-Plus Multicolour HF 1 L-key set, metric, BlackLaser, with holding function

- L-keys with retaining function for hexagon socket screws
- Hexagonal ballpoint on the long arm
- Colour coded, easy-to-grip plastic sleeve, even at low temperatures

### 950/9 Hex-Plus Multicolour HF 1 L-key set, metric, BlackLaser, with holding function

| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 05**022210**001 | *188403* | | | 1 |
| | | ○ | **950 SPKL Multicolour**<br>1x 1,5x90; 1x 2,0x101; 1x 2,5x112 | |
| | | ○ | **950 SPKL HF Multicolour**<br>1x 3,0x123; 1x 4,0x137; 1x 5,0x154; 1x 6,0x172; 1x 8,0x195; 1x 10,0x224 | |

### 950/9 Hex-Plus Multicolour 1 L-key set, metric, BlackLaser

| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 05**022089**001 | *180841* | | | 5 |
| | | ○ | **950 SPKL Multicolour**<br>1x 1,5x90; 1x 2,0x101; 1x 2,5x112; 1x 3,0x123; 1x 4,0x137; 1x 5,0x154; 1x 6,0x172; 1x 8,0x195; 1x 10,0x224 | |

## 950/9 Hex-Plus Multicolour 1 SB L-key set, metric, BlackLaser

| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 05**073593**001 | *165688* | | **950 SPKL Multicolour**<br>1x 1.5x90; 1x 2.0x101; 1x 2.5x112; 1x 3.0x123; 1x 4.0x137; 1x 5.0x154; 1x 6.0x172; 1x 8.0x195; 1x 10.0x224 | 1 |

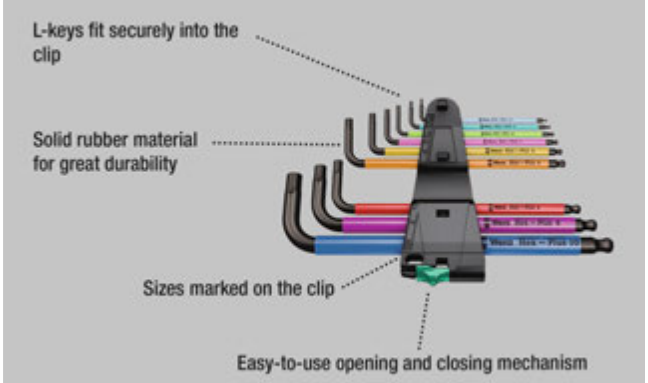


## 950/9 Hex-Plus Multicolour 2 L-key set, metric, BlackLaser

| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 05**133164**001 | *207517* | | | 1 |
| | | | **950 SPKS Multicolour**<br>1x 1,5x50; 1x 2,0x56; 1x 2,5x63; 1x 3,0x71; 1x 4,0x80; 1x 5,0x90; 1x 6,0x100; 1x 8,0x112; 1x 10,0x125 | |

## 950/9 Hex-Plus Multicolour 3 L-key set, metric, BlackLaser

9 L-keys with plastic sleeve (SPKL) made of circular, easy-grip material. The sleeve makes working comfortable even at low temperatures and is easy on the fingers.

All L-keys are easily accessible due to their colour coding and size markings. Convenient storage in the 9109 rack that can be set upright on the table or hung on the wall.

Clip 9539 integrated in the rack which can be removed for mobile use. On top of that, the rack includes a clever removable 9538 magnetiser that can be used to magnetise (and demagnetise) screws and tool tips; no more struggle to hold the screw with the second hand.

- Rack that can be set upright on the table or hung on the wall
- Integrated clip which can be removed for mobile use
- Removable magnet for magnetising and demagnetising tool tips
- L-keys for hexagonal socket screws
- Hex-Plus allows socket head screws to live longer
- Rubber sleeve for pleasant grip
- Hexagonal ballpoint on the long arm
- BlackLaser for high corrosion protection and long service life

## 950/9 Hex-Plus Multicolour 3 L-key set, metric, BlackLaser

| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 05**133165**001 | *230294* | | | 1 |
| | | | **950 SPKL Multicolour**<br>1x 1,5x90; 1x 2,0x101; 1x 2,5x112; 1x 3,0x123; 1x 4,0x137; 1x 5,0x154; 1x 6,0x172; 1x 8,0x195; 1x 10,0x224 | |
| | | | **9539** | |
| | | | **9109** | |
| | | | **9538** | |

## 3950/9 Hex-Plus Multicolour Imperial Stainless 1, imperial, stainless steel

Premium L-key set made of stainless steel for imperial hexagonal socket screws by Wera. Stainless steel prevents transmission of extraneous rust.

The Hex-Plus profile offers larger contact surfaces in the screw head. The notch effect is reduced to a minimum and the destruction of the screw head is almost eliminated.

With hexagonal ball tip at the long arm: The ball-shaped tip profiles enable the tool shaft to be moved and pivoted relative to the screw axis which allows screwdriving “around the corner”.

Take it easy tool finder with colour coding by size. In an almost wear-free L-key clip.

### 3950/9 Hex-Plus Multicolour Imperial Stainless 1, imperial, stainless steel

| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 05**022860**001 | *221360* | | | 1 |
| | | | **3950 SPKL Multicolour Imperial**<br>1x 5/64"x101; 1x 3/32"x112; 1x 1/8"x123;<br>1x 5/32"x137; 1x 3/16"x154; 1x 7/32"x172;<br>1x 1/4"x185; 1x 5/16"x195; 1x 3/8"x224 | |

## 950/9 Hex-Plus Multicolour Imperial 1 L-key set, imperial, BlackLaser

- In robust pouch

### 950/9 Hex-Plus Multicolour Imperial 1 L-key set, imperial, BlackLaser

| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 05**022639**001 | *182593* | | | 1 |
| | | | **950 SPKL inch**<br>1x 5/64"x101; 1x 3/32"x112; 1x 1/8"x123;<br>1x 5/32"x137; 1x 3/16"x154; 1x 7/32"x172;<br>1x 1/4"x185; 1x 5/16"x195; 1x 3/8"x224 | |

### 950/9 Hex-Plus Multicolour imperial 2 L-key set, imperial, BlackLaser

| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 05**022640**001 | *219107* | | | 1 |
| | | | **950 SPKL inch**<br>1x 5/64"x101; 1x 3/32"x112; 1x 1/8"x123;<br>1x 5/32"x137; 1x 3/16"x154; 1x 7/32"x172;<br>1x 1/4"x185; 1x 5/16"x195; 1x 3/8"x224 | |

## 950/9 Hex-Plus Multicolour Imperial 3 L-key set, imperial, BlackLaser

- Imperial

### 950/9 Hex-Plus Multicolour Imperial 3 L-key set, imperial, BlackLaser

| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 05**022641**001 | *230188* | | | 1 |
| | | | **950 SPKS Multicolour, imperial**<br>1x 5/64"x50; 1x 3/32"x56; 1x 1/8"x63; 1x 5/32"x71;<br>1x 3/16"x80; 1x 7/32"x90; 1x 1/4"x100; 1x 5/16"x112;<br>1x 3/8"x125 | |

## 950/7 Hex-Plus Multicolour Magnet 1 L-key set, metric, BlackLaser

- For recessed screws, it's often advantageous for the screw to be held on the L-key by magnetic force. The Wera clips with magnetiser/demagnetiser enble a magnetisation/demagnetisation of L-keys in a flash

### 950/7 Hex-Plus Multicolour Magnet 1 L-key set, metric, BlackLaser

| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 05**022534**001 | *183750* | | | 5 |
| | | ○ | **950 SPKL Multicolour**<br>1x 1,5x90; 1x 2,0x101; 1x 2,5x112; 1x 3,0x123; 1x 4,0x137; 1x 5,0x154; 1x 6,0x172 | |

## 950/9 L Hex-Plus HF 1 L-key set, metric, chrome-plated, with holding function

- The holding function on the long arm keeps screws securely on the tool
- High corrosion protection thanks to chrome-plating

### 950/9 L Hex-Plus HF 1 L-key set, metric, chrome-plated, with holding function

| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 05**022130**001 | *207227* | | | 1 |
| | | ○ | **950 L**<br>1x 1,5x90 [1]; 1x 2,0x100; 1x 2,5x112 | |
| | | ○ | **950 L HF**<br>1x 3,0x126; 1x 4,0x140; 1x 5,0x160; 1x 6,0x180; 1x 8,0x200; 1x 10,0x219 | |

[1] Regular hexagon

### 950/9 Hex-Plus 1 L-key set, metric, chrome-plated

| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 05**022087**001 | *104816* | | | 10 |
| | | ○ | **950 PKL**<br>1x 1,5x90 [1]; 1x 2,0x100; 1x 2,5x112; 1x 3,0x126; 1x 4,0x140; 1x 5,0x160; 1x 6,0x180; 1x 8,0x200; 1x 10,0x219 | |

[1] Regular hexagon

### 950/9 Hex-Plus 1 SB L-key set, metric, chrome-plated

| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 05**073391**001 | *030160* | ○ | **950 PKL**<br>1x 1,5x90 [1]; 1x 2,0x100; 1x 2,5x112; 1x 3,0x126; 1x 4,0x140; 1x 5,0x160; 1x 6,0x180; 1x 8,0x200; 1x 10,0x219 | 1 |

[1] Regular hexagon

### 950/9 Hex-Plus 2 L-key set, metric, chrome-plated

| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 05**021909**001 | *111937* | | | 10 |
| | | ○ | **950 L**<br>1x 1,5x90 [1]; 1x 2,0x100; 1x 2,5x112; 1x 3,0x126; 1x 4,0x140; 1x 5,0x160; 1x 6,0x180; 1x 8,0x200; 1x 10,0x219 | |

[1] Regular hexagon

## 950/9 Hex-Plus 3 L-key set, metric, chrome-plated

- Short version
- Hexagonal ballpoint on the long arm

### 950/9 Hex-Plus 3 L-key set, metric, chrome-plated

| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 05**133163**001 | *112255* | | | 10 |
| | | ○ | **950 PKS**<br>1x 1,5x50 [1]; 1x 2,0x56; 1x 2,5x63; 1x 3,0x71; 1x 4,0x80; 1x 5,0x90; 1x 6,0x100; 1x 8,0x112; 1x 10,0x125 | |

[1] Regular hexagon

## 950/9 Hex-Plus 4 L-key set, metric, chrome-plated

- Extra-short arm for use on difficult-to-access screws
- Hexagonal ballpoint on the long arm

### 950/9 Hex-Plus 4 L-key set, metric, chrome-plated

| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 05**073594**001 | *139177* | | | 1 |
| | | ○ | **950 PKLS**<br>1x 1,5x90 [1]; 1x 2,0x100; 1x 2,5x112; 1x 3,0x126; 1x 4,0x140; 1x 5,0x160; 1x 6,0x180; 1x 8,0x200; 1x 10,0x219 | |

[1] Regular hexagon

### 950/9 Hex-Plus 5 L-key set, metric, chrome-plated

| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 05**021406**001 | *111890* | | | 10 |
| | | ○ | **950**<br>1x 1,5x45 [1]; 1x 2,0x50; 1x 2,5x56; 1x 3,0x63; 1x 4,0x70; 1x 5,0x80; 1x 6,0x90; 1x 8,0x100; 1x 10,0x112 | |

[1] Regular hexagon.

## 950/9 Hex-Plus 6 L-key set, metric, BlackLaser

- BlackLaser for high corrosion protection and long service life

### 950/9 Hex-Plus 6 L-key set, metric, BlackLaser

| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 05**022086**001 | *104809* | | | 10 |
| | | ○ | **950 PKL BM**<br>1x 1,5x90 [1]; 1x 2,0x100; 1x 2,5x112; 1x 3,0x126; 1x 4,0x140; 1x 5,0x160; 1x 6,0x180; 1x 8,0x200; 1x 10,0x219 | |

[1] Regular hexagon

### 950/9 Hex-Plus 6 SB L-key set, metric, BlackLaser

| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 05**073596**001 | *106414* | ○ | **950 PKL BM**<br>1x 1.5x90[1] ; 1x 2.0x100; 1x 2.5x112; 1x 3.0x126; 1x 4.0x140; 1x 5.0x160; 1x 6.0x180; 1x 8.0x200; 1x 10.0x219 | 1 |

[1] Regular hexagon

## 950/9 Hex-Plus 7 L-key set, metric, BlackLaser

- Short version

### 950/9 Hex-Plus 7 L-key set, metric, BlackLaser

| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 05**021737**001 | *112286* | | | 10 |
| | | ○ | **950 BM**<br>1x 1,5x45 [1]; 1x 2,0x50; 1x 2,5x56; 1x 3,0x63; 1x 4,0x70; 1x 5,0x80; 1x 6,0x90; 1x 8,0x100; 1x 10,0x112 | |

[1] Regular hexagon

## 950/9 Hex-Plus 8 L-key set, metric, chrome-plated

9 chrome-plated L-keys with Hex-Plus advantage to prevent rounded screws - a strong tool set for hexagonal socket screws.

Convenient storage in a rack that can be set upright on the table or hung on the wall.

Integrated clip which can be removed for mobile use. On top of that, the rack includes a clever removable magnetiser that can be used to magnetise (and demagnetise) screws and tool tips; no more struggle to hold the screw with the second hand.

- Rack that can be set upright on the table or hung on the wall
- Integrated clip which can be removed for mobile use
- Removable magnet for magnetising and demagnetising tool tips

### 950/9 Hex-Plus 8 L-key set, metric, chrome-plated

| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 05**022102**001 | *230171* | | | 1 |
| | | ○ | **950 PKL**<br>1x 1,5x90 [1]; 1x 2,0x100; 1x 2,5x112;<br>1x 3,0x126; 1x 4,0x140; 1x 5,0x160; 1x 6,0x180;<br>1x 8,0x200; 1x 10,0x219 | |
| | | | **9109** | |
| | | | **9536** | |
| | | | **9538** | |

[1] Regular hexagon

## 950/7 Hex-Plus Magnet 1 Magnetic L-key set, metric, chrome-plated

- For recessed screws, it's often advantageous for the screw to be held on the L-key by magnetic force. The Wera clips with magnetiser/demagnetiser enable a magnetisation/demagnetisation of L-keys in a flash.

### 950/7 Hex-Plus Magnet 1 Magnetic L-key set, metric, chrome-plated

| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 05**022101**001 | *111968* | | | 10 |
| | | ○ | **950 PKL**<br>1x 1,5x90 [1]; 1x 2,0x100; 1x 2,5x112;<br>1x 3,0x126; 1x 4,0x140; 1x 5,0x160; 1x 6,0x180 | |

[1] Regular hexagon

## 950/7 Hex-Plus 1 L-key set, metric, chrome-plated

- Hexagonal ballpoint on the long arm

### 950/7 Hex-Plus 1 L-key set, metric, chrome-plated

| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 05**022181**001 | *111883* | | | 10 |
| | | ○ | **950 PKL**<br>1x 1,5x90 [1]; 1x 2,0x100; 1x 2,5x112;<br>1x 3,0x126; 1x 4,0x140; 1x 5,0x160; 1x 6,0x180 | |

[1] Regular hexagon

## 950/13 Hex-Plus Imperial 1 L-key set, imperial, BlackLaser

- BlackLaser for high corrosion protection and long service life
- Hexagonal ballpoint on the long arm

### 950/13 Hex-Plus Imperial 1 L-key set, imperial, BlackLaser

| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 05**021728**001 | *111982* | | | 10 |
| | | | **950 PKL inch**<br>1x 0,05"x83 [1]; 1x 1/16"x91 [1]; 1x 5/64"x100;<br>1x 3/32"x112; 1x 7/64"x119; 1x 1/8"x126;<br>1x 9/64"x132; 1x 5/32"x140; 1x 3/16"x160;<br>1x 7/32"x180; 1x 1/4"x190; 1x 5/16"x200;<br>1x 3/8"x212 | |

[1] Regular hexagon

## 950/13 Hex-Plus Imperial 1 SB L-key set, imperial, BlackLaser

Premium L-key set made of stainless steel for imperial hexagonal socket screws in convenient clip made of wear-free material for a permanently secure hold of the L-keys while also being easily accessible. L-keys with Hex-Plus profile which offers larger contact surfaces in the screw head.

The notch effect is reduced to a minimum and the destruction of the screw head is almost eliminated. The ball at the long arm allows safe working even in difficult installation positions.

The BlackLaser surface treatment makes for excellent surface protection, even from corrosion, and for long durability.

Lasered and therefore abrasion-proof size marking on the L-keys for quick access.

### 950/13 Hex-Plus Imperial 1 SB L-key set, imperial, BlackLaser

| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 05**021721**001 | *221315* | | **950 PKL Emperyal**<br>1x 0.05"x83 [1]; 1x 1/16"x91 [1]; 1x 5/64"x100;<br>1x 3/32"x112; 1x 7/64"x119; 1x 1/8"x126;<br>1x 9/64"x132; 1x 5/32"x140; 1x 3/16"x160;<br>1x 7/32"x180; 1x 1/4"x190; 1x 5/16"x200;<br>1x 3/8"x212 | 1 |

[1] Regular hexagon

## 950/9 Hex-Plus Imperial 1 L-key set, imperial, BlackLaser

| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 05**022171**001 | *111975* | | | 10 |
| | | | **950 PKL inch**<br>1x 5/64"x100; 1x 3/32"x112; 1x 1/8"x126;<br>1x 5/32"x140; 1x 3/16"x160; 1x 7/32"x180;<br>1x 1/4"x190; 1x 5/16"x200; 1x 3/8"x212 | |

## 950/9 Hex-Plus Imperial 1 SB L-key set, imperial, BlackLaser

| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 05**133180**001 | *154118* | | **950 PKL inch**<br>1x 5/64"x100; 1x 3/32"x112; 1x 1/8"x126;<br>1x 5/32"x140; 1x 3/16"x160; 1x 7/32"x180;<br>1x 1/4"x190; 1x 5/16"x200; 1x 3/8"x212 | 1 |

## Bicycle Set 4

L-keys made from circular material with plastic sleeve for use on bicycles. The plastic sleeve makes working comfortable even at low temperatures and is easy on the fingers.

All L-keys are easily accessible due to their colour coding and size markings. For hexagonal socket screws and TORX® screws. In a robust and lightweight folding pouch.

- In a practical, lightweight folding pouch for easy carrying

## Bicycle Set 4

| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 05**004173**001 | *211446* | | | 1 |
| | | | **950 SPKL Multicolour**<br>1x 2,0x101; 1x 2,5x112 | |
| | | | **950 SPKL HF Multicolour**<br>1x 3,0x123; 1x 4,0x137; 1x 5,0x154;<br>1x 6,0x172; 1x 8,0x195 | |
| | | | **967 SXL TORX® HF Multicolour**<br>1x TX 10x112; 1x TX 25x154 | |
| | | | **Hook and loop fastener strip 70**<br>1x 50,0x70,0 | |

## 3950 SPKL Multicolour HF L-key, metric, stainless steel, with holding function

High quality L-keys out of stainless steel for hexagonal socket screws by Wera. Stainless steel prevents the transfer of extraneous rust. The Hex-Plus profile offers a greater contact surface in the head of the screw.

The notching effect is therefore reduced to a minimum and damage to the screw head more or less eliminated. Come with hex ballpoint on the long arm: the ballpoint drive profile means that it is possible to swivel the tool axis away from the screwdriving axis, thus enabling “round the corner” screwdriving. Take it easy Tool Finder: colour coding according to size.

- Solution to the extraneous rust problem: fasten stainless screws with stainless tools
- Stainless L-keys prevent extraneous rust on stainless screws
- Hex-Plus allows socket head screws to live longer
- With holding function (HF) on the long arm to securely hold the screw on the tool
- The ball head on the long arm also allows offset use
- With Take it easy tool finder: colour coding by size
- All L-keys have a colour-coded, easy-grip hose sleeve for ergonomic and comfortable operation even at low temperatures
- With Take it easy tool finder: colour coding by size

### 3950 SPKL Multicolour HF L-key, metric, stainless steel, with holding function

| Code | EAN 4013288 | | mm | mm | mm | | | |
|---|---|---|---|---|---|---|---|---|
| 05**022693**001 | *224415* | | 3,0 | 123 | 21 | 4 7/8" | 27/32" | 10 |
| 05**022694**001 | *224422* | | 4,0 | 137 | 24 | 5 3/8" | 1" | 10 |
| 05**022695**001 | *224439* | | 5,0 | 154 | 27 | 6 1/16" | 1 1/16" | 10 |
| 05**022696**001 | *224446* | | 6,0 | 172 | 31 | 6 3/4" | 1 1/4" | 10 |
| 05**022697**001 | *224453* | | 8,0 | 195 | 37 | 7 11/16" | 1 7/16" | 10 |
| 05**022698**001 | *224460* | | 10,0 | 224 | 42 | 9" | 1 11/16" | 10 |

## 3950 SPKL Multicolour L-key, metric, stainless

High quality L-keys out of stainless steel for hexagonal socket screws by Wera. Stainless steel prevents the transfer of extraneous rust. The Hex-Plus profile offers a greater contact surface in the head of the screw.

The notching effect is therefore reduced to a minimum and damage to the screw head more or less eliminated.

Come with hex ballpoint on the long arm: the ballpoint drive profile means that it is possible to swivel the tool axis away from the screwdriving axis, thus enabling “round the corner” screwdriving.

Take it easy Tool Finder: colour coding according to size. In an almost wear-free L-key clip fastener.

- Solution to the extraneous rust problem: fasten stainless screws with stainless tools
- Hex-Plus allows socket head screws to live longer
- Stainless L-keys prevent extraneous rust on stainless screws
- Take it easy tool finder with colour coding according to sizes
- Wear-resistant clip material for enhanced durability

### 3950 SPKL Multicolour L-key, metric, stainless

| Code | EAN 4013288 | | mm | mm | mm | | | |
|---|---|---|---|---|---|---|---|---|
| 05**022660**001 | *185792* | | 1,5 | 90 | 14 | 3 1/2" | 9/16" | 10 |
| 05**022661**001 | *185808* | | 2,0 | 101 | 16 | 4" | 5/8" | 10 |
| 05**022662**001 | *185815* | | 2,5 | 112 | 19 | 4 7/16" | 3/4" | 10 |
| 05**022663**001 | *185822* | | 3,0 | 123 | 21 | 4 7/8" | 27/32" | 10 |
| 05**022664**001 | *185839* | | 4,0 | 137 | 24 | 5 3/8" | 1" | 10 |
| 05**022665**001 | *185846* | | 5,0 | 154 | 27 | 6 1/16" | 1 1/16" | 10 |
| 05**022666**001 | *185860* | | 6,0 | 172 | 31 | 6 3/4" | 1 1/4" | 10 |
| 05**022667**001 | *185877* | | 8,0 | 195 | 37 | 7 11/16" | 1 7/16" | 10 |
| 05**022668**001 | *185884* | | 10,0 | 224 | 42 | 9" | 1 11/16" | 10 |

## 3950 SPKL Multicolour L-keys, imperial, stainless

| Code | EAN 4013288 | | ⬡ | L' mm | L mm | L' | L | |
|---|---|---|---|---|---|---|---|---|
| 05022850001 | *221384* | | 5/64" | 101 | 16 | 4" | 5/8" | 10 |
| 05022851001 | *221469* | | 3/32" | 112 | 19 | 4 7/16" | 3/4" | 10 |
| 05022852001 | *221452* | | 1/8" | 123 | 21 | 4 7/8" | 53/64" | 10 |
| 05022853001 | *221445* | | 5/32" | 137 | 24 | 5 3/8" | 5/16" | 10 |
| 05022854001 | *221438* | | 3/16" | 154 | 27 | 6 1/16" | 1 1/16" | 10 |
| 05022855001 | *221377* | | 7/32" | 172 | 31 | 6 3/4" | 1 7/32" | 10 |
| 05022856001 | *221421* | | 1/4" | 185 | 34 | 7 1/4" | 1 11/32" | 10 |
| 05022857001 | *221414* | | 5/16" | 195 | 37 | 7 11/16" | 1 29/64" | 10 |
| 05022858001 | *221407* | | 3/8" | 224 | 42 | 9" | 1 21/32" | 10 |

## 3950 PKL L-key, metric, stainless

| Code | EAN 4013288 | ⬡ mm | L' mm | L mm | L' | L | | |
|---|---|---|---|---|---|---|---|---|
| 05022700001 | *111265* | 1,5 | 90 | 14 | 3 1/2" | 9/16" | | 10 |
| 05022701001 | *111272* | 2,0 | 101 | 16 | 4" | 5/8" | | 10 |
| 05022702001 | *111289* | 2,5 | 112 | 19 | 4 7/16" | 3/4" | | 10 |
| 05022703001 | *111296* | 3,0 | 123 | 21 | 4 7/8" | 27/32" | | 10 |
| 05022704001 | *111302* | 4,0 | 137 | 24 | 5 3/8" | 1" | | 10 |
| 05022705001 | *111319* | 5,0 | 154 | 27 | 6 1/16" | 1 1/16" | | 10 |
| 05022706001 | *111326* | 6,0 | 172 | 31 | 6 3/4" | 1 1/4" | | 10 |
| 05022708001 | *111340* | 8,0 | 195 | 37 | 7 11/16" | 1 7/16" | | 10 |
| 05022709001 | *111357* | 10,0 | 224 | 42 | 9" | 1 11/16" | | 10 |

## 3950 PKL L-key, imperial, stainless

| Code | EAN 4013288 | ⬡ | L' mm | L mm | L' | L | | |
|---|---|---|---|---|---|---|---|---|
| 05022710001 | *117151* | 3/32" | 112 | 19 | 4 7/16" | 3/4" | | 10 |
| 05022711001 | *117168* | 7/64" | 119 | 20 | 4 3/4" | 25/32" | | 10 |
| 05022712001 | *117175* | 1/8" | 123 | 21 | 4 7/8" | 27/32" | | 10 |
| 05022713001 | *117182* | 9/64" | 130 | 22 | 5 3/16" | 29/32" | | 10 |
| 05022714001 | *117199* | 5/32" | 137 | 24 | 5 3/8" | 1" | | 10 |
| 05022715001 | *117205* | 3/16" | 154 | 27 | 6 1/16" | 1 1/16" | | 10 |
| 05022716001 | *117212* | 1/4" | 185 | 34 | 7 1/4" | 1 5/16" | | 10 |
| 05022717001 | *117229* | 5/16" | 195 | 37 | 7 11/16" | 1 7/16" | | 10 |
| 05022718001 | *117236* | 3/8" | 224 | 42 | 9" | 1 11/16" | | 5 |

## 950 SPKL HF L-key Multicolour, metric, with holding function

- The holding function holds screws securely on the tool

## 950 SPKL HF L-key Multicolour, metric, with holding function

| Code | EAN 4013288 | | ⬡ mm | L' mm | L mm | L' | L | |
|---|---|---|---|---|---|---|---|---|
| 05022200001 | *188342* | | 3,0 | 123 | 21 | 4 7/8" | 27/32" | 10 |
| 05022201001 | *188359* | | 4,0 | 137 | 24 | 5 3/8" | 1" | 10 |
| 05022202001 | *188366* | | 5,0 | 154 | 27 | 6 1/16" | 1 1/16" | 10 |
| 05022203001 | *188373* | | 6,0 | 172 | 31 | 6 3/4" | 1 1/4" | 10 |
| 05022204001 | *188380* | | 8,0 | 195 | 37 | 7 11/16" | 1 7/16" | 10 |
| 05022205001 | *188397* | | 10,0 | 224 | 42 | 9" | 1 11/16" | 10 |

## 950 SPKL L-key Multicolour, metric

| Code | EAN 4013288 | | mm | mm | mm | | | |
|---|---|---|---|---|---|---|---|---|
| 05022600001 | *167842* | | 1,5 | 90 | 14 | 3 1/2" | 9/16" | 10 |
| 05022602001 | *167934* | | 2,0 | 101 | 16 | 4" | 5/8" | 10 |
| 05022604001 | *167859* | | 2,5 | 112 | 19 | 4 7/16" | 3/4" | 10 |
| 05022606001 | *167866* | | 3,0 | 123 | 21 | 4 7/8" | 27/32" | 10 |
| 05022608001 | *167873* | | 4,0 | 137 | 24 | 5 3/8" | 1" | 10 |
| 05022610001 | *167880* | | 5,0 | 154 | 27 | 6 1/16" | 1 1/16" | 10 |
| 05022612001 | *167897* | | 6,0 | 172 | 31 | 6 3/4" | 1 1/4" | 10 |
| 05022614001 | *167903* | | 8,0 | 195 | 37 | 7 11/16" | 1 7/16" | 10 |
| 05022616001 | *167910* | | 10,0 | 224 | 42 | 9" | 1 11/16" | 10 |

## 950 SPKL L-key Multicolour, imperial

| Code | EAN 4013288 | | | mm | mm | | | |
|---|---|---|---|---|---|---|---|---|
| 05022630001 | *182500* | | 5/64" | 101 | 16 | 4" | 5/8" | 10 |
| 05022631001 | *182517* | | 3/32" | 112 | 19 | 4 7/16" | 3/4" | 10 |
| 05022632001 | *182524* | | 1/8" | 123 | 21 | 4 7/8" | 27/32" | 10 |
| 05022633001 | *182531* | | 5/32" | 137 | 24 | 5 3/8" | 1" | 10 |
| 05022634001 | *182548* | | 3/16" | 154 | 27 | 6 1/16" | 1 1/16" | 10 |
| 05022635001 | *182555* | | 7/32" | 172 | 31 | 6 3/4" | 1 1/4" | 10 |
| 05022636001 | *182562* | | 1/4" | 185 | 34 | 7 1/4" | 1 5/16" | 10 |
| 05022637001 | *182579* | | 5/16" | 195 | 37 | 7 11/16" | 1 7/16" | 10 |
| 05022638001 | *182586* | | 3/8" | 224 | 42 | 9" | 1 11/16" | 10 |

## 950 SPKS L-key Multicolour, metric

- Short version

## 950 SPKS L-key Multicolour, metric

| Code | EAN 4013288 | | mm | mm | mm | | | |
|---|---|---|---|---|---|---|---|---|
| 05022678001 | *211910* | | 1,5 | 50 | 14 | 2" | 9/16" | 10 |
| 05022670001 | *211934* | | 2,0 | 56 | 16 | 2 7/32" | 5/8" | 10 |
| 05022671001 | *211927* | | 2,5 | 63 | 19 | 2 1/2" | 3/4" | 10 |
| 05022672001 | *211941* | | 3,0 | 71 | 21 | 2 3/4" | 27/32" | 10 |
| 05022673001 | *211958* | | 4,0 | 80 | 24 | 3 1/8" | 1" | 10 |
| 05022674001 | *211965* | | 5,0 | 90 | 27 | 3 1/2" | 1 1/16" | 10 |
| 05022675001 | *211972* | | 6,0 | 100 | 31 | 4" | 1 1/4" | 10 |
| 05022676001 | *211989* | | 8,0 | 112 | 37 | 4 7/16" | 1 7/16" | 10 |
| 05022677001 | *211996* | | 10,0 | 125 | 42 | 5" | 1 11/16" | 10 |

## 950 SPKS L-key Multicolour, imperial, BlackLaser

- Short version
- Imperial

## 950 SPKS L-key Multicolour, imperial, BlackLaser

| Code | EAN 4013288 | | | mm | mm | | | |
|---|---|---|---|---|---|---|---|---|
| 05022651001 | *230201* | | 5/64" | 50 | 14 | 2" | 9/16" | 10 |
| 05022652001 | *230195* | | 3/32" | 56 | 16 | 2 7/32" | 5/8" | 10 |
| 05022653001 | *230218* | | 1/8" | 63 | 19 | 2 1/2" | 3/4" | 10 |
| 05022654001 | *230232* | | 5/32" | 71 | 21 | 2 3/4" | 27/32" | 10 |
| 05022655001 | *230249* | | 3/16" | 80 | 24 | 3 1/8" | 1" | 10 |
| 05022656001 | *230256* | | 7/32" | 90 | 27 | 3 1/2" | 1 1/16" | 10 |
| 05022657001 | *230263* | | 1/4" | 100 | 31 | 4" | 1 1/4" | 10 |
| 05022658001 | *230270* | | 5/16" | 112 | 37 | 4 7/16" | 1 7/16" | 10 |
| 05022659001 | *230287* | | 3/8" | 125 | 42 | 5" | 1 11/16" | 10 |

## 950 PKL L-key, metric, chrome-plated

- High corrosion protection thanks to chrome-plating
- Hexagonal ballpoint on the long arm

### 950 PKL L-key, metric, chrome-plated

| | EAN | | | | | | | |
|---|---|---|---|---|---|---|---|---|
| Code | 4013288 | mm | mm | mm | | | | |
| 05**022050**001 [1] | *018779* | 1,5 | 90 | 14 | 3 1/2" | 9/16" | | 10 |
| 05**022052**001 | *018786* | 2,0 | 100 | 16 | 4" | 5/8" | | 10 |
| 05**022054**001 | *018793* | 2,5 | 112 | 18 | 4 7/16" | 23/32" | | 10 |
| 05**022056**001 | *018809* | 3,0 | 126 | 20 | 5" | 25/32" | | 10 |
| 05**022058**001 | *018816* | 4,0 | 140 | 25 | 5 1/2" | 1" | | 10 |
| 05**022060**001 | *018823* | 5,0 | 160 | 28 | 6 5/16" | 1 3/32" | | 10 |
| 05**022062**001 | *018830* | 6,0 | 180 | 32 | 7 1/16" | 1 1/4" | | 10 |
| 05**022063**001 | *037718* | 7,0 | 190 | 34 | 7 1/2" | 1 5/16" | | 10 |
| 05**022064**001 | *018847* | 8,0 | 200 | 36 | 8" | 1 7/16" | | 10 |
| 05**022066**001 | *018854* | 10,0 | 219 | 40 | 8 11/16" | 1 9/16" | | 10 |
| 05**022067**001 | *038708* | 12,0 | 248 | 45 | 10" | 1 3/4" | | 5 |

[1] Regular hexagon

## 950 PKL BM L-key, metric, BlackLaser

- BlackLaser for high corrosion protection and long service life
- Hexagonal ballpoint on the long arm

### 950 PKL BM L-key, metric, BlackLaser

| | EAN | | | | | | | |
|---|---|---|---|---|---|---|---|---|
| Code | 4013288 | mm | mm | mm | | | | |
| 05**027101**001 [1] | *094988* | 1,5 | 90 | 14 | 3 1/2" | 9/16" | | 10 |
| 05**027102**001 | *094995* | 2,0 | 100 | 16 | 4" | 5/8" | | 10 |
| 05**027103**001 | *095008* | 2,5 | 112 | 18 | 4 7/16" | 23/32" | | 10 |
| 05**027104**001 | *095015* | 3,0 | 126 | 19 | 5" | 3/4" | | 10 |
| 05**027105**001 | *095022* | 4,0 | 140 | 25 | 5 1/2" | 1" | | 10 |
| 05**027106**001 | *095039* | 5,0 | 160 | 28 | 6 5/16" | 1 3/32" | | 10 |
| 05**027107**001 | *095046* | 6,0 | 180 | 32 | 7 1/16" | 1 1/4" | | 10 |
| 05**027110**001 | *095053* | 7,0 | 190 | 34 | 7 1/2" | 1 5/16" | | 10 |
| 05**027108**001 | *095060* | 8,0 | 200 | 36 | 8" | 1 7/16" | | 10 |
| 05**027109**001 | *095077* | 10,0 | 219 | 40 | 8 11/16" | 1 9/16" | | 10 |
| 05**027111**001 | *095084* | 12,0 | 248 | 45 | 10" | 1 3/4" | | 5 |

[1] Regular hexagon

### 950 PKL L-key, imperial, BlackLaser

| | EAN | | | | | | | |
|---|---|---|---|---|---|---|---|---|
| Code | 4013288 | | mm | mm | | | | |
| 05**022079**001 [1] | *041203* | 0,05" | 83 | 14 | 3 1/4" | 9/16" | | 10 |
| 05**022081**001 [1] | *041210* | 1/16" | 91 | 15 | 3 1/2" | 19/32" | | 10 |
| 05**022068**001 | *018861* | 5/64" | 100 | 16 | 4" | 5/8" | | 10 |
| 05**022070**001 | *018878* | 3/32" | 112 | 18 | 4 7/16" | 23/32" | | 10 |
| 05**022071**001 | *041227* | 7/64" | 119 | 19 | 4 3/4" | 3/4" | | 10 |
| 05**022072**001 | *018885* | 1/8" | 126 | 20 | 5" | 25/32" | | 10 |
| 05**022073**001 | *041234* | 9/64" | 132 | 23 | 5 3/16" | 29/32" | | 10 |
| 05**022074**001 | *018892* | 5/32" | 140 | 25 | 5 1/2" | 1" | | 10 |
| 05**022076**001 | *018908* | 3/16" | 160 | 25 | 6 5/16" | 1" | | 10 |
| 05**022078**001 | *018915* | 7/32" | 180 | 27 | 7 1/16" | 1 1/16" | | 10 |
| 05**022080**001 | *018922* | 1/4" | 190 | 34 | 7 1/2" | 1 5/16" | | 10 |
| 05**022082**001 | *018939* | 5/16" | 200 | 36 | 8" | 1 7/16" | | 10 |
| 05**022095**001 | *038739* | 3/8" | 212 | 38 | 8 3/8" | 1 1/2" | | 5 |
| 05**022096**001 | *038746* | 1/2" | 224 | 40 | 9" | 1 9/16" | | 5 |

[1] Regular hexagon

## 950 PKLS Long Arm Ballpoint Hex Key, metric, chrome plated

- Extra-short arm for use on difficult-to-access screws

### 950 PKLS Long Arm Ballpoint Hex Key, metric, chrome plated

| | EAN | | | | | | | |
|---|---|---|---|---|---|---|---|---|
| Code | 4013288 | mm | mm | mm | | | | |
| 05**022040**001 [1] | *139429* | 1,5 | 90 | 4,5 | 3 1/2" | 11/64" | | 10 |
| 05**022041**001 | *139283* | 2,0 | 100 | 5,5 | 4" | 7/32" | | 10 |
| 05**022042**001 | *139290* | 2,5 | 112 | 6,5 | 4 7/16" | 1/4" | | 10 |
| 05**022043**001 | *139306* | 3,0 | 126 | 7,5 | 5" | 19/64" | | 10 |
| 05**022044**001 | *139313* | 4,0 | 140 | 10,0 | 5 1/2" | 25/64" | | 10 |
| 05**022045**001 | *139320* | 5,0 | 160 | 12 | 6 5/16" | 15/32" | | 10 |
| 05**022046**001 | *139337* | 6,0 | 180 | 15 | 7 1/16" | 19/32" | | 10 |
| 05**022047**001 | *139344* | 8,0 | 200 | 19 | 8" | 3/4" | | 10 |
| 05**022048**001 | *139351* | 10,0 | 219 | 22 | 8 5/8" | 7/8" | | 10 |

[1] Regular hexagon

## 950 PKS L-key, metric, chrome-plated

- Short design for particularly confined screwdriving situations

### 950 PKS L-key, metric, chrome-plated

| Code | EAN 4013288 | mm | mm | mm | | | | |
|---|---|---|---|---|---|---|---|---|
| 05**133150**001 [1] | *098047* | 1,5 | 50 | 14 | 2" | 9/16" | | 10 |
| 05**133151**001 | *098054* | 2,0 | 56 | 16 | 2 7/32" | 5/8" | | 10 |
| 05**133152**001 | *098061* | 2,5 | 63 | 18 | 2 1/2" | 23/32" | | 10 |
| 05**133153**001 | *098078* | 3,0 | 71 | 20 | 2 3/4" | 25/32" | | 10 |
| 05**133154**001 | *098085* | 4,0 | 80 | 22 | 3" | 29/32" | | 10 |
| 05**133155**001 | *098092* | 5,0 | 90 | 25 | 3 1/2" | 1" | | 10 |
| 05**133156**001 | *098108* | 6,0 | 100 | 28 | 4" | 1 3/32" | | 10 |
| 05**133157**001 | *098115* | 8,0 | 112 | 32 | 4 7/16" | 1 1/4" | | 10 |
| 05**133158**001 | *098122* | 10,0 | 125 | 36 | 5" | 1 5/16" | | 10 |

[1] Regular hexagon

## 950 L HF L-key, metric, chrome-plated, with holding function

- The holding function on the long arm keeps screws securely on the tool

### 950 L HF L-key, metric, chrome-plated, with holding function

| Code | EAN 4013288 | mm | mm | mm | | | | |
|---|---|---|---|---|---|---|---|---|
| 05**022120**001 | *207258* | 3,0 | 126 | 20 | 5" | 25/32" | | 10 |
| 05**022121**001 | *207265* | 4,0 | 140 | 25 | 5 1/2" | 1" | | 10 |
| 05**022122**001 | *207319* | 5,0 | 160 | 28 | 6 5/16" | 1 3/32" | | 10 |
| 05**022123**001 | *207326* | 6,0 | 180 | 32 | 7 1/16" | 1 1/4" | | 10 |
| 05**022124**001 | *207340* | 8,0 | 200 | 36 | 8" | 1 7/16" | | 10 |
| 05**022125**001 | *207333* | 10,0 | 219 | 40 | 8 11/16" | 1 9/16" | | 5 |

### 950 L-key, metric, chrome-plated

| Code | EAN 4013288 | mm | mm | mm | | | | |
|---|---|---|---|---|---|---|---|---|
| 05**021600**001 [1] | *038722* | 1,5 | 90 | 14 | 3 1/2" | 9/16" | | 10 |
| 05**021605**001 | *018656* | 2,0 | 100 | 16 | 4" | 5/8" | | 10 |
| 05**021610**001 | *018663* | 2,5 | 112 | 18 | 4 7/16" | 23/32" | | 10 |
| 05**021615**001 | *018670* | 3,0 | 126 | 20 | 5" | 25/32" | | 10 |
| 05**021620**001 | *018687* | 4,0 | 140 | 25 | 5 1/2" | 1" | | 10 |
| 05**021625**001 | *018694* | 5,0 | 160 | 28 | 6 5/16" | 1 3/32" | | 10 |
| 05**021630**001 | *018700* | 6,0 | 180 | 32 | 7 1/16" | 1 1/4" | | 10 |
| 05**021632**001 | *037701* | 7,0 | 190 | 30 | 7 1/2" | 1 1/4" | | 10 |
| 05**021635**001 | *018717* | 8,0 | 200 | 36 | 8" | 1 7/16" | | 10 |
| 05**021640**001 | *018724* | 10,0 | 219 | 40 | 8 11/16" | 1 9/16" | | 5 |
| 05**021645**001 | *018731* | 12,0 | 250 | 45 | 10" | 1 3/4" | | 5 |

[1] Regular hexagon.

### 950 L-key, metric, chrome-plated

| Code | EAN 4013288 | mm | mm | mm | | | | |
|---|---|---|---|---|---|---|---|---|
| 05**021005**001 [1] | *018267* | 1,5 | 45 | 14 | 1 3/4" | 9/16" | | 10 |
| 05**021010**001 | *018274* | 2,0 | 50 | 16 | 2" | 5/8" | | 10 |
| 05**021015**001 | *018281* | 2,5 | 56 | 18 | 2 7/32" | 23/32" | | 10 |
| 05**021020**001 | *018298* | 3,0 | 63 | 20 | 2 1/2" | 25/32" | | 10 |
| 05**021025**001 | *018304* | 3,5 | 66 | 23 | 2 5/8" | 29/32" | | 10 |
| 05**021030**001 | *018311* | 4,0 | 70 | 25 | 2 3/4" | 1" | | 10 |
| 05**021035**001 | *018328* | 4,5 | 75 | 26 | 3" | 1 1/32" | | 10 |
| 05**021040**001 | *018335* | 5,0 | 80 | 28 | 3 1/8" | 1 3/32" | | 10 |
| 05**021045**001 | *018342* | 6,0 | 90 | 32 | 3 1/2" | 1 1/4" | | 10 |
| 05**021050**001 | *018359* | 7,0 | 95 | 34 | 3 3/4" | 1 5/16" | | 10 |
| 05**021055**001 | *018366* | 8,0 | 100 | 36 | 4" | 1 7/16" | | 10 |
| 05**021060**001 | *018373* | 9,0 | 106 | 38 | 4 3/16" | 1 1/2" | | 10 |
| 05**021065**001 | *018380* | 10,0 | 112 | 40 | 4 7/16" | 1 9/16" | | 10 |
| 05**021070**001 | *018397* | 11,0 | 120 | 43 | 4 3/4" | 1 11/16" | | 10 |
| 05**021075**001 | *018403* | 12,0 | 125 | 45 | 5" | 1 3/4" | | 10 |
| 05**021080**001 | *018410* | 13,0 | 132 | 50 | 5 3/16" | 2" | | 10 |
| 05**021085**001 [1] | *018427* | 14,0 | 140 | 56 | 5 1/2" | 2 7/32" | | 10 |
| 05**021090**001 [1] | *018434* | 17,0 | 160 | 63 | 6 5/16" | 2 1/2" | | 5 |
| 05**021095**001 [1] | *018441* | 19,0 | 180 | 70 | 7 1/16" | 2 3/4" | | 5 |

[1] Regular hexagon.

## 950 BM L-key, metric, BlackLaser

| | EAN | | | | | | | |
|---|---|---|---|---|---|---|---|---|
| Code | 4013288 | mm | mm | mm | | | | |
| 05**027201**001 [1] | *095381* | 1,5 | 45 | 14 | 1 3/4" | 9/16" | | 10 |
| 05**027202**001 | *095398* | 2,0 | 50 | 16 | 2" | 5/8" | | 10 |
| 05**027203**001 | *095541* | 2,5 | 56 | 18 | 2 7/32" | 23/32" | | 10 |
| 05**027204**001 | *095404* | 3,0 | 63 | 20 | 2 1/2" | 25/32" | | 10 |
| 05**027205**001 | *095411* | 3,5 | 66 | 23 | 2 5/8" | 29/32" | | 10 |
| 05**027206**001 | *095428* | 4,0 | 70 | 25 | 2 3/4" | 1" | | 10 |
| 05**027207**001 | *095435* | 4,5 | 75 | 26 | 3" | 1 1/32" | | 10 |
| 05**027208**001 | *095442* | 5,0 | 80 | 28 | 3 1/8" | 1 3/32" | | 10 |
| 05**027209**001 | *095459* | 6,0 | 90 | 32 | 3 1/2" | 1 1/4" | | 10 |
| 05**027210**001 | *095466* | 7,0 | 95 | 34 | 3 3/4" | 1 5/16" | | 10 |
| 05**027211**001 | *095473* | 8,0 | 100 | 36 | 4" | 1 7/16" | | 10 |
| 05**027213**001 | *095480* | 9,0 | 106 | 38 | 4 11/64" | 1 1/2" | | 10 |
| 05**027212**001 | *095497* | 10,0 | 112 | 40 | 4 7/16" | 1 9/16" | | 10 |
| 05**027214**001 | *095503* | 11,0 | 120 | 43 | 4 23/32" | 1 11/16" | | 10 |
| 05**027215**001 | *095510* | 12,0 | 125 | 45 | 5" | 1 49/64" | | 10 |

[1] Regular hexagon

## Kraftform Stainless - stainless steel to prevent rust

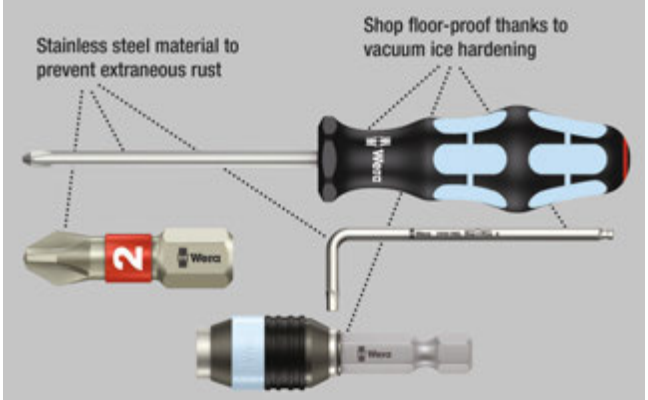


Set of high quality stainless steel L-keys for internal TORX® screws. Very corrosion-resistant due to ice-hardened stainless steel material of the L-key, avoiding the transmission of extraneous rust in stainless steel screw connections.

With holding function on the long arm: The clamping force resulting from the surface pressure between the output tip and the screw profile holds the screws securely on the tool.

With extra long arm for working in a low position.

The grip-friendly hose jacket facilitates screwdriving even at low temperatures. Take it easy tool finder with colour coding by size.

With a practical clip made of durable material for secure holding of the L-key while at the same time allowing easy removal.

- The holding function on the long arm keeps screws securely on the tool
- Extremely high corrosion protection thanks to ice-hardened stainless steel design
- Compact and easy to remove - stored in a 2-component plastic clip
- Handle-friendly hose jacket with tool finder Take it easy: Colour coding according to size

## TORX® Tools with holding function

### 3967/9 TX SXL Multicolour HF Stainless 1 L-key set with holding function, stainless

| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 05**022689**001 | *207128* | | | 1 |
| | | | **3967 SXL HF TORX® Multicolour**<br>1x TX 8x90; 1x TX 9x101; 1x TX 10x112;<br>1x TX 15x123; 1x TX 20x137; 1x TX 25x154;<br>1x TX 27x172; 1x TX 30x195; 1x TX 40x224 | |

## 967/9 TX XL Multicolour HF 1 L-key set with holding function, long

- With holding function (HF) on the long arm to securely hold the screw on the tool
- Long version
- Take it easy tool finder with colour coding according to sizes

### 967/9 TX XL Multicolour HF 1 L-key set with holding function, long

| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 05**024470**001 | *193537* | | | 1 |
| | | | **967 SXL TORX® HF Multicolour**<br>1x TX 8x90; 1x TX 9x101; 1x TX 10x112;<br>1x TX 15x123; 1x TX 20x137; 1x TX 25x154;<br>1x TX 27x172; 1x TX 30x195; 1x TX 40x224 | |

## 967/9 TX Multicolour HF 1 L-key set with holding function

- With holding function (HF) on the long arm to securely hold the screw on the tool
- Take it easy tool finder with colour coding according to sizes

### 967/9 TX Multicolour HF 1 L-key set with holding function

| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 05**024179**001 | *185228* | | | 1 |
| | | | **967 SL TORX® HF**<br>1x TX 8x76; 1x TX 9x79; 1x TX 10x85;<br>1x TX 15x90; 1x TX 20x96; 1x TX 25x104;<br>1x TX 27x112; 1x TX 30x122; 1x TX 40x132 | |

## 967/9 TX XL HF 1 L-key set with holding function, long

- With holding function (HF) on the long arm to securely hold the screw on the tool
- Long version

### 967/9 TX XL HF 1 L-key set with holding function, long

| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 05**024450**001 | *193513* | | | 1 |
| | | | **967 XL HF TORX®**<br>1x TX 8x90; 1x TX 9x101; 1x TX 10x112;<br>1x TX 15x123; 1x TX 20x137; 1x TX 25x154;<br>1x TX 27x172; 1x TX 30x195; 1x TX 40x224 | |

## 967/9 TX HF 1 L-key set with holding function, BlackLaser

- With holding function (HF) on the long arm to securely hold the screw on the tool

### 967/9 TX HF 1 L-key set with holding function, BlackLaser

| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 05**024244**001 | *104953* | | | 10 |
| | | | **967 L TORX® HF**<br>1x TX 8x76; 1x TX 9x79; 1x TX 10x85;<br>1x TX 15x90; 1x TX 20x96; 1x TX 25x104;<br>1x TX 27x112; 1x TX 30x122; 1x TX 40x132 | |

### 967/9 TX XL Multicolour 1 Multicolour L-key set for TORX® screws, long

| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 05**024480**001 | *193544* | | | 1 |
| | | | **967 SXL TORX® Multicolour**<br>1x TX 8x90; 1x TX 9x101; 1x TX 10x112 | |
| | | | **967 SPKXL TORX® Multicolour**<br>1x TX 15x123; 1x TX 20x137; 1x TX 25x154;<br>1x TX 27x172; 1x TX 30x195; 1x TX 40x224 | |

## 967/9 TX BO Multicolour 1 L-key set for tamper-proof TORX® screws, BlackLaser

- L-keys for TORX® BO screws to loosen safety connections

### 967/9 TX BO Multicolour 1 L-key set for tamper-proof TORX® screws, BlackLaser

| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 05**024335**001 | *180858* | | | 10 |
| | | | **967 SPKL TORX® BO Multicolour**<br>1x TX 8x76 [1]; 1x TX 9x79 [1];<br>1x TX 10x85 [2]; 1x TX 15x90; 1x TX 20x96;<br>1x TX 25x104; 1x TX 27x112; 1x TX 30x122;<br>1x TX 40x132 | |

[1] Product without bore hole at the short and without ball-end at the long arm.
[2] Product without ball-end at the long arm.

### 967/9 TX BO Multicolour 1 SB L-key set for tamper-proof TORX® screws, BlackLaser

| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 05**073599**001 | *170125* | | **967 SPKL TORX® BO Multicolour**<br>1x TX 8x76 [1]; 1x TX 9x79 [1]; 1x TX 10x85 [2];<br>1x TX 15x90; 1x TX 20x96; 1x TX 25x104;<br>1x TX 27x112; 1x TX 30x122; 1x TX 40x132; | 1 |

[1] Product without bore hole at the short and without ball-end at the long arm.
[2] Product without ball-end at the long arm.

## 967/9 TX XL 1 TORX® L-key set, long

- Long version

### 967/9 TX XL 1 TORX® L-key set, long

| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 05**024460**001 | *193520* | | | 1 |
| | | | **967 XL TORX®**<br>1x TX 8x90; 1x TX 9x101; 1x TX 10x112 | |
| | | | **967 PKXL TORX®**<br>1x TX 15x123; 1x TX 20x137; 1x TX 25x154;<br>1x TX 27x172; 1x TX 30x195; 1x TX 40x224 | |

### 967/9 TX 1 L-key set, BlackLaser

| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 05**024242**001 | *104946* | | | 10 |
| | | | **967 PKL TORX®**<br>1x TX 8x76 [1]; 1x TX 9x79 [1];<br>1x TX 10x85 [1]; 1x TX 15x90; 1x TX 20x96;<br>1x TX 25x104; 1x TX 27x112; 1x TX 30x122;<br>1x TX 40x132 | |

[1] Product without ball-end at the long arm.

### 967/9 TX 1 SB L-key set, BlackLaser

| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 05**073598**001 | *106438* | | **967 PKL TORX®**<br>1x TX 8x76 [1]; 1x TX 9x79 [1]; 1x TX 10x85 [1];<br>1x TX 15x90; 1x TX 20x96; 1x TX 25x104;<br>1x TX 27x112; 1x TX 30x122; 1x TX 40x132 | 1 |

[1] Product without ball-end at the long arm.

## Kraftform Stainless - stainless steel to prevent rust

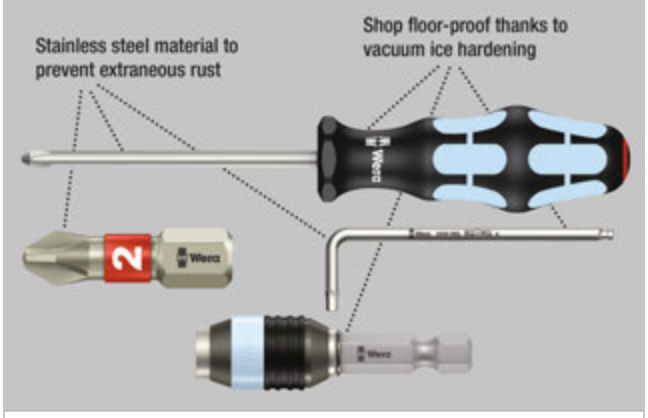


### 3967 SXL HF TORX® L-key Multicolour with holding function, long, stainless

| | EAN | | | L' | L | L' | L | |
|---|---|---|---|---|---|---|---|---|
| Code | 4013288 | | | mm | mm | | | |
| 05022680001 | *207135* | | TX 8 | 90 | 16 | 3 1/2" | 5/8" | 10 |
| 05022681001 | *207142* | | TX 9 | 101 | 16 | 4" | 5/8" | 10 |
| 05022682001 | *207159* | | TX 10 | 112 | 19 | 4 7/16" | 3/4" | 10 |
| 05022683001 | *207166* | | TX 15 | 123 | 21 | 4 7/8" | 27/32" | 10 |
| 05022684001 | *207173* | | TX 20 | 137 | 24 | 5 3/8" | 1" | 10 |
| 05022685001 | *207180* | | TX 25 | 154 | 27 | 6 1/16" | 1 1/16" | 10 |
| 05022686001 | *207197* | | TX 27 | 172 | 31 | 6 3/4" | 1 1/4" | 10 |
| 05022687001 | *207203* | | TX 30 | 195 | 37 | 7 11/16" | 1 7/16" | 10 |
| 05022688001 | *207210* | | TX 40 | 224 | 42 | 9" | 1 11/16" | 10 |

## 967 SXL HF TORX® L-key Multicolour with holding function, long

- With holding function (HF) on the long arm to securely hold the screw on the tool

### 967 SXL HF TORX® L-key Multicolour with holding function, long

| | EAN | | | L' | L | L' | L | |
|---|---|---|---|---|---|---|---|---|
| Code | 4013288 | | | mm | mm | | | |
| 05024471001 | *194145* | | TX 8 | 90 | 16 | 3 1/2" | 5/8" | 10 |
| 05024472001 | *194152* | | TX 9 | 101 | 16 | 4" | 5/8" | 10 |
| 05024473001 | *194169* | | TX 10 | 112 | 19 | 4 7/16" | 3/4" | 10 |
| 05024474001 | *194176* | | TX 15 | 123 | 21 | 4 7/8" | 27/32" | 10 |
| 05024475001 | *194183* | | TX 20 | 137 | 24 | 5 3/8" | 1" | 10 |
| 05024476001 | *194190* | | TX 25 | 154 | 27 | 6 1/16" | 1 1/16" | 10 |
| 05024477001 | *194206* | | TX 27 | 172 | 31 | 6 3/4" | 1 1/4" | 10 |
| 05024478001 | *194213* | | TX 30 | 195 | 37 | 7 11/16" | 1 7/16" | 10 |
| 05024479001 | *194220* | | TX 40 | 224 | 42 | 9" | 1 11/16" | 10 |

## 967 SPKXL TORX® L-key Multicolour, long

- Long design

### 967 SPKXL TORX® L-key Multicolour, long

| | EAN | | | L' | L | L' | L | |
|---|---|---|---|---|---|---|---|---|
| Code | 4013288 | | | mm | mm | | | |
| 05024484001 | *194305* | | TX 15 | 123 | 21 | 4 7/8" | 27/32" | 10 |
| 05024485001 | *194312* | | TX 20 | 137 | 24 | 5 3/8" | 1" | 10 |
| 05024486001 | *194329* | | TX 25 | 154 | 27 | 6 1/16" | 1 1/16" | 10 |
| 05024487001 | *194336* | | TX 27 | 172 | 31 | 6 3/4" | 1 1/4" | 10 |
| 05024488001 | *194343* | | TX 30 | 195 | 37 | 7 11/16" | 1 7/16" | 10 |
| 05024489001 | *194350* | | TX 40 | 224 | 42 | 9" | 1 11/16" | 10 |

## 967 SL TORX® HF L-key Multicolour with holding function

- With holding function (HF) on the long arm to securely hold the screw on the tool

### 967 SL TORX® HF L-key Multicolour with holding function

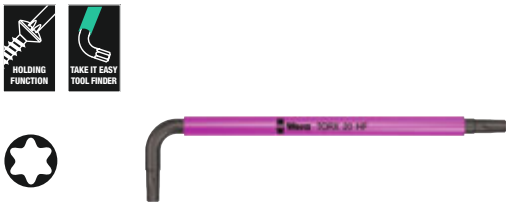


| | EAN | | | L' | L | L' | L | |
|---|---|---|---|---|---|---|---|---|
| Code | 4013288 | | | mm | mm | | | |
| 05024170001 | *185235* | | TX 8 | 76 | 16 | 3" | 5/8" | 5 |
| 05024171001 | *185242* | | TX 9 | 79 | 16 | 3 1/8" | 5/8" | 5 |
| 05024172001 | *185259* | | TX 10 | 85 | 17 | 3 1/4" | 21/32" | 5 |
| 05024173001 | *185266* | | TX 15 | 90 | 18 | 3 1/2" | 23/32" | 5 |
| 05024174001 | *185273* | | TX 20 | 96 | 19 | 3 3/4" | 3/4" | 5 |
| 05024175001 | *185280* | | TX 25 | 104 | 21 | 4 1/8" | 27/32" | 5 |
| 05024176001 | *185297* | | TX 27 | 112 | 22 | 4 7/16" | 29/32" | 5 |
| 05024177001 | *185303* | | TX 30 | 122 | 24 | 4 13/16" | 1" | 5 |
| 05024178001 | *185310* | | TX 40 | 132 | 27 | 5 3/16" | 1 1/16" | 5 |

## 967 SPKL TORX® BO L-key Multicolour

- L-key for TORX® socket screws with safety pin

### 967 SPKL TORX® BO L-key Multicolour

| Code | EAN 4013288 | | | L' mm | L mm | L' | L | |
|---|---|---|---|---|---|---|---|---|
| 05**024350**001 [1] | *172679* | | TX 8 | 76 | 16 | 3" | 5/8" | 10 |
| 05**024351**001 [1] | *172686* | | TX 9 | 79 | 16 | 3 1/8" | 5/8" | 10 |
| 05**024352**001 [2] | *172693* | | TX 10 | 85 | 17 | 3 3/8" | 21/32" | 10 |
| 05**024353**001 | *172709* | | TX 15 | 90 | 18 | 3 1/2" | 23/32" | 10 |
| 05**024354**001 | *172716* | | TX 20 | 96 | 19 | 3 3/4" | 3/4" | 10 |
| 05**024355**001 | *172723* | | TX 25 | 104 | 21 | 4 1/8" | 27/32" | 10 |
| 05**024356**001 | *172730* | | TX 27 | 112 | 22 | 4 7/16" | 29/32" | 10 |
| 05**024357**001 | *172747* | | TX 30 | 122 | 24 | 4 13/16" | 1" | 10 |
| 05**024358**001 | *172754* | | TX 40 | 132 | 27 | 5 3/16" | 1 1/16" | 10 |

[1] Product without bore hole at the short and without ball-end at the long arm.
[2] Product without ball-end at the long arm.

## 967 SXL TORX® L-key Multicolour, long

- Long version

### 967 SXL TORX® L-key Multicolour, long

| Code | EAN 4013288 | | | L' mm | L mm | L' | L | |
|---|---|---|---|---|---|---|---|---|
| 05**024481**001 | *194275* | | TX 8 | 90 | 16 | 3 1/2" | 5/8" | 10 |
| 05**024482**001 | *194282* | | TX 9 | 101 | 16 | 4" | 5/8" | 10 |
| 05**024483**001 | *194299* | | TX 10 | 112 | 19 | 4 7/16" | 3/4" | 10 |

## 967 XL HF TORX® L-key with holding function, long

- With holding function (HF) on the long arm to securely hold the screw on the tool

### 967 XL HF TORX® L-key with holding function, long

| Code | EAN 4013288 | | L' mm | L mm | L' | L | | |
|---|---|---|---|---|---|---|---|---|
| 05**024451**001 | *193674* | TX 8 | 90 | 16 | 3 1/2" | 5/8" | | 10 |
| 05**024452**001 | *193681* | TX 9 | 101 | 16 | 4" | 5/8" | | 10 |
| 05**024453**001 | *193698* | TX 10 | 112 | 19 | 4 7/16" | 3/4" | | 10 |
| 05**024454**001 | *193704* | TX 15 | 123 | 21 | 4 7/8" | 27/32" | | 10 |
| 05**024455**001 | *193711* | TX 20 | 137 | 24 | 5 3/8" | 1" | | 10 |
| 05**024456**001 | *193728* | TX 25 | 154 | 27 | 6 1/16" | 1 1/16" | | 10 |
| 05**024457**001 | *193735* | TX 27 | 172 | 31 | 6 3/4" | 1 1/4" | | 10 |
| 05**024458**001 | *193742* | TX 30 | 195 | 37 | 7 11/16" | 1 7/16" | | 10 |
| 05**024459**001 | *193759* | TX 40 | 224 | 42 | 9" | 1 11/16" | | 10 |

## 967 PKXL TORX® L-key, long

- TORX® ballpoint on the long arm

### 967 PKXL TORX® L-key, long

| Code | EAN 4013288 | | L' mm | L mm | L' | L | | |
|---|---|---|---|---|---|---|---|---|
| 05**024464**001 | *194084* | TX 15 | 123 | 21 | 4 7/8" | 27/32" | | 10 |
| 05**024465**001 | *194091* | TX 20 | 137 | 24 | 5 3/8" | 1" | | 10 |
| 05**024466**001 | *194107* | TX 25 | 154 | 27 | 6 1/16" | 1 1/16" | | 10 |
| 05**024467**001 | *194114* | TX 27 | 172 | 31 | 6 3/4" | 1 1/4" | | 10 |
| 05**024468**001 | *194121* | TX 30 | 195 | 37 | 7 11/16" | 1 7/16" | | 10 |
| 05**024469**001 | *194138* | TX 40 | 224 | 42 | 9" | 1 21/32" | | 10 |

## 967 XL TORX® L-key, long

- Long design

### 967 XL TORX® L-key, long

| | EAN | | | | | | | |
|---|---|---|---|---|---|---|---|---|
| Code | 4013288 | | mm | mm | | | | |
| 05**024461**001 | *194053* | TX 8 | 90 | 16 | 3 1/2" | 5/8" | | 10 |
| 05**024462**001 | *194060* | TX 9 | 101 | 16 | 4" | 5/8" | | 10 |
| 05**024463**001 | *194077* | TX 10 | 112 | 19 | 4 7/16" | 3/4" | | 10 |

## 967 PKL TORX® L-key, BlackLaser

- TORX® ballpoint on the long arm

### 967 PKL TORX® L-key, BlackLaser

| | EAN | | | | | | | |
|---|---|---|---|---|---|---|---|---|
| Code | 4013288 | | mm | mm | | | | |
| 05**024199**001 [1] | *104939* | TX 8 | 76 | 16 | 3" | 5/8" | | 5 |
| 05**024100**001 [1] | *035035* | TX 9 | 79 | 16 | 3 1/8" | 5/8" | | 5 |
| 05**024105**001 [1] | *019431* | TX 10 | 85 | 17 | 3 3/8" | 21/32" | | 5 |
| 05**024200**001 | *019547* | TX 15 | 90 | 18 | 3 1/2" | 23/32" | | 5 |
| 05**024202**001 | *019554* | TX 20 | 96 | 19 | 3 3/4" | 3/4" | | 5 |
| 05**024204**001 | *019561* | TX 25 | 104 | 21 | 4 1/8" | 27/32" | | 5 |
| 05**024206**001 | *019578* | TX 27 | 112 | 22 | 4 7/16" | 29/32" | | 5 |
| 05**024208**001 | *019585* | TX 30 | 122 | 24 | 4 13/16" | 1" | | 5 |
| 05**024210**001 | *019592* | TX 40 | 132 | 27 | 5 3/16" | 1 1/16" | | 5 |

[1] Product without ball-end at the long arm.

## 967 L TORX® HF L-key with holding function, BlackLaser

- With holding function (HF) on the long arm to securely hold the screw on the tool

### 967 L TORX® HF L-key with holding function, BlackLaser

| | EAN | | | | | | | |
|---|---|---|---|---|---|---|---|---|
| Code | 4013288 | | mm | mm | | | | |
| 05**024160**001 | *104847* | TX 8 | 76 | 16 | 3" | 5/8" | | 5 |
| 05**024161**001 | *104922* | TX 9 | 79 | 16 | 3 1/8" | 5/8" | | 5 |
| 05**024162**001 | *104854* | TX 10 | 85 | 17 | 3 1/4" | 21/32" | | 5 |
| 05**024163**001 | *104861* | TX 15 | 90 | 18 | 3 1/2" | 23/32" | | 5 |
| 05**024164**001 | *104878* | TX 20 | 96 | 19 | 3 3/4" | 3/4" | | 5 |
| 05**024165**001 | *104885* | TX 25 | 104 | 21 | 4 1/8" | 27/32" | | 5 |
| 05**024166**001 | *104892* | TX 27 | 112 | 22 | 4 7/16" | 29/32" | | 5 |
| 05**024167**001 | *104908* | TX 30 | 122 | 24 | 4 13/16" | 1" | | 5 |
| 05**024168**001 | *104915* | TX 40 | 132 | 27 | 5 3/16" | 1 1/16" | | 5 |

### 967 TORX® L-key, BlackLaser

| | EAN | | | | | | | |
|---|---|---|---|---|---|---|---|---|
| Code | 4013288 | | mm | mm | | | | |
| 05**024001**001 | *019257* | TX 6 | 42 | 16 | 1 5/8" | 5/8" | | 5 |
| 05**024002**001 | *019264* | TX 7 | 48 | 16 | 1 7/8" | 5/8" | | 5 |
| 05**024003**001 | *019271* | TX 8 | 48 | 16 | 1 7/8" | 5/8" | | 5 |
| 05**024004**001 | *019288* | TX 9 | 48 | 16 | 1 7/8" | 5/8" | | 5 |
| 05**024005**001 | *019295* | TX 10 | 51 | 17 | 2" | 21/32" | | 5 |
| 05**024008**001 | *019301* | TX 15 | 54 | 18 | 2 1/8" | 23/32" | | 5 |
| 05**024010**001 | *019318* | TX 20 | 57 | 19 | 2 1/4" | 3/4" | | 5 |
| 05**024012**001 | *019325* | TX 25 | 60 | 20 | 2 3/8" | 25/32" | | 5 |
| 05**024013**001 | *019332* | TX 27 | 64 | 21 | 2 1/2" | 27/32" | | 5 |
| 05**024015**001 | *019349* | TX 30 | 70 | 24 | 2 3/4" | 1" | | 5 |
| 05**024020**001 | *019356* | TX 40 | 76 | 26 | 3" | 1 1/32" | | 5 |

# Kraftform Kompakt

## Kraftform Kompakt 20 RA-R

Kraftform handle with magazine for 6 bits integrated in the handle; with telescopic blade; for 1/4" hex drive bits.

The ratchet with fine toothing integrated in the handle allows fast working. Switching the screwdriving direction is intuitive: Turn the ring switch clockwise for clockwise screwdriving, turn it counterclockwise for counterclockwise screwdriving. Use position 0 to deactivate the ratchet mechanism for precise working.

The telescopic blade with Rapidaptor quick-release chuck, which can be retracted into the handle, allows quick manual screwdriving even in confined working situations when the blade is retracted. The blade can be extended by simply pressing the locking sleeve. The tool can now be used as a fully-fledged screwdriver. The telescopic blade can be removed and used as a machine adapter, as well as returned to its original position.

The Rapidaptor technology of the bit holder makes for a quick bit change.

Includes 6 BiTorsion bits for long product life, tough, for universal use; stored in the bit magazine integrated in the handle.

The strong permanent magnet in the 1/4" bit mounting ensures a secure hold of the bit. The 2-component Kraftform handle with the combination of hard and soft zones allows for a firm grip and precise working. With a robust pouch.

- The ratchet with fine toothing integrated in the handle allows fast working
- The innovative ratchet mechanism also allows fast “spinning”. A real problem solver when there is no resistance from the screw
- Intuitive switching: If I turn the switch clockwise - the ratchet turns clockwise, if I turn the switch counterclockwise - it goes counterclockwise
- Integrated bit magazine with 6x 25 mm bits
- BiTorsion Bits
- Take it easy tool finder: colour coding according to profile and size
- Innovative Rapidaptor technology for a quick bit change

### Kraftform Kompakt 20 RA-R

| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 05**051513**001 | *233981* | | | 1 |
| | | | **851/1 BTZ**<br>1x PH 1x25; 1x PH 2x25 | |
| | | | **855/1 BTZ**<br>1x PZ 2x25 | |
| | | | **867/1 TORX® BTZ**<br>1x TX 20x25; 1x TX 25x25 | |
| | | | **800/1 BTZ**<br>1x 0,8x5,5x25 | |

## Kraftform Kompakt 20 RA-R with pouch

- In practical and robust belt pouch

### Kraftform Kompakt 20 RA-R with pouch

| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 05**051514**001 | *234001* | | | 1 |
| | | | **851/1 BTZ**<br>1x PH 1x25; 1x PH 2x25 | |
| | | | **855/1 BTZ**<br>1x PZ 2x25 | |
| | | | **867/1 TORX® BTZ**<br>1x TX 20x25; 1x TX 25x25 | |
| | | | **800/1 BTZ**<br>1x 1,0x5,5x25 | |

## Kraftform Kompakt 25 RA-R with pouch

- In practical and robust belt pouch

### Kraftform Kompakt 25 RA-R with pouch

| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 05**051515**001 | *234018* | | | 1 |
| | | | **851/1 BTZ**<br>1x PH 1x25; 1x PH 2x25; 1x PH 3x25 | |
| | | | **800/1 BTZ**<br>1x 0,8x5,5x25; 1x 1,0x5,5x25; 1x 1,2x6,5x25 | |

## Kraftform Kompakt 26 RA-R with pouch

- In practical and robust belt pouch

### Kraftform Kompakt 26 RA-R with pouch

| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 05**051516**001 | *234025* | | | 1 |
| | | | **851/1 BTZ**<br>1x PH 1x25; 1x PH 2x25 | |
| | | | **800/1 BTZ**<br>1x 0,8x5,5x25; 1x 1,2x6,5x25 | |
| | | | **868/1 Z**<br>1x # 1x25; 1x # 2x25 | |

## Kraftform Kompakt 27 RA 1

Kraftform bitholding screwdriver for 1/4" hex drive bits.

The ratchet with fine toothing integrated in the handle allows fast working. Switching the screwdriving direction is intuitive: Turn the ring switch clockwise for clockwise screwdriving, turn it counterclockwise for counterclockwise screwdriving. Use position 0 to deactivate the ratchet mechanism for precise working.

Includes 6 BiTorsion bits for a long product life, tough, for universal use; stored in the bit magazine integrated in the handle.

The strong permanent magnet in the 1/4" bit mounting ensures secure holding of the bit. The 2-component Kraftform handle with the combination of hard and soft zones allows for a firm grip and precise working.

- The ratchet with fine toothing integrated in the handle allows fast working
- The innovative ratchet mechanism also allows fast “spinning”. A real problem solver when there is no resistance from the screw
- Intuitive switching: If I turn the switch clockwise - the ratchet turns clockwise, if I turn the switch counterclockwise - it goes counterclockwise
- Integrated bit magazine with 6x 25 mm bits
- BiTorsion Bits
- Take it easy tool finder: colour coding according to profile and size
- Universal holder with stainless sleeve and strong permanent magnet

### Kraftform Kompakt 27 RA 1

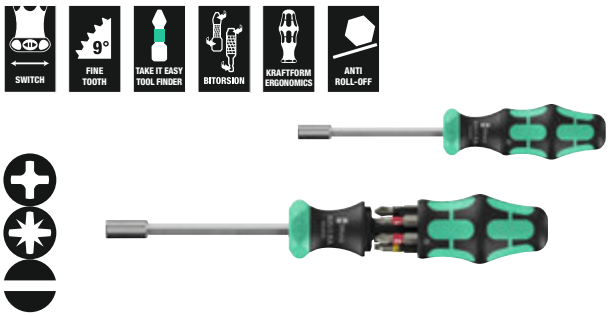


| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 05**051517**001 | *233974* | | | 1 |
| | | | **851/1 BTZ**<br>1x PH 1x25; 1x PH 2x25 | |
| | | | **855/1 BTZ**<br>1x PZ 1x25; 1x PZ 2x25 | |
| | | | **800/1 BTZ**<br>1x 1,0x5,5x25; 1x 1,2x6,5x25 | |

## Kraftform Kompakt 27 RA 2

- Tough viscous bits for universal use

### Kraftform Kompakt 27 RA 2

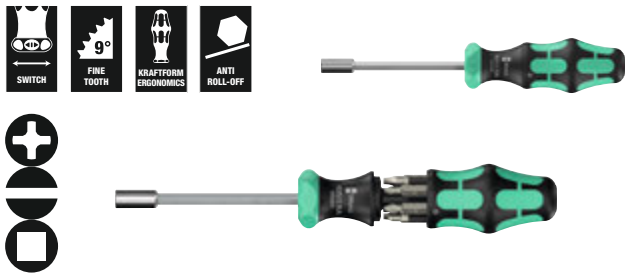


| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 05**051518**001 | *233967* | | | 1 |
| | | | **851/1 Z**<br>1x PH 1x25; 1x PH 2x25 | |
| | | | **800/1 Z**<br>1x 1,0x5,5x25; 1x 1,2x6,5x25 | |
| | | | **868/1 Z**<br>1x # 1x25; 1x # 2x25 | |

## Kraftform Kompakt 28 RA 1

- Universal holder with stainless sleeve and strong permanent magnet

### Kraftform Kompakt 28 RA 1

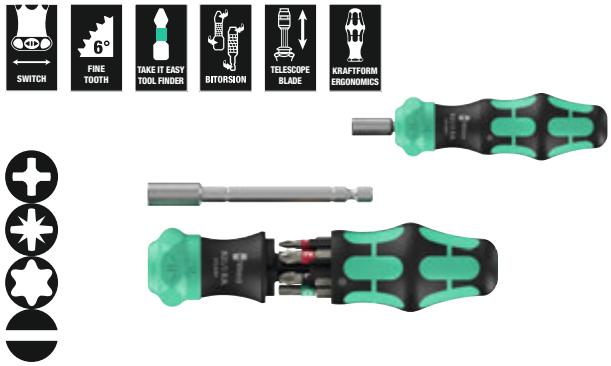


| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 05**051519**001 | *234032* | | | 1 |
| | | | **851/1 BTZ**<br>1x PH 1x25; 1x PH 2x25 | |
| | | | **855/1 BTZ**<br>1x PZ 2x25 | |
| | | | **867/1 TORX® BTZ**<br>1x TX 20x25; 1x TX 25x25 | |
| | | | **800/1 BTZ**<br>1x 0,8x5,5x25 | |

## Kraftform Kompakt 28 RA with pouch

- In practical and robust belt pouch

### Kraftform Kompakt 28 RA with pouch

| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 05**051520**001 | *234049* | | | 1 |
| | | | **851/1 BTZ**<br>1x PH 1x25; 1x PH 2x25 | |
| | | | **855/1 BTZ**<br>1x PZ 2x25 | |
| | | | **867/1 TORX® BTZ**<br>1x TX 20x25; 1x TX 25x25 | |
| | | | **800/1 BTZ**<br>1x 0,8x5,5x25 | |

## Kraftform Kompakt 60 RA-R 1

17-piece set with 89 mm long bits in a practical folding pouch.

Includes one 838 RA-R L bitholding screwdriver with ratchet functionality. The ratchet with fine toothing integrated in the handle allows fast working. The innovative ratchet mechanism allows “spinning” when the screw offers little resistance. Switching the screwdriving direction is intuitive: Turn the ring switch clockwise for clockwise screwdriving, turn it counterclockwise for counterclockwise screwdriving. Use position 0 to deactivate the ratchet mechanism for precise working.

The Rapidaptor quick-release chuck (suitable for bits with 1/4" external hexagon drive as per DIN ISO 1173-C 6.3 and E 6.3 (ISO 1173)) allows for lightning-fast bit changes without any extra tools.

16 bits (89 mm), tough, for universal use.

- The ratchet with fine toothing integrated in the handle allows fast working
- The innovative ratchet mechanism also allows fast “spinning”. A real problem solver when there is no resistance from the screw
- Intuitive switching: If I turn the switch clockwise - the ratchet turns clockwise, if I turn the switch counterclockwise - it goes counterclockwise
- Use position 0 to deactivate the ratchet mechanism for precise working
- In a robust folding pouch with Wera 2go compatibility

### Kraftform Kompakt 60 RA-R 1

| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 05**051530**001 | *234056* | | | 1 |
| | | | **838 RA-R L**<br>1x 1/4"x140 | |
| | | | **851/4 Z**<br>1x PH 1x89; 1x PH 2x89; 1x PH 3x89 [1] | |
| | | | **855/4 Z**<br>1x PZ 1x89; 1x PZ 2x89; 1x PZ 3x89 [1] | |
| | | | **867/4 Z TORX® BO**<br>1x TX 10x89; 1x TX 15x89; 1x TX 20x89;<br>1x TX 25x89; 1x TX 30x89 | |
| | | | **840/4 Z**<br>1x 3,0x89; 1x 4,0x89; 1x 5,0x89; 1x 6,0x89 [1] | |
| | | | **800/4 Z**<br>1x 1,0x5,5x89 | |

[1] Hexagonal blade

## Kraftform Kompakt 60 RA-R Imperial 1

- 16 bits, 89 mm long, for Phillips, TORX® BO, hexagonal socket, square head and slotted

### Kraftform Kompakt 60 RA-R Imperial 1

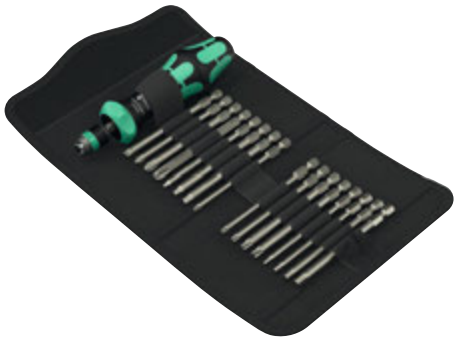

| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 05**051531**001 | *234063* | | | 1 |
| | | | **838 RA-R L**<br>1x 1/4"x140 | |
| | | | **851/4 Z**<br>1x PH 1x89; 1x PH 2x89; 1x PH 3x89 [1] | |
| | | | **867/4 Z TORX® BO**<br>1x TX 10x89; 1x TX 15x89; 1x TX 20x89; 1x TX 25x89; 1x TX 30x89 | |
| | | | **840/4 Z**<br>1x 3/32"x89; 1x 1/8"x89; 1x 5/32"x89; 1x 3/16"x89 | |
| | | | **868/4**<br>1x # 1x89; 1x # 2x89; 1x # 3x89 | |
| | | | **800/4 Z**<br>1x 1,0x5,5x89 | |

[1] Hexagonal blade

## Kraftform Kompakt 400 RA Set 1

17-piece set in a robust textile box. One 416 RA T-handle bitholding screwdriver with ratchet function and Rapidaptor quick-release chuck for ¼" bits. The integrated ratchet with fine toothing (80 teeth/return angle 4.5°) eases and accelerates screwdriving without having to reposition the tool. The ratchet mechanism completely embedded in the handle ensures very handy and comfortable work.

With reversing lever for comfortable clockwise/counterclockwise direction change in one-hand operation. The ergonomic shape of the handle fills the ball of the hand well, the fingers lie securely in the softly rounded recessed grips. The whole hand comes into contact with the handle, friction loss between hand and handle is avoided.

Bit holder for bits with 1/4" external hexagon drive as per DIN ISO 1173-C 6.3 and E 6.3. With Rapidaptor technology for lightning-fast bit changes. 16 tough bits, ¼", 89 mm long, for universal use.

- The integrated ratchet with fine toothing ensures fast and safe working
- Convenient working thanks to the ratchet mechanism fully embedded in the handle
- Rapidaptor bitholding screwdriver with fast-rotating sleeve for lightning-fast bit changes and high working speeds
- Fast-rotating sleeve for extremely high working speed
- Ergonomic 2-component handle with finger handle recesses and pleasant surface feel for very high power transmission and fatigue-free working
- For bits with 1/4" external hexagon drive as per DIN ISO 1173-C 6.3 and E 6.3

### Kraftform Kompakt 400 RA Set 1

| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 05**023471**001 | *222879* | | | 1 |
| | | | **416 RA**<br>1x 1/4"x45 | |
| | | | **851/4 Z**<br>1x PH 2x89; 1x PH 3x89[1] | |
| | | | **855/4 Z**<br>1x PZ 2x89; 1x PZ 3x89[1] | |
| | | | **867/4 Z TORX®**<br>1x TX 10x89; 1x TX 15x89; 1x TX 20x89; 1x TX 25x89; 1x TX 30x89; 1x TX 40x89 | |
| | | | **840/4 Z**<br>1x 3,0x89; 1x 4,0x89; 1x 5,0x89; 1x 6,0x89[1]; 1x 8,0x89[1] | |
| | | | **800/4 Z**<br>1x 1,0x5,5x89 | |
| | | | **Hook and Loop Fastener Strip 120**<br>1x 50,0x120,0 | |

[1] Hexagonal blade

## Kraftform Kompakt 400 RA Imperial Set 1

| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 05**057473**001 | *222930* | | | 1 |
| | | | **416 RA**<br>1x 1/4"x45 | |
| | | | **851/4 Z**<br>1x PH 2x89; 1x PH 3x89[1] | |
| | | | **867/4 Z TORX®**<br>1x TX 10x89; 1x TX 15x89; 1x TX 20x89;<br>1x TX 25x89; 1x TX 30x89; 1x TX 40x89 | |
| | | | **840/4 Z**<br>1x 1/8"x89; 1x 5/32"x89; 1x 3/16"x89; 1x 7/32"x89;<br>1x 1/4"x89 | |
| | | | **868/4**<br>1x # 2x89; 1x # 3x89 | |
| | | | **800/4 Z**<br>1x 1,0x5,5x89 | |
| | | | **Hook and Loop Fastener Strip 120**<br>1x 50,0x120,0 | |

[1] Hexagonal blade

## Kraftform Kompakt 400 RA Set 2

9-piece set in a robust textile box. One 411 A RA T-handle adapter screwdriver with ratchet function for 1/4" sockets.

The integrated ratchet with fine toothing (80 teeth/return angle 4.5°) eases and accelerates screwdriving without having to reposition the tool. The ratchet mechanism completely embedded in the handle ensures very handy and comfortable work.

With reversing lever for comfortable clockwise/counterclockwise direction change in one-hand operation. The ergonomic shape of the handle fills the ball of the hand well, the fingers lie securely in the softly rounded recessed grips.

The whole hand comes into contact with the handle, friction loss between hand and handle is avoided. For 1/4" sockets as well as 1/4" connectors with square head drive, with ball lock. 8 Zyklop sockets with 1/4" drive.

Take it easy tool finder: With colour coding by size – for quick and easy identification of the required tool .

- Ergonomic 2-component handle with finger handle recesses and pleasant surface feel for very high power transmission and fatigue-free working
- The integrated ratchet with fine toothing ensures fast and safe working
- Reversing lever for comfortable clockwise/counterclockwise direction change
- Convenient working thanks to the ratchet mechanism fully embedded in the handle
- Fast-rotating sleeve for extremely high working speed
- 1/4" socket mounting with secure ball lock
- With Take it easy tool finder: colour coding by size

## Kraftform Kompakt 400 RA Set 2

| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 05**023470**001 | *222862* | | | 1 |
| | | | **411 A RA**<br>1x 1/4"x45 | |
| | | | **8790 HMA**<br>1x 6,0x23,0; 1x 7,0x23,0; 1x 8,0x23,0;<br>1x 9,0x23,0; 1x 10,0x23,0; 1x 11,0x23,0;<br>1x 12,0x23,0; 1x 13,0x23,0 | |
| | | | **Hook and Loop Fastener Strip 120**<br>1x 50,0x120,0 | |

## Kraftform Kompakt 400 RA Imperial Set 2

| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 05**057474**001 | *223364* | | | 1 |
| | | | **411 A RA**<br>1x 1/4"x45 | |
| | | | **8790 HMA**<br>1x 3/16"x23,0; 1x 7/32"x23,0; 1x 1/4"x23,0; 1x 9/32"x23,0; 1x 5/16"x23,0; 1x 3/8"x23,0; 1x 7/16"x23,0; 1x 1/2"x23,0 | |
| | | | **Hook and Loop Fastener Strip 120**<br>1x 50,0x120,0 | |

## Kraftform Kompakt 400 RA SHK Set 1

- Set especially for HVAC applications

### Kraftform Kompakt 400 RA SHK Set 1

| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 05**136072**001 | *228369* | | | 1 |
| | | | **416 RA**<br>1x 1/4"x45 | |
| | | | **816 R**<br>1x 1/4"x119 | |
| | | | **851/4 Z**<br>1x PH 2x89 | |
| | | | **855/4 Z**<br>1x PZ 2x89 | |
| | | | **855/4 PZ/S**<br>1x # 1x70; 1x # 2x70 | |
| | | | **867/4 Z TORX®**<br>1x TX 15x89; 1x TX 20x89; 1x TX 25x89; 1x TX 30x89 | |
| | | | **840/4 Z**<br>1x 2,0x89; 1x 2,5x89; 1x 3,0x89; 1x 4,0x89; 1x 5,0x89; 1x 6,0x89 [1] | |
| | | | **869/4 M**<br>1x 8,0x50,0; 1x 10,0x50,0 | |
| | | | **Hook and Loop Fastener Strip 120**<br>1x 50,0x120,0 | |

[1] Hexagonal blade

## Kraftform Kompakt 838 RA S Set 1

14-piece ratchet screwdriver set. Bitholding screwdriver with intuitive ratchet functionality. Turning the tool speeds up work. The ratchet mechanism completely embedded in the handle ensures very handy and effortless work. Ergonomic switching to clockwise/counterclockwise or position 0. Kraftform Plus handle for ergonomic screwdriving, avoiding blisters and calluses. Magnetic bitholding screwdriver for bits with 1/4" external hexagon drive.

13 tough bits for universal use (Phillips-head Phillips and Pozidriv, TORX®, hexagonal socket and slotted), 50 mm length; chemically nickel-plated, with Take it easy Tool finder: With size stamping and colour coding by output to help you find the required bit easily.

- Extremely small bitholding screwdriver for bits with 1/4" external hexagon drive
- Ratchet mechanism integrated in the handle
- The integrated ratchet with fine toothing ensures fast and safe working
- High working speed: The ratchet mechanism allows to “spin” when screwdriving
- Ergonomic intuitive switching to clockwise/counterclockwise or position 0
- Strong permanent magnet in the bit mounting holds the bits firmly
- Take it easy tool finder: colour coding according to profile and size
- Suitable for docking with the Wera 2go system

### Kraftform Kompakt 838 RA S Set 1

| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 05**051060**001 | *229755* | | | 1 |
| | | | **838 RA S**<br>1x 1/4"x102 | |
| | | | **851/4 BTZ**<br>1x PH 1x50; 1x PH 2x50 | |
| | | | **855/4 BTZ**<br>1x PZ 1x50; 1x PZ 2x50 | |
| | | | **867/4 TORX® BTZ**<br>1x TX 10x50; 1x TX 15x50; 1x TX 20x50;<br>1x TX 25x50 | |
| | | | **840/4 BTZ**<br>1x 2,5x50; 1x 3,0x50; 1x 4,0x50; 1x 5,0x50 | |
| | | | **800/4 BTZ**<br>1x 0,8x5,5x50 | |
| | | | **Hook and Loop Fastener Strip 70**<br>1x 50,0x70,0 | |

### Kraftform Kompakt 838 RA S Imperial Set 1

| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 05**051065**001 | *229816* | | | 1 |
| | | | **838 RA S**<br>1x 1/4"x102 | |
| | | | **851/4 BTZ**<br>1x PH 1x50; 1x PH 2x50 | |
| | | | **867/4 TORX® BTZ**<br>1x TX 10x50; 1x TX 15x50; 1x TX 20x50;<br>1x TX 25x50 | |
| | | | **840/4 Z**<br>1x 9/64"x50; 1x 5/32"x50; 1x 3/16"x50; 1x 7/32"x50 | |
| | | | **800/4 BTZ**<br>1x 0,8x5,5x50 | |
| | | | **868/4**<br>1x # 1x50; 1x # 2x50 | |
| | | | **Hook and Loop Fastener Strip 70**<br>1x 50,0x70,0 | |

## Kraftform Kompakt 838 RA-R M Set 1

15-piece ratchet screwdriver set. Bitholding screwdriver with intuitive ratchet functionality. The ratchet mechanism with fine toothing integrated in the handle (36 teeth/return angle 10°) eases and accelerates screwdriving without having to reposition the tool. Spinning the tool is also possible. The ratchet mechanism completely embedded in the handle ensures very handy and comfortable work. Ergonomic switching to clockwise/counter-clockwise or position 0.

Kraftform Plus handle for comfortable ergonomic screwdriving, avoiding blisters and calluses. Magnetic bitholding screwdriver for bits with 1/4" external hexagon drive as per DIN ISO 1173-C 6.3 and E 6.3 (ISO 1173).

The Rapidaptor quick-release chuck allows lightning-fast bit changes without any extra tools. The strong permanent magnet holds the bits firmly. 13 tough bits for universal use (Phillips-head Phillips and Pozidriv, TORX®, slotted and hexagonal socket), 89 mm length; chemically nickel-plated.

- Bitholding screwdriver with Rapidaptor quick-release chuck for bits with 1/4" external hexagon drive as per DIN ISO 1173-C 6.3 and E 6.3 and Wera series 1 and 4
- Rapidaptor holder for rapid bit change
- In robust folding pouch with Wera 2go compatibility

### Kraftform Kompakt 838 RA-R M Set 1

| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 05**051061**001 | *229779* | | | 1 |
| | | | **838 RA-R M**<br>1x 1/4"x123,5 | |
| | | | **851/4 Z**<br>1x PH 1x89; 1x PH 2x89; 1x PH 3x89 [1] | |
| | | | **855/4 Z**<br>1x PZ 1x89; 1x PZ 2x89; 1x PZ 3x89 [1] | |
| | | | **867/4 Z TORX®**<br>1x TX 10x89; 1x TX 15x89; 1x TX 20x89;<br>1x TX 25x89 | |
| | | | **840/4 Z**<br>1x 3,0x89; 1x 4,0x89; 1x 5,0x89 | |
| | | | **800/4 Z**<br>1x 1,0x5,5x89 | |
| | | | **Hook and Loop Fastener Strip 70**<br>1x 50,0x70,0 | |

[1] Hexagonal blade

### Kraftform Kompakt 838 RA-R M Imperial Set 1

| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 05**051066**001 | *229823* | | | 1 |
| | | | **838 RA-R M**<br>1x 1/4"x123,5 | |
| | | | **851/4 Z**<br>1x PH 1x89; 1x PH 2x89; 1x PH 3x89 [1] | |
| | | | **867/4 Z TORX®**<br>1x TX 10x89; 1x TX 15x89; 1x TX 20x89;<br>1x TX 25x89 | |
| | | | **840/4 Z**<br>1x 1/8"x89; 1x 5/32"x89; 1x 3/16"x89 | |
| | | | **800/4 Z**<br>1x 1,0x5,5x89 | |
| | | | **868/4**<br>1x # 1x89; 1x # 2x89; 1x # 3x89 | |
| | | | **Hook and Loop Fastener Strip 70**<br>1x 50,0x70,0 | |

[1] Hexagonal blade

## Kraftform Kompakt Pistol RA-R 1

Kraftform pistol handle for 1/4" hex drive bits.

The ratchet with fine toothing integrated in the handle allows fast working. Switching the screwdriving direction is intuitive: Turn the ring switch clockwise for clockwise screwdriving, turn it counterclockwise for counterclockwise screwdriving. Use position 0 to deactivate the ratchet mechanism for precise working.

The Rapidaptor technology of the bitholding screwdriver makes for a quick bit change.

Includes 6 BiTorsion bits for a long product life, tough, for universal use; stored in the bit magazine integrated in the handle.

The strong permanent magnet in the 1/4" bit mounting ensures secure holding of the bit. The 2-component Kraftform pistol handle allows for high leverage. The robust holster can be attached to the belt.

- The ratchet with fine toothing integrated in the handle allows fast working
- The innovative ratchet mechanism also allows fast “spinning”. A real problem solver when there is no resistance from the screw
- Intuitive switching: If I turn the switch clockwise - the ratchet turns clockwise, if I turn the switch counterclockwise - it goes counterclockwise
- Integrated bit magazine with 6x 25 mm bits
- BiTorsion Bits
- Take it easy tool finder: colour coding according to profile and size
- Innovative Rapidaptor technology for a quick bit change
- The robust holster can be attached to the belt

### Kraftform Kompakt Pistol RA-R 1

| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 050**51535**001 | *234087* | | | 1 |
| | | | **851/1 BTZ**<br>1x PH 1x25; 1x PH 2x25 | |
| | | | **855/1 BTZ**<br>1x PZ 1x25; 1x PZ 2x25 | |
| | | | **867/1 TORX® BTZ**<br>1x TX 20x25; 1x TX 25x25 | |
| | | | **814 RA-R**<br>1x 1/4" | |

## Kraftform Kompakt Pistol RA-R 2

- 6x25mm bits with Take it easy tool finder: colour coding by profile and size stamping
- 6x89mm bits, tough viscous bits for universal use

### Kraftform Kompakt Pistol RA-R 2

| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 05**051536**001 | *234094* | | | 1 |
| | | | **851/1 BTZ**<br>1x PH 1x25; 1x PH 2x25 | |
| | | | **855/1 BTZ**<br>1x PZ 1x25; 1x PZ 2x25 | |
| | | | **867/1 TORX® BTZ**<br>1x TX 20x25; 1x TX 25x25 | |
| | | | **851/4 Z**<br>1x PH 1x89; 1x PH 2x89 | |
| | | | **855/4 Z**<br>1x PZ 1x89; 1x PZ 2x89 | |
| | | | **867/4 Z TORX®**<br>1x TX 20x89; 1x TX 25x89 | |
| | | | **814 RA-R**<br>1x 1/4" | |

## Kraftform Kompakt Stubby magazine RA 1

Particularly small bit holder with short bit mounting for hard-to-reach areas.

The ratchet with fine toothing integrated in the handle allows fast working. Switching the screwdriving direction is intuitive: Turn the ring switch clockwise for clockwise screwdriving, turn it counterclockwise for counterclockwise screwdriving. Use position 0 to deactivate the ratchet mechanism for precise working.

Includes 6 BiTorsion bits for a long product life, tough, for universal use. With Take it easy tool finder: with size stamping and colour coding by output to help you find the required bit easily.

The strong permanent magnet in the bit mounting ensures secure holding of the bit. The 2-component Kraftform handle with the practical combination of hard and soft zones allows for a firm grip and precise working.

- The ratchet with fine toothing integrated in the handle allows fast working
- The innovative ratchet mechanism also allows fast “spinning”. A real problem solver when there is no resistance from the screw
- With 6 BiTorsion bits in the magazine: Phillips, TORX® and slotted; tough
- Take it easy tool finder: colour coding according to profile and size

### Kraftform Kompakt Stubby magazine RA 1

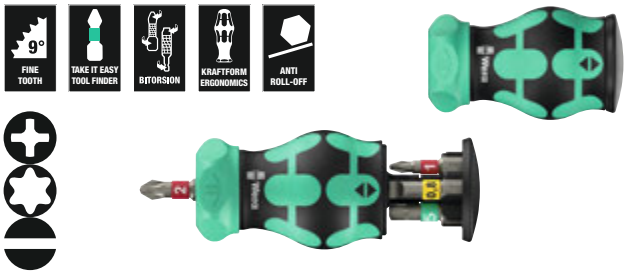


| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 05**008891**001 | *233936* | | | 1 |
| | | | **851/1 BTZ**<br>1x PH 1x25; 1x PH 2x25 | |
| | | | **867/1 TORX® BTZ**<br>1x TX 15x25; 1x TX 20x25; 1x TX 25x25 | |
| | | | **800/1 BTZ**<br>1x 0,8x5,5x25 | |

## Kraftform Kompakt Stubby magazine RA 2

- With 6 BiTorsion bits in the magazine: Phillips and Pozidriv, TORX® and slotted; tough

### Kraftform Kompakt Stubby magazine RA 2

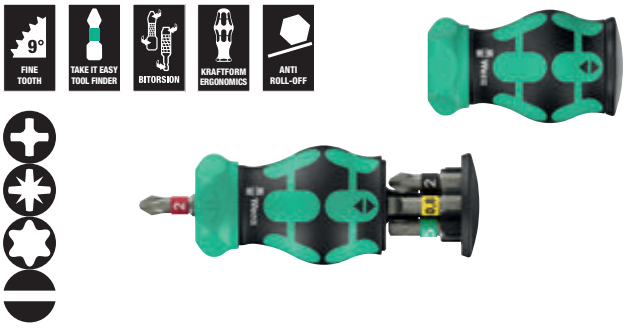


| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 05**008892**001 | *233943* | | | 1 |
| | | | **851/1 BTZ**<br>1x PH 1x25; 1x PH 2x25 | |
| | | | **855/1 BTZ**<br>1x PZ 1x25; 1x PZ 2x25 | |
| | | | **867/1 TORX® BTZ**<br>1x TX 25x25 | |
| | | | **800/1 BTZ**<br>1x 0,8x5,5x25 | |

## Kraftform Kompakt Stubby magazine RA 4

- With 6 bits in the magazine: cross recess Phillips, slotted and square head (Robertson); tough

### Kraftform Kompakt Stubby magazine RA 4

| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 05**008893**001 | *233950* | | | 1 |
| | | | **851/1 Z**<br>1x PH 1x25; 1x PH 2x25 | |
| | | | **868/1 Z**<br>1x # 1x25; 1x # 2x25 | |
| | | | **800/1 Z**<br>1x 1,0x5,5x25; 1x 1,2x6,5x25 | |

## Bicycle Set 5

- Stainless Steel Bits
- Take it easy tool finder: colour coding according to profile and size
- Bicycle tool set

### Bicycle Set 5

| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 05**004186**001 | *233929* | | | 1 |
| | | | **3851/1 TS PH**<br>1x PH 1x25 | |
| | | | **3867/1 TS TORX®**<br>1x TX 10x25; 1x TX 25x25 | |
| | | | **3840/1 TS**<br>1x 2,5x25; 1x 3,0x25; 1x 4,0x25; 1x 5,0x25 | |

## Kraftform Kompakt Vario RA

7-piece blade set.

One Kraftform bitholding screwdriver with 6 mm hexagonal blade mounting for combination blades (double blades) from the Wera Vario range.

The ratchet with fine toothing integrated in the handle allows fast working. Switching the screwdriving direction is intuitive: Turn the ring switch clockwise for clockwise screwdriving, turn it counterclockwise for counterclockwise screwdriving.
Use position 0 to deactivate the ratchet mechanism for precise working.

The 2-component Kraftform handle with the combination of hard and soft zones allows for a firm grip and precise working.

6 Wera Vario double blades (= 12 different profiles), 175 mm long, 6 mm hexagonal.

In a robust folding pouch.

- Kraftform bitholding screwdriver with 6 mm hexagonal blade mounting for combination blades (double blades) from the Wera Vario range
- The ratchet with fine toothing integrated in the handle allows fast working
- Intuitive switching: If I turn the switch clockwise - the ratchet turns clockwise, if I turn the switch counterclockwise - it goes counterclockwise
- Use position 0 to deactivate the ratchet mechanism for precise working
- Includes 6 Vario double-end blades
- In a robust folding pouch with Wera 2go compatibility

### Kraftform Kompakt Vario RA

| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 05**051540**001 | *234070* | | | 1 |
| | | | **80 RA**<br>1x 6x113,5 | |
| | | | **85**<br>1x PH 1xPH 2x175 | |
| | | | **86**<br>1x PZ 1xPZ 2x175 | |
| | | | **84**<br>1x 4x5x175 [1] | |
| | | | **87**<br>1x TX 10xTX 15x175; 1x TX 20xTX 25x175 | |
| | | | **81**<br>1x 0,6x4,0x1,0x6,0x175 | |

[1] without ball-end

## 838 RA-R Bitholding screwdriver with ratchet functionality, 1/4"

Premium bitholding screwdriver. Kraftform Plus handle for comfortable ergonomic screwdriving, avoiding blisters and calluses. Hard handle zones for high working speeds, while soft handle zones guarantee a high torque transfer.

Suitable for bits with 1/4" external hexagon drive as per DIN ISO 1173-C 6.3.

- Bitholding screwdriver with Rapidaptor quick-release chuck for bits with 1/4" external hexagon drive as per DIN ISO 1173-C 6.3 and E 6.3 and Wera series 1 and 4
- Ratchet mechanism integrated in the handle
- The integrated ratchet with fine toothing ensures fast and safe working
- High working speed: The ratchet mechanism allows to “spin” when screwdriving
- Ergonomic intuitive switching to clockwise/counterclockwise or position 0
- Rapidaptor holder for rapid bit change
- For bits with 1/4" external hexagon drive as per DIN ISO 1173-C 6.3 and E 6.3
- Multi-component Kraftform handle for fast and ergonomic screwdriving
- Hexagonal anti-roll feature against rolling away
- Magnetic

### 838 RA-R L Bitholding screwdriver with ratchet functionality, 1/4"

| Code | EAN 4013288 | | mm | mm | | | | |
|---|---|---|---|---|---|---|---|---|
| 05**051494**001 | *233608* | 1/4" | 140 | 111 | | | | 1 |

## 838 RA-R M Bitholding screwdriver with ratchet functionality, 1/4"

| | EAN | | | | | | | |
|---|---|---|---|---|---|---|---|---|
| Code | 4013288 | | mm | mm | | | | |
| 05**051493**001 | *229748* | 1/4" | 123,5 | 98 | | | | 1 |

## 838 RA S Bitholding screwdriver with ratchet functionality, 1/4"

- Extremely small bitholding screwdriver for bits with 1/4" external hexagon drive
- Strong permanent magnet in the bit mounting holds the bits firmly
- Universal holder for the take-up of bits with 1/4" hexagon head drive

## 838 RA S Bitholding screwdriver with ratchet functionality, 1/4"

| | EAN | | | | | | | |
|---|---|---|---|---|---|---|---|---|
| Code | 4013288 | | mm | mm | | | | |
| 05**051492**001 | *229731* | 1/4" | 102 | 84 | | | | 1 |

## 80 RA Vario blade holding handle with ratchet functionality

- Kraftform bitholding screwdriver with 6 mm hexagonal blade mounting for combination blades (double blades) from the Wera Vario range
- Not suitable for bits with 1/4" hex drive
- The ratchet with fine toothing integrated in the handle allows fast working
- Intuitive switching: If I turn the switch clockwise - the ratchet turns clockwise, if I turn the switch counterclockwise - it goes counterclockwise
- Use position 0 to deactivate the ratchet mechanism for precise working
- Ergonomic Kraftform handle for low-fatigue working

## 80 RA Vario blade holding handle with ratchet functionality

| | EAN | | | | | | | |
|---|---|---|---|---|---|---|---|---|
| Code | 4013288 | mm | mm | | | | | |
| 05**051495**001 | *233998* | 6 | 113,5 | | | | | 1 |

## Kraftform Kompakt Turbo 1

Many users would like to be able to carry out screwdriving processes faster without compromise. With a screwdriver that is precise, allows powerful screwdriving, and is much faster than a conventional screwdriver.

A part-time universal gear is the solution: Integrated in the screwdriver handle, it quadruples the working speed with smooth couplings - purely mechanically.

One hand holds the front part of the handle, the other hand turns the rear part of the handle. The turbo function can be switched on or off at the push of a button.

Turning it off is recommended for tightening and loosening with high torque, e.g. for screw connections in wood, as well as for fine adjustments. Robust, maintenance-free gear made of steel with a maximum torque of 14Nm when the turbo function is deactivated.

Thanks to the Rapidaptor bit holder, the Kraftform Turbo can be used with all conventional 1/4" hexagon bits for a wide variety of screw profiles.

With the Rapidaptor function the bits can be inserted directly and can be easily removed by pushing the sleeve forward.

- 4 times the screwdriving speed thanks to the turbo function (purely mechanical - without battery)
- Activate and deactivate the turbo function by a simple push of a button
- Turbo function especially for smooth couplings
- Can be used without the turbo function like a normal screwdriver, e.g. for timber couplings with steadily increasing torque
- Robust, maintenance-free gear made of steel

### Kraftform Kompakt Turbo 1

| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 05**057482**001 | *214614* | | | 1 |
| | | | **826 T Kraftform Turbo**<br>1x 1/4"x146 | |
| | | | **851/4 Z**<br>1x PH 1x89; 1x PH 2x89; 1x PH 3x89[1] | |
| | | | **855/4 Z**<br>1x PZ 1x89; 1x PZ 2x89; 1x PZ 3x89[1] | |
| | | | **867/4 Z TORX®**<br>1x TX 10x89; 1x TX 15x89; 1x TX 20x89;<br>1x TX 25x89; 1x TX 30x89 | |
| | | | **840/4 Z**<br>1x 3,0x89; 1x 4,0x89; 1x 5,0x89; 1x 6,0x89[1] | |
| | | | **800/4 Z**<br>1x 0,8x4,0x89; 1x 1,0x5,5x89; 1x 1,2x6,5x89 | |
| | | | **Hook and Loop Fastener Strip 120**<br>1x 50,0x120,0 | |

[1] Hexagonal blade

### Kraftform Kompakt Turbo Imperial 1

| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 05**057483**001 | *214621* | | | 1 |
| | | | **826 T Kraftform Turbo**<br>1x 1/4"x146 | |
| | | | **851/4 Z PH**<br>1x PH 1x89; 1x PH 2x89; 1x PH 3x89[1] | |
| | | | **867/4 Z TORX®**<br>1x TX 10x89; 1x TX 15x89; 1x TX 20x89;<br>1x TX 25x89; 1x TX 30x89 | |
| | | | **840/4 Z Hex-Plus**<br>1x 3/32"x89; 1x 1/8"x89; 1x 5/32"x89;<br>1x 3/16"x89 | |
| | | | **868/4 Square-Plus**<br>1x # 1x89; 1x # 2x89; 1x # 3x89 | |
| | | | **800/4 Z**<br>1x 0,8x4,0x89; 1x 1,0x5,5x89; 1x 1,2x6,5x89 | |
| | | | **Hook and Loop Fastener Strip 120**<br>1x 50,0x120,0 | |

[1] Hexagonal blade

## 826 T Kraftform Turbo bits handholder with Rapidaptor quick-release chuck

- 4 times the screwdriving speed thanks to the turbo function (purely mechanical - without battery)
- Activate and deactivate the turbo function by a simple push of a button
- Turbo function especially for smooth couplings
- Can be used without the turbo function like a normal screwdriver, e.g. for timber couplings with steadily increasing torque
- Robust, maintenance-free gear made of steel

### 826 T Kraftform Turbo bits handholder with Rapidaptor quick-release chuck

| Code | EAN 4013288 | | mm | | | | | |
|---|---|---|---|---|---|---|---|---|
| 05**057480**001 | *214591* | 1/4" | 146 | | | | | 1 |

## Kraftform Kompakt 10, 12

9 tough viscous Wera bits for universal use. Torsion design to combat premature wear.

1 holder 813 R Kraftform with Rapidaptor quick-release chuck; multi-component for high working speeds and particularly ergonomic screwdriving.

- Kraftform holder with Rapidaptor quick-release chuck
- Torsion design of the bits against premature wear
- Tough viscous bits for universal use
- Convenient and robust storage

### Kraftform Kompakt 10

| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 05**056653**001 | *041647* | | | 1 |
| | | | **813 R**<br>1x 1/4"x90 | |
| | | | **851/1 TZ PH**<br>1x PH 1x25; 1x PH 2x25 | |
| | | | **855/1 TZ PZ**<br>1x PZ 1x25; 1x PZ 2x25 | |
| | | | **867/1 TZ TORX®**<br>1x TX 10x25; 1x TX 15x25; 1x TX 20x25 | |
| | | | **800/1 TZ**<br>1x 0,5x4,0x25; 1x 1,0x5,5x25 | |

### Kraftform Kompakt 12

| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 05**135942**001 | *155887* | | | 1 |
| | | | **813 R**<br>1x 1/4"x90 | |
| | | | **851/1 J**<br>1x PH 00x25x2,0 [1]; 1x PH 0x25x2,5 [2]; 1x PH 1x25x3,0 | |
| | | | **851/1 TZ PH**<br>1x PH 2x25 | |
| | | | **867/1 TZ TORX®**<br>1x TX 5x25; 1x TX 6x25; 1x TX 7x25; 1x TX 8x25; 1x TX 9x25 | |

[1] Size 00 modificated according to JCIS 00 (Japanese Camera Industrial Standard)

[2] Size 0 modificated according to JCIS 0 (Japanese Camera Industrial Standard)

## Kraftform Kompakt 20 - the right tool for machine or hand

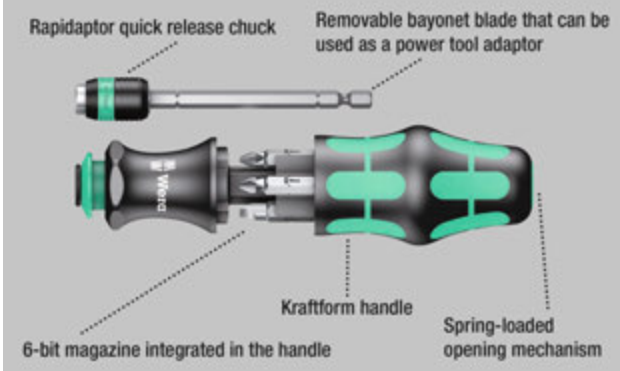


Wera compact tools enable the simultaneous use for the two types of fastening “manual” and “power tool”. The handle/interchangeable system in a compact design with various blade tips in a minimum of space make the user mobile and flexible.

Suitable for bits with 1/4" hexagon head drive as per DIN ISO 1173-C 6.3 und E 6.3 (ISO 1173) and Wera connecting series 1 and 4. Comes with an extension, bayonet, Rapidaptor technology.

Kraftform handle with non-roll feature, multi-component for particularly ergonomic screwdriving. Integrated magazine for the storage of the bits. In this way, this set replaces a 6-piece screwdriver set and reduces the equipment required to a minimum.

The profile and size of the bits are easy to recognise thanks to the Wera Take it easy Tool Finder with its colour coding and clearly visible imprint.

- Kraftform holder with bayonet blade and Rapidaptor quick-release chuck
- Kraftform handle with anti-roll feature, multi-component and integrated magazine
- Retractable bayonet blade
- Take it easy tool finder: colour coding according to profile and size
- In robust pouch

## Take it easy tool finder with color markings - for quick tool identification

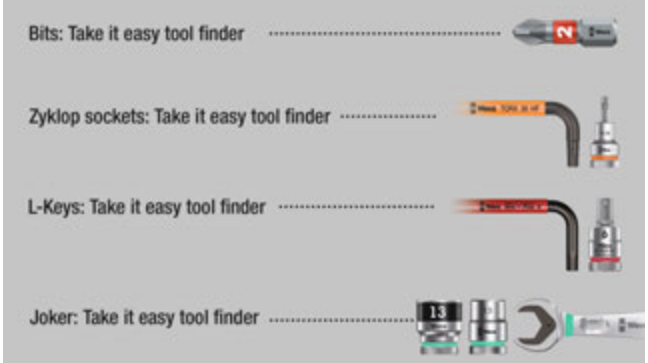


### Kraftform Kompakt 20 Tool Finder 1 with pouch

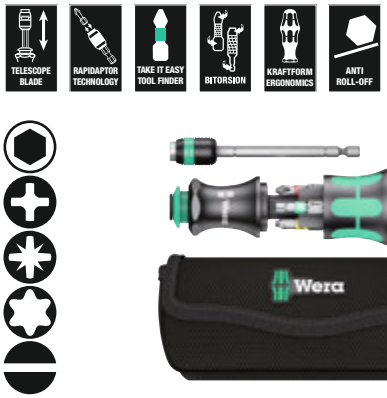


| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 05**051016**001 | *185327* | | | 1 |
| | | | **889/4 R**<br>1x 1/4"x100 | |
| | | | **851/1 BTZ**<br>1x PH 1x25; 1x PH 2x25 | |
| | | | **855/1 BTZ**<br>1x PZ 1x25; 1x PZ 2x25 | |
| | | | **867/1 TORX® BTZ**<br>1x TX 25x25 | |
| | | | **800/1 BTZ**<br>1x 0,8x5,5x25 | |
| | | | **Hook and Loop Fastener Strip 70**<br>1x 50,0x70,0 | |

## Kraftform Kompakt 20 Tool Finder 2 with pouch

13-piece Kraftform Kompakt set with 6x 25 mm long and 6x 89 mm long bits. Wera's compact tools allow the simultaneous use of both types of screw connections; "hand" or "machine".

The handle blade-change system in a compact design with different compact blade tips makes the user mobile and flexible. Suitable for bits with ¼" hexagonal drive as per DIN ISO 1173-C 6.3 and E 6.3 (ISO 1173) and Wera connection series 1 and 4.

With connecting adapter, bayonet, Rapidaptor technology, Kraftform handle with anti-roll protection, multi-components allow for particularly ergonomic screwdriving. Integrated magazine for storing 25 mm long bits.

This set replaces a 12-piece screwdriver set and reduces the necessary equipment to a minimum.

Profile and size of the bits are easily recognizable due to the Wera Take it easy tool finder with its colour coding and easily visible labels.

- 6x25mm bits with Take it easy tool finder: colour coding by profile and size stamping and 6x89mm bits

### Kraftform Kompakt 20 Tool Finder 2 with pouch

| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 05**051017**001 | *211224* | | | 1 |
| | | | **889/4 R**<br>1x ¼"x100 | |
| | | | **851/1 BTZ**<br>1x PH 1x25; 1x PH 2x25 | |
| | | | **855/1 BTZ**<br>1x PZ 1x25; 1x PZ 2x25 | |
| | | | **867/1 TORX® BTZ**<br>1x TX 20x25; 1x TX 25x25 | |
| | | | **851/4 Z**<br>1x PH 1x89; 1x PH 2x89 | |
| | | | **855/4 Z**<br>1x PZ 1x89; 1x PZ 2x89 | |
| | | | **867/4 Z TORX®**<br>1x TX 20x89; 1x TX 25x89 | |
| | | | **Hook and Loop Fastener Strip 70**<br>1x 50,0x70,0 | |

### Kraftform Kompakt 20 with pouch

| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 05**051021**001 | *098917* | | | 1 |
| | | | **889/4 R**<br>1x ¼"x100 | |
| | | | **851/1 Z**<br>1x PH 1x25; 1x PH 2x25 | |
| | | | **855/1 Z**<br>1x PZ 1x25; 1x PZ 2x25 | |
| | | | **800/1 Z**<br>1x 1,0x5,5x25; 1x 1,2x6,5x25 | |
| | | | **Hook and Loop Fastener Strip 70**<br>1x 50,0x70,0 | |

## Kraftform Kompakt 25 with pouch

| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 05**051024**001 | *098931* | | | 1 |
| | | | **889/4 R**<br>1x 1/4"x100 | |
| | | | **851/1 Z**<br>1x PH 1x25; 1x PH 2x25; 1x PH 3x25 | |
| | | | **800/1 Z**<br>1x 0,6x4,5x25; 1x 1,0x5,5x25; 1x 1,2x6,5x25 | |
| | | | **Hook and Loop Fastener Strip 70**<br>1x 50,0x70,0 | |

## Kraftform Kompakt 26 with pouch

| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 05**051025**001 | *098948* | | | 1 |
| | | | **889/4 R**<br>1x 1/4"x100 | |
| | | | **851/1 Z**<br>1x PH 1x25; 1x PH 2x25 | |
| | | | **800/1 Z**<br>1x 1,0x5,5x25; 1x 1,2x6,5x25 | |
| | | | **868/1 Z**<br>1x # 1x25; 1x # 2x25 | |
| | | | **Hook and Loop Fastener Strip 70**<br>1x 50,0x70,0 | |

## Kraftform Kompakt 27 XL Universal 1

Bit set for universal use. Bitholding screwdriver with 300 mm long blade and very slim, lockable bit mounting to reach areas which are difficult to access.

Thanks to the particularly slim design, even screws in very tight installation spaces can be operated. Multi-component Kraftform handle for high working speeds and particularly ergonomic screwdriving. Magazine integrated in the handle for bit storage.

6 tough, 25 mm length bits (Phillips-head Phillips and Pozidriv and TORX®). This set replaces a 6-piece screwdriver set and reduces the necessary equipment to a minimum. With hexagon anti-roll protection against rolling away.

- For universal use
- 300 mm long rigid blade
- Bit holder with very slim design for work in confined spaces
- Secure bit holding feature due to locking mechanism. With strong permanent magnet.
- Compact stainless steel holder for bits with 1/4"- external hexagon drive as per DIN 3126, ISO 1173 Form C 6.3 and E 6,3
- 6 tough bits, for universal use

## Kraftform Kompakt 27 XL Universal 1

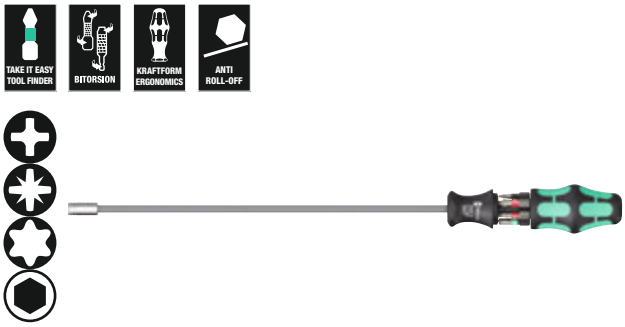


| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 05**051028**001 | *229588* | | | 1 |
| | | | **851/1 BTZ**<br>1x PH 1x25; 1x PH 2x25 | |
| | | | **855/1 BTZ**<br>1x PZ 2x25 | |
| | | | **867/1 TORX® BTZ**<br>1x TX 15x25; 1x TX 20x25; 1x TX 25x25 | |
| | | | **394 S**<br>1x 1/4"x300 | |

## Kraftform Kompakt 27 XL Universal Imperial Set 1

- With 6 bits in the magazine: Phillips-head Phillips, slotted and square head (Robertson); tough

### Kraftform Kompakt 27 XL Universal Imperial Set 1

| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 05**051032**001 | *229724* | | | 1 |
| | | | **851/1 Z**<br>1x PH 1x25; 1x PH 2x25 | |
| | | | **800/1 Z**<br>1x 1,0x5,5x25; 1x 1,2x6,5x25 | |
| | | | **868/1 Z**<br>1x # 1x25; 1x # 2x25 | |
| | | | **394 S**<br>1x 1/4"x300 | |

## Kraftform Kompakt 27 XL SHK 1

- Particularly suitable for applications in plumbing, heating and air conditioning

### Kraftform Kompakt 27 XL SHK 1

| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 051**36075**001 | *228994* | | | 1 |
| | | | **851/1 Z**<br>1x PH 2x25 | |
| | | | **867/1 TORX®**<br>1x TX 15x25; 1x TX 20x25; 1x TX 25x25 | |
| | | | **840/1 Z**<br>1x 5,0x25; 1x 6,0x25 | |
| | | | **394 S**<br>1x 1/4"x300 | |

## Kraftform Kompakt 27 Set 1

Wera compact tools with multi-component Kraftform handle for high working speeds and particularly ergonomic screwdriving. Bit magazine integrated in the handle, 6 bits with Torsion zone to prevent the bit tip from twisting at high loads. This significantly increases product life.

With Take it easy tool finder: Colour coding by profile and size stamping. Bit holder with strong permanent magnet for secure seating of the bit.

- Bit-holding handle with bit magazine
- Bit holder with strong permanent magnet which holds bits firmly
- With 6 BiTorsion bits in the magazine: Phillips-head Phillips and Pozidriv, TORX® and slotted; tough
- Take it easy tool finder: colour coding according to profile and size

### Kraftform Kompakt 27 Set 1

| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 05**051510**001 | *226556* | | | 1 |
| | | | **828/1**<br>1x 1/4" | |
| | | | **851/1 BTZ**<br>1x PH 1x25; 1x PH 2x25 | |
| | | | **855/1 BTZ**<br>1x PZ 2x25 | |
| | | | **867/1 TORX® BTZ**<br>1x TX 20x25; 1x TX 25x25 | |
| | | | **800/1 BTZ**<br>1x 0,8x5,5x25 | |

## Kraftform Kompakt 27 Set 2

- With 6 bits in the magazine: Phillips-head Phillips and slotted; tough

### Kraftform Kompakt 27 Set 2

| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 05**051511**001 | *226587* | | | 1 |
| | | | **828/1**<br>1x 1/4" | |
| | | | **851/1 Z**<br>1x PH 1x25; 1x PH 2x25; 1x PH 3x25 | |
| | | | **800/1 Z**<br>1x 0,6x4,5x25; 1x 1,0x5,5x25; 1x 1,2x6,5x25 | |

## Kraftform Kompakt 27 Imperial Set 1

- With 6 bits in the magazine: Phillips-head Phillips, slotted and square head (Robertson); tough

### Kraftform Kompakt 27 Imperial Set 1

| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 05**051512**001 | *226594* | | | 1 |
| | | | **828/1**<br>1x 1/4" | |
| | | | **851/1 Z**<br>1x PH 1x25; 1x PH 2x25 | |
| | | | **800/1 Z**<br>1x 1,0x5,5x25; 1x 1,2x6,5x25 | |
| | | | **868/1 Z**<br>1x # 1x25; 1x # 2x25 | |

## Kraftform Kompakt 28 SB

Wera compact tool with multi-component Kraftform handle for high working speeds and particularly ergonomic screwdriving. Integrated bit magazine in the handle for the storage of 6 bits.

The bayonet blade can be lowered into the handle in confined screwdriving situations; it can be removed for insertion in a power tool. The retaining ring and the strong permanent magnet ensure a secure fit of the bit.

- Adaptor bayonet with stainless sleeve, retaining ring and strong permanent magnet
- Tough viscous bits for universal use

### Kraftform Kompakt 28 SB



| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 05**073240**001 | *138927* | | | 1 |
| | | | **851/1 Z PH**<br>1x PH 1x25; 1x PH 2x25 | |
| | | | **855/1 Z PZ**<br>1x PZ 1x25; 1x PZ 2x25 | |
| | | | **800/1 Z**<br>1x 1,0x5,5x25; 1x 1,2x6,5x25 | |

### Kraftform Kompakt 28 Imperial 1



| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 05**073241**001 | *214676* | | | 1 |
| | | | **851/1 Z PH**<br>1x PH 1x25; 1x PH 2x25 | |
| | | | **868/1 Z**<br>1x # 1x25; 1x # 2x25 | |
| | | | **800/1 Z**<br>1x 1,0x5,5x25; 1x 1,2x6,5x25 | |

## Kraftform Kompakt 28 with pouch

| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 05**134491**001 | *175373* | | | 1 |
| | | | **851/1 Z**<br>1x PH 1x25; 1x PH 2x25 | |
| | | | **855/1 Z**<br>1x PZ 1x25; 1x PZ 2x25 | |
| | | | **800/1 Z**<br>1x 1,0x5,5x25; 1x 1,2x6,5x25 | |
| | | | **Hook and Loop Fastener Strip 70**<br>1x 50,0x70,0 | |

### Kraftform Kompakt 40 and 41

- Pouch with 89 mm-long bits
- Kraftform holder with Rapidaptor quick-release chuck
- Rapidaptor quick-release chuck allows rapid bit change
- Tough viscous bits for universal use
- Ergonomic Kraftform handle for low-fatigue working

## Kraftform Kompakt 40

| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 05**059298**001 | *096319* | | | 1 |
| | | | **816 R**<br>1x 1/4"x119 | |
| | | | **851/4 Z**<br>1x PH 1x89; 1x PH 2x89 | |
| | | | **855/4 Z**<br>1x PZ 1x89; 1x PZ 2x89 | |
| | | | **800/4 Z**<br>1x 1,0x5,5x89; 1x 1,2x6,5x89 | |
| | | | **Hook and Loop Fastener Strip 70**<br>1x 50,0x70,0 | |

## Kraftform Kompakt 41

| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 05**059299**001 | *096326* | | | 1 |
| | | | **816 R**<br>1x 1/4"x119 | |
| | | | **851/4 Z**<br>1x PH 1x89; 1x PH 2x89; 1x PH 3x89[1] | |
| | | | **855/4 Z**<br>1x PZ 1x89; 1x PZ 2x89; 1x PZ 3x89[1] | |
| | | | **867/4 Z TORX® BO**<br>1x TX 15x89; 1x TX 20x89; 1x TX 25x89;<br>1x TX 30x89 | |
| | | | **Hook and Loop Fastener Strip 70**<br>1x 50,0x70,0 | |

[1] Hexagonal blade

## Kraftform Kompakt 60 Torque 1.2 - 3.0 Nm

Pouch with bits in a length of 89 mm. Includes torque screwdriver 7441 with Rapidaptor quick-release chuck and multi-component Kraftform handle for low-fatigue working. Suitable for manual and power tool operations. 17-piece; compact handle/interchangeable blade system for torque-controlled tightening. Includes torque holder 7441, settings from 1.2 to 3.0 Nm. Adjustable in 0.10 Nm steps.

Simple setting of the required torque value without any special tools. Easy-to-read scale value. Rapidaptor quick-release technology for rapid bit change. Unlimited torque to loosen seized screws.

Multi-component Kraftform handle with hard and soft zones for high working speeds, whilst being easy on the hand. Includes 16 bits with a length of 89 mm and a practical pouch for tidy storage.

- Adjustable Kraftform torque screwdriver with Rapidaptor quick-release chuck
- Multi-component Kraftform handle for fast and ergonomic screwdriving
- Rapidaptor technology for rapid bit change
- Suitable for manual and power tool operations
- Practical pouch for tidy storage

### Kraftform Kompakt 60 Torque 1.2 - 3.0 Nm

| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 05**059293**001 | *169624* | | | 1 |
| | | | **7400**<br>1x 7441, 1/4", 1,2-3,0 Nm | |
| | | | **851/4 Z PH**<br>1x PH 1x89; 1x PH 2x89; 1x PH 3x89[1] | |
| | | | **855/4 Z PZ**<br>1x PZ 1x89; 1x PZ 2x89; 1x PZ 3x89[1] | |
| | | | **867/4 Z TORX® BO**<br>1x TX 10x89; 1x TX 15x89; 1x TX 20x89; 1x TX 25x89; 1x TX 30x89 | |
| | | | **800/4 Z**<br>1x 1,0x5,5x89 | |
| | | | **840/4 Z Hex-Plus**<br>1x 3,0x89; 1x 4,0x89; 1x 5,0x89; 1x 6,0x89[1] | |

[1] Hexagonal blade

## Kraftform Stainless - stainless steel to prevent rust

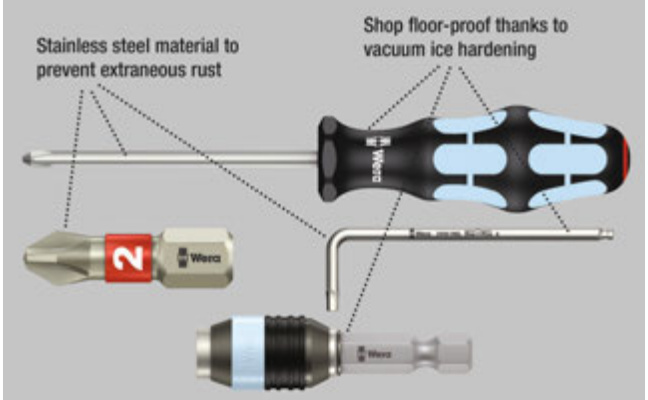


Pouch with bits in a length of 89 mm. Includes Kraftform holder 3816 R with Rapidaptor quick-release chuck and multi-component Kraftform handle for low-fatigue working. Stainless design to prevent the formation of extraneous rust.

### Kraftform Kompakt 60, stainless

| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 05**071116**001 | *115713* | | | 1 |
| | | | **3816 R**<br>1x 1/4"x119 | |
| | | | **3851/4**<br>1x PH 1x89; 1x PH 2x89; 1x PH 3x89[1] | |
| | | | **3855/4**<br>1x PZ 1x89; 1x PZ 2x89; 1x PZ 3x89[1] | |
| | | | **3867/4 TORX® BO**<br>1x TX 10x89; 1x TX 15x89; 1x TX 20x89; 1x TX 25x89; 1x TX 30x89 | |
| | | | **3800/4**<br>1x 1,0x5,5x89 | |
| | | | **3840/4 Hex-Plus**<br>1x 3,0x89; 1x 4,0x89; 1x 5,0x89; 1x 6,0x89 | |

[1] Hexagonal blade

## Kraftform Kompakt 60, imperial, stainless

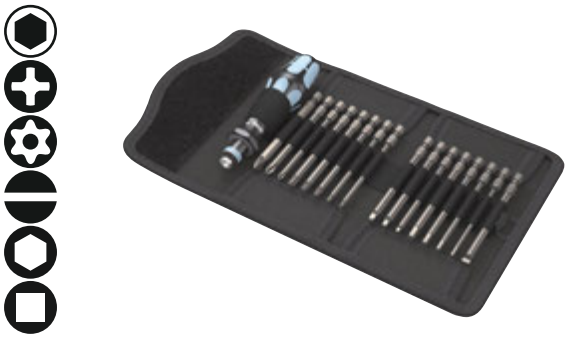

| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 05**071117**001 | *115720* | | | 1 |
| | | | **3816 R**<br>1x 1/4"x119 | |
| | | | **3851/4 PH**<br>1x PH 1x89; 1x PH 2x89; 1x PH 3x89[1] | |
| | | | **3867/4 TORX® BO**<br>1x TX 10x89; 1x TX 15x89; 1x TX 20x89;<br>1x TX 25x89; 1x TX 30x89 | |
| | | | **3800/4**<br>1x 1,0x5,5x89 | |
| | | | **3840/4 Hex-Plus**<br>1x 3/32"x89; 1x 1/8"x89; 1x 5/32"x89;<br>1x 3/16"x89 | |
| | | | **3868/4 Square-Plus**<br>1x # 1x89; 1x # 2x89; 1x # 3x89 | |

[1] Hexagonal blade

## Kraftform Kompakt 60

Pouch with 89-mm long bits. Includes 816 R Kraftform holder with Rapidaptor quick-release chuck and multi-component Kraftform handle for low-fatigue working.

Hard gripping zones for high working speeds whereas soft zones ensure high torque transfer. Suitable for manual and power tool operations; 17-piece.

## Kraftform Kompakt 60

| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 05**059295**001 | *096289* | | | 1 |
| | | | **816 R**<br>1x 1/4"x119 | |
| | | | **851/4 Z**<br>1x PH 1x89; 1x PH 2x89; 1x PH 3x89[1] | |
| | | | **855/4 Z**<br>1x PZ 1x89; 1x PZ 2x89; 1x PZ 3x89[1] | |
| | | | **867/4 Z TORX® BO**<br>1x TX 10x89; 1x TX 15x89; 1x TX 20x89;<br>1x TX 25x89; 1x TX 30x89 | |
| | | | **800/4 Z**<br>1x 1,0x5,5x89 | |
| | | | **840/4 Z**<br>1x 3,0x89; 1x 4,0x89; 1x 5,0x89; 1x 6,0x89[1] | |
| | | | **Hook and Loop Fastener Strip 70**<br>1x 50,0x70,0 | |

[1] Hexagonal blade

## Kraftform Kompakt 60 imperial

| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 05**051042**001 | *156037* | | | 1 |
| | | | **816 R**<br>1x 1/4"x119 | |
| | | | **851/4 Z**<br>1x PH 1x89; 1x PH 2x89; 1x PH 3x89[1] | |
| | | | **867/4 Z TORX® BO**<br>1x TX 10x89; 1x TX 15x89; 1x TX 20x89;<br>1x TX 25x89; 1x TX 30x89 | |
| | | | **800/4 Z**<br>1x 1,0x5,5x89 | |
| | | | **840/4 Z**<br>1x 3/32"x89; 1x 1/8"x89; 1x 5/32"x89; 1x 3/16"x89 | |
| | | | **868/4**<br>1x # 1x89; 1x # 2x89; 1x # 3x89 | |
| | | | **Hook and Loop Fastener Strip 70**<br>1x 50,0x70,0 | |

[1] Hexagonal blade

## Kraftform Kompakt 60 KK

- Ballpoint bits allow a swivelling of the tool axis

## Kraftform Kompakt 60 KK

| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 05**059294**001 | *165503* | | | 1 |
| | | | **816 R**<br>1x 1/4"x119 | |
| | | | **851/4 Z**<br>1x PH 1x89; 1x PH 2x89; 1x PH 3x89[1] | |
| | | | **855/4 Z**<br>1x PZ 1x89; 1x PZ 2x89; 1x PZ 3x89[1] | |
| | | | **867/4 TORX® KK**<br>1x TX 10x89; 1x TX 15x89; 1x TX 20x89;<br>1x TX 25x89; 1x TX 30x89; 1x TX 40x89[1] | |
| | | | **842/4**<br>1x 3,0x89; 1x 4,0x89; 1x 5,0x89; 1x 6,0x89 | |
| | | | **Hook and Loop Fastener Strip 70**<br>1x 50,0x70,0 | |

[1] Hexagonal blade

## Kraftform Kompakt 62

| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 05**059297**001 | *096302* | | | 1 |
| | | | **816 R**<br>1x 1/4"x119 | |
| | | | **851/4 Z**<br>1x PH 1x89; 1x PH 2x89; 1x PH 3x89[1] | |
| | | | **855/4 Z**<br>1x PZ 1x89; 1x PZ 2x89; 1x PZ 3x89[1] | |
| | | | **867/4 Z TORX® BO**<br>1x TX 8x89; 1x TX 10x89; 1x TX 15x89;<br>1x TX 20x89; 1x TX 25x89; 1x TX 27x89;<br>1x TX 30x89; 1x TX 40x89 | |
| | | | **840/4 Z BO**<br>1x 2,0x89; 1x 2,5x89; 1x 3,0x89; 1x 4,0x89;<br>1x 5,0x89; 1x 6,0x89 | |
| | | | **800/4 Z**<br>1x 1,2x6,5x89 | |
| | | | **871/4 TORQ-SET® Mplus**<br>1x 6x89; 1x 8x89; 1x 10x89 | |
| | | | **875/4 TRI-WING®**<br>1x 1x89; 1x 2x89; 1x 3x89; 1x 4x89 | |
| | | | **857/4 Z**<br>1x 4x89; 1x 6x89; 1x 8x89; 1x 10x89 | |
| | | | **Hook and Loop Fastener Strip 70**<br>1x 50,0x70,0 | |

[1] Hexagonal blade

## Bicycle Set 2

Bicycle tool set in practical pouch with 89 mm long bits. Including 816 R Kraftform bit hand-holder with Rapidaptor quick-release chuck and multi-component Kraftform handle for fatigue-free working.

## Bicycle Set 2

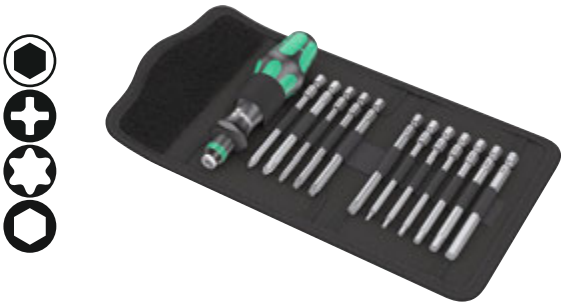

| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 05**004171**001 | *211439* | | | 1 |
| | | | **816 R**<br>1x 1/4"x119 | |
| | | | **851/4 Z**<br>1x PH 1x89; 1x PH 2x89 | |
| | | | **867/4 Z TORX®**<br>1x TX 10x89; 1x TX 20x89; 1x TX 25x89;<br>1x TX 30x89 | |
| | | | **840/4 Z**<br>1x 2,0x89; 1x 2,5x89; 1x 3,0x89; 1x 4,0x89;<br>1x 5,0x89; 1x 6,0x89[1] | |
| | | | **Hook and Loop Fastener Strip 70**<br>1x 50,0x70,0 | |

[1] Hexagonal blade

## Kraftform Kompakt 70 Universal

32-piece set with 816 R Kraftform bitholding screwdriver with Rapidaptor quick-release chuck and multi-component Kraftform handle for fatigue-free working.

Rapidaptor universal holder with strong permanent magnet, which even holds big and heavy screws. Throw in the 30 bits and the user is equipped for almost every application. In a robust textile box; suitable for Wera 2go.

- Assortment in robust textile box with low weight for easy transport
- Suitable for docking with the Wera 2go system

### Kraftform Kompakt 70 Universal

RAPIDAPTOR TECHNOLOGY | HEX-PLUS | KRAFTFORM ERGONOMICS | ANTI ROLL-OFF | WERA 2GO COMPATIBLE

| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 05**057113**001 | *228345* | | | 1 |
| | | | **816 R**<br>1x 1/4"x119 | |
| | | | **889/4/1 K**<br>1x 1/4"x50 | |
| | | | **851/1 TZ**<br>3x PH 1x25; 3x PH 2x25; 3x PH 3x25 | |
| | | | **855/1 TZ**<br>3x PZ 1x25; 3x PZ 2x25; 3x PZ 3x25 | |
| | | | **867/1 Z TORX® BO**<br>1x TX 10x25; 1x TX 15x25; 1x TX 20x25;<br>1x TX 25x25; 1x TX 30x25; 1x TX 40x25 | |
| | | | **840/1 Z**<br>1x 4,0x25; 1x 5,0x25; 1x 6,0x25 | |
| | | | **800/1 TZ**<br>1x 0,6x4,5x25; 1x 1,0x5,5x25; 1x 1,2x6,5x25 | |
| | | | **9478**<br>1x 160,0x95,0x65,0 | |
| | | | **Hook and Loop Fastener Strip 120**<br>1x 50,0x120,0 | |

## Kraftform Kompakt 71 Security

- Assortment in robust textile box with low weight for easy transport
- Suitable for docking with the Wera 2go system

### Kraftform Kompakt 71 Security

RAPIDAPTOR TECHNOLOGY | HEX-PLUS | KRAFTFORM ERGONOMICS | ANTI ROLL-OFF | WERA 2GO COMPATIBLE

| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 05**057114**001 | *228352* | | | 1 |
| | | | **816 R**<br>1x 1/4"x119 | |
| | | | **889/4/1 K**<br>1x 1/4"x50 | |
| | | | **867/1 Z TORX® BO**<br>1x TX 7x25; 1x TX 8x25; 1x TX 9x25;<br>1x TX 10x25; 1x TX 15x25; 1x TX 20x25;<br>1x TX 25x25; 1x TX 30x25; 1x TX 40x25 | |
| | | | **840/1 Z BO**<br>1x 2,0x25; 1x 2,5x25; 1x 3,0x25; 1x 4,0x25;<br>1x 5,0x25; 1x 6,0x25 | |
| | | | **868/1 Z**<br>1x # 0x25; 1x # 1x25; 1x # 2x25; 1x # 3x25 | |
| | | | **871/1 TORQ-SET® Mplus 25 mm**<br>1x 6x25; 1x 8x25; 1x 10x25; 1x 1/4"x25 | |
| | | | **875/1 TRI-WING® 25 mm**<br>1x 1x25; 1x 2x25; 1x 3x25 | |
| | | | **857/1 Z**<br>1x 4x25; 1x 6x25; 1x 8x25; 1x 10x25 | |
| | | | **9478**<br>1x 160,0x95,0x65,0 | |
| | | | **Hook and Loop Fastener Strip 120**<br>1x 50,0x120,0 | |

## Kraftform Kompakt 100

52-piece; in surface-protecting, compact textile box which is extremely robust. Low volume and weight for simplified mobility. Compact tool set with 52 screwdriving tools.

1 bit holder Rapidaptor with quick-release chuck; 1 B bit holder Rapidaptor with quick-release chuck for take-up in the power screwdriver or use in the chuck of the power drill; 30 BiTorsion bits with a length of 25 mm for long service life, tough-absorbing (BTZ), for universal use, extra hard (BTH), 12 Impaktor bits with a length of 50 mm for particularly demanding jobs, 8 L-keys with Hex-Plus profile (prevents the rounding of socket head screws) and hexagonal ballpoint on the long arm for working at angles; textile box that is very robust and durable; can be positioned upright for tidy storage on the workshop shelf; additional surface protection thanks to the outer textile material.

- Robust surface-protecting, compact, textile box
- Rapidaptor technology for rapid bit change
- BiTorsion bits in a length of 25 mm for long service life
- Impaktor bits in a length of 50 mm for particularly demanding jobs
- L-keys with Hex-Plus profile (prevents the rounding of hexagon socket screws)

### Hex-Plus - lets hexagon socket screws last longer

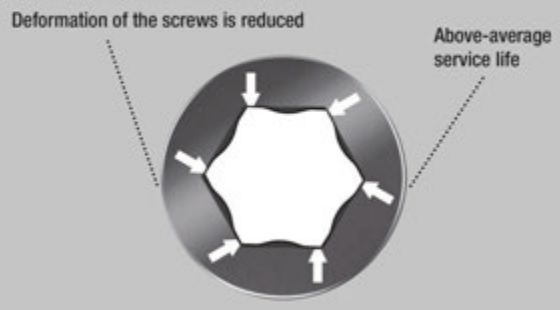


## Kraftform Kompakt 100

| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 05**057460**001 | *179968* | | | 1 |
| | | | **813 R**<br>1x 1/4"x90 | |
| | | | **889/4/1 K**<br>1x 1/4"x50 | |
| | | | **851/1 BTZ**<br>2x PH 1x25; 4x PH 2x25; 2x PH 3x25 | |
| | | | **851/4 Impaktor DC**<br>2x PH 2x50; 1x PH 3x50 | |
| | | | **855/1 BTH**<br>2x PZ 1x25; 4x PZ 2x25; 2x PZ 3x25 | |
| | | | **855/4 Impaktor DC**<br>2x PZ 2x50; 1x PZ 3x50 | |
| | | | **867/1 TORX® BTZ**<br>2x TX 10x25; 2x TX 15x25; 3x TX 20x25; 2x TX 25x25; 2x TX 30x25; 1x TX 40x25 | |
| | | | **867/4 TORX® Impaktor DC**<br>1x TX 25x50; 1x TX 30x50; 1x TX 40x50 | |
| | | | **800/1 BTZ**<br>1x 0,8x5,5x25; 1x 1,0x5,5x25 | |
| | | | **840/4 Impaktor DC**<br>1x 4,0x50; 1x 5,0x50; 1x 6,0x50 | |
| | | | **950 PKS**<br>1x 1,5x50 [1]; 1x 2,0x56; 1x 2,5x63; 1x 3,0x71; 1x 4,0x80; 1x 5,0x90; 1x 6,0x100; 1x 8,0x112 | |
| | | | **Hook and Loop Fastener Strip 120**<br>1x 50,0x120,0 | |

[1] Regular hexagon

## Kraftform Kompakt 400

T-handle screwdriver: The ideal handle shape to allow high torque transmission in difficult tightening and loosening situations. The ergonomic shape of the handle fills the palm of the hand well, the fingers lie safely in the soft rounded handle recesses.

The whole hand makes contact with the handle and friction losses between the hand and the handle are avoided. Special surface treatment of the blades for high corrosion protection and an optimum fit in the screw head.

- T-handle screwdriver for the transmission of particularly high tightening and loosening moments
- Ergonomic 2-component handle with finger handle recesses and pleasant surface feel for very high power transmission and fatigue-free working.
- With Rapidaptor technology for lightning-fast bit changes
- Bitholders, magnetic, for easier application of the screw
- For bits with 1/4" external hexagon drive as per DIN ISO 1173-C 6.3 and E 6.3

## Kraftform Kompakt Stubby magazine

Particularly small bitholding screwdriver with short bit mounting for hard to reach areas. Includes 6 bits, which are located in a magazine in the handle.

With only 65mm total length, the Kraftform Kompakt Stubby is a real mini screwdriving workshop. The strong permanent magnet in the bit mounting ensures secure holding of the bit.

The 2-component handle with the practical combination of hard and soft zones allows for a firm grip and precise working. Take it easy tool finder: With size stamping and colour coding by output to find the required bit easily.

- Short, compact Stubby shape for working in tight installation spaces, with 6 bits in the integrated magazine
- Ergonomic 2-component Kraftform handle for precise work
- 1/4" bit mounting with strong permanent magnet
- Captive and swiveling bit magazine for easy removal and safe storage of bits
- Take it easy tool finder: colour coding according to profile and size

### Kraftform Kompakt 400

| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 05**057470**001 | *214546* | | | 1 |
| | | | **416 R**<br>1x 1/4"x45 | |
| | | | **851/4 Z**<br>1x PH 2x89; 1x PH 3x89[1] | |
| | | | **855/4 Z**<br>1x PZ 2x89; 1x PZ 3x89[1] | |
| | | | **867/4 Z TORX®**<br>1x TX 10x89; 1x TX 15x89; 1x TX 20x89; 1x TX 25x89; 1x TX 30x89; 1x TX 40x89 | |
| | | | **840/4 Z**<br>1x 3,0x89; 1x 4,0x89; 1x 5,0x89; 1x 6,0x89; 1x 8,0x89[1] | |
| | | | **800/4 Z**<br>1x 1,0x5,5x89 | |
| | | | **Hook and Loop Fastener Strip 120**<br>1x 50,0x120,0 | |

[1] Hexagonal blade

### Kraftform Kompakt Stubby magazine 1

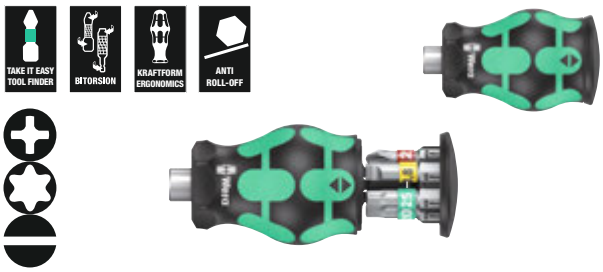


| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 05**008873**001 | *217769* | | | 1 |
| | | | **851/1 BTZ PH**<br>1x PH 1x25; 1x PH 2x25 | |
| | | | **867/1 TORX® BTZ**<br>1x TX 15x25; 1x TX 20x25; 1x TX 25x25 | |
| | | | **800/1 BTZ**<br>1x 0,8x5,5x25 | |

### Kraftform Kompakt Stubby magazine 2

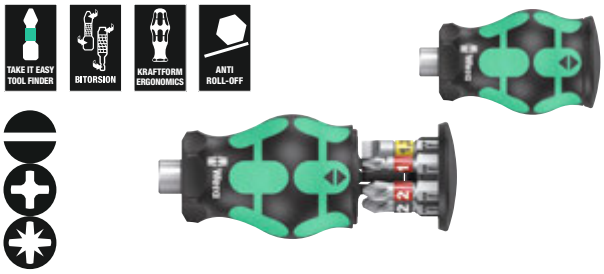


| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 05**008874**001 | *217776* | | | 1 |
| | | | **800/1 BTZ**<br>1x 0,8x5,5x25; 1x 1,2x6,5x25 | |
| | | | **851/1 BTZ PH**<br>1x PH 1x25; 1x PH 2x25 | |
| | | | **855/1 BTZ PZ**<br>1x PZ 1x25; 1x PZ 2x25 | |

## Kraftform Kompakt Stubby magazine 3

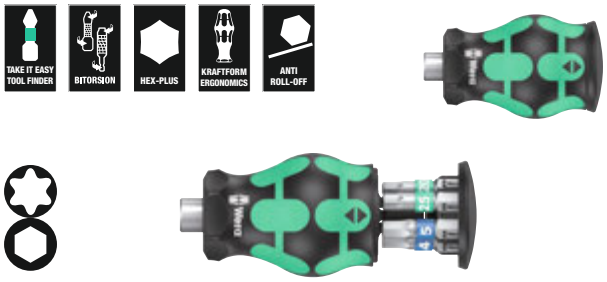

| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 05**008875**001 | *217783* | | | 1 |
| | | | **867/1 TORX® BTZ**<br>1x TX 15x25; 1x TX 20x25; 1x TX 25x25 | |
| | | | **840/1 BTZ Hex-Plus**<br>1x 3,0x25; 1x 4,0x25; 1x 5,0x25 | |

## Kraftform Kompakt Stubby magazine 4

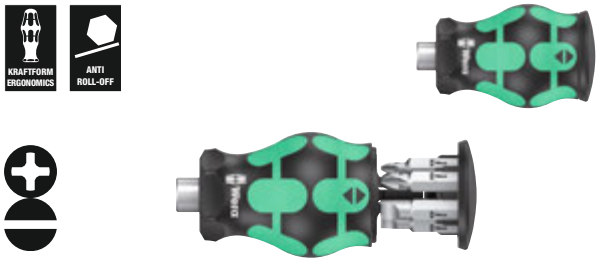

| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 05**008877**001 | *219800* | | | 1 |
| | | | **851/1 Z PH**<br>1x PH 1x25; 1x PH 2x25; 1x PH 3x25 | |
| | | | **800/1 Z**<br>1x 0,6x4,5x25; 1x 1,0x5,5x25; 1x 1,2x6,5x25 | |

## Kraftform Kompakt Stubby magazine 5

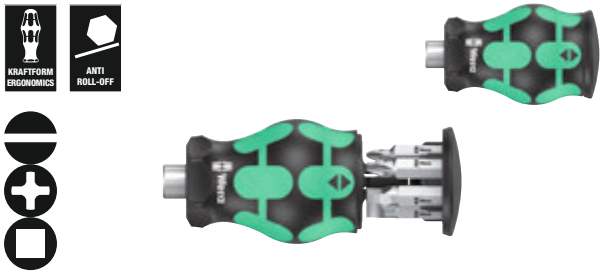

| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 05**008878**001 | *219817* | | | 1 |
| | | | **800/1 Z**<br>1x 1,0x5,5x25; 1x 1,2x6,5x25 | |
| | | | **851/1 Z PH**<br>1x PH 1x25; 1x PH 2x25 | |
| | | | **868/1 Z**<br>1x # 1x25; 1x # 2x25 | |

## Kraftform Kompakt Stubby 1

Handle/interchangeable blade system for lightning fast replacement of the required blade. Especially small bit-holding Stubby screwdriver handle with short blade for hard to reach areas. Suitable for the mounting of bits with ¼" hexagon drive as per DIN ISO 1173-C 6.3 and Wera connection series 1.

With strong permanent magnet, which also holds large and heavy screws. The 2-component Kraftform handle with its practical combination of hard and soft zones allows for a firm grip and precise working.

High-quality BiTorsion bits with BiTorsion zone to prevent twisting of the bit tip under high loads. This significantly increases product life. Compact, textile box with high robustness, low weight and volume. Suitable for docking with the Wera 2go system.

- Handle/Interchangeable blade system for rapid exchange of the blade
- Stubby bit hand holder: short compact shape for working in confined spaces
- Ergonomic 2-component Kraftform handle for precise work
- Bits with BiTorsion zone to cushion load peaks
- Take it easy tool finder: colour coding according to profile and size

## Kraftform Kompakt Stubby 1

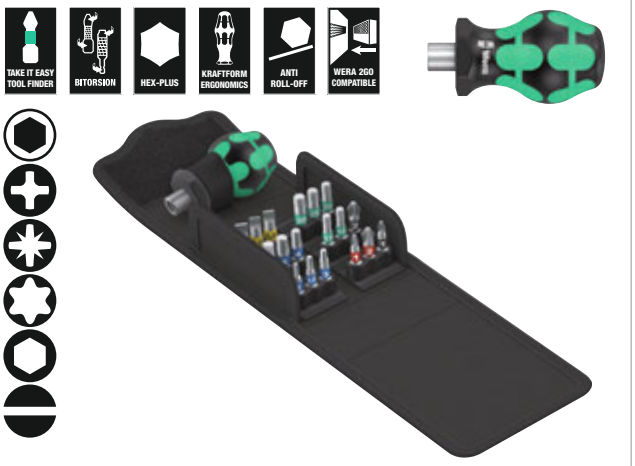

| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 05**057471**001 | *214553* | | | 1 |
| | | | **811/1 Stubby**<br>1x ¼" | |
| | | | **851/1 BTZ**<br>1x PH 1x25; 1x PH 2x25 | |
| | | | **855/1 BTZ**<br>1x PZ 1x25; 1x PZ 2x25 | |
| | | | **867/1 TORX® BTZ**<br>1x TX 10x25; 1x TX 15x25; 1x TX 20x25; 1x TX 25x25; 1x TX 30x25 | |
| | | | **840/1 BTZ**<br>1x 2,0x25; 1x 2,5x25; 1x 3,0x25; 1x 4,0x25; 1x 5,0x25; 1x 5,5x25 | |
| | | | **800/1 BTZ**<br>1x 0,8x5,5x25; 1x 1,0x5,5x25; 1x 1,2x6,5x25 | |
| | | | **Hook and Loop Fastener Strip 70**<br>1x 50,0x70,0 | |

## Bicycle set 11

Stubby magazine for quick operations on the bike. Particularly small bit hand-holder with short bit mounting for hard to reach areas. Includes 7 stainless steel bits, 6 of which are located in a magazine in the handle and one in the bit holder.

The 2-component Kraftform handle with the practical combination of hard and soft zones allows for a firm grip and precise working.

Take it easy tool finder: With size stamping and colour coding by output to help you find the required bit easily.

- Short compact Stubby shape for working in tight installation spaces with 7 included bits
- Ergonomic 2-component Kraftform handle for precise work
- Stainless Steel Bits
- Captive and swiveling bit magazine for easy removal and safe storage of bits
- Take it easy tool finder: colour coding according to profile and size

### Bicycle set 11

| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 05**004179**001 | *220714* | | | 1 |
| | | | **3851/1 TS PH**<br>1x PH 1x25 | |
| | | | **3867/1 TS TORX®**<br>1x TX 10x25; 1x TX 25x25 | |
| | | | **3840/1 TS**<br>1x 2,5x25; 1x 3,0x25; 1x 4,0x25; 1x 5,0x25 | |

## 88/1 Vario set

11-piece Vario set with handle and blades. In a practical belt pouch, enabling the tools to be safely and securely stored and to always be at hand. The Kraftform grip on the handle stands for pleasant, ergonomic working and makes blisters and calluses a thing of the past.

Hard gripping zones for high working speeds whereas soft zones ensure high torque transfer. The hexagonal non-roll feature prevents any annoying rolling away at the workplace. The integrated hex bolster allows higher torque to be applied with an open-end or ring spanner.

The double blades are out of high quality bit material and are therefore particularly durable. The Wera Black Point tip on the blade offers a perfect fit and optimised corrosion protection.

- Vario set with handle and 10 combination blades
- Smooth hard zones for high speed turning, soft grip zones for high torque transfer
- Chrome-plated hexagonal blade material, 6 mm
- Black Point tip offers a perfect fit with optimised corrosion protection
- In a robust belt pouch

### 88/1 Vario set

| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 05**002990**001 | *000675* | | | 1 |
| | | | **80**<br>1x 6x98 | |
| | | | **85**<br>1x PH 1xPH 2x175 | |
| | | | **86**<br>1x PZ 1xPZ 2x175 | |
| | | | **87**<br>1x TX 10xTX 15x175; 1x TX 20xTX 25x175;<br>1x TX 30xTX 40x175 | |
| | | | **81**<br>1x 0,6x4,0x1,0x6,0x175;<br>1x 0,8x5,0x1,2x7,0x175 | |
| | | | **84**<br>1x 4x4x175; 1x 5x5x175; 1x 6x6x175 | |

## 80 Vario handle

- Kraftform handle with 10 mm hex bolster
- Suitable for insertion of 6 mm Vario blades or a Vario adaptor

### 80 Vario handle

| | EAN | | | | | | | |
|---|---|---|---|---|---|---|---|---|
| Code | 4013288 | mm | mm | mm | | | | |
| 05**002900**001 | *000460* | 6 | 10 | 98 | | | | 5 |

## 95 Vario T-handle hand holder for Vario blades

T-handle screwdriver: The ideal handle shape to allow high torque transmission in difficult tightening and loosening situations. The ergonomic shape of the handle fills the palm of the hand well, the fingers lie safely in the soft rounded handle recesses.

The whole hand makes contact with the handle and friction losses between the hand and the handle are avoided. Bit holder for bits with 1/4" external hexagon drive as per DIN ISO 1173-C 6.3 in magnetic design for easier placement of the screws.

- T-handle screwdriver for the transmission of particularly high tightening and loosening moments
- Ergonomic 2-component handle with finger handle recesses and pleasant surface feel for very high power transmission and fatigue-free working.
- Vario T-handle for 6 mm Vario blades and adaptor

### 95 Vario T-handle hand holder for Vario blades

| | EAN | | | | | | | |
|---|---|---|---|---|---|---|---|---|
| Code | 4013288 | mm | mm | mm | mm | | | |
| 05**023400**001 | *208446* | 6 | 60 | 44 | 100 | 2 23/64" | | 2 |

## 830 Vario bit holder adaptor

- Vario adaptor blade with quick-release chuck for Vario holder
- Suitable for take-up of bits with 1/4" hexagon head drive
- 1/4" quick-release chuck with strong permanent magnet

### 830 Vario bit holder adaptor

| | EAN | | | | | | | |
|---|---|---|---|---|---|---|---|---|
| Code | 4013288 | mm | mm | mm | | | | |
| 05**051835**001 | *012425* | 1/4" | 6 | 165 | 6 9/16" | | | 2 |

## 91 Vario extension

- Vario extension for Vario blades and adaptor
- Chrome-plated hexagonal material, 6 mm

### 91 Vario extension

| | EAN | | | | | | | |
|---|---|---|---|---|---|---|---|---|
| Code | 4013288 | mm | mm | mm | | | | |
| 05**003210**001 | *000804* | 6 | 6 | 175 | 7" | | | 2 |

## 712 Vario socket adaptor

- For sockets

### 712 Vario socket adaptor

| | EAN | | | | | | | |
|---|---|---|---|---|---|---|---|---|
| Code | 4013288 | | mm | mm | | | | |
| 05**040001**001 | *006165* | 1/4" | 6 | 175 | 7" | | | 2 |

## Combination blades

Combination blade for Vario handles. The double-ended blades are made out of high quality bit material and are therefore particularly durable. The Wera Black Point tip offers a perfect fit and optimised corrosion protection.

### 81 Combination blade for slotted screws

| | EAN | | | | | | | |
|---|---|---|---|---|---|---|---|---|
| Code | 4013288 | mm | mm | mm | mm | mm | mm | |
| 05**002910**001 | *000477* | 0,6 | 4,0 | 1,0 | 6,0 | 6 | 175 | 5 |
| 05**002913**001 | *000484* | 0,8 | 5,0 | 1,2 | 7,0 | 6 | 175 | 5 |

### 82 Combination blade for slotted/Phillips screws

| | EAN | | | | | | | |
|---|---|---|---|---|---|---|---|---|
| Code | 4013288 | | mm | mm | mm | mm | | |
| 05**002920**001 | *000491* | PH 1 | 0,6 | 4,0 | 6 | 175 | 7" | 5 |
| 05**002923**001 | *000507* | PH 2 | 1,0 | 6,0 | 6 | 175 | 7" | 5 |
| 05**002926**001 | *000514* | PH 3 | 1,2 | 7,0 | 6 | 175 | 7" | 5 |

### 83 Combination blade for Phillips/Pozidriv screws

| | EAN | | | | | | | |
|---|---|---|---|---|---|---|---|---|
| Code | 4013288 | | | mm | mm | | | |
| 05**002930**001 | *000521* | PH 1 | PZ 1 | 6 | 175 | 7" | | 5 |
| 05**002933**001 | *000538* | PH 2 | PZ 2 | 6 | 175 | 7" | | 5 |

### 84 Combination blade for hexagon socket screws

BALL END HEX-PLUS

| | EAN | | | | | | | |
|---|---|---|---|---|---|---|---|---|
| Code | 4013288 | | | mm | mm | | | |
| 05**002936**001 | *000545* | 2,5 | 2,5 | 6 | 175 | 7" | | 5 |
| 05**002938**001 | *000552* | 3 | 3 | 6 | 175 | 7" | | 5 |
| 05**002940**001 | *000569* | 4 | 4 | 6 | 175 | 7" | | 5 |
| 05**002943**001 | *000576* | 5 | 5 | 6 | 175 | 7" | | 5 |
| 05**002948**001 [1] | *155436* | 4 | 5 | 6 | 175 | 7" | | 5 |
| 05**002946**001 | *000583* | 6 | 6 | 6 | 175 | 7" | | 5 |

[1] without ball-end

### 85 Combination blade for Phillips screws

| | EAN | | | | | | | |
|---|---|---|---|---|---|---|---|---|
| Code | 4013288 | | | mm | mm | | | |
| 05**002950**001 | *000590* | PH 1 | PH 2 | 6 | 175 | 7" | | 5 |

### 86 Combination blade for Pozidriv screws

| | EAN | | | | | | | |
|---|---|---|---|---|---|---|---|---|
| Code | 4013288 | | | mm | mm | | | |
| 05**002960**001 | *000606* | PZ 1 | PZ 2 | 6 | 175 | 7" | | 5 |
| 05**140310**001 | *000613* | PZ 2 | PZ 3 | 6 | 175 | 7" | | 5 |

### 87 Combination blade for TORX® screws

| | EAN | | | | | | | |
|---|---|---|---|---|---|---|---|---|
| Code | 4013288 | | | mm | mm | | | |
| 05**002966**001 | *000620* | TX 6 | TX 8 | 6 | 175 | 7" | | 5 |
| 05**002968**001 | *000637* | TX 7 | TX 9 | 6 | 175 | 7" | | 5 |
| 05**002970**001 | *000644* | TX 10 | TX 15 | 6 | 175 | 7" | | 5 |
| 05**002973**001 | *000651* | TX 20 | TX 25 | 6 | 175 | 7" | | 5 |
| 05**002976**001 | *000668* | TX 30 | TX 40 | 6 | 175 | 7" | | 5 |

### 68 Combination blade for square socket head screws

| | EAN | | | | | | | |
|---|---|---|---|---|---|---|---|---|
| Code | 4013288 | | | mm | mm | | | |
| 05**002980**001 | *100061* | #1 | #2 | 6 | 175 | 7" | | 5 |

## Kraftform Kompakt 900 Set 1

The impact screwdriver 921 combines the advantages of manual impact wrenches, compact tools and screwdrivers with pound-thru blade. The impact wrench function offers a loosening moment of up to 25 Nm.

The robust bit holder allows the mounting of different specialised bits for various screw profiles. The pound-thru blade ensures complete power transmission (zero loss). The impact wrench function and screwdriver function can be switched as required.

- Compact and robust blade screwdriver set with manually activatable impact wrench function
- For loosening stubborn screw connections
- Hammer blow impulse is converted into a rotary movement with a loosening torque of approx. 25 Nm – without loss via a pound-thru blade
- Reversible functions: impact wrench and screwdriver
- Specially hardened and extra tough bits with 1/4" external hexagon drive
- Combines the advantages of manual impact wrenches, compact tools and screwdrivers with pound-thru blade

### Kraftform Kompakt 900 Set 1

| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 05**018110**001 | *222176* | | | 1 |
| | | | **921**<br>1x 1/4"x163,5 | |
| | | | **851 S**<br>1x PH 1x70; 1x PH 2x70; 1x PH 3x70 | |
| | | | **855 S**<br>1x PZ 1x70; 1x PZ 2x70; 1x PZ 3x70 | |
| | | | **867 S TORX®**<br>1x TX 15x70; 1x TX 20x70; 1x TX 25x70;<br>1x TX 30x70; 1x TX 40x70 | |
| | | | **840 S Hex-Plus**<br>1x 3,0x70; 1x 4,0x70; 1x 5,0x70; 1x 6,0x70 | |
| | | | **800 S**<br>1x 0,8x4,0x70; 1x 1,0x5,5x70; 1x 1,2x6,5x70 | |
| | | | **Hook and Loop Fastener Strip 120**<br>1x 50,0x120,0 | |

### Kraftform Kompakt 900 Imperial Set 1

| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 05**018111**001 | *222312* | | | 1 |
| | | | **921**<br>1x 1/4"x163,5 | |
| | | | **851 S** 1x PH 1x70; 1x PH 2x70; 1x PH 3x70 | |
| | | | **867 S TORX®**<br>1x TX 15x70; 1x TX 20x70; 1x TX 25x70;<br>1x TX 30x70; 1x TX 40x70 | |
| | | | **840 S Hex-Plus**<br>1x 1/8"x70; 1x 5/32"x70; 1x 3/16"x70; 1x 1/4"x70 | |
| | | | **868 S** 1x # 1x70; 1x # 2x70; 1x # 3x70 | |
| | | | **800 S**<br>1x 0,8x4,0x70; 1x 1,0x5,5x70; 1x 1,2x6,5x70 | |
| | | | **Hook and Loop Fastener Strip 120**<br>1x 50,0x120,0 | |

## 921 Kraftform Plus impact screwdriver - series 900

The impact screwdriver 921 combines the advantages of manual impact wrenches, compact tools and screwdrivers with pound-thru blade. The impact wrench function offers a loosening moment of up to 25 Nm.

The robust bit holder allows the mounting of different specialised bits for various screw profiles. The pound-thru blade ensures complete power transmission (zero loss). The impact wrench function and screwdriver function can be switched as required.

- For loosening stubborn screw connections
- Manual impact wrench function can be switched on and off
- Hammer blow impulse is converted into a rotary movement with a loosening torque of approx. 25 Nm – without loss via a pound-thru blade
- Reversible functions: impact wrench and screwdriver

### 921 Kraftform Plus impact screwdriver - series 900

| | EAN | | | | | | | |
|---|---|---|---|---|---|---|---|---|
| Code | 4013288 | | mm | | | | | |
| 05**018100**001 | *221698* | 1/4" | 163,5 | 6 7/16" | | | | 1 |

## 851 S Phillips bits for impact screwdrivers

Extra tough bit for Phillips-head screws Phillips-Recess. This prevents the bit from breaking prematurely and extends its service life.

Suitable for use with Wera impact screwdriver 921.
With 1/4" hexagonal drive.

- For Phillips screws
- Extra tough for long durability
- 1/4" hexagon drive
- For use with Wera impact screwdriver 921

### 851 S Phillips bits for impact screwdrivers

| | EAN | | | | | | | |
|---|---|---|---|---|---|---|---|---|
| Code | 4013288 | | mm | | | | | |
| 05**018160**001 | *222510* | PH 1 | 70 | 2 3/4" | | | | 5 |
| 05**018161**001 | *222527* | PH 2 | 70 | 2 3/4" | | | | 5 |
| 05**018162**001 | *222534* | PH 3 | 70 | 2 3/4" | | | | 5 |

## 855 S Pozidriv bits for impact screwdrivers

Extra tough bit suitable for Pozidriv screws. This prevents the bit from breaking prematurely and extends its service life.

Suitable for use with Wera impact screwdriver 921.
With 1/4" hexagonal drive.

- Suitable for Pozidriv screws
- Extra tough for long durability
- 1/4" hexagon drive
- For use with Wera impact screwdriver 921

### 855 S Pozidriv bits for impact screwdrivers

| | EAN | | | | | | | |
|---|---|---|---|---|---|---|---|---|
| Code | 4013288 | | mm | | | | | |
| 05**018163**001 | *222541* | PZ 1 | 70 | 2 3/4" | | | | 5 |
| 05**018164**001 | *222558* | PZ 2 | 70 | 2 3/4" | | | | 5 |
| 05**018165**001 | *222565* | PZ 3 | 70 | 2 3/4" | | | | 5 |

## 867 S TORX® bits for impact screwdrivers

Extra tough bit for TORX® socket screws. This prevents the bit from breaking prematurely and extends its service life.

Suitable for use with Wera impact screwdriver 921.
With 1/4" hexagonal drive.

- For recessed TORX® screws
- Extra tough for long durability
- 1/4" hexagon drive
- For use with Wera impact screwdriver 921

### 867 S TORX® bits for impact screwdrivers

| | EAN | | | | | | | |
|---|---|---|---|---|---|---|---|---|
| Code | 4013288 | | mm | | | | | |
| 05**018166**001 | *222572* | TX 15 | 70 | 2 3/4" | | | | 5 |
| 05**018167**001 | *222589* | TX 20 | 70 | 2 3/4" | | | | 5 |
| 05**018168**001 | *222596* | TX 25 | 70 | 2 3/4" | | | | 5 |
| 05**018169**001 | *222602* | TX 30 | 70 | 2 3/4" | | | | 5 |
| 05**018170**001 | *222619* | TX 40 | 70 | 2 3/4" | | | | 5 |

## Hex-Plus - lets hexagon socket screws last longer

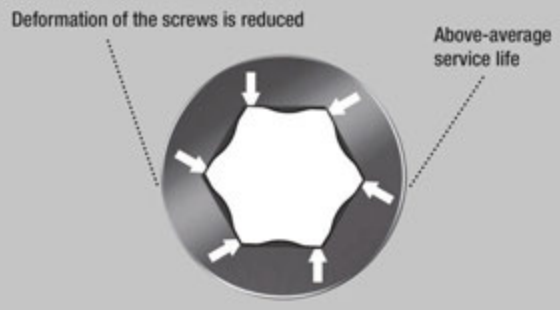


Extra tough bit for hexagonal socket screws. This prevents the bit from breaking prematurely and extends its service life.

Suitable for use with Wera impact screwdrivers 921.
With 1/4" hexagonal drive.

- For socket head screws
- Extra tough for long durability
- Hex-Plus allows socket head screws to live longer
- 1/4" hexagon drive
- For use with Wera impact screwdriver 921

### 840 S Hex-Plus bits for impact screwdrivers

| | EAN | | | | | | | |
|---|---|---|---|---|---|---|---|---|
| Code | 4013288 | mm | | mm | | | | |
| 05**018150**001 | *222428* | 3,0 | | 70 | 2 3/4" | | | 5 |
| 05**018151**001 | *222435* | 4,0 | | 70 | 2 3/4" | | | 5 |
| 05**018152**001 | *222442* | 5,0 | | 70 | 2 3/4" | | | 5 |
| 05**018153**001 | *222459* | 6,0 | | 70 | 2 3/4" | | | 5 |
| 05**018154**001 | *222466* | | 1/8" | 70 | 2 3/4" | | | 5 |
| 05**018155**001 | *222473* | | 5/32" | 70 | 2 3/4" | | | 5 |
| 05**018156**001 | *222480* | | 3/16" | 70 | 2 3/4" | | | 5 |
| 05**018157**001 | *222497* | | 1/4" | 70 | 2 3/4" | | | 5 |

## 800 S Slotted bits for impact screwdrivers

Extra tough bit for slotted screws. This prevents the bit from breaking prematurely and extends its service life.

Suitable for use with Wera impact screwdriver 921.
With 1/4" hexagonal drive.

- For slotted screws
- Extra tough for long durability
- 1/4" hexagon drive
- For use with Wera impact screwdriver 921

### 800 S Slotted bits for impact screwdrivers

| | EAN | | | | | | | |
|---|---|---|---|---|---|---|---|---|
| Code | 4013288 | mm | mm | mm | | | | |
| 05**018140**001 | *222398* | 0,8 | 4,0 | 70 | 2 3/4" | | | 5 |
| 05**018141**001 | *222404* | 1,0 | 5,5 | 70 | 2 3/4" | | | 5 |
| 05**018142**001 | *222411* | 1,2 | 6,5 | 70 | 2 3/4" | | | 5 |

## 868 S Square head socket bits for impact screwdrivers

Extra tough bit for square head socket screws. This prevents the bit from breaking prematurely and extends its service life.

Suitable for use with Wera impact screwdriver 921.
With 1/4" hexagonal drive.

- Suitable for square head socket screws
- Extra tough for long durability
- 1/4" hexagon drive
- For use with Wera impact screwdriver 921

### 868 S Square head socket bits for impact screwdrivers

| | EAN | | | | | | | |
|---|---|---|---|---|---|---|---|---|
| Code | 4013288 | | mm | | | | | |
| 05**018171**001 | *222626* | # 1 | 70 | 2 3/4" | | | | 5 |
| 05**018172**001 | *222633* | # 2 | 70 | 2 3/4" | | | | 5 |
| 05**018173**001 | *222640* | # 3 | 70 | 2 3/4" | | | | 5 |

## Kraftform Kompakt W 1 Maintenance

Compact tool set with the 35 most important screwdriving tools for maintenance work both indoors as well as outdoors.

Includes VDE holder with 12 VDE blades; 1 Jioker double open-end wrench with holding function, limit stop, small return angle and extremely gripping teeth; the incredibly fast 1/4" Zyklop Speed ratchet and accessories; 8 manual and power tool sockets, sizes 5.5-13,
1 universal bit holder; 7 bits in a length of 25 mm; 1 screw gripper for firmly holding screws; 1 single-pole phase tester 247; textile box, very robust and durable; can be positioned upright in the workshop shelf for convenient storage; additional surface protection thanks to the textile outer material; low weight and volume for simplified mobility.

- Incredibly fast 1/4" Zyklop Speed ratchet with pivoting ratchet head and 5 predefined locking positions
- Manual and power tool sockets (non-impact) with ball-stop groove and knurling at lower end for more grip
- Joker double open-end wrench with holding function, limit stop, small return angle and extremely gripping teeth
- VDE-insulated Kraftform holder and interchangeable blades
- VDE blades (157 mm length) with practical spinning function, anti-roll protection and Take it easy Tool finder: Colour coding by profile and laser-engraved size indication
- Set in robust textile box

## Kraftform Kompakt W 1 Maintenance

| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 05**135926**001 | *178336* | | | 1 |
| | | | **817 VDE**<br>1x 9x98 | |
| | | | **Kraftform Kompakt VDE 60 i Take it easy**<br>1x 0,4x2,5x157 | |
| | | | **Kraftform Kompakt VDE 60 iS Take it easy**<br>1x 0,6x3,5x157; 1x 0,8x4,0x157;<br>1x 1,0x5,5x157 | |
| | | | **Kraftform Kompakt VDE 62 iS Take it easy**<br>1x PH 1x157; 1x PH 2x157 | |
| | | | **Kraftform Kompakt VDE 65 iS Take it easy**<br>1x PZ 1x157; 1x PZ 2x157 | |
| | | | **Kraftform Kompakt VDE 67 i TORX®**<br>**Take it easy**<br>1x TX 10x157 | |
| | | | **Kraftform Kompakt VDE 67 iS TORX®**<br>**Take it easy**<br>1x TX 15x157; 1x TX 20x157; 1x TX 25x157 | |
| | | | **1440**<br>1x 4,5-6,0x41,0 | |
| | | | **247**<br>1x 0,5x3,0x70 | |
| | | | **6002 Joker Double**<br>1x 10x13x167 | |
| | | | **8000 A**<br>1x 1/4"x152,0 | |
| | | | **8784 A1**<br>1x 1/4"x1/4"x37,0 | |
| | | | **8794 SA**<br>1x 1/4"x75,0 | |
| | | | **8790 HMA**<br>1x 5,5x23,0; 1x 6,0x23,0; 1x 7,0x23,0;<br>1x 8,0x23,0; 1x 10,0x23,0; 1x 11,0x23,0;<br>1x 12,0x23,0; 1x 13,0x23,0 | |
| | | | **893/4/1 K**<br>1x 1/4"x50 | |
| | | | **855/1 Z**<br>1x PZ 1x25; 1x PZ 2x25 | |
| | | | **840/1 Z**<br>1x 3,0x25; 1x 4,0x25; 1x 5,0x25; 1x 6,0x25 | |
| | | | **867/1 TORX®**<br>1x TX 25x25 | |
| | | | **Hook and Loop Fastener Strip 240**<br>1x 50,0x240,0 | |

**)Product not available in the USA and Canada.

## Kraftform Kompakt W 2 Maintenance

VDE TOOL · TAKE IT EASY TOOL FINDER · EXTRA SLIM · HEX-PLUS · ULTRA COMPACT · WERA 2GO COMPATIBLE

| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 05**135870**001 | *209542* | | | 1 |
| | | | **817 VDE**<br>1x 9x98 | |
| | | | **Kraftform Kompakt VDE 60 i Take it easy**<br>1x 0,4x2,5x157 | |
| | | | **Kraftform Kompakt VDE 60 iS Take it easy**<br>1x 0,6x3,5x157; 1x 0,8x4,0x157;<br>1x 1,0x5,5x157 | |
| | | | **Kraftform Kompakt VDE 62 iS Take it easy**<br>1x PH 1x157; 1x PH 2x157 | |
| | | | **Kraftform Kompakt VDE 67 i TORX®**<br>**Take it easy**<br>1x TX 10x157 | |
| | | | **Kraftform Kompakt VDE 67 iS TORX®**<br>**Take it easy**<br>1x TX 15x157; 1x TX 20x157; 1x TX 25x157 | |
| | | | **Kraftform Kompakt VDE 65 iS Take it easy**<br>1x PZ 1x157; 1x PZ 2x157 | |
| | | | **1440**<br>1x 4,5-6,0x41,0 | |
| | | | **335**<br>1x 0,4x2,5x60 [1] | |
| | | | **6002 Joker Double**<br>1x 10x13x167 | |
| | | | **8000 A**<br>1x 1/4"x152,0 | |
| | | | **8784 A1**<br>1x 1/4"x1/4"x37,0 | |
| | | | **8794 SA**<br>1x 1/4"x75,0 | |
| | | | **8790 HMA**<br>1x 5,5x23,0; 1x 6,0x23,0; 1x 7,0x23,0;<br>1x 8,0x23,0; 1x 10,0x23,0; 1x 11,0x23,0;<br>1x 12,0x23,0; 1x 13,0x23,0 | |
| | | | **893/4/1 K**<br>1x 1/4"x50 | |
| | | | **851/1 Z**<br>1x PH 1x25; 1x PH 2x25 | |
| | | | **840/1 Z**<br>1x 3,0x25; 1x 4,0x25; 1x 5,0x25; 1x 6,0x25 | |
| | | | **867/1 TORX®**<br>1x TX 25x25 | |
| | | | **Hook and Loop Fastener Strip 240**<br>1x 50,0x240,0 | |

[1] without Lasertip

## Kraftform Kompakt W Imperial 1 Maintenance

VDE TOOL · TAKE IT EASY TOOL FINDER · EXTRA SLIM · HEX-PLUS · ULTRA COMPACT · WERA 2GO COMPATIBLE

| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 05**135871**001 | *209559* | | | 1 |
| | | | **817 VDE**<br>1x 9x98 | |
| | | | **Kraftform Kompakt VDE 60 i Take it easy**<br>1x 0,4x2,5x157 | |
| | | | **Kraftform Kompakt VDE 60 iS Take it easy**<br>1x 0,6x3,5x157; 1x 0,8x4,0x157;<br>1x 1,0x5,5x157 | |
| | | | **Kraftform Kompakt VDE 62 iS Take it easy**<br>1x PH 1x157; 1x PH 2x157 | |
| | | | **Kraftform Kompakt VDE 67 i TORX®**<br>**Take it easy**<br>1x TX 10x157 | |
| | | | **Kraftform Kompakt VDE 67 iS TORX®**<br>**Take it easy**<br>1x TX 15x157; 1x TX 20x157; 1x TX 25x157 | |
| | | | **Kraftform Kompakt VDE 68 iS Take it easy**<br>1x # 1x157; 1x # 2x157 | |
| | | | **335**<br>1x 0,4x2,5x60 [1] | |
| | | | **1440**<br>1x 4,5-6,0x41,0 | |
| | | | **6000 Joker Imperial**<br>1x 1/2"x177 | |
| | | | **8000 A**<br>1x 1/4"x152,0 | |
| | | | **8790 HMA**<br>1x 7/32"x23,0; 1x 1/4"x23,0; 1x 9/32"x23,0;<br>1x 5/16"x23,0; 1x 3/8"x23,0; 1x 7/16"x23,0;<br>1x 1/2"x23,0; 1x 9/16"x23,0 | |
| | | | **8784 A1**<br>1x 1/4"x1/4"x37,0 | |
| | | | **8794 SA**<br>1x 1/4"x75,0 | |
| | | | **893/4/1 K**<br>1x 1/4"x50 | |
| | | | **851/1 Z**<br>1x PH 1x25; 1x PH 2x25 | |
| | | | **840/1 Z**<br>1x 1/8"x25; 1x 5/32"x25; 1x 7/32"x25;<br>1x 1/4"x25 | |
| | | | **867/1 TORX®**<br>1x TX 25x25 | |
| | | | **Hook and Loop Fastener Strip 240**<br>1x 50,0x240,0 | |

[1] without Lasertip

## Kraftform Kompakt H 1 Woodcraft

Compact tool set with the 41 most important screwdriving tools for applications involving wood. Includes the bit ratchet Zyklop Mini with extension and socket adaptor; 8 manual and power tool sockets, sizes 5.5-13, 1 ratchet holder 816 RA with ratcheting function, fine-pitched teeth for small return angle, switchover ring (right, fixed, left), maximum torque 50 Nm and bit take-up with the Rapidaptor technology; 1 universal bit holder; 6 bits in a length of 25 mm; 16 bits of a length of 89 mm; 5 wood twist drill bits with a diameter of 3-8 mm; 1 screw gripper for firmly holding screws; 1 single-pole phase tester 247; textile box, very robust and durable; can be positioned upright in the workshop shelf for convenient storage; additional surface protection thanks to the textile outer material; low weight and volume for simplified mobility.

- Robust Zyklop Mini ratchet suitable for take-up of bits and sockets
- Torque of over 65 Nm thanks to fine-pitched ratchet mechanism and small return angle of 6°
- Ratcheting screwdriver with Rapidaptor technology for rapid bit change
- High quality wood twist drill bits for drilling soft wood, hard wood and laminated panel material
- Set in robust textile box

### Kraftform Kompakt H 1 Woodcraft

| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 05**135939**001 | *178350* | | | 1 |
| | | | **816 RA**<br>1x 1/4"x142,0 | |
| | | | **8001 A**<br>1x 1/4"x87,0 | |
| | | | **870/1**<br>1x 1/4"x25 [1] | |
| | | | **8794 SA**<br>1x 1/4"x75,0 | |
| | | | **8790 HMA**<br>1x 5,5x23,0; 1x 6,0x23,0; 1x 7,0x23,0; 1x 8,0x23,0; 1x 10,0x23,0; 1x 12,0x23,0; 1x 13,0x23,0 | |
| | | | **893/4/1 K**<br>1x 1/4"x50 | |
| | | | **851/4 Z PH**<br>1x PH 1x89; 1x PH 2x89; 1x PH 3x89 [2] | |
| | | | **855/4 Z PZ**<br>1x PZ 1x89; 1x PZ 2x89; 1x PZ 3x89 [2] | |
| | | | **855/1 Z PZ**<br>1x PZ 1x25; 1x PZ 2x25; 1x PZ 3x25 | |
| | | | **867/4 Z TORX® BO**<br>1x TX 10x89; 1x TX 15x89; 1x TX 20x89; 1x TX 25x89; 1x TX 30x89 | |
| | | | **867/1 TORX®**<br>1x TX 20x25; 1x TX 25x25 | |
| | | | **840/4 Z Hex-Plus**<br>1x 3,0x89; 1x 4,0x89; 1x 5,0x89; 1x 6,0x89 [2] | |
| | | | **800/4 Z**<br>1x 1,0x5,5x89 | |
| | | | **800/1 Z**<br>1x 1,0x5,5x25 | |
| | | | **849 HSS**<br>1x 3,0x70,0; 1x 4,0x74,0; 1x 5,0x85,0; 1x 6,0x95,0; 1x 8,0x110,0 | |
| | | | **247**<br>1x 0,5x3,0x70 | |
| | | | **1441**<br>1x 4,5 - 6,0x41,0 | |

[1] With friction ball; for manual nut spinner sockets
[2] Hexagonal blade
[*] Product not available in the USA and Canada.

## Kraftform Kompakt M 1 Metal

Compact tool set with the 39 most important screwdriving tools for jobs on metal. Includes the incredibly fast 1/4" Zyklop Speed ratchet and accessories; 7 manual and power tool sockets, sizes 5.5-13, 1 universal bit holder;

13 bits in a length of 89 mm; 6 metal twist drill bits with diameter of 3-10 mm; 1 screw gripper for firmly holding screws;
1 single-pole phase tester 247; textile box, very robust and durable; can be positioned upright in the workshop shelf for convenient storage; additional surface protection thanks to the textile outer material; low weight and volume for simplified mobility.

## Kraftform Kompakt M 1 Metal

TAKE IT EASY TOOL FINDER | HEX-PLUS | ULTRA COMPACT

| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 05**135928**001 | *178367* | | | 1 |
| | | | **8000 A**<br>1x 1/4"x152,0 | |
| | | | **8794 LA**<br>1x 1/4"x150,0 | |
| | | | **8794 A**<br>1x 1/4"x56,0 | |
| | | | **8784 A1**<br>1x 1/4"x1/4"x37,0 | |
| | | | **816 R**<br>1x 1/4"x119 | |
| | | | **8790 HMA**<br>1x 5,5x23,0; 1x 6,0x23,0; 1x 7,0x23,0;<br>1x 8,0x23,0; 1x 10,0x23,0; 1x 12,0x23,0;<br>1x 13,0x23,0 | |
| | | | **851/4 Z PH**<br>1x PH 1x89; 1x PH 2x89; 1x PH 3x89 [1] | |
| | | | **840/4 Z Hex-Plus**<br>1x 3,0x89; 1x 4,0x89; 1x 5,0x89; 1x 6,0x89 [1] | |
| | | | **867/4 Z TORX®**<br>1x TX 10x89; 1x TX 15x89; 1x TX 20x89;<br>1x TX 25x89; 1x TX 30x89 | |
| | | | **800/4 Z** 1x 1,0x5,5x89 | |
| | | | **847 HSS**<br>1x 2,5x36,0; 1x 3,3x39,0; 1x 4,2x41,0;<br>1x 5,0x44,0; 1x 6,8x51,0; 1x 8,5x59,0 | |
| | | | **848 HSS**<br>1x 3,0x38,0; 1x 4,0x44,0; 1x 5,0x50,0;<br>1x 6,0x50,0; 1x 8,0x51,0; 1x 10,0x54,0 | |
| | | | **1441**<br>1x 4,5 - 6,0x41,0 | |
| | | | **247**<br>1x 0,5x3,0x70 | |

[1] Hexagonal blade
[*] Product not available in the USA and Canada.

## Kraftform Kompakt SH 1 PlumbKit

Compact tool set with the 25 most important screwdriving tools for plumbing and heating applications. Includes 2 Joker open-end wrenches, the 1/4" Zyklop ratchet and accessories, 6 x 89 mm bits, 5 multi-component Kraftform Plus screwdrivers and single-pole phase tester. Two Joker combination ratcheting wrenches with special holding plate against slipping/loss of the screw and more torque transfer; 1 Zyklop ratchet 8000 A (1/4") for fast, powerful working; 3 Zyklop sockets 8790 HMA for manual and power tools usage; 1 Zyklop adaptor 8784 A1 for bits; 6 TORX® HF bits 867/4 with holding function for TORX® screws for secure carry without any loss of the screws;

1 single-pole phase tester 247; 2 Kraftform series 100 slotted screwdrivers 160 i and 160 iS for safe work up to 1,000 volts (160 iS with reduced shaft diameter and integrated insulation protection for reaching and actuating low-lying screws and spring elements);

1 Kraftform Chiseldriver 932 A (slotted) with hex blade extending right through the handle and integrated impact cap for screwdriving and simpler chiselling work; 2 nutsetters 395 HO with hollow shaft for the tightening or loosening of screws on long bolts as well as seized screws.

Take it easy tool finder with colour coding according to profiles and size stamp – for simple and rapid accessing of the required tool.

- Joker combination ratcheting wrench with special holding plate against slipping/loss of the screw
- Zyklop Speed ratchet for fast and powerful working
- Insulated Kraftform VDE slotted screwdriver for safe work at 1,000 volts
- Kraftform Chiseldriver with hex blade extending through handle and integrated impact cap
- Hollow shaft nutspinner for nuts on protruding threaded rods

### Kraftform Kompakt SH 1 PlumbKit

| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 05**135927**001 | *170132* | | | 1 |
| | | | **6000 Joker**<br>1x 10x159; 1x 13x177 | |
| | | | **8000 A**<br>1x 1/4"x152,0 | |
| | | | **8790 HMA**<br>1x 7,0x23,0; 1x 10,0x23,0; 1x 13,0x23,0 | |
| | | | **8784 A1**<br>1x 1/4"x1/4"x37,0 | |
| | | | **867/4 TORX® HF**<br>2x TX 20x50; 2x TX 25x50; 1x TX 30x50; 1x TX 40x50[1)] | |
| | | | **851/4 Z PH**<br>1x PH 1x89; 1x PH 2x89 | |
| | | | **840/4 Z Hex-Plus**<br>1x 3,0x89; 1x 4,0x89; 1x 5,0x89; 1x 6,0x89[2)] | |
| | | | **247**<br>1x 0,5x3,0x70 | |
| | | | **160 iS**<br>1x 0,6x3,5x100 | |
| | | | **160 i VDE**<br>1x 1,0x5,5x125 | |
| | | | **932 A**<br>1x 1,2x7,0x125 | |
| | | | **395 HO**<br>1x 10,0x90; 1x 13,0x90 | |

*) Product not available in the USA and Canada.

1) Pound-thru hexagonal; no Take it easy.

2) Hexagonal blade

## Kraftform Kompakt SH 2 PlumbKit

- 15 screwdriving tools for sanitary or heating applications in compact and robust Wera textile box
- Joker combination ratcheting wrench with special holding plate against slipping/loss of the screw
- Insulated Kraftform VDE slotted screwdriver for safe work at 1,000 volts
- Kraftform Chiseldriver with hex blade extending through handle and integrated impact cap
- Hollow shaft nutspinner for nuts on protruding threaded rods
- VDE-insulated Kraftform holder and interchangeable blades
- VDE blades (157 mm length) with practical spinning function, anti-roll protection and Take it easy Tool finder: Colour coding by profile and laser-engraved size indication

### Kraftform Kompakt SH 2 PlumbKit

| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 05**136026**001 | *204387* | | | 1 |
| | | | **395 HO**<br>1x 10,0x90; 1x 13,0x90 | |
| | | | **932 A**<br>1x 1,2x7,0x125 | |
| | | | **6001 Joker Switch**<br>1x 10x159; 1x 13x179 | |
| | | | **950 SPKL HF Multicolour**<br>1x 3,0x123; 1x 4,0x137; 1x 5,0x154;<br>1x 6,0x172 | |
| | | | **817 VDE**<br>1x 9x98 | |
| | | | **Kraftform Kompakt VDE 62 iS Take it easy**<br>1x PH 1x157; 1x PH 2x157 | |
| | | | **Kraftform Kompakt VDE 60 iS Take it easy**<br>1x 0,6x3,5x157; 1x 1,0x5,5x157 | |
| | | | **247**<br>1x 0,5x3,0x70 | |
| | | | **Hook and Loop Fastener Strip 240**<br>1x 50,0x240,0 | |

*) Product not available in the USA and Canada.

## Kraftform Kompakt F 1 screwdriving tool set for window installation

Compact Wera screwdriving tool set with the 36 most important tools for window construction

- Premium 36-piece universal tool set for the professional window builder
- 393 S extra slim bit hand holder with flexible shaft for applications in hard-to-reach work spaces
- Socket wrench and bit assortment in premium Wera quality, attuned to universal window construction applications
- Compact and solid textile tool box with Wera 2go compatibility

### Kraftform Kompakt F 1 screwdriving tool set for window installation

| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 05**134013**001 | *217721* | | | 1 |
| | | | **393 S**<br>1x 1/4"x173,5 | |
| | | | **813**<br>1x 1/4"x78 | |
| | | | **8001 A**<br>1x 1/4"x87,0 | |
| | | | **870/1**<br>1x 1/4"x25 [1] | |
| | | | **8794 SA**<br>1x 1/4"x75,0 | |
| | | | **8790 HMA**<br>1x 7,0x23,0; 1x 8,0x23,0; 1x 10,0x23,0;<br>1x 13,0x23,0 | |
| | | | **851/4 TZ PH**<br>1x PH 1x50; 1x PH 2x50; 1x PH 3x50 | |
| | | | **867/4 Z TORX®**<br>1x TX 8x50; 1x TX 10x50; 1x TX 15x50;<br>1x TX 20x50; 1x TX 25x50; 1x TX 30x50 | |
| | | | **840/4 Z Hex-Plus**<br>1x 2,0x50; 1x 2,5x50; 1x 3,0x50; 1x 4,0x50;<br>1x 5,0x50; 1x 6,0x89 [2] | |
| | | | **950 SPKL Multicolour**<br>1x 2,0x101; 1x 2,5x112 | |
| | | | **950 SPKL HF Multicolour**<br>1x 3,0x123; 1x 4,0x137; 1x 5,0x154 | |
| | | | **967 SXL HF TORX® Multicolour**<br>1x TX 8x90; 1x TX 10x112; 1x TX 15x123;<br>1x TX 20x137; 1x TX 25x154; 1x TX 30x195 | |
| | | | **6004 Joker S**<br>1x 10-13 (7/16"-1/2")x154 | |

[1] With friction ball; for manual nut spinner sockets
[2] Hexagonal blade

## 9532 Chain riveter set for workshops

18-piece tool set for the bike workshop. With the Zyklop Mini bit ratchet and the bitholding screwdriver and the 89 mm and 25 mm length bits, hexagonal socket, TORX® and Phillips-head Phillips screws can be operated.

With the included chain riveter and chain fastener with exchangeable rivet pin, bicycle chains can be opened and closed (suitable for single-speed chains, up to 12-speed). The chain lock tool makes it easier to open and close chains with a chain lock.

- Tool set for the bike workshop
- With Wera Zyklop Mini 1 bit ratchet, 816 R bitholding screwdriver, one chain riveter, one chain fastener, spare parts set chain riveter pin, one chain lock tool, 10 bits with 89 mm length, 2 bits with 25 mm length
- With chain riveter and chain fastener with exchangeable rivet pin for opening and closing bicycle chains. Suitable for single-speed chains, up to 12-speed
- Quick-release bike chain tool for opening and closing chains with a chain lock
- In robust pouch

### 9532 Chain riveter set for workshops

| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 05**136042**001 | *229571* | | | 1 |
| | | | **8001 A**<br>1x 1/4"x87,0 | |
| | | | **816 R**<br>1x 1/4"x119 | |
| | | | **851/4 Z**<br>1x PH 1x89; 1x PH 2x89 | |
| | | | **867/4 Z TORX®**<br>1x TX 10x89; 1x TX 25x89 | |
| | | | **840/4 Z**<br>1x 2,0x89; 1x 2,5x89; 1x 3,0x89; 1x 4,0x89; 1x 5,0x89; 1x 6,0x89 [1] | |
| | | | **840/1 Z**<br>1x 5,0x25; 1x 8,0x25 | |
| | | | **9512 Chain-Hook** | |
| | | | **9513 Chain Tool** | |
| | | | **9533 Quick-release bike chain tool**<br>1x 167,5 | |
| | | | **9534**<br>3x 15,0 | |

[1] Hexagonal blade

## 9100 guitar tool set

Guitar tool set: The set contains all the tools necessary for adjustment and maintenance repair work. Wera stainless steel angle wrench with Hex-Plus profile (sizes: 1.5, 2.0, 2.5, 5.0 and in the inch sizes 1/8", 5/32", 3/16").

Wera 89 mm long stainless steel bits for hexagon socket screws (sizes: 1.5, 2.0, 2.5), Kraftform handle for 1/4" bits, 1/4" stainless steel bits for slot (sizes: 1.8x 12x41 mm, 0.6x3.5x89 mm, 1.2x8.0x89 mm), Phillips screws (sizes: PH 1x89 mm, PH 2x89 mm) and hexagon socket screws (size: 0.05"x25 mm), Wera adapter for handle (1/4" hex socket of the handle on 1/4" square of sockets), Wera Zyklop sockets (sizes 10 and 1/2"), string crank with 1/4" hex for use in the handle, Knipex® string cutter, feeler gauge, input jacker, 2 picks.

### 9100 guitar tool set

| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 05**134015**001 | *211675* | | | 1 |
| | | | **815 R**<br>1x 1/4"x119 | |
| | | | **3851/4**<br>1x PH 1x89; 1x PH 2x89 | |
| | | | **3800/1 TS**<br>1x 1,8x12,0x41 | |
| | | | **3800/4**<br>1x 0,6x3,5x89; 1x 1,2x8,0x89 | |
| | | | **3840/1 TS**<br>1x 0,05"x25 | |
| | | | **3950 PKL**<br>1x 1,5x90; 1x 2,0x101; 1x 2,5x112; 1x 3,0x123; 1x 4,0x137; 1x 5,0x154 | |
| | | | **3950 PKL Imperial**<br>1x 1/8"x123; 1x 5/32"x137; 1x 3/16"x154 | |
| | | | **870/1**<br>1x 1/4"x25 [1] | |
| | | | **8790 HMA**<br>1x 10,0x23,0; 1x 7/16"x23,0 | |
| | | | **8790 HMA Deep**<br>1x 1/2"x50,0 | |
| | | | **9103 stringer** | |
| | | | **9105 slip gauge 0,05 - 1,00mm, 13 blades** | |
| | | | **9104 Input-Jacker** | |
| | | | **9101 plectrum Wera** | |
| | | | **9102 plectrum Tool Rebel** | |
| | | | **9110 box with lid Wera** | |
| | | | **KNIPEX® 74 01 140** | |
| | | | **Hook and Loop Fastener Strip 120**<br>1x 50,0x120,0 | |

[1] With friction ball; for manual nut spinner sockets

## Radidaptor - the amazing compact multifunction tool

High quality holder for stainless steel bits so as to avoid the formation of extraneous rust. The Rapidaptor quick-release chuck enables rapid bit change without needing any special tools.

Kraftform Plus handle for pleasant, ergonomic working that makes blisters and calluses a thing of the past. Hard gripping zones for high working speeds whereas soft zones ensure high torque transfer.

Suitable for bits with 1/4" hexagon head drive as per DIN ISO 1173-C 6.3 and E 6.3 (ISO 1173).

- Solution to the extraneous rust problem: fasten stainless screws with stainless tools
- Bit handholder with Rapidaptor quick-release chuck, stainless
- Secure clamping of bits
- Fast bit change
- Free-turning sleeve for guiding the power tool

## Kraftform Stainless - stainless steel to prevent rust

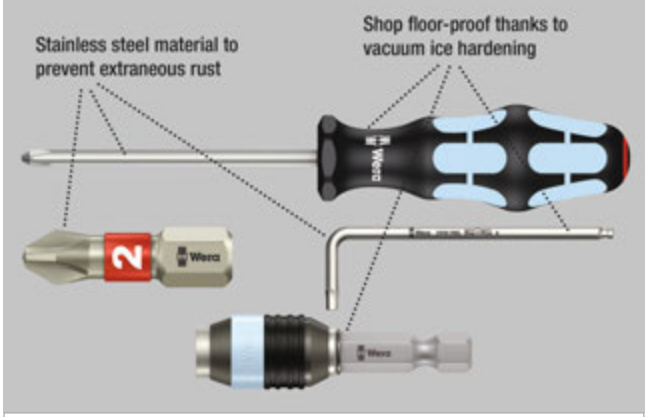


### 3816 R Bit-holding screwdriver with Rapidaptor quick-release chuck, stainless

| | EAN | | | | | | | |
|---|---|---|---|---|---|---|---|---|
| Code | 4013288 | | mm | | | | | |
| 05**051465**001 | *127570* | 1/4" | 119 | | | | | 5 |

## 817 R Bitholding screwdriver with Rapidaptor quick-release chuck

High quality bit holder. The telescopic bayonet blade, which can be lowered into the handle, together with the quick-release chuck allows fast manual work even in confined installation situations. The Rapidaptor quick-release chuck enables rapid bit change without needing any special tools.

The strong permanent magnet holds the bits absolutely securely. Kraftform Plus handle for pleasant, ergonomic working that makes blisters and calluses a thing of the past. Hard gripping zones for high working speeds whereas soft zones ensure high torque transfer. Suitable for bits with 1/4" hexagon head drive as per DIN ISO 1173-C 6.3 and E 6.3 (ISO 1173).

- Retractable bayonet blade

### 817 R Bitholding screwdriver with Rapidaptor quick-release chuck

| | EAN | | | | | | | |
|---|---|---|---|---|---|---|---|---|
| Code | 4013288 | | mm | | | | | |
| 05**051482**001 | *103130* | 1/4" | 133 | | | | | 2 |

### 817 R SB Bitholding screwdriver with Rapidaptor quick-release chuck

| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 05**073541**001 | *106025* | | **817 R** 1x 1/4"x133 | 1 |

## 816 R Bitholding screwdriver with Rapidaptor quick-release chuck

| | EAN | | | | | | | |
|---|---|---|---|---|---|---|---|---|
| Code | 4013288 | | mm | | | | | |
| 05**051462**001 | *099617* | 1/4" | 119 | | | | | 5 |

## 816 R SB Bitholding screwdriver with Rapidaptor quick-release chuck

| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 05**073540**001 | *106032* | | **816 R** 1x 1/4"x119 | 1 |

## 813 R Bitholding screwdriver with Rapidaptor quick-release chuck

| | EAN | | | | | | | |
|---|---|---|---|---|---|---|---|---|
| Code | 4013288 | | mm | | | | | |
| 05**051272**001 | *103123* | 1/4" | 90 | | | | | 2 |

## 393 S Bitholding screwdriver extra slim with flexible shaft

Screwdriver with bendable shaft to reach hard-to-reach areas. Thanks to the construction with a particularly slim bit holder, different screw profiles can be operated, even in very narrow work spaces. Multi-component Kraftform handle for high work speed and especially ergonomic screwdriving. With hexagon anti-roll protection to avoid rolling away.

- Flexible, bendable shaft
- Secure bit holding feature due to locking mechanism. With strong permanent magnet.
- Compact stainless steel holder for bits with 1/4"- external hexagon drive as per DIN 3126, ISO 1173 Form C 6.3 and E 6,3
- Multi-component Kraftform handle for fast and ergonomic screwdriving

## 393 S Bitholding screwdriver extra slim with flexible shaft

| | EAN | | | | | | | |
|---|---|---|---|---|---|---|---|---|
| Code | 4013288 | | mm | mm | | | | |
| 05**028161**001 | *217660* | 1/4" | 173,5 | 98 | 6 53/64" | | | 5 |

## 392 Bitholding screwdriver with flexible shaft

High quality bit holder with flexible shaft by Wera. Multi-component Kraftform handle for high working speeds and particularly ergonomic screwdriving.

Kraftform Plus: hard gripping zones for high working speeds whereas soft zones ensure high torque transfer. Comes with quick-release chuck for rapid bit change and hexagonal anti-roll feature that prevents any rolling away. Suitable for the insertion of bits with 1/4" hexagon head drive as per DIN ISO 1173-C 6.3.

- Bit holder with flexible shaft and quick-release chuck
- Flexible, circular blade

## 392 Bitholding screwdriver with flexible shaft

| | EAN | | | | | | | |
|---|---|---|---|---|---|---|---|---|
| Code | 4013288 | | mm | mm | | | | |
| 05**028160**001 | *041418* | 1/4" | 177 | 98 | 7" | | | 5 |

## 815/1 Bitholding screwdriver, 1/4"

- For 1/4" hex drive bits
- Magnetic

### 815/1 Bitholding screwdriver, 1/4"

| | EAN | | | | | | | |
|---|---|---|---|---|---|---|---|---|
| Code | 4013288 | | mm | mm | | | | |
| 05**145100**001 | *234308* | 1/4" | 78 | 68 | | | | 3 |

## 813 Bitholding screwdriver

- Bit holder for bits with 1/4" hexagon drive
- Magnetic

### 813 Bitholding screwdriver

| | EAN | | | | | | | |
|---|---|---|---|---|---|---|---|---|
| Code | 4013288 | | mm | mm | | | | |
| 05**051274**001 | *175656* | 1/4" | 78 | 68 | | | | 3 |

## 812/1 Bitholding screwdriver with strong permanent magnet

- Hexagonal blade, chrome-plated
- Stainless sleeve with strong permanent magnet for secure fit of the bit

### 812/1 Bitholding screwdriver with strong permanent magnet

| | EAN | | | | | | | |
|---|---|---|---|---|---|---|---|---|
| Code | 4013288 | | mm | mm | mm | | | |
| 05**051205**001 | *012272* | 1/4" | 120 | 112 | 10,5 | 4 3/4" | | 2 |

## 811/1 Stubby bits hand holder, magnetic

Especially small bit-holding Stubby screwdriver handle with short blade for hard to reach areas. Suitable for the mounting of bits with 1/4" hexagon drive as per DIN ISO 1173-C 6.3 and Wera connection series 1. With strong permanent magnet, which also holds large and heavy screws.

The 2-component Kraftform handle with its practical combination of hard and soft zones allows for a firm grip and precise working.

The hexagon anti-roll protection prevents annoying rolling away of bits in the workplace.

- Short compact shape for working in confined spaces
- Ergonomic 2-component Kraftform handle for precise work
- Hexagonal anti-roll feature against rolling away
- Magnetic bits hand holder for easier placement of the screws
- For 1/4" bits as per DIN ISO 1173-C 6.3

### 811/1 Stubby bits hand holder, magnetic

| | EAN | | | | | | | |
|---|---|---|---|---|---|---|---|---|
| Code | 4013288 | | mm | mm | | | | |
| 05**008880**001 | *212375* | 1/4" | 10 | 54 | 3/8" | | | 2 |

## 810/1 Bitholding screwdriver with retaining ring

- Bit holder with retaining ring for bits with 1/4" hexagon drive

### 810/1 Bitholding screwdriver with retaining ring

| | EAN | | | | | | | |
|---|---|---|---|---|---|---|---|---|
| Code | 4013288 | | mm | mm | mm | | | |
| 05**051005**001 | *012258* | 1/4" | 120 | 112 | 10,5 | 4 3/4" | | 2 |

Wera
Wera
TOOL
REBELS
BE A TOOL REBEL
Wera

# Roller cabinet and foam inserts

## 9700 Tool Rebel Roller Cabinet 1

Exclusive roller cabinet in the Tool Rebel design. Five flat and two high drawers ensure efficient, mobile organization of tools and materials.

Extremely robust thanks to a double-walled design and the completely welded construction of the entire body. For daily hard work in the workshop.

Equipped with four Wera foam inserts: 9710 foam insert screwdriver set 1, 9720 foam insert 8000 A Zyklop ratchet set 1, 9731 foam insert 6003 Joker ring spanner set 1, 9740 foam insert L-key set 1.

- Exclusive roller cabinet in the Tool Rebel design
- Extremely robust design thanks to a double-walled design
- With 7 drawers (5 flat, 2 high) – of which 2 flat drawers are equipped with foam inserts and tools (e.g. with Zyklop Speed ratchet and accessories, Joker spanners, Kraftform screwdrivers, L-keys)
- Dimensions flat drawers (width x height x depth): 522 x 81 x 398 mm
- Dimensions high drawers (width x height x depth): 522 x 166 x 398 mm
- 100 % drawer pull-out with ball bearing telescopic slides, self-closing
- All drawers are elaborately and individually layered
- Minimum risk of tilting over thanks to the drawer stop – only one drawer can be opened, no simultaneous pull-out of multiple drawers
- Both sides with square head boring
- High-quality, durable foam inserts without chemical vapours
- Optimum fit for the best possible removal of the tools from the foam inserts

### 9700 Tool Rebel Roller Cabinet 1

| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 05**150130**001 | *225085* | | | 1 |
| | | **1x 9710 Foam insert screwdriver set 1** | | |
| | | | **932 A** 1x 1,0x5,5x100; 1x 1,2x7,0x125 | |
| | | | **350** 1x PH 1x80; 1x PH 2x100; 1x PH 3x150 | |
| | | | **350 PH Stubby/carburetor screwdriver** 1x PH 2x25 | |
| | | | **355** 1x PZ 1x80; 1x PZ 2x100 | |
| | | | **335** 1x 0,8x4,0x100; 1x 1,0x5,5x125 | |
| | | | **334** 1x 1,2x6,5x150 | |
| | | | **335 Stubby/carburetor screwdriver** 1x 1,0x5,5x24,5 | |
| | | | **2050 Micro** 1x PH 0x40 [1] | |
| | | | **2035 Micro** 1x 0,40x2,5x80 | |
| | | | **160 i VDE** 1x 0,4x2,5x80 [2]; 1x 0,6x3,5x100 [2] | |
| | | | **1441** 1x 4,5-6,0x41,0 | |
| | | | **1442** 1x 6,0-8,5x41,0 | |
| | | | **9810** 1x 344,0x30,0x392,0 [3] | |

| | | | | |
|---|---|---|---|---|
| | | | **1x 9720**<br>**Foam insert 8000 A Zyklop 1/4“ ratchet set 1** | |
| | | | **8000 A**<br>1x 1/4"x152,0 | |
| | | | **8794 LA**<br>1x 1/4"x150,0 | |
| | | | **8794 SA**<br>1x 1/4"x75,0 | |
| | | | **8795 A**<br>1x 1/4"x35,5 | |
| | | | **8794 A**<br>1x 1/4"x56,0 | |
| | | | **8790 HMA**<br>1x 4,0x23,0; 1x 4,5x23,0; 1x 5,0x23,0; 1x 5,5x23,0; 1x 6,0x23,0; 1x 7,0x23,0; 1x 8,0x23,0; 1x 9,0x23,0; 1x 10,0x23,0; 1x 11,0x23,0; 1x 12,0x23,0; 1x 13,0x23,0; 1x 14,0x23,0; 1x 15,0x23,0 | |
| | | | **8767 A HF**<br>1x TX 8x28,0; 1x TX 9x28,0; 1x TX 10x28,0; 1x TX 15x28,0; 1x TX 20x28,0; 1x TX 25x28,0; 1x TX 27x28,0; 1x TX 30x28,0; 1x TX 40x28,0 | |
| | | | **8740 A HF**<br>1x 3,0x28,0; 1x 4,0x28,0; 1x 4,0x100,0; 1x 5,0x28,0; 1x 5,0x100,0; 1x 6,0x28,0; 1x 6,0x100,0; 1x 8,0x28,0; 1x 8,0x100,0 | |
| | | | **9820**<br>1x 172,0x30,0x392,0 [3] | |
| | | | **1x 9731**<br>**Foam insert 6003 Joker set 1** | |
| | | | **6003 Joker**<br>1x 6x105; 1x 7x110; 1x 8x115; 1x 9x120; 1x 10x125; 1x 11x135; 1x 12x148; 1x 13x160; 1x 14x167; 1x 15x174; 1x 16x182; 1x 17x190; 1x 18x210; 1x 19x230; 1x 20x230; 1x 21x260; 1x 22x260; 1x 24x280 | |
| | | | **Bottle opener**<br>1x 145 | |
| | | | **9831**<br>1x 344,0x30,0x392,0 [3] | |
| | | | **1x 9740**<br>**Foam insert L-key set 1** | |
| | | | **1x 950/9 Hex-Plus Multicolour 1** | |
| | | | **950 SPKL Multicolour**<br>1x 1,5x90; 1x 2,0x101; 1x 2,5x112; 1x 3,0x123; 1x 4,0x137; 1x 5,0x154; 1x 6,0x172; 1x 8,0x195; 1x 10,0x224 | |
| | | | **1x 967/9 TX XL Multicolour 1** | |
| | | | **967 SXL TORX® Multicolour**<br>1x TX 8x90; 1x TX 9x101; 1x TX 10x112 | |
| | | | **967 SPKXL TORX® Multicolour**<br>1x TX 15x123; 1x TX 20x137; 1x TX 25x154; 1x TX 27x172; 1x TX 30x195; 1x TX 40x224 | |
| | | | **1x 9500 Magnetiser SB**<br>1x 64,6 | |
| | | | **1x STABILA® BM 100 Pocket tape, metric scale, 3 m, item 19570** | |
| | | | **1x 9840**<br>1x 172,0x30,0x392,0 [3] | |

[1] Size 0 modified according to JCIS 0 (Japanese Camera Industrial Standard)
[2] without Lasertip
[3] Attention: The foam insert does not fit in the previous model 05**501051**001 of the roller cabinet.

## 9710 Foam insert screwdriver set 1

Durable foam insert; two-coloured for quick identification of missing parts; suitable for the Tool Rebel roller cabinet, equipped with 16 Wera Kraftform screwdrivers (workshop, VDE, chiseldriver, Micro) as well as 2 screw grippers.

- Durable foam insert, each tool has its own place; two-coloured, missing tools will quickly be noticed
- High-quality, durable foam insert without chemical vapours
- Optimum fit for the best possible removal of the tools from the foam insert
- Water- and oil-repellent, low maintenance and easy to clean
- Protection of the tool from dirt and impact
- 8 Kraftform Plus screwdrivers with hard zones for high working speeds and soft handle zones for a high torque transfer
- 2 Kraftform Plus VDE screwdrivers with insulated blades for safe working up to 1,000 volt
- 2 Kraftform Micro screwdrivers with a rotating cap for fast turning
- 2 Stubby screwdrivers with short blade for hard-to-reach areas
- Two screw grippers (attachment tools with gripping function for screws)
- Width x height x depth: without tools 344 x 30 x 392 mm, with tools 344 x 47 x 392 mm

### 9710 Foam insert screwdriver set 1

| Code | EAN<br>4013288 | | | |
|---|---|---|---|---|
| 05**150101**001 | *225122* | | | 1 |
| | | | **932 A** 1x 1,0x5,5x100; 1x 1,2x7,0x125 | |
| | | | **350** 1x PH 1x80; 1x PH 2x100; 1x PH 3x150 | |
| | | | **350 PH Stubby/carburetor screwdriver**<br>1x PH 2x25 | |
| | | | **355** 1x PZ 1x80; 1x PZ 2x100 | |
| | | | **335** 1x 0,8x4,0x100; 1x 1,0x5,5x125 | |
| | | | **334** 1x 1,2x6,5x150 | |
| | | | **335 Stubby/carburetor screwdriver**<br>1x 1,0x5,5x24,5 | |
| | | | **2050 Micro** 1x PH 0x40 [1] | |
| | | | **2035 Micro** 1x 0,40x2,5x80 | |
| | | | **160 i VDE 1**x 0,4x2,5x80 [2]; 1x 0,6x3,5x100 [2] | |
| | | | **1441** 1x 4,5-6,0x41,0 | |
| | | | **1442** 1x 6,0-8,5x41,0 | |
| | | | **9810** 1x 344,0x30,0x392,0 [3] | |

[1] Size 0 modified according to JCIS 0 (Japanese Camera Industrial Standard)
[2] without Lasertip
[3] Attention: The foam insert does not fit in the previous model 05**501051**001 of the roller cabinet.

## 9711 Foam insert VDE screwdriver set 1

- Screwdriver with insulated blades for safe working up to 1,000 volt, five of which with reduced blade diameter for lower-lying screws
- Two screw grippers (attachment tools with gripping function for screws)
- Width x height x depth: without tools 344 x 30 x 392 mm, with tools 344 x 46 x 392 mm

### 9711 Foam insert VDE screwdriver set 1

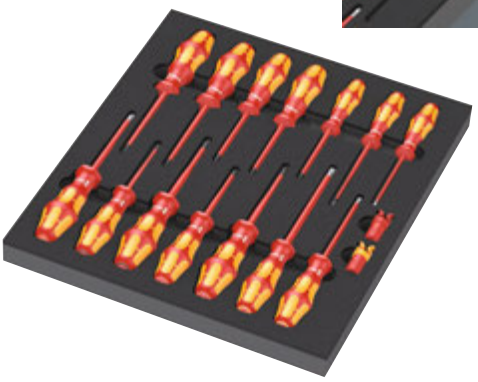

| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 05**150102**001 | *225320* | | | 1 |
| | | | **162 iS PH VDE**<br>1x PH 1x80; 1x PH 2x100 | |
| | | | **165 iS PZ VDE**<br>1x PZ 1x80; 1x PZ 2x100 | |
| | | | **165 i PZ/S VDE**<br>1x # 2x100 | |
| | | | **160 i VDE**<br>1x 0,4x2,5x80 [1]; 1x 0,8x4,0x100;<br>1x 1,0x5,5x125 | |
| | | | **160 iS VDE**<br>1x 0,6x3,5x100 | |
| | | | **167 i TORX® VDE**<br>1x TX 10x80; 1x TX 15x80; 1x TX 20x80;<br>1x TX 25x100; 1x TX 30x100 | |
| | | | **1440**<br>1x 4,5-6,0x41,0 | |
| | | | **1442**<br>1x 6,0-8,5x41,0 | |
| | | | **9811**<br>1x 344,0x30,0x392,0 [2] | |

[1] without Lasertip

[2] Attention: The foam insert does not fit in the previous model 05**501051**001 of the roller cabinet.

## 9712 Foam insert TORX® HF screwdriver set 1

- 6 Kraftform Plus screwdrivers with hard zones for high working speeds and soft handle zones for a high torque transfer
- 4 Kraftform Micro screwdrivers with a rotating cap for fast turning
- 4 T-handle screwdrivers for the transmission of particularly high tightening and loosening moments
- Width x height x depth: without tools 344 x 30 x 392 mm, with tools 344 x 45 x 392 mm

### 9712 Foam insert TORX® HF screwdriver set 1



| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 05**150103**001 | *225283* | | | 1 |
| | | | **367 TORX® HF**<br>1x TX 8x60; 1x TX 9x60; 1x TX 10x80;<br>1x TX 15x80; 1x TX 20x100; 1x TX 25x100 | |
| | | | **2067 TORX® HF Micro**<br>1x TX 4x40; 1x TX 5x40; 1x TX 6x40;<br>1x TX 7x60 | |
| | | | **467 TORX® HF**<br>1x TX 20x100; 1x TX 25x100; 1x TX 30x200;<br>1x TX 40x200 | |
| | | | **9812**<br>1x 344,0x30,0x392,0 [1] | |

[1] Attention: The foam insert does not fit in the previous model 05**501051**001 of the roller cabinet.

## 9713 Foam insert Hex screwdriver set 1

- 4 Kraftform Plus screwdrivers with hard zones for high working speeds and soft handle zones for a high torque transfer, two of which with hollow shaft for protruding thread rods
- 3 Kraftform Micro screwdrivers with a rotating cap for fast turning
- 5 T-handle screwdrivers for the transmission of particularly high tightening and loosening moments, with holding function for hexagonal socket screws
- With Hex-Plus profile (prevents hexagonal socket screws from cylindrical turning)
- Width x height x depth: without tools 344 x 30 x 392 mm, with tools 344 x 45 x 392 mm

### 9713 Foam insert Hex screwdriver set 1



| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 05**150104**001 | *225290* | | | 1 |
| | | | **354**<br>1x 3,0x75; 1x 4,0x75 | |
| | | | **2054 Micro**<br>1x 1,5x60; 1x 2x60; 1x 2,5x60 | |
| | | | **454 HF**<br>1x 4x100; 1x 5x100; 1x 6x150; 1x 8x200; 1x 10x200 | |
| | | | **395 HO**<br>1x 10,0x90; 1x 13,0x90 | |
| | | | **9813**<br>1x 344,0x30,0x392,0 [1] | |

[1] Attention: The foam insert does not fit in the previous model 05**501051**001 of the roller cabinet.

## 9714 Foam insert The Chiseldriver screwdriver set 1

- 13 chiseldrivers for screwdriving, chiseling, mortising
- Hexagonal blade extending through the handle
- Impact cap and bolster for the transfer of higher torque
- Width x height x depth: without tools 344 x 30 x 392 mm, with tools 344 x 46 x 392 mm

### 9714 Foam insert The Chiseldriver screwdriver set 1

| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 05**150105**001 | *232540* | | | 1 |
| | | | **917 SPH**<br>1x PH 1x80; 1x PH 2x100; 1x PH 3x150 | |
| | | | **918 SPZ**<br>1x PZ 1x80; 1x PZ 2x100; 1x PZ 3x150 | |
| | | | **932 A**<br>1x 0,6x3,5x80 [1]; 1x 0,8x4,5x90; 1x 1,0x5,5x100; 1x 1,2x7,0x125; 1x 1,6x9,0x150 | |
| | | | **977 TORX®**<br>1x TX 20x90; 1x TX 25x100 | |
| | | | **9814**<br>1x 344,0x30,0x392,0 | |

[1] No throughout blade, no impact cap and no hexagon bolster

[*] Attention: The foam insert does not fit in the previous model 05**501051**001 of the roller cabinet.

## 9715 Foam insert Kraftform Micro screwdriver set 1

- Kraftform Micro screwdriver
- Multi-component Kraftform Micro handle for fast and ergonomic screwdriving
- Anti-roll feature and swivel cap for rapid twisting
- The Wera Black Point tip offers an exact fit and optimum corrosion protection
- “Take it easy” tool finder: colour coding according to profile and size
- Width x height x depth: without tools 344 x 30 x 392 mm, with tools 344 x 38 x 392 mm

### 9715 Foam insert Kraftform Micro screwdriver set 1

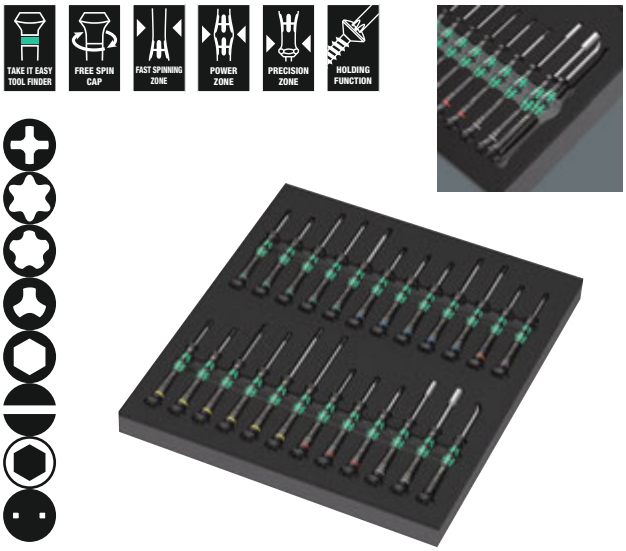


| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 05**150106**001 | *232557* | | | 1 |
| | | | **2050 Micro**<br>1x PH 000x40 [1) 2)]; 1x PH 00x40 [1) 2)];<br>1x PH 0x40 [3)] | |
| | | | **2067 TORX® HF**<br>1x TX 5x40; 1x TX 6x40; 1x TX 7x60; 1x TX 8x60;<br>1x TX 10x60 | |
| | | | **2067 TORX PLUS® IPR Micro**<br>1x 1 IPRx40 [4)] | |
| | | | **2072 Micro**<br>1x mx40 | |
| | | | **2054 Micro**<br>1x 0,7x40; 1x 0,9x40; 1x 1,3x40; 1x 1,5x60;<br>1x 2x60 | |
| | | | **2035 Micro**<br>1x 0,23x1,5x40; 1x 0,30x1,8x60;<br>1x 0,35x2,5x40; 1x 0,40x2,0x60;<br>1x 0,40x2,5x80; 1x 0,50x3,0x80 | |
| | | | **2069 Micro**<br>1x 4,0x60; 1x 5,5x60 | |
| | | | **1429**<br>1x 1,0x3,5x50 | |
| | | | **9815**<br>1x 344,0x30,0x392,0 | |

[1)] Optimised for Asian PH screws

[2)] On the output side, the blade is turned to a nominal length of 10 mm

[3)] Size 0 modified according to JCIS 0 (Japanese Camera Industrial Standard)

[4)] Without bore hole

[**)] Attention: The foam insert does not fit in the previous model 05**501051**001 of the roller cabinet.

## 9720 Foam insert 8000 A Zyklop 1/4" ratchet set 1

- The Zyklop Speed ratchet combines five ratchet types in one
- With flywheel design and slip-proof fast-rotating sleeve for extremely high working speed
- Freely pivoting ratchet head, push button release and left/right switchover
- Fine-tooth design allows a small return angle of 5°
- Can also be used as a screwdriver
- Set including sockets, bit sockets, extensions and universal joint
- 14 sockets, 9 bit sockets with holding function for TORX® screws, 9 bit sockets with holding function for hexagonal socket screws
- Width x height x depth: without tools 172 x 30 x 392 mm, with tools 172 x 40 x 392 mm

### 9720 Foam insert 8000 A Zyklop 1/4" ratchet set 1

| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 05**150110**001 | *225139* | | | 1 |
| | | | **8000 A**<br>1x 1/4"x152,0 | |
| | | | **8794 LA**<br>1x 1/4"x150,0 | |
| | | | **8794 SA**<br>1x 1/4"x75,0 | |
| | | | **8795 A**<br>1x 1/4"x35,5 | |
| | | | **8794 A**<br>1x 1/4"x56,0 | |
| | | | **8790 HMA**<br>1x 4,0x23,0; 1x 4,5x23,0; 1x 5,0x23,0;<br>1x 5,5x23,0; 1x 6,0x23,0; 1x 7,0x23,0;<br>1x 8,0x23,0; 1x 9,0x23,0; 1x 10,0x23,0;<br>1x 11,0x23,0; 1x 12,0x23,0; 1x 13,0x23,0;<br>1x 14,0x23,0; 1x 15,0x23,0 | |
| | | | **8767 A HF**<br>1x TX 8x28,0; 1x TX 9x28,0; 1x TX 10x28,0;<br>1x TX 15x28,0; 1x TX 20x28,0; 1x TX 25x28,0;<br>1x TX 27x28,0; 1x TX 30x28,0; 1x TX 40x28,0 | |
| | | | **8740 A HF**<br>1x 3,0x28,0; 1x 4,0x28,0; 1x 4,0x100,0;<br>1x 5,0x28,0; 1x 5,0x100,0; 1x 6,0x28,0;<br>1x 6,0x100,0; 1x 8,0x28,0; 1x 8,0x100,0 | |
| | | | **9820**<br>1x 172,0x30,0x392,0 [1)] | |

[1)] Attention: The foam insert does not fit in the previous model 05**501051**001 of the roller cabinet.

## 9721 Foam insert 8000 B Zyklop 3/8" ratchet set 1

- The Zyklop Speed ratchet combines five ratchet types in one
- With flywheel design and slip-proof fast-rotating sleeve for extremely high working speed
- Freely pivoting ratchet head, push button release and left/right switchover
- Fine-tooth design allows a small return angle of 5°
- Can also be used as a screwdriver
- Set including sockets, extensions and universal joint
- Width x height x depth: without tools 172 x 30 x 392 mm, with tools 172 x 45 x 392 mm

### 9721 Foam insert 8000 B Zyklop 3/8" ratchet set 1

| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 051**50111**001 | *225306* | | | 1 |
| | | | **8000 B**<br>1x 3/8"x199,0 | |
| | | | **8794 SB**<br>1x 3/8"x125,0 | |
| | | | **8794 LB**<br>1x 3/8"x200,0 | |
| | | | **8795 B**<br>1x 3/8"x50,0 | |
| | | | **8794 B**<br>1x 3/8"x76,0 | |
| | | | **8790 HMB**<br>1x 6,0x29,0; 1x 7,0x29,0; 1x 8,0x29,0; 1x 9,0x29,0; 1x 10,0x29,0; 1x 11,0x29,0; 1x 12,0x29,0; 1x 13,0x29,0; 1x 14,0x29,0; 1x 15,0x29,0; 1x 16,0x30,0; 1x 17,0x30,0; 1x 18,0x30,0; 1x 19,0x30,0; 1x 20,0x30,0; 1x 21,0x30,0; 1x 22,0x30,0; 1x 24,0x32,0 | |
| | | | **9821**<br>1x 172,0x30,0x392,0 [1] | |

[1] Attention: The foam insert does not fit in the previous model 05**501051**001 of the roller cabinet.

## 9722 Foam insert 8000 C Zyklop 1/2" ratchet set 1

- The Zyklop Speed ratchet combines five ratchet types in one
- Freely pivoting ratchet head, push button release and left/right switchover
- Fine-tooth design allows a small return angle of 5°
- Set including sockets, extensions and universal joint
- 17 sockets, 9 bit sockets with holding function for hexagonal socket screws
- Width x height x depth: without tools 344 x 30 x 392 mm, with tools 344 x 51 x 392 mm

### 9722 Foam insert 8000 C Zyklop 1/2" ratchet set 1

| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 051**50112**001 | *225207* | | | 1 |
| | | | **8000 C**<br>1x 1/2"x277,0 | |
| | | | **8794 LC**<br>1x 1/2"x250,0 | |
| | | | **8794 SC**<br>1x 1/2"x125,0 | |
| | | | **8795 C**<br>1x 1/2"x69,0 | |
| | | | **8794 C**<br>1x 1/2"x52,0 | |
| | | | **8790 HMC**<br>1x 10,0x37,0; 1x 11,0x37,0; 1x 12,0x37,0; 1x 13,0x37,0; 1x 14,0x37,0; 1x 15,0x37,0; 1x 16,0x37,0; 1x 17,0x37,0; 1x 18,0x37,0; 1x 19,0x37,0; 1x 20,0x37,0; 1x 21,0x37,0; 1x 22,0x37,0; 1x 24,0x37,0; 1x 27,0x40,0; 1x 30,0x42,0; 1x 32,0x42,0 | |
| | | | **8740 C HF**<br>1x 4,0x60,0; 1x 4,0x140,0; 1x 5,0x60,0; 1x 5,0x140,0; 1x 6,0x60,0; 1x 6,0x140,0; 1x 7,0x60,0; 1x 8,0x60,0; 1x 10,0x60,0 | |
| | | | **9822**<br>1x 344,0x30,0x392,0 [1] | |

[1] Attention: The foam insert does not fit in the previous model 05**501051**001 of the roller cabinet.

## 9723 Foam insert Zyklop B 3/8" bit socket set 1

- Bit socket (non-impact) for manual or power tool operations
- 10 bit sockets with holding function for TORX® screws, 11 bit sockets with holding function for hexagonal socket screws, one Zyklop connector with quick-release chuck for 1/4" bits
- With Take it easy tool finder: colour coding by size
- Knurling on lower end for more grip when used manually
- Chrome-vanadium makes for hardness and strength
- Width x height x depth: without tools 172 x 30 x 392 mm, with tools 172 x 39 x 392 mm

### 9723 Foam insert Zyklop B 3/8" bit socket set 1

| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 05**150113**001 | *225313* | | | 1 |
| | | | **8784 B1**<br>1x 1/4"x3/8"x44,0 | |
| | | | **8767 B HF**<br>1x TX 15x35,0; 1x TX 20x35,0; 1x TX 25x35,0; 1x TX 25x107,0; 1x TX 27x35,0; 1x TX 27x107,0; 1x TX 30x35,0; 1x TX 30x107,0; 1x TX 40x35,0; 1x TX 40x107,0 | |
| | | | **8740 B HF**<br>1x 4,0x35,0; 1x 4,0x107,0; 1x 5,0x35,0; 1x 5,0x107,0; 1x 6,0x35,0; 1x 6,0x107,0; 1x 7,0x38,5; 1x 8,0x38,5; 1x 8,0x100,0; 1x 10,0x38,5; 1x 10,0x100,0 | |
| | | | **9823**<br>1x 172,0x30,0x392,0 [1] | |

[1] Attention: The foam insert does not fit in the previous model 05**501051**001 of the roller cabinet.

## 9724 Foam insert 8010 B Zyklop Comfort ratchet set 1, 3/8"

- One Zyklop Comfort ratchet, 14x 8790 B Impaktor sockets, one 8798 B Zyklop extension; 3/8"
- Zyklop Comfort ratchet with pleasant feel thanks to the plastic sleeve
- Plastic coating protects surfaces from damage
- Fine toothing with 80 teeth for a short return angle of only 4.5°
- Extremely slim design with a soft, ergonomic grip zone for easy work even in very confined spaces
- Safe socket lock via push button, convenient direction change thanks to the reversing lever
- 8790 B Impaktor sockets also for use with electric or pneumatic wrenches, 3/8"
- Sockets with Impaktor technology for higher-than-average service life
- Sockets with “Take it easy” tool finder: Colour coding by size
- Width x height x depth: without tools 172 x 30 x 392 mm, with tools 172 x 48 x 392 mm

### 9724 Foam insert 8010 B Zyklop Comfort ratchet set 1, 3/8"

| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 05**150114**001 | *232564* | | | 1 |
| | | | **8010 B**<br>1x 3/8"x230,0 | |
| | | | **8790 B Impaktor**<br>1x 8,0x30,0; 1x 10,0x30,0; 1x 11,0x30,0; 1x 12,0x30,0; 1x 13,0x30,0; 1x 14,0x30,0; 1x 15,0x30,0; 1x 16,0x30,0; 1x 17,0x30,0; 1x 18,0x30,0; 1x 19,0x30,0; 1x 21,0x32,0; 1x 22,0x32,0; 1x 24,0x32,0 | |
| | | | **8798 B**<br>1x 3/8"x152,4 | |
| | | | **9824**<br>1x 172,0x30,0x392,0 | |

[*] Attention: The foam insert does not fit in the previous model 05**501051**001 of the roller cabinet.

## 9725 Foam insert Zyklop C, 1/2", Impaktor Deep socket set 1

- Robust Impaktor socket wrench inserts for extremely high stress; for use with electric or pneumatic wrenches with 12.5 mm = 1/2" drive
- Long socket wrenches for low-lying couplings, also suitable for fitting, protruding thread rods in confined spaces
- Hexagon profile for precise and profile-friendly screwdriving at a high power transmission
- With cross-bore and ring socket for securing locking pin and locking ring of machine-operated tools
- Width x height x depth: without tools 172 x 30 x 392 mm, with tools 172 x 48 x 392 mm

### 9725 Foam insert Zyklop C, 1/2", Impaktor Deep socket set 1

| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 05**150115**001 | *232571* | | | 1 |
| | | | **8790 C Impaktor Deep**<br>1x 13,0x83,0; 1x 14,0x83,0; 1x 15,0x83,0; 1x 16,0x83,0; 1x 17,0x83,0; 1x 18,0x83,0; 1x 19,0x83,0; 1x 21,0x83,0; 1x 22,0x83,0; 1x 24,0x83,0; 1x 27,0x83,0 | |
| | | | **9825**<br>1x 172,0x30,0x392,0 | |

*) Attention: The foam insert does not fit in the previous model 05**501051**001 of the roller cabinet.

## 9726 Foam insert 8007 B VDE Zyklop VDE ratchet set 1, 3/8"

- Insulated and 100% individually tested Zyklop 8007 B ratchet for safe working up to 1,000 volt
- Fine-toothed ratchet with 80 teeth for a return angle of only 4.5°
- Extremely slim design with a soft, ergonomic grip zone for easy work even in very confined spaces
- Plastic coating protects surfaces from damage
- Sockets, bit sockets and extensions with increased safety thanks to a 2-component insulation with yellow insulation core under red outer insulation layer
- 8767 B VDE HF bit sockets with holding function for TORX® screws as per the specification Acument Intellectual Properties
- 8740 B VDE HF bit sockets with holding function for hexagonal socket screws
- Width x height x depth: without tools 344 x 30 x 392 mm, with tools 344 x 45 x 392 mm

### 9726 Foam insert 8007 B VDE Zyklop VDE ratchet set 1, 3/8"

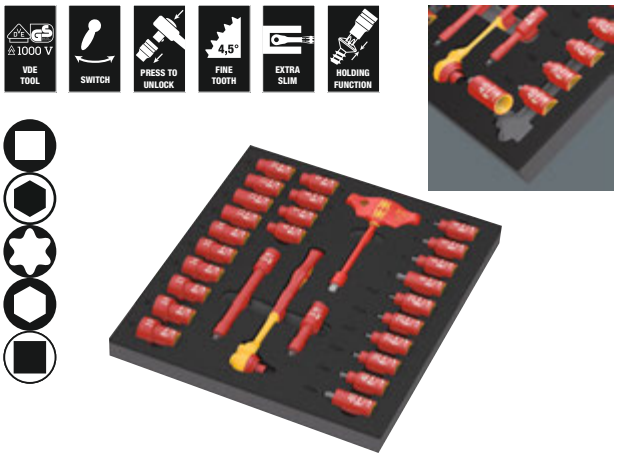


| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 05**150116**001 | *232519* | | | 1 |
| | | | **8007 B VDE**<br>1x 3/8"x222,0 | |
| | | | **410 i VDE B**<br>1x 3/8"x130 | |
| | | | **8790 B VDE**<br>1x 6,0x46,0; 1x 7,0x46,0; 1x 8,0x46,0; 1x 9,0x46,0; 1x 10,0x46,0; 1x 11,0x46,0; 1x 12,0x46,0; 1x 13,0x46,0; 1x 14,0x46,0; 1x 15,0x46,0; 1x 16,0x46,0; 1x 17,0x46,0; 1x 18,0x46,0; 1x 19,0x46,0 | |
| | | | **8767 B VDE HF**<br>1x TX 20x55,0; 1x TX 25x55,0; 1x TX 27x55,0; 1x TX 30x55,0; 1x TX 40x55,0; 1x TX 45x59,0 | |
| | | | **8740 B VDE HF**<br>1x 4,0x55,0; 1x 5,0x55,0; 1x 6,0x55,0; 1x 8,0x59,0 | |
| | | | **8794 SB VDE**<br>1x 3/8"x91,0 | |
| | | | **8794 LB VDE**<br>1x 3/8"x166,0 | |
| | | | **9826**<br>1x 344,0x30,0x392,0 | |

*) Attention: The foam insert does not fit in the previous model 05**501051**001 of the roller cabinet.

## 9730 Foam insert 6000 Joker set 1

- Ring ratchet spanner with useful holding function by a metal plate in the mouth
- No slipping down thanks to the end stop
- Double hexagon geometry reduces the risk of slipping to the side
- Return angle of only 30°
- With Take it easy tool finder: colour coding by size
- Width x height x depth: without tools 172 x 30 x 392 mm, with tools 172 x 47 x 392 mm

### 9730 Foam insert 6000 Joker set 1

| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 05**150120**001 | *225214* | | | 1 |
| | | | **6000 Joker**<br>1x 8x144; 1x 10x159; 1x 11x165; 1x 12x170,7; 1x 13x177; 1x 14x188; 1x 15x200; 1x 16x212; 1x 17x224; 1x 18x235; 1x 19x246 | |
| | | | **9830**<br>1x 172,0x30,0x392,0 [1] | |

[1] Attention: The foam insert does not fit in the previous model 05**501051**001 of the roller cabinet.

## 9731 Foam insert 6003 Joker set 1

- Ring spanner, perfect for small spaces
- The special mouth geometry expands the placement possibilities of the tool
- The low return angle in the mouth “takes” the screw every 15°
- Slim ring side with 15° crank
- With Take it easy tool finder: colour coding by size
- Iconic bottle opener with original Kraftform Plus handle
- Width x height x depth: without tools 344 x 30 x 392 mm, with tools 344 x 58 x 392 mm

### 9731 Foam insert 6003 Joker set 1

| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 05**150121**001 | *225115* | | | 1 |
| | | | **6003 Joker**<br>1x 6x105; 1x 7x110; 1x 8x115; 1x 9x120; 1x 10x125; 1x 11x135; 1x 12x148; 1x 13x160; 1x 14x167; 1x 15x174; 1x 16x182; 1x 17x190; 1x 18x210; 1x 19x230; 1x 20x230; 1x 21x260; 1x 22x260; 1x 24x280 | |
| | | | **Bottle opener**<br>1x 145 | |
| | | | **9831**<br>1x 344,0x30,0x392,0 [1] | |

[1] Attention: The foam insert does not fit in the previous model 05**501051**001 of the roller cabinet.

## 9732 Foam insert 6004 Joker set 1

- The adjustable Joker 6004 covers all metric and imperial dimensions in the respective field of application
- Automatic and continuous gripping of the hexagon screw or bolt
- Lever mechanism when gripping avoids slippage and damage
- Fast and consistent screwdriving without removing the wrench thanks to mechanical ratchet function
- Return angle of only 30° through placement in the corner-width rectangular prisms in the mouth
- Width x height x depth: without tools 172 x 30 x 392 mm, with tools 172 x 35 x 392 mm

### 9732 Foam insert 6004 Joker set 1

| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 051**50122**001 | *225337* | | | 1 |
| | | | **6004 Joker XS**<br>1x 7-10 (1/4"-3/8")x117 | |
| | | | **6004 Joker S**<br>1x 10-13 (7/16"-1/2")x154 | |
| | | | **6004 Joker M**<br>1x 13-16 (1/2"-5/8")x188 | |
| | | | **6004 Joker L**<br>1x 16-19 (5/8"-3/4")x224 | |
| | | | **6004 Joker XL**<br>1x 19-24 (3/4"-15/16")x256 | |
| | | | **9832**<br>1x 172,0x30,0x392,0 [1] | |

[1] Attention: The foam insert does not fit in the previous model 05**501051**001 of the roller cabinet.

## 9733 Foam insert 6001 Joker Switch set 1

- Reversible 6001 Joker Switch ratcheting combination wrench
- Ratchet end tilted by 15°
- Practical holding function thanks to the metal plate in the jaw
- Limit stop prevents any slipping
- Very fine toothing and robust locking element
- With Take it easy tool finder: colour coding by size
- Width x height x depth: without tools 172 x 30 x 392 mm, with tools 172 x 48 x 392 mm

### 9733 Foam insert 6001 Joker Switch set 1



| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 051**50123**001 | *232496* | | | 1 |
| | | | **6001 Joker Switch**<br>1x 8x144; 1x 10x159; 1x 11x165; 1x 12x171; 1x 13x179; 1x 14x187; 1x 15x199; 1x 16x213; 1x 17x225; 1x 18x234; 1x 19x246 | |
| | | | **9833**<br>1x 172,0x30,0x392,0 | |

[*] Attention: The foam insert does not fit in the previous model 05**501051**001 of the roller cabinet.

## 9734 Foam insert 6004 Joker VDE set 1

- 6004 Joker VDE XS for wrench size 7-10 (metric) or 1/4"-3/8" (imperial); 6004 Joker VDE S for wrench size 10-13 (metric) or 7/16"-1/2" (imperial); 6004 Joker VDE M for wrench size 13-16 (metric) or 1/2"- 5/8" (imperial); 6004 Joker VDE L for wrench size 16-19 (metric) or 5/8"-3/4" (imperial)
- Individually tested tools with insulated handles for safe working up to 1,000 volt, with anti-slip protection and sliding function for contactless and safe opening of the non-insulated jaws
- Automatic and continuous grip of hexagon screws and bolts
- Lever mechanism when gripping avoids slippage and damage
- Fast and consistent screwdriving without removing the wrench thanks to mechanical ratchet functionality
- Return angle of only 30° through placement in the corner-width rectangular prisms in the open end
- Width x height x depth: without tools 172 x 30 x 392 mm, with tools 172 x 40 x 392 mm

### 9734 Foam insert 6004 Joker VDE set 1

| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 05**150124**001 | *232502* | | | 1 |
| | | | **6004 Joker VDE XS**<br>1x 7-10 (1/4"-3/8")x119 | |
| | | | **6004 Joker VDE S**<br>1x 10-13 (7/16"-1/2")x155 | |
| | | | **6004 Joker VDE M**<br>1x 13-16 (1/2"-5/8")x190 | |
| | | | **6004 Joker VDE L**<br>1x 16-19 (5/8"-3/4")x226 | |
| | | | **9834**<br>1x 172,0x30,0x392,0 | |

*[1] Attention: The foam insert does not fit in the previous model 05**501051**001 of the roller cabinet.

## 9740 Foam insert L-key set 1

- Thanks to their Hex-Plus profile, the 950 L-keys let hexagonal socket screws live longer
- All L-keys with Take it easy tool finder: Colour coding by size
- All L-keys have a colour-coded, easy-grip hose sleeve for ergonomic and comfortable operation even at low temperatures
- Magnetiser 9500 for magnetising and demagnetising tool tips so that screws can be held on the tool by magnetic force
- Width x height x depth: without tools 172 x 30 x 392 mm, with tools 172 x 44 x 392 mm

### 9740 Foam insert L-key set 1

| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 05**150140**001 | *225108* | | | 1 |
| | | | **1x 950/9 Hex-Plus Multicolour 1** | |
| | | | **950 SPKL Multicolour**<br>1x 1.5x90; 1x 2.0x101; 1x 2.5x112; 1x 3.0x123; 1x 4.0x137; 1x 5.0x154; 1x 6.0x172; 1x 8.0x195; 1x 10.0x224 | |
| | | | **1x 967/9 TX XL Multicolour 1** | |
| | | | **967 SXL TORX® Multicolour**<br>1x TX 8x90; 1x TX 9x101; 1x TX 10x112 | |
| | | | **967 SPKXL TORX® Multicolour**<br>1x TX 15x123; 1x TX 20x137; 1x TX 25x154; 1x TX 27x172; 1x TX 30x195; 1x TX 40x224 | |
| | | | **1x 9500** | |
| | | | 1x 48.0 | |
| | | | **1x STABILA®** | |
| | | | 1x STABILA® BM 100 Pocket tape, metric scale, 3 m, item 19570 | |
| | | | **1x 9840** | |
| | | | 1x 172,0x30,0x392,0 [1] | |

[1] Attention: The foam insert does not fit in the previous model 05**501051**001 of the roller cabinet.

## 9750 Foam insert Kraftform Kompakt and Tool-Check PLUS set 1

- Kraftform Kompakt 60: Folding pouch with 89 mm long bits and 816 R bitholding screwdriver with Rapidaptor quick-release chuck and multi-component Kraftform handle for fatigue-free working
- Tool-Check PLUS: 39-piece tool combination of ratchet, sockets and one bitholding screwdriver
- Bitholding screwdriver extra slim with flexible shaft and very slim design for working in confined spaces
- Width x height x depth: without tools 172 x 30 x 392 mm, with tools 172 x 59 x 392 mm

## 9750 Foam insert Kraftform Kompakt and Tool-Check PLUS set 1

| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 05**150150**001 | *225344* | | | 1 |
| | | | **1x Tool-Check PLUS** | |
| | | | **8001 A** 1x 1/4"x87.0 | |
| | | | **813** 1x 1/4"x78 | |
| | | | **889/4/1 K** 1x 1/4"x50 | |
| | | | **870/1** 1x 1/4"x25 [1] | |
| | | | **8790 HMA**<br>1x 5.5x23.0; 1x 6.0x23.0; 1x 7.0x23.0;<br>1x 8.0x23.0; 1x 10.0x23.0; 1x 12.0x23.0;<br>1x 13.0x23.0 | |
| | | | **851/1 TZ**<br>2x PH 1x25; 3x PH 2x25; 1x PH 3x25 | |
| | | | **855/1 TH**<br>1x PZ 1x25; 3x PZ 2x25; 1x PZ 3x25 | |
| | | | **867/1 TZ TORX®**<br>1x TX 10x25; 1x TX 15x25; 1x TX 20x25;<br>1x TX 25x25; 1x TX 30x25; 1x TX 40x25 | |
| | | | **867/1 Z TORX® BO**<br>1x TX 10x25; 1x TX 15x25; 1x TX 20x25;<br>1x TX 25x25; 1x TX 30x25 | |
| | | | **840/1 Z**<br>1x 3.0x25; 1x 4.0x25; 1x 5.0x25; 1x 6.0x25;<br>1x 8.0x25 | |
| | | | **800/1 TZ**<br>1x 1.0x5.5x25 | |
| | | | **1x Kraftform Kompakt 60** | |
| | | | **816 R**<br>1x 1/4"x119 | |
| | | | **851/4 Z**<br>1x PH 1x89; 1x PH 2x89; 1x PH 3x89 [2] | |
| | | | **855/4 Z**<br>1x PZ 1x89; 1x PZ 2x89; 1x PZ 3x89 [2] | |
| | | | **867/4 Z TORX® BO**<br>1x TX 10x89; 1x TX 15x89; 1x TX 20x89;<br>1x TX 25x89; 1x TX 30x89 | |
| | | | **800/4 Z**<br>1x 1.0x5.5x89 | |
| | | | **840/4 Z**<br>1x 3.0x89; 1x 4.0x89; 1x 5.0x89; 1x 6.0x89 [2] | |
| | | | **Hook and Loop Fastener Strip 70**<br>1x 50.0x70.0 | |
| | | | **1x 393 S Bitholding screwdriver extra slim with flexible shaft** | |
| | | | 1x 1/4"x173,5 | |
| | | | **1x 9850** | |
| | | | 1x 172,0x30,0x392,0 [3] | |

[1] With friction ball; for manual nut spinner sockets

[2] Hexagonal blade

[3] Attention: The foam insert does not fit in the previous model 05**501051**001 of the roller cabinet.

## 9751 Foam insert Kraftform Kompakt VDE set 1

- 837 i RA VDE handle with ratchet functionality; for Kraftform Kompakt
- 817 VDE handle for Kraftform Kompakt interchangeable blades
- VDE blades (157 mm length) with practical spinning function, anti-roll protection and “Take it easy” Tool finder: Colour coding by profile and laser-engraved size indication
- 14 interchangeable blades with reduced blade diameter and integrated protective insulation (iS)
- interchangeable blades with “Take it easy” Tool finder: Colour coding by profile and laser-engraved size indication
- Width x height x depth: without tools 344 x 30 x 392 mm, with tools 344 x 46 x 392 mm

## 9751 Foam insert Kraftform Kompakt VDE set 1



| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 05**150151**001 | *232526* | | | 1 |
| | | | **837 i RA**<br>1x 9x115 | |
| | | | **817 VDE**<br>1x 9x98 | |
| | | | **Kraftform Kompakt VDE 62 iS Take it easy**<br>1x PH 1x157; 1x PH 2x157 | |
| | | | **Kraftform Kompakt VDE 65 iS Take it easy**<br>1x PZ 1x157; 1x PZ 2x157 | |
| | | | **Kraftform Kompakt VDE 62 iS PH/S Take it easy**<br>1x # 1x157; 1x # 2x157 | |
| | | | **Kraftform Kompakt VDE 65 iS PZ/S Take it easy**<br>1x # 1x157; 1x # 2x157 | |
| | | | **Kraftform Kompakt VDE 67 i Take it easy**<br>1x TX 8x157; 1x TX 9x157; 1x TX 10x157;<br>1x TX 27x157; 1x TX 30x157 | |
| | | | **Kraftform Kompakt VDE 67 iS Take it easy**<br>1x TX 15x157; 1x TX 20x157; 1x TX 25x157 | |
| | | | **Kraftform Kompakt VDE 64 i Take it easy**<br>1x 2,5x157; 1x 3,0x157; 1x 4,0x157;<br>1x 5,0x157; 1x 6,0x157 | |
| | | | **Kraftform Kompakt VDE 60 iS Take it easy**<br>1x 0,6x3,5x157; 1x 0,8x4,0x157; 1x 1,0x5,5x157 | |
| | | | **Kraftform Kompakt VDE 60 i Take it easy**<br>1x 0,4x2,5x157; 1x 1,2x6,5x157 | |
| | | | **9851**<br>1x 344,0x30,0x392,0 | |

*) Attention: The foam insert does not fit in the previous model 05**501051**001 of the roller cabinet.

## 9752 Foam insert Kraftform Kompakt with ratchet functionality set 1

- 838 RA-R M bitholding screwdriver with integrated ratchet functionality (fine toothing, 36 teeth, return angle 10°) for 1/4" bits
- 416 RA T-handle bitholding screwdriver with integrated ratchet (fine toothing, 80 teeth, return angle 4,5°) for 1/4" bits
- Ergonomic 2-component T-handle
- 816 R bitholding screwdriver with ergonomic Kraftform handle and Rapidaptor quick-release chuck for 1/4" bits
- Rapidaptor quick-release chuck for lightning-fast bit changes; with strong permanent magnet
- Zyklop 8001 A Mini bit ratchet (60 teeth, return angle 6°), drop-forged solid steel design; for 1/4" bits and with adapter for 1/4" sockets
- 870/1 connection part for manually operated sockets; adapts from 1/4" external hexagon to 1/4" external square head
- Magnetiser 9500 for magnetising and demagnetising tool tips
- Tough bits for universal use
- Width x height x depth: without tools 172 x 30 x 392 mm, with tools 172 x 42 x 392 mm

## 9752 Foam insert Kraftform Kompakt with ratchet functionality set 1

| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 05**150152**001 | *232533* | | | 1 |
| | | | **838 RA-R M**<br>1x 1/4"x123,5 | |
| | | | **416 RA**<br>1x 1/4"x45 | |
| | | | **816 R**<br>1x 1/4"x119 | |
| | | | **8001 A**<br>1x 1/4"x87,0 | |
| | | | **851/4 Z**<br>1x PH 1x89; 1x PH 2x89; 1x PH 3x89 [1] | |
| | | | **855/4 Z**<br>1x PZ 1x89; 1x PZ 2x89; 1x PZ 3x89 [1] | |
| | | | **867/4 Z TORX®**<br>1x TX 10x89; 1x TX 15x89; 1x TX 20x89;<br>1x TX 25x89; 1x TX 27x89; 1x TX 30x89;<br>1x TX 40x89 | |
| | | | **840/4 Z**<br>1x 3,0x89; 1x 4,0x89; 1x 5,0x89; 1x 6,0x89 [1] | |
| | | | **800/4 Z**<br>1x 1,0x5,5x89 | |
| | | | **870/1**<br>1x 1/4"x25 [2] | |
| | | | **9500**<br>1x 64,6 | |
| | | | **9852**<br>1x 172,0x30,0x392,0 | |

[1] Hexagonal blade

[2] With friction ball; for manual nut spinner sockets

[**] Attention: The foam insert does not fit in the previous model 05**501051**001 of the roller cabinet.

## 9780 Foam insert KNIPEX pliers set 1

- Width x height x depth: without tools 172 x 30 x 392 mm, with tools 172 x 38 x 392 mm

### 9780 Foam insert KNIPEX pliers set 1

| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 05**150180**001 | *225153* | | | 1 |
| | | | **KNIPEX Combination Pliers 03 05 180**<br>1x 180 | |
| | | | **KNIPEX Cobra® High-Tech Water Pump Pliers 87 05 250**<br>1x 250 | |
| | | | **KNIPEX High Leverage Diagonal Cutter 74 05 160**<br>1x 160 | |
| | | | **9880**<br>1x 172,0x30,0x392,0 [1] | |

[1] Attention: The foam insert does not fit in the previous model 05**501051**001 of the roller cabinet.

## 9781 Foam insert KNIPEX pliers set 2

- Width x height x depth: without tools 172 x 30 x 392 mm, with tools 172 x 38 x 392 mm

### 9781 Foam insert KNIPEX pliers set 2

| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 05**150181**001 | *225177* | | | 1 |
| | | | **KNIPEX Snipe Nose Cutting Pliers (Stork Beak Pliers) 26 15 200**<br>1x 200 | |
| | | | **KNIPEX Mechanics' Pliers 38 25 200**<br>1x 200 | |
| | | | **KNIPEX Electricians' Shears 95 05 155**<br>1x 155 | |
| | | | **9881**<br>1x 172,0x30,0x392,0 [1] | |

[1] Attention: The foam insert does not fit in the previous model 05**501051**001 of the roller cabinet.

## 9782 Foam insert hammer set 1

- Width x height x depth: without tools 172 x 30 x 392 mm, with tools 172 x 35 x 392 mm

### 9782 Foam insert hammer set 1

| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 05**150182**001 | *225191* | | | 1 |
| | | | **PICARD® riveting hammer 500 g, 0000101-500**<br>1x 500,0 | |
| | | ○ | **RENNSTEIG Parallel pin punches Exclusive**<br>1x 452 003 6 RC, 3,0x150; 1x 452 004 6 RC, 4,0x150; 1x 452 006 6 RC, 6,0x150; 1x 452 008 6 RC, 8,0x150 | |
| | | ⬬ | **RENNSTEIG Flat cold chisel 310 250 1**<br>1x 25,0x13,0x23,0 | |
| | | | **9882**<br>1x 172,0x30,0x392,0 [1] | |

[1] Attention: The foam insert does not fit in the previous model 05**501051**001 of the roller cabinet.

## 9783 Foam insert PFERD file set 1

- Width x height x depth: without tools 344 x 30 x 392 mm, with tools 344 x 42 x 392 mm

### 9783 Foam insert PFERD file set 1

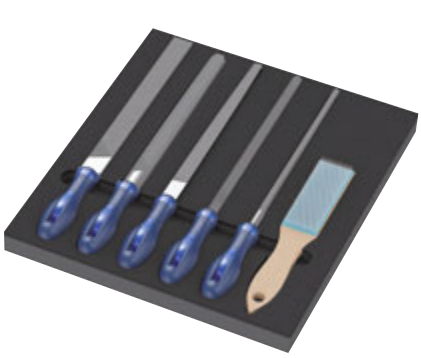

| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 05**150183**001 | *225368* | | | 1 |
| | | | **PFERD machinist's file square PF1142 250 H2**<br>1x 250 | |
| | | | **PFERD machinist's file half-round pointed 1152SP 250 H2**<br>1x 250 | |
| | | | **PFERD machinist's file round 1162 250 H2**<br>1x 250 | |
| | | | **PFERD machinist's file hand 1112 250 H2**<br>1x 250 | |
| | | | **PFERD machinist's file three square 1132 250 H2**<br>1x 250 | |
| | | | **PFERD scratch brush HBF steel wire Ø 0.15**<br>1x 232 | |
| | | | **9883**<br>1x 344,0x30,0x392,0 [1] | |

[1] Attention: The foam insert does not fit in the previous model 05**501051**001 of the roller cabinet.

## 9784 Foam insert KNIPEX pliers set VDE 1

- Width x height x depth: without tools 172 x 30 x 392 mm, with tools 172 x 38 x 392 mm

### 9784 Foam insert KNIPEX pliers set VDE 1

| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 05**150184**001 | *232489* | | | 1 |
| | | | **KNIPEX Diagonal stripper 70 06 160** | |
| | | | **KNIPEX Snipe nose pliers with blade (stork beak pliers) 26 16 200** | |
| | | | **KNIPEX Needle-nose combination pliers 08 26 185** | |
| | | | **9884**<br>1x 172,0x30,0x392,0 | |

[*] Attention: The foam insert does not fit in the previous model 05**501051**001 of the roller cabinet.

Wera

# Wera 2go

## Wera 2go 1 Tool Carrier

The Wera 2go 1 is the super lightweight and mobile tool carrier for all Wera pouches and textile boxes equipped with hook and loop zone on their reverse sides.

The pouches and boxes are easily and securely attached individually to the tool carrier. The hands remain free during transport thanks to the shoulder strap that is included.

- Wera 2go Tool Carrier with hook and loop fastener system
- For the docking of the Wera textile boxes and pouches with hook and loop fastener zones
- Individually configurable for greater mobility
- Hands remain free during Transport
- Includes an adjustable, detachable Shoulder Strap with a wide padded section

### Wera 2go 1 Tool Carrier

| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 05**004350**001 | *187352* | | | 1 |
| | | | **Wera 2go 5**<br>1x 135,0x300,0x270,0 | |
| | | | **Wera 2go 6**<br>1x 38,0x1470,0 | |

## Wera 2go 2 Tool Container

The Wera 2go tool container is the ideal solution for individual and convenient tool transport thanks to its hook and loop fastener system and its compactness. The inner and outer hook and loop fastener zones ensure a maximum in terms of space utilisation. This means that an incredible number of tools can fit in and on the container.

Wera 2go 2 ensures a low weight since only the tools really needed for the job are taken along. The robust and dimensionally stable material protects the tools carried against damage and moisture and enhances the service life of the tool container.

The padded and width-adjustable shoulder strap and the snug fit of the container on the body mean that the container is easy and convenient to carry.

The hands remain free during transport. It comes with a quiver with an individually adjustable hook and loop fastener partition for screwdrivers and other tools.

- Wera 2go tool container with inner and outer hook and loop fastener zones
- Individually configurable for greater mobility
- Ideal also for the docking of Wera textile boxes and pouches equipped with hook and loop fastener zones

### Wera 2go 2 Tool Container

| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 05**004351**001 | *187840* | | | 1 |
| | | | **Wera 2go Container**<br>1x 355,0x330,0x115,0 | |
| | | | **Wera 2go 6**<br>1x 38,0x1470,0 | |
| | | | **Wera 2go 4**<br>1x 165,0x165,0x105,0 | |

## Wera 2go 2 XL Tool Container

The Wera 2go 2 XL Tool Container with extra low-profile compartments, with its hook and loop fastener system and its compactness, is the ideal solution for individual and convenient tool transport. The inner and outer hook and loop fastener zones provide extremely high flexibility and space utilization.

This fits an incredible amount of tools in and on the container. Wera 2go 2 makes for light luggage, because only the essential tools are taken.

The robust and sturdy material protects the enclosed tools from damage and moisture, and increases the service life of the tool container.

The padded and adjustable wide belt and the close-fitting position of the container provide a comfortable fit.

The hands remain free during transport. Including one Wera 2go 4 holder with individually adjustable hook and loop fastener divider for screwdrivers and other tools. Four of these holders can be stowed effortlessly.

- Wera 2go 2 XL Tool Container with extra low-profile compartments for e.g. the Wera 2go 4 Tool Quivers

## Wera 2go 2 XL Tool Container

| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 05**004357**001 | *211491* | | | 1 |
| | | | **Wera 2go XL Container**<br>1x 455,0x330,0x170,0 | |
| | | | **Wera 2go 6**<br>1x 38,0x1470,0 | |
| | | | **Wera 2go 4**<br>1x 165,0x165,0x105,0 | |

## Wera 2go 3 Tool Box

- Suitable for docking with the Wera 2go system
- Permanently dimensionally stable thanks to the fabric-lined plastic panels
- High resistance against cuts and stabs
- High protection for transported tools against damage and moisture
- Can be individually equipped

## Wera 2go 3 Tool Box

| Code | EAN 4013288 | mm | mm | mm | | | | |
|---|---|---|---|---|---|---|---|---|
| 05**004352**001 | *187369* | 130,0 | 325,0 | 80,0 | | | | 1 |

## Wera 2go 4 Tool Quiver

- Suitable for docking with the Wera 2go system
- Dimensionally stable Wera 2go tool quiver
- High resistance against cuts and stabs
- Variable hook and loop fastener partition for a division into as many as 5 inner sections
- Large set-down area; handle for carrying and hanging up

## Wera 2go 4 Tool Quiver

| Code | EAN 4013288 | mm | mm | mm | | | | |
|---|---|---|---|---|---|---|---|---|
| 05**004353**001 | *187857* | 165,0 | 165,0 | 105,0 | | | | 1 |

## Wera 2go 5 Tool Carrier

The Wera 2go 5 is the super lightweight and mobile tool carrier for all Wera pouches and textile boxes equipped with Velcro on their reverse sides. The pouches and boxes are easily and securely attached individually to the Wera 2go 5 article.

## Wera 2go 5 Tool Carrier

| Code | EAN 4013288 | mm | mm | mm | | | | |
|---|---|---|---|---|---|---|---|---|
| 05**004354**001 | *187383* | 135,0 | 300,0 | 270,0 | | | | 1 |

## Wera 2go 6 Shoulder Strap

Shoulder strap for the Wera 2go tool transport system. It comes with extra wide, comfortable padding sections and adjustable strap length and is suitable for use with the Wera 2go 1 and 5 articles.

### Wera 2go 6 Shoulder Strap

| | EAN | | | | | | | |
|---|---|---|---|---|---|---|---|---|
| Code | 4013288 | mm | mm | | | | | |
| 05**004355**001 | *187390* | 38,0 | 1470,0 | | | | | 1 |

## Wera 2go 7 High Tool Box

- Transport box even for long tools such as spirit levels

### Wera 2go 7 High Tool Box

| | EAN | | | | | | | |
|---|---|---|---|---|---|---|---|---|
| Code | 4013288 | mm | mm | mm | | | | |
| 05**004356**001 | *204370* | 295,0 | 100,0 | 100,0 | | | | 1 |

## Wera 2go H 1 tool set for wood applications

Compact tool set with the 134 most important tools for woodwork with products by Wera, BESSEY®, “KIRSCHEN“®, KNIPEX, Lyra®, PICARD® and Stabila®.

Mobility is made considerably easy thanks to the compact tool container from the Wera 2go system.

- Extensive 134-piece tool set in compact Wera 2go tool container for carpenters on the go
- Premium brand tools by Wera, BESSEY®, “KIRSCHEN“®, KNIPEX, Lyra®, PICARD® and Stabila®
- Wera Kraftform Kompakt H 1 Wood (41-piece set) and Wera Bit-Safe 61 Wood 1 (61-piece set)
- 393 S extra slim bit hand holder with flexible shaft for applications in hard-to-reach work spaces
- Wera L-key with holding function: 967/9 TX XL Multicolour HF 1 (9-piece set) and 950/9 Hex-Plus Multicolour HF 1 (9-piece set)

### Wera 2go H 1 tool set for wood applications



| Code | EAN 4013288 | | |
|---|---|---|---|
| 05**134011**001 | *217677* | | 1 |
| | | 1x Wera 2go 2 Tool Container | |
| | | 1x Bit-Safe 61 Wood 1 | |
| | | 1x Kraftform Kompakt H 1 Woodcraft | |
| | | 1x 967/9 TX XL Multicolour HF 1 L-key set with holding function, long | |
| | | 1x 950/9 Hex-Plus Multicolour HF 1 L-key set, metric, BlackLaser, with holding function | |
| | | 1x 393 S bits hand holder extra slim with flexible shaft | |
| | | 1x KNIPEX multigrip pliers COBRA® 250 mm 87 11 250 | |
| | | 1x KNIPEX combination pliers 160 mm 03 01 160 | |
| | | 1x KNIPEX carpenters' pincers 210 mm 50 00 210 | |
| | | 1x Stabila® spirit level type 81 25 cm 02500 Torpedo | |
| | | 1x Carpenters' mallet 105 mm 52-1 P | |
| | | 1x “KIRSCHEN“® bevelled-edge chisel 10 mm 1001010 | |
| | | 1x “KIRSCHEN“® bevelled-edge chisel 16 mm 1001016 | |
| | | 1x “KIRSCHEN“® bevelled-edge chisel 20 mm 1001020 | |
| | | 1x “KIRSCHEN“® bevelled-edge chisel 26 mm 1001026 | |
| | | 1x BESSEY® Folding utility knife DBKPH-EU | |
| | | 1x Lyra® deep hole marker 4494202 | |

Product not available in the USA and Canada.

## Wera 2go E 1 Tool set for electricians

Compact tool set with the 73 most important tools for electricians with products by Wera, Jung, KNIPEX, Lyra®, PICARD®, PUK® and Stabila®.

Mobility is made considerably easier thanks to the compact tool container from the Wera 2go system.

- Extensive 73-piece tool set in the compact Wera 2go 2 tool container for electricians in mobile operations
- Premium brand tools by Wera, Jung, KNIPEX, Lyra®, PICARD®, PUK® and Stabila®
- Wera Kraftform Kompakt Turbo i 1 Tool Finder (16-piece handle/ interchangeable blades VDE set) for four times the screwdriving speed and Wera 8100 SA 6 Zyklop Speed ratchet set (1/4", 28-piece set)
- Joker 6004 S self-setting spanner for bolts and screws of 10-13mm (metric) and 7/16"-1/2" (imperial)
- With chiseldriver for screwdriving, chiselling, mortising as well as 4 VDE screwdrivers - 2 of which with stainless steel blade to prevent extraneous rust

### Wera 2go E 1 Tool set for electricians

| Code | EAN 4013288 | | |
|---|---|---|---|
| 05**134025**001 | *221278* | 1 x Wera 2go 2 Tool Container | 1 |
| | | 1 x 8100 SA 6 Zyklop Speed Ratchet Set, 1/4" drive, metric | |
| | | 1 x 950/9 Hex-Plus Multicolour HF 1 L-key set, metric, BlackLaser, with holding function | |
| | | 1 x Kraftform Kompakt Turbo i 1 Tool Finder | |
| | | 1x 932 A Screwdriver for slotted screws 1.2x7.0x125 | |
| | | 1x 3162 i PH VDE Insulated screwdriver for Phillips screws, stainless PH 2x100 | |
| | | 1x 3165 i PZ VDE Insulated screwdriver for Pozidriv screws, stainless PZ 2x100 | |
| | | 1x 160 i VDE Insulated screwdriver for slotted screws 1.2x6.5x150 | |
| | | 1x 160 iS VDE Insulated screwdriver with reduced blade diameter for slotted screws 0.6x3.5x100 | |
| | | 1x 6004 Joker S self-setting spanner 10-13x7/16"-1/2"x154 | |
| | | 1 x KNIPEX Combination pliers 160mm 01 06 160 | |
| | | 1 x KNIPEX Diagonal insulation stripper 14 26 160 | |
| | | 1 x KNIPEX Snipe nose pliers with blade (stork beak pliers) 26 16 200 | |
| | | 1 x KNIPEX Cobra® VDE Hightech water pump pliers, insulated, 87 26 250 | |
| | | 1 x KNIPEX Cable knife 98 52 | |
| | | 1 x KNIPEX ErgoStrip® Universal dismantling tool 16 95 01 | |
| | | 1 x PUK® 2200 Hand saw frame | |
| | | 1 x Lyra® Construction marker DRY PROFI 4494202 | |
| | | 1 x STABILA® Spirit level Pocket Electric 17775 | |
| | | 1 x STABILA® Spirit level type 70, 30 cm, 02281 | |
| | | 1 x STABILA® Wooden folding rule type 607, 2 m, yellow, 01104 | |
| | | 1 x PICARD® Fitter's hammer 400 g, German shape, 000101-0400 | |
| | | 1 x Jung Plastering cup 127mm, 946 127 00 | |
| | | 1 x Jung Scraping knife with natural wood handle, 922 050 00 | |

## Wera 2go SHK 1 Tool set for plumbing, heating and air conditioning

Compact tool set with the most important tools for HVAC services with products by Wera, BESSEY®, KNIPEX, Lyra®, PICARD®, PUK® and Stabila®. Mobility is made considerably easier thanks to the compact tool container from the Wera 2go system.

- Extensive 30-piece tool set in the compact Wera 2go 2 tool container for mobile HVAC applications
- Premium brand tools by Wera, BESSEY®, KNIPEX, Lyra®, PICARD®, PUK® and Stabila®
- Joker 6002 double spanner with practical holding function by a metal plate in the open end
- With chiseldriver for screwdriving, chiselling, mortising as well as 4 VDE screwdrivers - 2 of which with stainless steel blade to prevent extraneous rust
- 1/2" Zyklop Metal 8004 C ratchet (72 teeth, 5° low return angle ) with reversing lever; slim design for very narrow spaces
- L-key set for hexagonal socket screws; the Hex-Plus profile reduces the cylindrical turning of hexagonal socket screws

## Wera 2go SHK 1 Tool set for plumbing, heating and air conditioning

| Code | EAN 4013288 | |
|---|---|---|
| 05**136071**001 | *230300* | 1 |
| | | 1x Wera 2go Container |
| | | 1x Wera 2go 6 Shoulder Strap |
| | | 1x Wera 2go 4 Tool Quiver |
| | | 1x 932 A Screwdriver for slotted screws 1,2x7,0x125 |
| | | 1x 395 HO Nutdriver 10,0x90 |
| | | 1x 395 HO Nutdriver 13,0x90 |
| | | 1x 1060 i VDE-insulated Kraftform slotted screwdriver 0,6x3,5x100 |
| | | 1x 1060 i VDE-insulated Kraftform slotted screwdriver 1,0x5,5x125 |
| | | 1x 1062 i PH VDE-insulated Kraftform Phillips-head screwdriver PH 1x80 |
| | | 1x 1062 i PH VDE-insulated Kraftform Phillips-head screwdriver PH 2x100 |
| | | 1x 8004 C Zyklop Metal Ratchet with switch lever and 1/2" drive 1/2"x281 |
| | | 1x 8790 HMC Zyklop socket with 1/2" drive 10,0x37,0 |
| | | 1x 8790 HMC Zyklop socket with 1/2" drive 13,0x37,0 |
| | | 1x 8790 HMC Zyklop socket with 1/2" drive 17,0x37,0 |
| | | 1x 8790 HMC Zyklop socket with 1/2" drive 19,0x37,0 |
| | | 1x Belt C (textile belt), 6 location, unloaded 45,0x275,0 |
| | | 1x 6002 Joker Double open-ended wrenches 10x13x167 |
| | | 1x 6002 Joker Double open-ended wrenches 17x19x235 |
| | | 1x 6002 Joker Double open-ended wrenches 24x27x280 |
| | | 1x 6002 Joker Double open-ended wrenches 30x32x305 |
| | | 1x 950/9 Hex-Plus 2 |
| | | 1x 9529 C SB 1/2" Step wrench 10,0x88,0 |
| | | 1x KNIPEX Water pump pliers COBRA® 250mm 87 11 250 |
| | | 1x KNIPEX Combination pliers 160mm 03 01 160 |
| | | 1x KNIPEX Diagonal insulation stripper 14 26 160 |
| | | 1x KNIPEX 001104 Pro wrench for standard shut-off systems |
| | | 1x STABILA® Spirit level type 70, 30 cm, 02281 |
| | | 1x STABILA® Wooden folding rule type 607, 2 m, yellow, 01104 |
| | | 1x PICARD® Fitter's hammer 400 g, German shape, 000101-0400 |
| | | 1x PUK® 2200 Hand saw frame |
| | | 1x BESSEY® blades DBKPH-EU flick knife |
| | | 1x Lyra® Construction marker DRY PROFI 4494202 |

## Hook and Loop Fastener Strip 1

| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 05**670446**001 | *189448* | | | 1 |
| | | | **Hook and Loop Fastener Strip 70**<br>1x 50,0x70,0 | |

## Hook and Loop Fastener Strip 2

| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 05**670447**001 | *189455* | | | 1 |
| | | | **Hook and Loop Fastener Strip 120**<br>1x 50,0x120,0 | |

## Hook and Loop Fastener Strip 3

| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 05**670448**001 | *189462* | | | 1 |
| | | | **Hook and Loop Fastener Strip 240**<br>1x 50,0x240,0 | |

Wera
BE A TOOL REBEL

# Bits

## Impaktor system - For an above-average service life

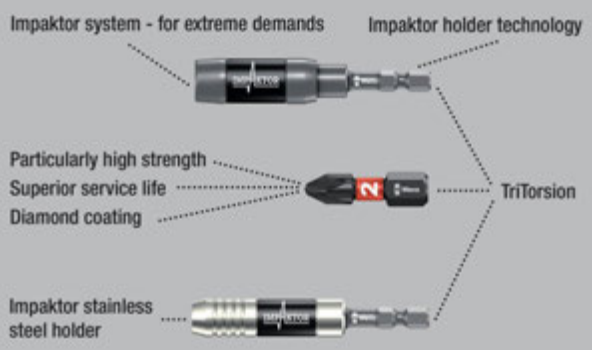


The Impaktor technology offers an above-average service life even under extreme circumstances.

Enhanced friction resistance, thanks to the rough diamond-particle coating on the bit tip, prevents any slipping out of the screw head.

Particularly suitable for use with customary impact drivers. 1/4" hexagon, suitable for holders as per DIN ISO 1173-D 6.3.

### 851/1 IMP DC PH DIY Impaktor PH bits

| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 05**057615**001 | *178695* | ⊕ | **851/1 IMP DC** 10x PH 1x25 | 1 |
| 05**057616**001 | *157638* | ⊕ | **851/1 IMP DC** 10x PH 2x25 | 1 |
| 05**057617**001 | *157645* | ⊕ | **851/1 IMP DC** 10x PH 3x25 | 1 |

### 851/1 IMP DC SB Impaktor bits

| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 05**073916**001 | *158369* | ⊕ | **851/1 IMP DC** 1x PH 2x25 | 5 |
| 05**073917**001 | *158376* | ⊕ | **851/1 IMP DC** 1x PH 3x25 | 5 |

### Bit-Box 15 Impaktor PH

| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 05**057752**001 | *187918* | ⊕ | **851/1 IMP DC** 15x PH 2x25 | 10 |

## Kraftform Stainless - stainless steel to prevent rust

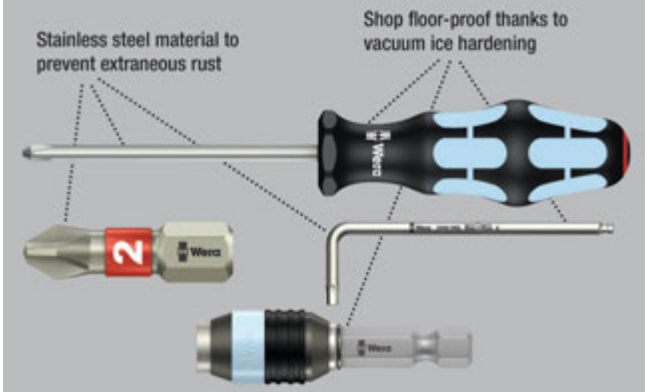


High quality bits out of stainless steel for cross-recess screws. Wera stainless are made out of stainless steel which prevents the formation of unsightly extraneous rust.
Come with Torsion zone: Torsion bits take-up torque peaks and absorb them in the Torsion zone. This prevents premature wear and extends the service life of the bit. 1/4" hexagon, suitable for holders as per DIN ISO 1173-D 6.3.

### 3851/1 TS bits, stainless

| Code | EAN 4013288 | ⊕ | mm | | | | | |
|---|---|---|---|---|---|---|---|---|
| 05**071010**001 | *110985* | PH 1 | 25 | 1" | | | | 10 |
| 05**071011**001 | *110992* | PH 2 | 25 | 1" | | | | 10 |
| 05**071012**001 | *111005* | PH 3 | 25 | 1" | | | | 10 |

## 3851/1 TS SB bits, stainless

| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 05**073610**001 | *112132* | | **3851/1 TS PH** 1x PH 1x25 | 5 |
| 05**073611**001 | *112149* | | **3851/1 TS PH** 1x PH 2x25 | 5 |

## BiTorsion system - for longer service life

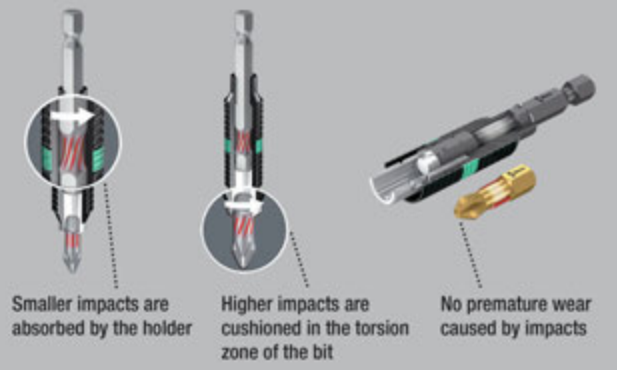


## 851/1 BDC bits

Bits with tiny diamond particles on the bit tip. This ensures a secure fit of the bit in the screw, reduces the contact pressure required and lowers the risk of slipping.

Comes with Torsion zone where kinetic energy is diverted from peak loads. This greatly extends the product service life; 1/4" hexagon, suitable for holders as per DIN ISO 1173-D 6.3.

## 851/1 BDC bits

| Code | EAN 4013288 | | mm | | | | | |
|---|---|---|---|---|---|---|---|---|
| 05**056400**001 | *033970* | PH 1 | 25 | 1" | | | | 10 |
| 05**056402**001 | *033987* | PH 2 | 25 | 1" | | | | 10 |
| 05**056404**001 | *033994* | PH 3 | 25 | 1" | | | | 10 |

## 851/1 BDC SB bits

| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 05**073332**001 | *029324* | | **851/1 BDC PH** 1x PH 1x25 | 5 |
| 05**073333**001 | *029331* | | **851/1 BDC PH** 1x PH 2x25 | 5 |
| 05**073334**001 | *029348* | | **851/1 BDC PH** 1x PH 3x25 | 5 |
| 05**073335**001 | *029355* | | **851/1 BDC PH** 2x PH 2x25 | 5 |

## 851/1 BTH bits

Bits with Torsion zone – where kinetic energy is diverted from peak loads – and BiTorsion zone to prevent the bit tip from twisting under peak loads.

This greatly extends the product service life. Extra-hard design, 1/4" hexagon, suitable for holders as per DIN ISO 1173-D 6.3.

## 851/1 BTH bits

| Code | EAN 4013288 | | mm | | | | | |
|---|---|---|---|---|---|---|---|---|
| 05**056410**001 | *034243* | PH 1 | 25 | 1" | | | | 10 |
| 05**056412**001 | *034250* | PH 2 | 25 | 1" | | | | 10 |
| 05**056414**001 | *034267* | PH 3 | 25 | 1" | | | | 10 |

## 851/1 BTZ bits

Bits with Torsion zone – where kinetic energy is diverted from peak loads – and BiTorsion zone to prevent the bit tip from twisting under peak loads.

This greatly extends the product service life. Tough viscous, 1/4" hexagon, suitable for holders as per DIN ISO 1173-D 6.3.

### 851/1 BTZ bits

| Code | EAN 4013288 | | mm | | | | | |
|---|---|---|---|---|---|---|---|---|
| 05**056420**001 | *034458* | PH 1 | 25 | 1" | | | | 10 |
| 05**056422**001 | *034465* | PH 2 | 25 | 1" | | | | 10 |
| 05**056424**001 | *034472* | PH 3 | 25 | 1" | | | | 10 |

### Bit-Box 20 BTZ PH

| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 05**057751**001 | *187956* | | **851/1 BTZ PH** 20x PH 2x25 | 10 |

## Diamond-coated bits

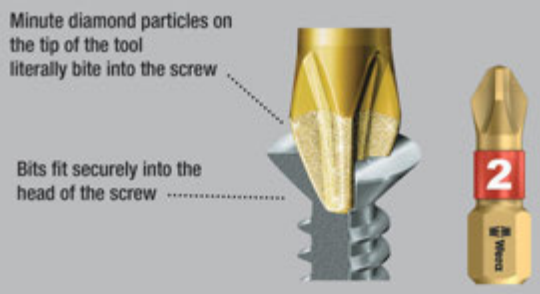


The diamond coating of the bits ensures a secure fit in the screw, reduces the contact pressure required and lowers the risk of slipping.

Profiled version with especially sharp edges which break away the paint when e.g. screw profiles are covered in it and this ensures a dependable transfer of power between the bit and screw.

1/4" hexagon, suitable for holders as per DIN ISO 1173-D 6.3.

## 851/1 A bits

Extra-hard design. Profiled version. 1/4" hexagon, suitable for holders as per DIN ISO 1173-D 6.3.

### 851/1 A bits

| Code | EAN 4013288 | | mm | | mm | | | |
|---|---|---|---|---|---|---|---|---|
| 05**134919**001 | *099976* | PH 1 | 25 | 1" | 4,5 | | | 10 |
| 05**134920**001 | *099983* | PH 2 | 25 | 1" | 6,0 | | | 10 |
| 05**134921**001 | *099990* | PH 3 | 25 | 1" | - | | | 10 |

## 851/1 RDC bits

High quality bits for drywall screws. Reduced shaft diameter for low-lying screw connections. Countersinking of screws without any surface damage.

Especially for drywall construction. The diamond coating of the bits ensures a secure fit in the screw, reduces the contact pressure required and lowers the risk of slipping. 1/4" hexagon, suitable for holders as per DIN ISO 1173-D 6.3.

### 851/1 RDC bits

| Code | EAN 4013288 | | mm | | mm | | | |
|---|---|---|---|---|---|---|---|---|
| 05**135008**001 | *032904* | PH 2 | 25 | 1" | 4,2 | | | 10 |

## 851/1 RH bits

Bits with reduced shaft diameter for low-lying screw connections. Countersinking of screws without any surface damage. Tough viscous for universal use. 1/4" hexagon, suitable for holders as per DIN ISO 1173-D 6.3.

### 851/1 RH bits

REDUCED DIAMETER

| | EAN | | | | | | | |
|---|---|---|---|---|---|---|---|---|
| Code | 4013288 | | mm | | mm | | | |
| 05**346281**001 | *107176* | PH 2 | 25 | 1" | 4,2 | | | 10 |

## 851/1 RZ bits

Bits for drywall screws. Reduced shaft diameter for low-lying screw connections. Tough viscous for universal use. 1/4" hexagon, suitable for holders as per DIN ISO 1173-D 6.3.

### 851/1 RZ bits

REDUCED DIAMETER

| | EAN | | | | | | | |
|---|---|---|---|---|---|---|---|---|
| Code | 4013288 | | mm | | mm | | | |
| 05**135009**001 | *032799* | PH 2 | 25 | 1" | 4,2 | | | 10 |

### 851/1 RZ SB bits

REDUCED DIAMETER

| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 05**135005**001 | *038456* | | **851/1 RZ PH**<br>2x PH 2x25 | 5 |

## 851/1 TH bits

The Torsion design means that torque peaks can be absorbed. This prevents premature wear and enhances the service life. Extra-hard; 1/4" hexagon, suitable for holders as per DIN ISO 1173-D 6.3.

### 851/1 TH bits

TORSION

| | EAN | | | | | | | |
|---|---|---|---|---|---|---|---|---|
| Code | 4013288 | | mm | | | | | |
| 05**056605**001 | *013545* | PH 1 | 25 | 1" | | | | 10 |
| 05**056610**001 | *013552* | PH 2 | 25 | 1" | | | | 10 |
| 05**056625**001 | *013569* | PH 3 | 25 | 1" | | | | 10 |

## 851/1 TiN bits

Extra-hard titanium nitride (TiN) coating for withstanding permanent loads such as e.g. in industrial applications. 1/4" hexagon, suitable for holders as per DIN ISO 1173-D 6.3.

### 851/1 TiN bits

| | EAN | | | | | | | |
|---|---|---|---|---|---|---|---|---|
| Code | 4013288 | | mm | | | | | |
| 05**480172**001 | *040992* | PH 2 | 25 | 1" | | | | 10 |

## 851/1 TZ bits

- Ductile and tough for hard materials
- Torsion design against premature wear

### 851/1 TZ bits

| Code | EAN 4013288 | | mm | | | | | |
|---|---|---|---|---|---|---|---|---|
| 05**056505**001 | *013606* | PH 1 | 25 | 1" | | | | 10 |
| 05**056510**001 | *013613* | PH 2 | 25 | 1" | | | | 10 |
| 05**056525**001 | *013620* | PH 3 | 25 | 1" | | | | 10 |

### 851/1 TZ SB bits

| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 05**073323**001 | *029249* | | **851/1 TZ PH**<br>2x PH 1x25 | 5 |
| 05**073324**001 | *029256* | | **851/1 TZ PH**<br>2x PH 2x25 | 5 |
| 05**073325**001 | *029263* | | **851/1 TZ PH**<br>2x PH 3x25 | 5 |
| 05**073326**001 | *029270* | | **851/1 TZ PH**<br>1x PH 1x25; 1x PH 2x25; 1x PH 3x25 | 5 |

## 853/1 TZ ACR® bits

Bits with Torsion zone: where kinetic energy is diverted from peak loads. This greatly extends the product service life. Come with rough ribs (anti cam-out feature, ACR).

Tough viscous, for universal use; 1/4" hexagon, suitable for holders as per DIN ISO 1173-D 6.3.

### 853/1 TZ ACR® bits

| Code | EAN 4013288 | | mm | | | | | |
|---|---|---|---|---|---|---|---|---|
| 05**056662**001 | *014405* | PH 2 | 25 | 1" | | | | 10 |

## 851/1 Z bits

- Ductile and tough for hard materials

### 851/1 Z bits

| Code | EAN 4013288 | | mm | | | | | |
|---|---|---|---|---|---|---|---|---|
| 05**056500**001 | *013323* | PH 0 | 25 | 1" | | | | 10 |
| 05**072070**001 | *013453* | PH 1 | 25 | 1" | | | | 10 |
| 05**056507**001 | *013330* | PH 1 | 50 | 2" | | | | 10 |
| 05**072072**001 | *013460* | PH 2 | 25 | 1" | | | | 10 |
| 05**056515**001 | *013347* | PH 2 | 32 | 1 1/4" | | | | 10 |
| 05**056520**001 | *013354* | PH 2 | 50 | 2" | | | | 10 |
| 05**072074**001 | *013477* | PH 3 | 25 | 1" | | | | 10 |
| 05**134905**001 | *094858* | PH 3 | 50 | 2" | | | | 10 |
| 05**056535**001 | *013378* | PH 4 | 32 | 1 1/4" | | | | 10 |

### 851/1 Z SB bits

| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 05**073304**001 | *029058* | | **851/1 Z PH**<br>2x PH 1x25 | 5 |
| 05**073305**001 | *029065* | | **851/1 Z PH**<br>2x PH 2x25 | 5 |
| 05**073306**001 | *029072* | | **851/1 Z PH**<br>2x PH 3x25 | 5 |
| 05**073307**001 | *029089* | | **851/1 Z PH**<br>1x PH 1x25; 1x PH 2x25; 1x PH 3x25 | 5 |

### 851/1 Z DIY bits

| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 05**072400**001 | *115737* | | **851/1 Z PH**<br>10x PH 1x25 | 1 |
| 05**072401**001 | *115744* | | **851/1 Z PH**<br>10x PH 2x25 | 1 |
| 05**072402**001 | *115751* | | **851/1 Z PH**<br>10x PH 3x25 | 1 |

## 851/1 Z DIY 100 bits

| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 05**072441**001 | *138477* | | **851/1 Z PH**<br>100x PH 2x25 | 1 |

## Bit-Box 20 PH

| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 05**057750**001 | *188014* | | **851/1 Z PH**<br>20x PH 2x25 | 20 |

## 851/1 J bits

Bits optimised for Asian PH screws. Similar to Camera screws. Tough viscous for universal use. 1/4" hexagon, suitable for holders as per DIN ISO 1173-D 6.3.

## 851/1 J bits

| Code | EAN 4013288 | | mm | | mm | | | |
|---|---|---|---|---|---|---|---|---|
| 05**135040**001 [1] | *112569* | PH 00 | 25 | 1" | 2,0 | | | 10 |
| 05**135041**001 [2] | *112576* | PH 0 | 25 | 1" | 2,5 | | | 10 |

[1] Size 00 modificated according to JCIS 00 (Japanese Camera Industrial Standard)
[2] Size 0 modificated according to JCIS 0 (Japanese Camera Industrial Standard)

## Impaktor system - For an above-average service life

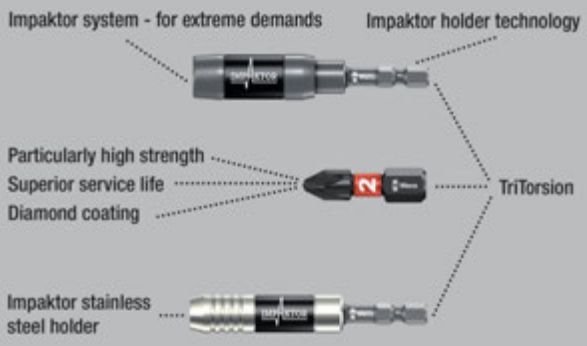


The Impaktor technology offers an above-average service life even under extreme circumstances. Enhanced friction resistance, thanks to the rough diamond-particle coating on the bit tip, prevents any slipping out of the screw head.

Particularly suitable for use with customary impact drivers. 1/4" hexagon, suitable for holders as per DIN ISO 1173-F 6.3.

## 851/4 IMP DC PH DIY Impaktor PH bits

| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 05**057656**001 | *157652* | | **851/4 IMP DC**<br>5x PH 2x50 | 1 |
| 05**057657**001 | *157669* | | **851/4 IMP DC**<br>5x PH 3x50 | 1 |

## 851/4 IMP DC SB Impaktor bits

| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 05**073956**001 | *158482* | | **851/4 IMP DC** 1x PH 2x50 | 5 |
| 05**073957**001 | *158499* | | **851/4 IMP DC** 1x PH 3x50 | 5 |

## Kraftform Stainless - stainless steel to prevent rust

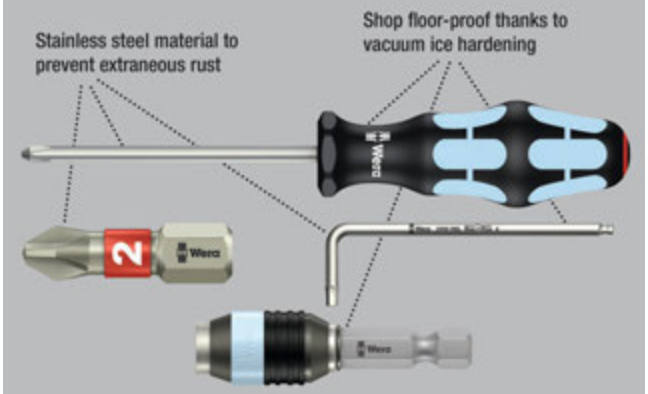


High quality bits out of stainless steel for cross-recess screws. Wera stainless are made out of stainless steel which prevents the formation of unsightly extraneous rust. 1/4" hexagon, suitable for holders as per DIN ISO 1173-F 6.3.

## 3851/4 Bits, stainless

| Code | EAN 4013288 | | mm | | | | | |
|---|---|---|---|---|---|---|---|---|
| 05**071081**001 | *115485* | PH 1 | 89 | 3 1/2" | | | | 10 |
| 05**071082**001 | *115492* | PH 2 | 89 | 3 1/2" | | | | 10 |
| 05**071083**001 | *115508* | PH 3 | 89 | 3 1/2" | | | | 10 |

## BiTorsion system - for longer service life

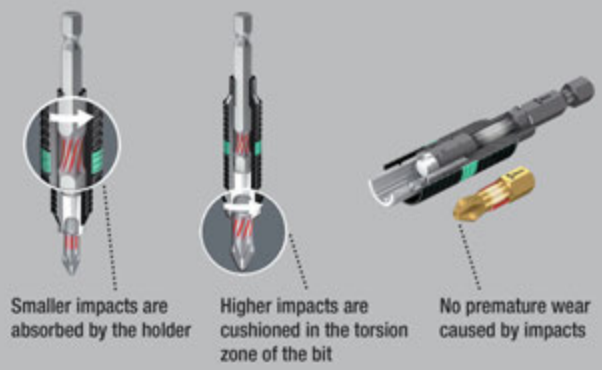


### 851/4 BDC bits

BiTorsion bits with tiny diamond particles on the bit tip. This ensures a secure fit of the bit in the screw, reduces the contact pressure required and lowers the risk of slipping.

Comes with Torsion zone – where kinetic energy is diverted from peak loads. This greatly extends the product service life; 1/4" hexagon, suitable for holders as per DIN ISO 1173-F 6.3.

## 851/4 BDC bits

| Code | EAN 4013288 | | mm | | | | | |
|---|---|---|---|---|---|---|---|---|
| 05**059530**001 | *034090* | PH 1 | 50 | 2" | | | | 10 |
| 05**059532**001 | *034106* | PH 2 | 50 | 2" | | | | 10 |
| 05**059534**001 | *034113* | PH 3 | 50 | 2" | | | | 10 |

## 851/4 BTH bits

BiTorsion bits with Torsion zone – where kinetic energy is diverted from peak loads.

This greatly extends the product service life; 1/4" hexagon, suitable for holders as per DIN ISO 1173-F 6.3.

### 851/4 BTH bits

| Code | EAN 4013288 | ⊕ | mm | | | | | |
|---|---|---|---|---|---|---|---|---|
| 05**059540**001 | *034304* | PH 1 | 50 | 2" | | | | 10 |
| 05**059542**001 | *034311* | PH 2 | 50 | 2" | | | | 10 |
| 05**059544**001 | *034328* | PH 3 | 50 | 2" | | | | 10 |

## 851/4 BTZ bits

BiTorsion with Torsion zone – where kinetic energy is diverted from peak loads.

This greatly extends the product service life. Tough viscous for universal use; 1/4" hexagon, suitable for holders as per DIN ISO 1173-F 6.3.

### 851/4 BTZ bits

| Code | EAN 4013288 | ⊕ | mm | | | | | |
|---|---|---|---|---|---|---|---|---|
| 05**059550**001 | *034571* | PH 1 | 50 | 2" | | | | 10 |
| 05**059552**001 | *034588* | PH 2 | 50 | 2" | | | | 10 |
| 05**059554**001 | *034595* | PH 3 | 50 | 2" | | | | 10 |

## 851/4 RH Reduced tip bits

Bits with reduced shaft diameter for low-lying screw connections, enabling countersinking of screws without any surface damage. Profiled version. Extra-hard. 1/4" hexagon, suitable for holders as per DIN ISO 1173-F 6.3.

### 851/4 RH Reduced tip bits

| Code | EAN 4013288 | ⊕ | mm | | mm | | | |
|---|---|---|---|---|---|---|---|---|
| 05**380161**001 | *157065* | PH 2 | 50 | 2" | 4,2 | | | 10 |

## 851/4 A bits

The sharp-edged profile ensures a dependable transfer of power between the bit and screw by breaking off the paint e.g. when screw profiles are covered in it.

Extra-hard design: 1/4" hexagon, suitable for holders as per DIN ISO 1173-F 6.3.

### 851/4 A bits

| Code | EAN 4013288 | ⊕ | mm | | mm | | | |
|---|---|---|---|---|---|---|---|---|
| 05**134929**001 | *105165* | PH 0 | 50 | 2" | 3 | | | 10 |
| 05**134906**001 | *105141* | PH 0 | 70 | 2 3/4" | 3 | | | 10 |
| 05**134907**001 | *105172* | PH 0 | 89 | 3 1/2" | 3 | | | 10 |
| 05**134930**001 | *100009* | PH 1 | 50 | 2" | 4,5 | | | 10 |
| 05**134370**001 | *037831* | PH 1 | 70 | 2 3/4" | 4,5 | | | 10 |
| 05**134372**001 | *037855* | PH 1 | 89 | 3 1/2" | 4,5 | | | 10 |
| 05**134931**001 | *100016* | PH 2 | 50 | 2" | 6 | | | 10 |
| 05**134371**001 | *037848* | PH 2 | 70 | 2 3/4" | 6 | | | 10 |
| 05**134373**001 | *037862* | PH 2 | 89 | 3 1/2" | 6 | | | 10 |
| 05**134910**001 [1] | *105202* | PH 2 | 152 | 6" | 6 | | | 10 |
| 05**134911**001 [2] | *105219* | PH 2 | 152 | 6" | 6 | | | 10 |
| 05**134932**001 | *100023* | PH 3 | 50 | 2" | - | | | 10 |
| 05**134913**001 | *105233* | PH 3 | 70 | 2 3/4" | 8 | | | 10 |
| 05**134914**001 | *105240* | PH 3 | 89 | 3 1/2" | 8 | | | 10 |
| 05**134915**001 | *105257* | PH 3 | 152 | 6" | 8 | | | 10 |
| 05**160983**001 | *106575* | PH 4 | 50 | 2" | 10 | | | 10 |

[1] Length of drive 100 mm
[2] Length of drive 20 mm

## 851/4 R Reduced tip bits

High quality bits with reduced shaft diameter for low-lying screw connections, enabling countersinking of screws without any surface damage. Profiled version. Extra-hard. 1/4" hexagon, suitable for holders as per DIN ISO 1173-F 6.3.

### 851/4 R Reduced tip bits

| Code | EAN 4013288 | | mm | | mm | | | |
|---|---|---|---|---|---|---|---|---|
| 05**160899**001 | *105547* | PH 2 | 50 | 2" | 3,0 | | | 10 |
| 05**160896**001 | *105554* | PH 2 | 152 | 6" | 3,0 | | | 10 |

## 851/4 TH bits

High quality bits with Torsion zone – where kinetic energy is diverted from peak loads. This greatly extends the product service life. Extra-hard; 1/4" hexagon, suitable for holders as per DIN ISO 1173-F 6.3.

### 851/4 TH bits

| Code | EAN 4013288 | | mm | | | | | |
|---|---|---|---|---|---|---|---|---|
| 05**059855**001 | *013897* | PH 1 | 50 | 2" | | | | 10 |
| 05**059860**001 | *013903* | PH 2 | 50 | 2" | | | | 10 |
| 05**059865**001 | *013910* | PH 3 | 50 | 2" | | | | 10 |

## 851/4 TZ bits

Bits with Torsion zone – where kinetic energy is diverted from peak loads. This greatly extends the product service life. Tough viscous, for universal use. 1/4" hexagon, suitable for holders as per DIN ISO 1173-F 6.3.

### 851/4 TZ bits

| Code | EAN 4013288 | | mm | | | | | |
|---|---|---|---|---|---|---|---|---|
| 05**059805**001 | *013927* | PH 1 | 50 | 2" | | | | 10 |
| 05**059810**001 | *013934* | PH 2 | 50 | 2" | | | | 10 |
| 05**059815**001 | *013941* | PH 3 | 50 | 2" | | | | 10 |

### 851/4 TZ SB bits

| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 05**134380**001 | *037947* | | **851/4 TZ PH** 2x PH 1x50 | 3 |
| 05**134381**001 | *037954* | | **851/4 TZ PH** 2x PH 2x50 | 3 |
| 05**134382**001 | *037961* | | **851/4 TZ PH** 2x PH 3x50 | 3 |

## 851/4 Z bits

Tough viscous for universal use. 1/4" hexagon, suitable for holders as per DIN ISO 1173-F 6.3.

### 851/4 Z bits

| Code | EAN 4013288 | | mm | | mm | | | |
|---|---|---|---|---|---|---|---|---|
| 05**059755**001 | *013781* | PH 1 | 70 | 2 3/4" | 4,5 | | | 10 |
| 05**059760**001 | *013798* | PH 1 | 89 | 3 1/2" | 4,5 | | | 10 |
| 05**059765**001 | *031044* | PH 1 | 127 | 5" | 4,5 | | | 10 |
| 05**059766**001 | *031051* | PH 1 | 152 | 6" | 4,5 | | | 10 |
| 05**059770**001 | *013804* | PH 2 | 70 | 2 3/4" | 6,0 | | | 10 |
| 05**059775**001 | *013811* | PH 2 | 89 | 3 1/2" | 6,0 | | | 10 |
| 05**059780**001 | *013828* | PH 2 | 110 | 4 3/8" | 6,0 | | | 10 |
| 05**059785**001 | *030474* | PH 2 | 127 | 5" | 6,0 | | | 10 |
| 05**059786**001 | *031068* | PH 2 | 152 | 6" | 6,0 | | | 10 |
| 05**059790**001 | *013835* | PH 3 | 70 | 2 3/4" | - | | | 10 |
| 05**059795**001 | *013842* | PH 3 | 89 | 3 1/2" | - | | | 10 |
| 05**059800**001 | *013859* | PH 3 | 110 | 4 3/8" | - | | | 10 |
| 05**059802**001 | *031075* | PH 3 | 152 | 6" | - | | | 10 |

## 851/4 J bits

Bits optimised for Asian PH screws. In particular, for applications with very small dimensions pursuant to the Japanese Camera Industrial Standard.

Tough viscous for universal use. 1/4" hexagon, suitable for holders as per DIN ISO 1173-F 6.3.

### 851/4 J bits

| Code | EAN 4013288 | | mm | | mm | | | |
|---|---|---|---|---|---|---|---|---|
| 05**135530**001 [1] | *113252* | PH 00 | 50 | 2" | 2,0 | | | 10 |
| 05**380200**001 [1] | *156204* | PH 00 | 89 | 3 1/2" | 2,0 | | | 10 |
| 05**135531**001 [2] | *113269* | PH 0 | 50 | 2" | 2,5 | | | 10 |
| 05**380201**001 [2] | *156211* | PH 0 | 89 | 3 1/2" | 2,5 | | | 10 |
| 05**135532**001 | *113276* | PH 1 | 50 | 2" | 4,5 | | | 10 |
| 05**380202**001 | *156228* | PH 1 | 89 | 3 1/2" | 4,5 | | | 10 |

[1] Optimised for Asian PH screws
[2] Size 0 modificated according to JCIS 0 (Japanese Camera Industrial Standard)

### 851/4 Z SB bits

| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 05**073520**001 | *105875* | | **851/4 Z PH**<br>1x PH 1x89 | 5 |
| 05**136305**001 | *213839* | | **851/4 Z PH**<br>1x PH 1x152 | 3 |
| 05**073521**001 | *105882* | | **851/4 Z PH**<br>1x PH 2x89 | 5 |
| 05**136306**001 | *213846* | | **851/4 Z PH**<br>1x PH 2x152 | 3 |
| 05**073522**001 | *105899* | | **851/4 Z PH**<br>1x PH 3x89 | 5 |
| 05**136307**001 | *213853* | | **851/4 Z PH**<br>1x PH 3x152 | 3 |

## 853/4 ACR® SL bits with sleeve, magnetized

Bits with rough ribs (anti cam-out feature, ACR) to prevent any slipping out of the screw head, permanently magnetized, thus screws can be held securely on the tip of the bit; with plastic sleeve, protects components from being damaged when screwdriving.

Tough viscous for universal use. 1/4" hexagon, suitable for holders as per DIN ISO 1173-F 6.3.

### 853/4 ACR® SL bits with sleeve, magnetized

| Code | EAN 4013288 | | mm | | mm | | | |
|---|---|---|---|---|---|---|---|---|
| 05**323780**001 | *165190* | PH 2 | 50 | 2" | 5,2 | | | 40 |
| 05**323781**001 | *165206* | PH 2 | 90 | 3 1/2" | 5,2 | | | 40 |
| 05**203913**001 | *163189* | PH 2 | 150 | 6" | 5,2 | | | 40 |
| 05**203914**001 | *163196* | PH 2 | 200 | 8" | 5,2 | | | 60 |

## 853/4 ACR® bits

Bits with Torsion zone – where kinetic energy is diverted from peak loads. This greatly extends the product service life. Come with rough ribs (anti cam-out feature, ACR) to prevent any slipping out of the screw head.

Tough viscous for universal use. 1/4" hexagon, suitable for holders as per DIN ISO 1173-F 6.3.

### 853/4 ACR® bits

| Code | EAN 4013288 | | mm | | mm | | | |
|---|---|---|---|---|---|---|---|---|
| 05**346286**001 | *105578* | PH 2 | 50 | 2" | 5,2 | | | 10 |

## 853/4 Harpoon ACR® bits

Bits with reduced shaft diameter for low-lying screw connections. Countersinking of screws without any surface damage. Come with rough ribs (anti cam-out feature, ACR) to prevent any slipping out of the screw head.

Tough viscous for universal use. 1/4" hexagon, suitable for holders as per DIN ISO 1173-F 6.3.

### 853/4 Harpoon ACR® bits

| | EAN | | | | ∅ | | | |
|---|---|---|---|---|---|---|---|---|
| Code | 4013288 | | mm | | mm | | | |
| 05**160901**001 | *105592* | PH 2 | 50 | 2" | 3,3 | | | 10 |
| 05**160895**001 | *105608* | PH 2 | 70 | 2 3/4" | 3,3 | | | 10 |
| 05**160908**001 | *105615* | PH 2 | 152 | 6" | 3,3 | | | 10 |

## 851/0 Micro bits for Phillips screws

- 4 mm hexagonal drive

### 851/0 Micro bits for Phillips screws

| | EAN | | | | ∅ | | | |
|---|---|---|---|---|---|---|---|---|
| Code | 4013288 | | mm | | mm | | | |
| 05**058119**001 | *234568* | PH 000 | 30 | 1 3/16" | 1,5 | | | 10 |
| 05**058120**001 | *188687* | PH 00 | 30 | 1 3/16" | 2,5 | | | 10 |
| 05**058121**001 [1] | *188694* | PH 0 | 30 | 1 3/16" | 2,5 | | | 10 |
| 05**058122**001 | *234575* | PH 1 | 30 | 1 3/16" | 2,5 | | | 10 |

[1] Size 0 modified according to JCIS 0 (Japanese Camera Industrial Standard)

## 851/2 Z bits

For universal use. 5/16" hexagon, suitable for holders as per DIN ISO 1173-D 8.

### 851/2 Z bits

| | EAN | | | | ∅ | | | |
|---|---|---|---|---|---|---|---|---|
| Code | 4013288 | | mm | | mm | | | |
| 05**057705**001 | *013668* | PH 1 | 32 | 1 1/4" | 4,5 | | | 10 |
| 05**057710**001 | *013675* | PH 2 | 32 | 1 1/4" | 6,0 | | | 10 |
| 05**057715**001 | *013682* | PH 3 | 32 | 1 1/4" | 7,6 | | | 10 |
| 05**057720**001 | *013699* | PH 4 | 32 | 1 1/4" | - | | | 10 |

## 851/11 Bits

With thread drive M 4.

### 851/11 Bits

| | EAN | | | | ∅ | | | |
|---|---|---|---|---|---|---|---|---|
| Code | 4013288 | | mm | | mm | | | |
| 05**065081**001 | *014245* | PH 2 | 33 | 1 1/4" | 6,0 | | | 5 |

## 851/12 Bits

Tough viscous for universal use. Thread drive M 5.

### 851/12 Bits

| | EAN | | | | ∅ | | | |
|---|---|---|---|---|---|---|---|---|
| Code | 4013288 | | mm | | mm | | | |
| 05**065110**001 | *014252* | PH 2 | 33 | 1 1/4" | 7,0 | | | 5 |
| 05**065112**001 | *014269* | PH 2 | 35 | 1 3/8" | 7,0 | | | 5 |
| 05**065114**001 | *014276* | PH 2 | 44,5 | 1 3/4" | 6,0 | | | 5 |

## 851/16 bits

Thread drive #10-32 UNF.

### 851/16 bits

| | EAN | | | | ∅ | | | |
|---|---|---|---|---|---|---|---|---|
| Code | 4013288 | | mm | | mm | | | |
| 05**065197**001 | *014351* | PH 2 | 44,5 | 1 3/4" | 6,0 | | | 5 |

## 851/9 C J PH bits, halfmoon

With 4 mm halfmoon drive. Optimised for Japanese PH screws. Hard design.

### 851/9 C J PH bits, halfmoon

| | EAN | | | | ∅ | | | |
|---|---|---|---|---|---|---|---|---|
| Code | 4013288 | | mm | | mm | mm | | |
| 05**134605**001 [1] | *190444* | PH 000 | 44 | 1 47/64" | 1,5 | 20 | 25/32" | 10 |
| 05**135270**001 [1] | *112729* | PH 00 | 44 | 1 47/64" | 1,8 | 20 | 25/32" | 10 |
| 05**135271**001 [1] | *112736* | PH 00 | 64 | 2 33/64" | 1,8 | 20 | 25/32" | 10 |
| 05**135272**001 [2] | *112743* | PH 0 | 44 | 1 47/64" | 1,8 | 20 | 25/32" | 10 |
| 05**135273**001 [2] | *112750* | PH 0 | 64 | 2 33/64" | 1,8 | 20 | 25/32" | 10 |
| 05**135276**001 [1] | *112781* | PH 1 | 44 | 1 47/64" | 3,0 | 20 | 25/32" | 10 |
| 05**135277**001 [1] | *112798* | PH 1 | 64 | 2 33/64" | 3,0 | 20 | 25/32" | 10 |

[1] Optimised for Asian PH screws
[2] Size 0 modificated according to JCIS 0 (Japanese Camera Industrial Standard)

## 851/21 J bits

With HIOS 4 mm drive. Optimised for Japanese PH screws. Hard design.

### 851/21 J bits

| Code | EAN 4013288 | | mm | | mm | | | |
|---|---|---|---|---|---|---|---|---|
| 05**135280**001 [1] | *112804* | PH 00 | 40 | 1 9/16" | 1,8 | | | 10 |
| 05**135281**001 [1] | *112811* | PH 00 | 60 | 2 3/8" | 1,8 | | | 10 |
| 05**135284**001 [2] | *112828* | PH 0 | 40 | 1 9/16" | 1,8 | | | 10 |
| 05**135285**001 [2] | *112835* | PH 0 | 60 | 2 3/8" | 1,8 | | | 10 |

[1] Size 00 modificated according to JCIS 00 (Japanese Camera Industrial Standard)
[2] Size 0 modificated according to JCIS 0 (Japanese Camera Industrial Standard)

## Impaktor system - For an above-average service life

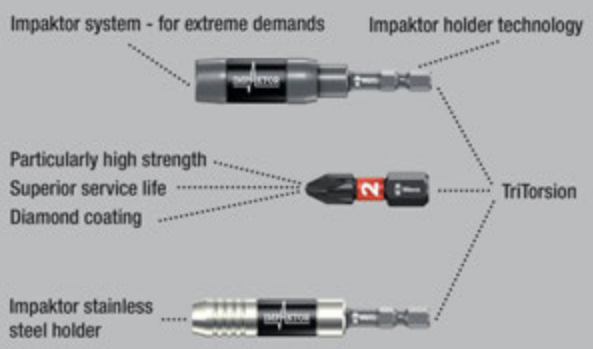


High quality bits for Pozidriv screws. The Impaktor technology offers an above-average service life even under extreme circumstances. Enhanced friction resistance, thanks to the rough diamond-particle coating on the bit tip, prevents any slipping out of the screw head. Particularly suitable for use with customary impact drivers. 1/4" hexagon, suitable for holders as per DIN ISO 1173-D 6.3.

### 855/1 IMP DC PZ DIY Impaktor bits

| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 05**057620**001 | *178718* | | **855/1 IMP DC** 10x PZ 1x25 | 1 |
| 05**057621**001 | *157676* | | **855/1 IMP DC** 10x PZ 2x25 | 1 |
| 05**057622**001 | *157683* | | **855/1 IMP DC** 10x PZ 3x25 | 1 |

### 855/1 IMP DC SB Impaktor bits

| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 05**073921**001 | *158383* | | **855/1 IMP DC** 1x PZ 2x25 | 5 |
| 05**073922**001 | *158390* | | **855/1 IMP DC** 1x PZ 3x25 | 5 |

### Bit-Box 15 Impaktor PZ

| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 05**057763**001 | *187901* | | **855/1 IMP DC** 15x PZ 2x25 | 10 |

## Kraftform Stainless - stainless steel to prevent rust

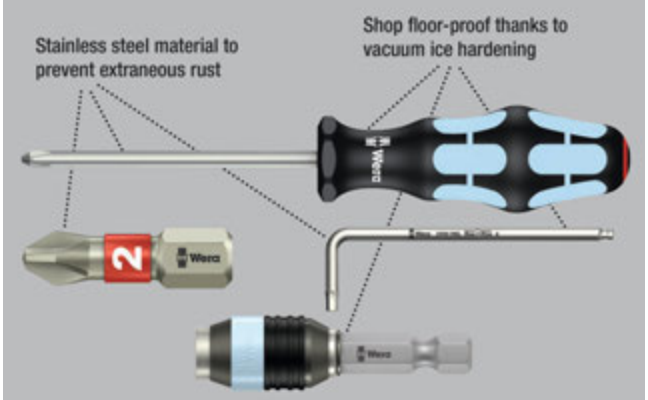


High quality bits out of stainless steel for Pozidriv screws. Wera stainless are made out of stainless steel which prevents the formation of unsightly extraneous rust.
Come with Torsion zone: Torsion bits take-up torque peaks and absorb them in the Torsion zone. This prevents premature wear and extends the service life of the bit. 1/4" hexagon, suitable for holders as per DIN ISO 1173-D 6.3.

### 3855/1 TS bits, stainless

| Code | EAN 4013288 | | mm | | | | | |
|---|---|---|---|---|---|---|---|---|
| 05**071020**001 | *111012* | PZ 1 | 25 | 1" | | | | 10 |
| 05**071021**001 | *111029* | PZ 2 | 25 | 1" | | | | 10 |
| 05**071022**001 | *111036* | PZ 3 | 25 | 1" | | | | 10 |

### 3855/1 TS SB bits, stainless

| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 05**073613**001 | *112101* | | **3855/1 TS PZ** 1x PZ 1x25 | 5 |
| 05**073614**001 | *112118* | | **3855/1 TS PZ** 1x PZ 2x25 | 5 |
| 05**073615**001 | *112125* | | **3855/1 TS PZ** 1x PZ 3x25 | 5 |

## BiTorsion system - for longer service life

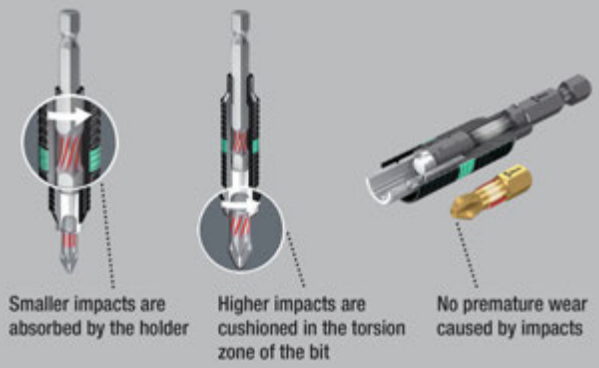


### 855/1 BDC bits

BiTorsion bits with tiny diamond particles on the bit tip. This ensures a secure fit of the bit in the screw, reduces the contact pressure required and lowers the risk of slipping.

Comes with Torsion zone – where kinetic energy is diverted from peak loads. This greatly extends the product service life; 1/4" hexagon, suitable for holders as per DIN ISO 1173-D 6.3.

### 855/1 BDC bits

| Code | EAN 4013288 | | mm | | | | | |
|---|---|---|---|---|---|---|---|---|
| 05**056700**001 | *034007* | PZ 1 | 25 | 1" | | | | 10 |
| 05**056702**001 | *034014* | PZ 2 | 25 | 1" | | | | 10 |
| 05**056704**001 | *034021* | PZ 3 | 25 | 1" | | | | 10 |

## 855/1 BDC SB bits

| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 05**073336**001 | *029362* | | **855/1 BDC PZ** 1x PZ 1x25 | 5 |
| 05**073337**001 | *029379* | | **855/1 BDC PZ** 1x PZ 2x25 | 5 |
| 05**073338**001 | *029386* | | **855/1 BDC PZ** 1x PZ 3x25 | 5 |
| 05**073339**001 | *029393* | | **855/1 BDC PZ** 2x PZ 2x25 | 5 |

## 855/1 BTH bits

BiTorsion bits with Torsion zone – where kinetic energy is diverted from peak loads.

This greatly extends the product service life. This provides the best possible durability together with the matching holder.

Extra-hard; 1/4" hexagon, suitable for holders as per DIN ISO 1173-D 6.3.

## 855/1 BTH bits

| Code | EAN 4013288 | | mm | | | | | |
|---|---|---|---|---|---|---|---|---|
| 05**056710**001 | *034274* | PZ 1 | 25 | 1" | | | | 10 |
| 05**056712**001 | *034281* | PZ 2 | 25 | 1" | | | | 10 |
| 05**056714**001 | *034298* | PZ 3 | 25 | 1" | | | | 10 |

## Bit-Box 20 BTH PZ

| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 05**057762**001 | *187963* | | **855/1 BTH PZ** 20x PZ 2x25 | 10 |

## 855/1 BTZ bits

BiTorsion bits with Torsion zone – where kinetic energy is diverted from peak loads.

This greatly extends the product service life.

Tough, for universal use; 1/4" hexagon, suitable for holders as per DIN ISO 1173-D 6.3.

## 855/1 BTZ bits

| Code | EAN 4013288 | | mm | | | | | |
|---|---|---|---|---|---|---|---|---|
| 05**056720**001 | *034489* | PZ 1 | 25 | 1" | | | | 10 |
| 05**056722**001 | *034496* | PZ 2 | 25 | 1" | | | | 10 |
| 05**056724**001 | *034502* | PZ 3 | 25 | 1" | | | | 10 |

## Bit-Box 20 BTZ PZ

| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 05**057761**001 | *187970* | | **855/1 BTZ PZ** 20x PZ 2x25 | 10 |

## 855/1 RZ bits

Reduced shaft diameter for low-lying screw connections. Countersinking of screws without any surface damage. Especially for drywall construction and suitable for drywall screws.

### 855/1 RZ bits

| Code | EAN 4013288 | | mm | | mm | | | |
|---|---|---|---|---|---|---|---|---|
| 05**135017**001 | *175311* | PZ 1 | 25 | 1" | 4,2 | | | 10 |
| 05**135003**001 | *096739* | PZ 2 | 25 | 1" | 4,2 | | | 10 |

## 855/1 TH bits

With Torsion zone – where kinetic energy is diverted from peak loads. This greatly extends the product service life. Extra-hard; 1/4" hexagon, suitable for holders as per DIN ISO 1173-D 6.3.

### 855/1 TH bits

| Code | EAN 4013288 | | mm | | | | | |
|---|---|---|---|---|---|---|---|---|
| 05**056910**001 | *014740* | PZ 1 | 25 | 1" | | | | 10 |
| 05**056915**001 | *014757* | PZ 2 | 25 | 1" | | | | 10 |
| 05**056925**001 | *014764* | PZ 3 | 25 | 1" | | | | 10 |

### 855/1 TH SB bits

| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 05**073370**001 | *029638* | | **855/1 TH PZ**<br>2x PZ 1x25 | 5 |
| 05**073371**001 | *029645* | | **855/1 TH PZ**<br>2x PZ 2x25 | 5 |
| 05**073372**001 | *029652* | | **855/1 TH PZ**<br>2x PZ 3x25 | 5 |
| 05**073373**001 | *029669* | | **855/1 TH PZ**<br>1x PZ 1x25; 1x PZ 2x25; 1x PZ 3x25 | 5 |

## 855/1 TiN bits

With extra-hard titanium nitride (TiN) coating for withstanding permanent loads such as e.g. in industrial applications.

1/4" hexagon, suitable for holders as per DIN ISO 1173-D 6.3.

### 855/1 TiN bits

| Code | EAN 4013288 | | mm | | | | | |
|---|---|---|---|---|---|---|---|---|
| 05**480222**001 | *041029* | PZ 2 | 25 | 1" | | | | 10 |

## 855/1 TZ bits

With Torsion zone to combat premature wear.

Tough viscous for universal use. 1/4" hexagon, suitable for holders as per DIN ISO 1173-D 6.3.

### 855/1 TZ bits

| Code | EAN 4013288 | | mm | | | | | |
|---|---|---|---|---|---|---|---|---|
| 05**056810**001 | *014801* | PZ 1 | 25 | 1" | | | | 10 |
| 05**056815**001 | *014818* | PZ 2 | 25 | 1" | | | | 10 |
| 05**056825**001 | *014825* | PZ 3 | 25 | 1" | | | | 10 |

## 855/1 Z bits

Tough viscous for universal use. 1/4" hexagon, suitable for holders as per DIN ISO 1173-D 6.3.

### 855/1 Z bits

| Code | EAN 4013288 | | mm | | | | | |
|---|---|---|---|---|---|---|---|---|
| 05**056805**001 | *014535* | PZ 0 | 25 | 1" | | | | 10 |
| 05**072080**001 | *014658* | PZ 1 | 25 | 1" | | | | 10 |
| 05**056812**001 | *014542* | PZ 1 | 50 | 2" | | | | 10 |
| 05**072082**001 | *014665* | PZ 2 | 25 | 1" | | | | 10 |
| 05**056820**001 | *014559* | PZ 2 | 50 | 2" | | | | 10 |
| 05**072084**001 | *014672* | PZ 3 | 25 | 1" | | | | 10 |
| 05**056835**001 | *014573* | PZ 4 | 32 | 1 1/4" | | | | 10 |

## 855/1 Z SB bits

| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 05**073308**001 | *029096* | | **855/1 Z PZ**<br>2x PZ 1x25 | 5 |
| 05**073309**001 | *029102* | | **855/1 Z PZ**<br>2x PZ 2x25 | 5 |
| 05**073310**001 | *029119* | | **855/1 Z PZ**<br>2x PZ 3x25 | 5 |
| 05**073380**001 | *029621* | | **855/1 Z PZ**<br>1x PZ 4x32 | 5 |
| 05**073311**001 | *029126* | | **855/1 Z PZ**<br>1x PZ 1x25; 1x PZ 2x25; 1x PZ 3x25 | 5 |

## 855/1 Z DIY bits

| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 05**072403**001 | *115768* | | **855/1 Z PZ**<br>10x PZ 1x25 | 1 |
| 05**072404**001 | *115775* | | **855/1 Z PZ**<br>10x PZ 2x25 | 1 |
| 05**072405**001 | *115782* | | **855/1 Z PZ**<br>10x PZ 3x25 | 1 |

## 855/1 Z DIY 100 bits

| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 05**072443**001 | *138484* | | **855/1 Z PZ**<br>100x PZ 1x25 | 1 |
| 05**072444**001 | *138491* | | **855/1 Z PZ**<br>100x PZ 2x25 | 1 |

## Bit-Box 20 PZ

| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 05**057760**001 | *188052* | | **855/1 Z PZ**<br>20x PZ 2x25 | 20 |

## Impaktor system - For an above-average service life

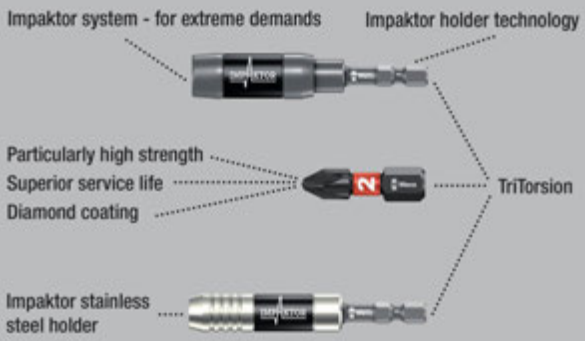


The Impaktor technology offers an above-average service life even under extreme circumstances. Enhanced friction resistance, thanks to the rough diamond-particle coating on the bit tip, prevents any slipping out of the screw head.

Particularly suitable for use with customary impact drivers. 1/4" hexagon, suitable for holders as per DIN ISO 1173-F 6.3.

## 855/4 IMP DC PZ DIY Impaktor bits

| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 05**057661**001 | *157690* | | **855/4 IMP DC**<br>5x PZ 2x50 | 1 |
| 05**057662**001 | *157706* | | **855/4 IMP DC**<br>5x PZ 3x50 | 1 |

## 855/4 IMP DC Impaktor bits SB

| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 05**073961**001 | *158505* | | **855/4 IMP DC** 1x PZ 2x50 | 5 |
| 05**073962**001 | *158512* | | **855/4 IMP DC** 1x PZ 3x50 | 5 |

## Kraftform Stainless - stainless steel to prevent rust

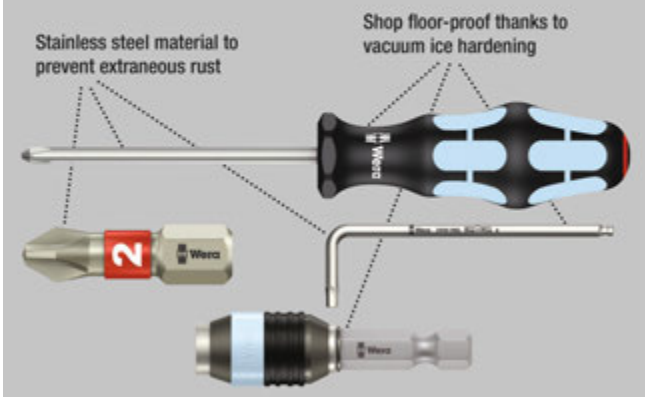


High quality bits out of stainless steel which prevents the formation of unsightly extraneous rust. 1/4" hexagon, suitable for holders as per DIN ISO 1173-F 6.3.

## 3855/4 bits, stainless

| Code | EAN 4013288 | | mm | | | | | |
|---|---|---|---|---|---|---|---|---|
| 05**071084**001 | *115515* | PZ 1 | 89 | 3 1/2" | | | | 10 |
| 05**071085**001 | *115522* | PZ 2 | 89 | 3 1/2" | | | | 10 |
| 05**071086**001 | *115539* | PZ 3 | 89 | 3 1/2" | | | | 10 |

## BiTorsion system - for longer service life

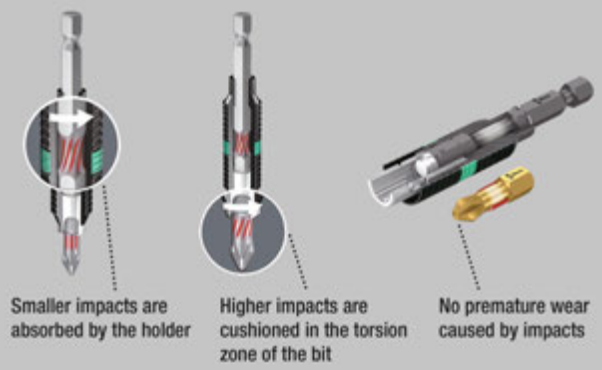


### 855/4 BDC bits

Bits with tiny diamond particles on the bit tip. This ensures a secure fit of the bit in the screw, reduces the contact pressure required and lowers the risk of slipping.

Comes with Torsion zone – where kinetic energy is diverted from peak loads. This greatly extends the product service life; 1/4" hexagon, suitable for holders as per DIN ISO 1173-F 6.3.

## 855/4 BDC bits

| Code | EAN 4013288 | | mm | | | | | |
|---|---|---|---|---|---|---|---|---|
| 05**059900**001 | *034120* | PZ 1 | 50 | 2" | | | | 10 |
| 05**059902**001 | *034137* | PZ 2 | 50 | 2" | | | | 10 |
| 05**059904**001 | *034144* | PZ 3 | 50 | 2" | | | | 10 |

### 855/4 BTH bits

Bits with Torsion zone – where kinetic energy is diverted from peak loads. This greatly extends the product service life. This provides the best possible durability together with the matching holder.

Extra-hard; 1/4" hexagon, suitable for holders as per DIN ISO 1173-F 6.3.

## 855/4 BTH bits

| Code | EAN 4013288 | | mm | | | | | |
|---|---|---|---|---|---|---|---|---|
| 05**059910**001 | *034335* | PZ 1 | 50 | 2" | | | | 10 |
| 05**059912**001 | *034342* | PZ 2 | 50 | 2" | | | | 10 |
| 05**059914**001 | *034359* | PZ 3 | 50 | 2" | | | | 10 |

## 855/4 BTZ bits

BiTorsion bits fwith Torsion zone – where kinetic energy is diverted from peak loads. This greatly extends the product service life.

Tough viscous for universal use; 1/4" hexagon, suitable for holders as per DIN ISO 1173-F 6.3.

### 855/4 BTZ bits

| Code | EAN 4013288 | | mm | | | | | |
|---|---|---|---|---|---|---|---|---|
| 05**059920**001 | *034601* | PZ 1 | 50 | 2" | | | | 10 |
| 05**059922**001 | *034618* | PZ 2 | 50 | 2" | | | | 10 |
| 05**059924**001 | *034625* | PZ 3 | 50 | 2" | | | | 10 |

## 855/4 TH bits

Bits with Torsion zone – where kinetic energy is diverted from peak loads. This greatly extends the product service life. Extra-hard; 1/4" hexagon, suitable for holders as per DIN ISO 1173-F 6.3.

### 855/4 TH bits

| Code | EAN 4013288 | | mm | | | | | |
|---|---|---|---|---|---|---|---|---|
| 05**060055**001 | *015068* | PZ 1 | 50 | 2" | | | | 10 |
| 05**060060**001 | *015075* | PZ 2 | 50 | 2" | | | | 10 |
| 05**060065**001 | *015082* | PZ 3 | 50 | 2" | | | | 10 |

## 855/4 TZ bits

High quality bits with Torsion zone – where kinetic energy is diverted from peak loads.

This greatly extends the product service life. Tough viscous, for universal use. 1/4" hexagon, suitable for holders as per DIN ISO 1173-F 6.3.

### 855/4 TZ bits

| Code | EAN 4013288 | | mm | | | | | |
|---|---|---|---|---|---|---|---|---|
| 05**060005**001 | *015099* | PZ 1 | 50 | 2" | | | | 10 |
| 05**060010**001 | *015105* | PZ 2 | 50 | 2" | | | | 10 |
| 05**060015**001 | *015112* | PZ 3 | 50 | 2" | | | | 10 |

### 855/4 TZ SB bits

| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 05**134384**001 | *037985* | | **855/4 TZ PZ** 2x PZ 1x50 | 3 |
| 05**134385**001 | *037992* | | **855/4 TZ PZ** 2x PZ 2x50 | 3 |
| 05**134386**001 | *038005* | | **855/4 TZ PZ** 2x PZ 3x50 | 3 |

## 855/4 Z bits

Tough viscous for universal use. 1/4" hexagon, suitable for holders as per DIN ISO 1173-F 6.3.

### 855/4 Z bits

| Code | EAN 4013288 | | mm | | mm | | | |
|---|---|---|---|---|---|---|---|---|
| 05**060027**001 | *014955* | PZ 1 | 70 | 2 3/4" | 4,5 | | | 10 |
| 05**060029**001 | *014962* | PZ 1 | 89 | 3 1/2" | 4,5 | | | 10 |
| 05**060031**001 | *031426* | PZ 1 | 127 | 5" | 4,5 | | | 10 |
| 05**060030**001 | *031259* | PZ 1 | 152 | 6" | 4,5 | | | 10 |
| 05**060033**001 | *014979* | PZ 2 | 70 | 2 3/4" | 6,0 | | | 10 |
| 05**060035**001 | *014986* | PZ 2 | 89 | 3 1/2" | 6,0 | | | 10 |
| 05**060037**001 | *014993* | PZ 2 | 110 | 4 3/8" | 6,0 | | | 10 |
| 05**060036**001 | *031440* | PZ 2 | 127 | 5" | 6,0 | | | 10 |
| 05**060038**001 | *031297* | PZ 2 | 152 | 6" | 6,0 | | | 10 |
| 05**060041**001 | *015006* | PZ 3 | 70 | 2 3/4" | - | | | 10 |
| 05**060043**001 | *015013* | PZ 3 | 89 | 3 1/2" | - | | | 10 |
| 05**060045**001 | *015020* | PZ 3 | 110 | 4 3/8" | - | | | 10 |
| 05**060047**001 | *031433* | PZ 3 | 152 | 6" | - | | | 10 |

## 855/4 Z SB bits

| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 05**073523**001 | *105905* | | **855/4 Z PZ** 1x PZ 1x89 | 5 |
| 05**073524**001 | *106452* | | **855/4 Z PZ** 1x PZ 2x89 | 5 |
| 05**073525**001 | *105912* | | **855/4 Z PZ** 1x PZ 3x89 | 5 |
| 05**136308**001 | *213860* | | **855/4 Z PZ** 1x PZ 1x152 | 3 |
| 05**136309**001 | *213877* | | **855/4 Z PZ** 1x PZ 2x152 | 3 |
| 05**136310**001 | *213884* | | **855/4 Z PZ** 1x PZ 3x152 | 3 |

## 855/0 Micro bits suitable for Pozidriv screws

- 4 mm hexagonal drive

## 855/0 Micro bits suitable for Pozidriv screws

| | EAN | | | | | | | |
|---|---|---|---|---|---|---|---|---|
| Code | 4013288 | | mm | | mm | | | |
| 05**058140**001 | *234605* | PZ 0 | 30 | 1 3/16" | 3,0 | | | 10 |
| 05**058141**001 | *234612* | PZ 1 | 30 | 1 3/16" | 3,5 | | | 10 |

## 855/2 Z bits

5/16" hexagon, suitable for holders as per DIN ISO 1173-D 8.

## 855/2 Z bits

| | EAN | | | | | | | |
|---|---|---|---|---|---|---|---|---|
| Code | 4013288 | | mm | | mm | | | |
| 05**058005**001 | *014863* | PZ 1 | 32 | 1 1/4" | 4,5 | | | 10 |
| 05**058010**001 | *014870* | PZ 2 | 32 | 1 1/4" | 6,0 | | | 10 |
| 05**058015**001 | *014887* | PZ 3 | 32 | 1 1/4" | 7,6 | | | 10 |
| 05**058020**001 | *014894* | PZ 4 | 32 | 1 1/4" | - | | | 10 |

## 855/11 bits

With thread drive M 4.

## 855/11 bits

| | EAN | | | | | | | |
|---|---|---|---|---|---|---|---|---|
| Code | 4013288 | | mm | | mm | | | |
| 05**065096**001 | *015426* | PZ 2 | 33 | 1 1/4" | 6,0 | | | 5 |

## 855/12 bits

With thread drive M 5.

## 855/12 bits

| | EAN | | | | | | | |
|---|---|---|---|---|---|---|---|---|
| Code | 4013288 | | mm | | mm | | | |
| 05**065129**001 | *015457* | PZ 2 | 44,5 | 1 3/4" | 6,0 | | | 5 |

## 851/4 PH/S PlusMinus bits

Bits with combination profile Phillips/slotted. In electrical applications screws with mixed geometry (slotted and Phillips cross-recess) are quite common.

Bits having a PlusMinus profile are optimum for addressing these screws. Tough viscous for universal use. 1/4" hexagon, suitable for holders as per DIN ISO 1173-F 6.3.

## 851/4 PH/S PlusMinus bits

| | EAN | | | | | | | |
|---|---|---|---|---|---|---|---|---|
| Code | 4013288 | | mm | | mm | | | |
| 05**059720**001 | *102577* | # 1 | 70 | 2 3/4" | 4,5 | | | 10 |
| 05**059721**001 | *102584* | # 2 | 70 | 2 3/4" | 6 | | | 10 |

## 855/4 PZ/S PlusMinus bits

Bits with combination profile slotted and Pozidriv, particularly for jobs on terminal blocks, fuse boxes, switches and relays.

Tough viscous for universal use. 1/4" hexagon, suitable for holders as per DIN ISO 1173-F 6.3.

### 855/4 PZ/S PlusMinus bits

| Code | EAN 4013288 | | mm | | mm | | | |
|---|---|---|---|---|---|---|---|---|
| 05**059896**001 | *102591* | # 1 | 70 | 2 3/4" | 4,5 | | | 10 |
| 05**059897**001 | *102607* | # 2 | 70 | 2 3/4" | 6 | | | 10 |

## Impaktor system - For an above-average service life

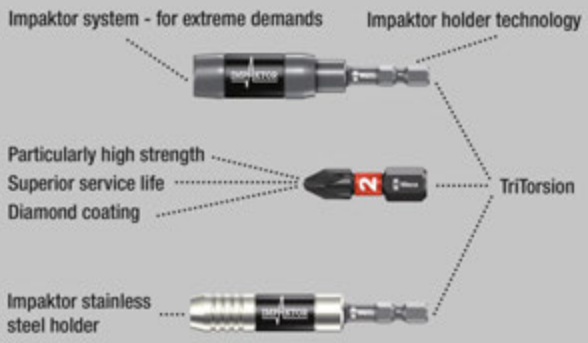


High quality bits for recessed TORX® screws. The Impaktor technology offers an above-average service life even under extreme circumstances. Enhanced friction resistance, thanks to the rough diamond-particle coating on the bit tip, prevents any slipping out of the screw head.

Particularly suitable for use with customary impact drivers. 1/4" hexagon, suitable for holders as per DIN ISO 1173-D 6.3.

### 867/1 IMP DC TORX® DIY Impaktor bits

| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 05**057628**001 | *178688* | | **867/1 IMP DC** 10x TX 10x25 | 1 |
| 05**057623**001 | *169242* | | **867/1 IMP DC** 10x TX 15x25 | 1 |
| 05**057624**001 | *163165* | | **867/1 IMP DC** 10x TX 20x25 | 1 |
| 05**057625**001 | *157447* | | **867/1 IMP DC** 10x TX 25x25 | 1 |
| 05**057626**001 | *157454* | | **867/1 IMP DC** 10x TX 30x25 | 1 |
| 05**057627**001 | *157461* | | **867/1 IMP DC** 10x TX 40x25 | 1 |

### 867/1 IMP DC SB Impaktor bits

| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 05**073924**001 | *163240* | | **867/1 IMP DC** 1x TX 20x25 | 5 |
| 05**073925**001 | *158406* | | **867/1 IMP DC** 1x TX 25x25 | 5 |
| 05**073926**001 | *158413* | | **867/1 IMP DC** 1x TX 30x25 | 5 |
| 05**073927**001 | *158420* | | **867/1 IMP DC** 1x TX 40x25 | 5 |

### Bit-Box 15 Impaktor TX

| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 05**057772**001 | *187871* | | **867/1 IMP DC** 15x TX 20x25 | 10 |
| 05**057775**001 | *187888* | | **867/1 IMP DC** 15x TX 25x25 | 10 |
| 05**057776**001 | *187895* | | **867/1 IMP DC** 15x TX 30x25 | 10 |

## Kraftform Stainless - stainless steel to prevent rust

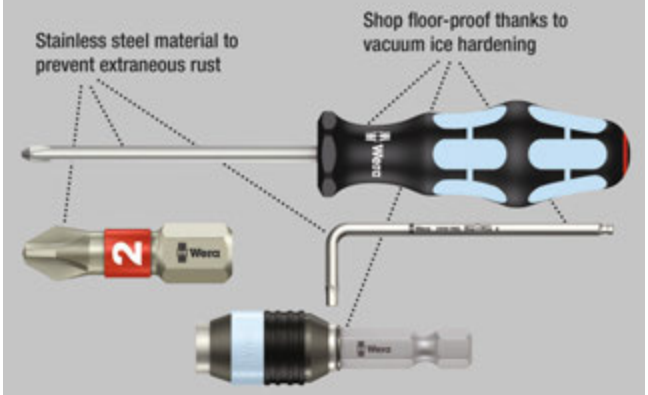


High quality bits out of stainless steel for recessed TORX® screws. Prevent the formation of unsightly extraneous rust.

Come with Torsion zone: Torsion bits take-up torque peaks and absorb them in the Torsion zone. This prevents premature wear and extends the service life of the bit. 1/4" hexagon, suitable for holders as per DIN ISO 1173-D 6.3.

### 3867/1 TS TORX® bits, stainless

| Code | EAN 4013288 | | mm | 1" | | | | |
|---|---|---|---|---|---|---|---|---|
| 05**071030**001 | *111043* | TX 8 | 25 | 1" | | | | 10 |
| 05**071032**001 | *111067* | TX 10 | 25 | 1" | | | | 10 |
| 05**071033**001 | *111074* | TX 15 | 25 | 1" | | | | 10 |
| 05**071034**001 | *111081* | TX 20 | 25 | 1" | | | | 10 |
| 05**071035**001 | *111098* | TX 25 | 25 | 1" | | | | 10 |
| 05**071037**001 | *111111* | TX 30 | 25 | 1" | | | | 10 |
| 05**071038**001 | *111128* | TX 40 | 25 | 1" | | | | 10 |

### 3867/1 TS SB TORX® bits, stainless

| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 05**073620**001 | *117670* | | **3867/1 TS TORX®** 1x TX 10x25 | 5 |
| 05**073621**001 | *117687* | | **3867/1 TS TORX®** 1x TX 15x25 | 5 |
| 05**073622**001 | *117694* | | **3867/1 TS TORX®** 1x TX 20x25 | 5 |
| 05**073623**001 | *117700* | | **3867/1 TS TORX®** 1x TX 25x25 | 5 |
| 05**073625**001 | *117724* | | **3867/1 TS TORX®** 1x TX 30x25 | 5 |

## BiTorsion system - for longer service life

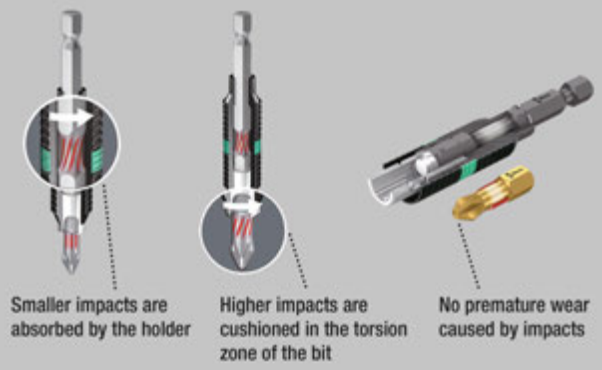


### 867/1 BDC TORX® bits

Bits with tiny diamond particles on the bit tip. This ensures a secure fit of the bit in the screw, reduces the contact pressure required and lowers the risk of slipping.

Come with a Torsion zone – where kinetic energy is diverted from peak loads. This greatly extends the product service life. 1/4" hexagon, suitable for holders as per DIN ISO 1173-D 6.3.

## 867/1 BDC TORX® bits

| Code | EAN 4013288 | | mm | | | | | |
|---|---|---|---|---|---|---|---|---|
| 05**066100**001 | *034038* | TX 10 | 25 | 1" | | | | 10 |
| 05**066102**001 | *034045* | TX 15 | 25 | 1" | | | | 10 |
| 05**066104**001 | *034052* | TX 20 | 25 | 1" | | | | 10 |
| 05**066106**001 | *034069* | TX 25 | 25 | 1" | | | | 10 |
| 05**066108**001 | *034076* | TX 30 | 25 | 1" | | | | 10 |
| 05**066110**001 | *034083* | TX 40 | 25 | 1" | | | | 10 |

## 867/1 BDC SB TORX® bits

| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 05**134374**001 | *099778* | | **867/1 TORX® BDC** 1x TX 10x25 | 5 |
| 05**134375**001 | *099785* | | **867/1 TORX® BDC** 1x TX 15x25 | 5 |
| 05**134376**001 | *099792* | | **867/1 TORX® BDC** 1x TX 20x25 | 5 |
| 05**134377**001 | *099808* | | **867/1 TORX® BDC** 1x TX 25x25 | 5 |
| 05**134378**001 | *099822* | | **867/1 TORX® BDC** 1x TX 30x25 | 5 |
| 05**134379**001 | *099815* | | **867/1 TORX® BDC** 1x TX 40x25 | 5 |

## 867/1 BTZ TORX® bits

BiTorsion bits with an Torsion zone – where kinetic energy is diverted from peak loads. This greatly extends the product service life. This provides the best possible durability together with the matching holder.

Tough viscous for universal use. 1/4" hexagon, suitable for holders as per DIN ISO 1173-D 6.3.

## 867/1 BTZ TORX® bits

| Code | EAN 4013288 | | mm | | | | | |
|---|---|---|---|---|---|---|---|---|
| 05**066120**001 | *034519* | TX 10 | 25 | 1" | | | | 10 |
| 05**066122**001 | *034526* | TX 15 | 25 | 1" | | | | 10 |
| 05**066124**001 | *034533* | TX 20 | 25 | 1" | | | | 10 |
| 05**066126**001 | *034540* | TX 25 | 25 | 1" | | | | 10 |
| 05**066128**001 | *034557* | TX 30 | 25 | 1" | | | | 10 |
| 05**066130**001 | *034564* | TX 40 | 25 | 1" | | | | 10 |

## 867/1 TORX® HF bits with holding function

- For TORX® socket screws
- Holding function for recessed TORX® screws
- Also suitable for Würth ASSY screws as well as Altenloh SPAX T-STAR plus screws
- 1/4" hexagon drive (Wera connecting series 1)
- With Take it easy tool finder: colour coding by size

## 867/1 TORX® HF bits with holding function

| Code | EAN 4013288 | | mm | | | | | |
|---|---|---|---|---|---|---|---|---|
| 05**066140**001 | *226334* | TX 10 | 25 | 1" | | | | 10 |
| 05**066141**001 | *226341* | TX 15 | 25 | 1" | | | | 10 |
| 05**066142**001 | *226365* | TX 20 | 25 | 1" | | | | 10 |
| 05**066143**001 | *226358* | TX 25 | 25 | 1" | | | | 10 |
| 05**066144**001 | *226389* | TX 30 | 25 | 1" | | | | 10 |
| 05**066145**001 [1] | *226655* | TX 40 | 25 | 1" | | | | 10 |

[1] Pound-thru hexagonal; no Take it easy.

## Bit-Box 20 TX HF

| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 05**057777**001 | *226013* | | **867/1 TORX® HF** 20x TX 20x25 | 20 |
| 05**057778**001 | *226020* | | **867/1 TORX® HF** 20x TX 25x25 | 20 |

## 867/1 TZ TORX® bits

With a Torsion zone – where kinetic energy is diverted from peak loads. This greatly extends the product service life.

Tough viscous for universal use. 1/4" hexagon, suitable for holders as per DIN ISO 1173-D 6.3.

## 867/1 TZ TORX® bits

| Code | EAN 4013288 | | mm | | mm | | | |
|---|---|---|---|---|---|---|---|---|
| 05**066300**001 | *015709* | TX 5 | 25 | 1" | 4,2 | | | 10 |
| 05**066301**001 | *015716* | TX 6 | 25 | 1" | 4,2 | | | 10 |
| 05**066302**001 | *015723* | TX 7 | 25 | 1" | 4,2 | | | 10 |
| 05**066303**001 | *015730* | TX 8 | 25 | 1" | 4,2 | | | 10 |
| 05**066304**001 | *015747* | TX 9 | 25 | 1" | 4,2 | | | 10 |
| 05**066305**001 | *015754* | TX 10 | 25 | 1" | 4,2 | | | 10 |
| 05**066308**001 | *015761* | TX 15 | 25 | 1" | 4,2 | | | 10 |
| 05**066310**001 | *015778* | TX 20 | 25 | 1" | 4,8 | | | 10 |
| 05**066312**001 | *015785* | TX 25 | 25 | 1" | 5,5 | | | 10 |
| 05**066313**001 | *015792* | TX 27 | 25 | 1" | 5,5 | | | 10 |
| 05**066315**001 | *015808* | TX 30 | 25 | 1" | 6,0 | | | 10 |
| 05**066320**001 | *015815* | TX 40 | 25 | 1" | - | | | 10 |

## 867/1 TORX® bits

| Code | EAN 4013288 | | mm | | mm | | | |
|---|---|---|---|---|---|---|---|---|
| 05**135140**001 | *107114* | TX 1 | 25 | 1" | 1,5 | | | 10 |
| 05**135141**001 | *107121* | TX 2 | 25 | 1" | 1,5 | | | 10 |
| 05**135142**001 | *111456* | TX 3 | 25 | 1" | 2,0 | | | 10 |
| 05**135143**001 | *111463* | TX 4 | 25 | 1" | 2,0 | | | 10 |
| 05**066492**001 | *030405* | TX 5 | 25 | 1" | 3,0 | | | 10 |
| 05**066493**001 | *030412* | TX 6 | 25 | 1" | 3,0 | | | 10 |
| 05**066494**001 | *030429* | TX 7 | 25 | 1" | 3,0 | | | 10 |
| 05**066495**001 | *030436* | TX 8 | 25 | 1" | 3,0 | | | 10 |
| 05**066496**001 | *030443* | TX 9 | 25 | 1" | 3,0 | | | 10 |
| 05**066485**001 | *030320* | TX 10 | 25 | 1" | 4,0 | | | 10 |
| 05**066486**001 | *030337* | TX 15 | 25 | 1" | 4,0 | | | 10 |
| 05**066487**001 | *030344* | TX 20 | 25 | 1" | 5,0 | | | 10 |
| 05**066488**001 | *030351* | TX 25 | 25 | 1" | 5,0 | | | 10 |
| 05**066489**001 | *030368* | TX 27 | 25 | 1" | 6,0 | | | 10 |
| 05**066490**001 | *030375* | TX 30 | 25 | 1" | 6,0 | | | 10 |
| 05**066491**001 | *030382* | TX 40 | 25 | 1" | - | | | 10 |
| 05**066325**001 | *031174* | TX 45 | 35 | 1 3/8" | 8,0 | | | 10 |
| 05**066330**001 | *031181* | TX 50 | 35 | 1 3/8" | 9,0 | | | 10 |
| 05**066335**001 | *031167* | TX 55 | 35 | 1 3/8" | 12,0 | | | 10 |

## 867/1 SB TORX® bits

| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 05**073313**001 | *029140* | | **867/1 TORX®** 2x TX 10x25 | 5 |
| 05**073340**001 | *029591* | | **867/1 TORX®** 2x TX 15x25 | 5 |
| 05**073314**001 | *029157* | | **867/1 TORX®** 2x TX 20x25 | 5 |
| 05**073315**001 | *029164* | | **867/1 TORX®** 2x TX 25x25 | 5 |
| 05**073316**001 | *029171* | | **867/1 TORX®** 2x TX 30x25 | 5 |
| 05**073317**001 | *029188* | | **867/1 TORX®** 2x TX 40x25 | 5 |
| 05**073346**001 | *125859* | | **867/1 TORX®** 1x TX 50x35 | 5 |
| 05**073375**001 | *037503* | | **867/1 TORX®** 1x TX 10x251x TX 15x251x TX 20x25 | 5 |
| 05**073376**001 | *037510* | | **867/1 TORX®** 1x TX 25x25; 1x TX 30x25; 1x TX 40x25 | 5 |

## 867/1 DIY TORX® bits

| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 05**072406**001 | *115799* | | **867/1 TORX®** 10x TX 10x25 | 1 |
| 05**072407**001 | *115805* | | **867/1 TORX®** 10x TX 15x25 | 1 |
| 05**072408**001 | *115812* | | **867/1 TORX®** 10x TX 20x25 | 1 |
| 05**072409**001 | *115829* | | **867/1 TORX®** 10x TX 25x25 | 1 |
| 05**072411**001 | *115843* | | **867/1 TORX®** 10x TX 30x25 | 1 |
| 05**072412**001 | *115850* | | **867/1 TORX®** 10x TX 40x25 | 1 |

## 867/1 TORX® DIY 100

| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 05**072446**001 | *138507* | | **867/1 TORX®** 100x TX 10x25 | 1 |
| 05**072447**001 | *138514* | | **867/1 TORX®** 100x TX 15x25 | 1 |
| 05**072448**001 | *138521* | | **867/1 TORX®** 100x TX 20x25 | 1 |
| 05**072449**001 | *138538* | | **867/1 TORX®** 100x TX 25x25 | 1 |
| 05**072451**001 | *138552* | | **867/1 TORX®** 100x TX 30x25 | 1 |
| 05**072452**001 | *138569* | | **867/1 TORX®** 100x TX 40x25 | 1 |

## Bit-Box 20 TX

| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 05**057770**001 | *187994* | | **867/1 TORX®** 20x TX 20x25 | 20 |
| 05**057773**001 | *188007* | | **867/1 TORX®** 20x TX 25x25 | 20 |

### 867/1 Z TORX® Wedge bits

The conical design of the profile means that a wedging effect is generated that holds the TORX® screw securely on the bit.

Tough viscous for universal use. 1/4" hexagon, suitable for holders as per DIN ISO 1173-D 6.3.

## 867/1 Z TORX® Wedge bits

| Code | EAN 4013288 | | mm | | | | | |
|---|---|---|---|---|---|---|---|---|
| 05**066455**001 | *016034* | TX 15 | 25 | 1" | | | | 10 |
| 05**066460**001 | *016041* | TX 20 | 25 | 1" | | | | 10 |
| 05**066465**001 | *016058* | TX 25 | 25 | 1" | | | | 10 |

## 867/1 ZA TORX® bits with central pin

Come with a pin which, together with the bore hole within the screw, makes it easier to centre the tool.

Tough viscous for universal use. 1/4" hexagon, suitable for holders as per DIN ISO 1173-D 6.3.

### 867/1 ZA TORX® bits with central pin

| Code | EAN 4013288 | | mm | | mm | | | |
|---|---|---|---|---|---|---|---|---|
| 05**066081**001 | *107190* | TX 15 | 25 | 1" | 4,0 | | | 10 |
| 05**066082**001 | *107206* | TX 20 | 25 | 1" | 5,0 | | | 10 |
| 05**066083**001 | *107213* | TX 25 | 25 | 1" | 5,0 | | | 10 |

## Impaktor system - For an above-average service life

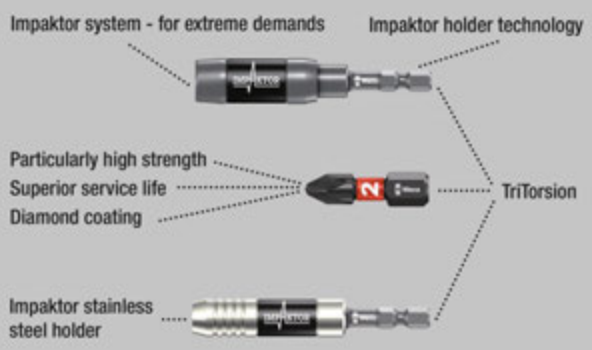


The Impaktor technology offers an above-average service life even under extreme circumstances. Enhanced friction resistance, thanks to the rough diamond-particle coating on the bit tip, prevents any slipping out of the screw head.

Particularly suitable for use with customary impact drivers. 1/4" hexagon, suitable for holders as per DIN ISO 1173-F 6.3.

### 867/4 IMP DC TORX® DIY Impaktor bits

| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 05**057664**001 | *163172* | | **867/4 IMP DC** 5x TX 20x50 | 1 |
| 05**057665**001 | *157515* | | **867/4 IMP DC** 5x TX 25x50 | 1 |
| 05**057666**001 | *157522* | | **867/4 IMP DC** 5x TX 30x50 | 1 |
| 05**057667**001 | *157539* | | **867/4 IMP DC** 5x TX 40x50 | 1 |

### 867/4 IMP DC SB Impaktor bits

| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 05**073964**001 | *163257* | | **867/4 IMP DC** 1x TX 20x50 | 5 |
| 05**073965**001 | *158529* | | **867/4 IMP DC** 1x TX 25x50 | 5 |
| 05**073966**001 | *158536* | | **867/4 IMP DC** 1x TX 30x50 | 5 |
| 05**073967**001 | *158543* | | **867/4 IMP DC** 1x TX 40x50 | 5 |

## TORX® Tools with holding function

The TORX® HF (HF = holding function) specially developed by Wera distinguishes itself through the geometric optimisation of the original TORX® profile.

The wedging forces resulting from the contact pressure between the drive tip and the screw profile securely hold the screw on the tool! 1/4" hexagon, suitable for holders as per DIN ISO 1173-F 6.3.

### 867/4 TORX® HF bits with holding function

- For TORX® socket screws
- Holding function for recessed TORX® screws
- Also suitable for Würth ASSY screws as well as Altenloh SPAX T-STAR plus screws
- 1/4" hexagon drive (Wera connecting series 4)
- With Take it easy tool finder: colour coding by size

### 867/4 TORX® HF bits with holding function

| | EAN | | | | | | | |
|---|---|---|---|---|---|---|---|---|
| Code | 4013288 | | mm | | mm | | | |
| 05**060505**001 | *226747* | TX 8 | 50 | 2" | 3,0 | | | 10 |
| 05**060506**001 | *226754* | TX 10 | 50 | 2" | 4,0 | | | 10 |
| 05**060507**001 | *226761* | TX 15 | 50 | 2" | 4,0 | | | 10 |
| 05**060508**001 | *226778* | TX 20 | 50 | 2" | 4,5 | | | 10 |
| 05**060509**001 | *226785* | TX 25 | 50 | 2" | 6,0 | | | 10 |
| 05**060510**001 | *226792* | TX 30 | 50 | 2" | 6,0 | | | 10 |
| 05**060511**001 [1] | *226808* | TX 40 | 50 | 2" | - | | | 10 |

[1] Pound-thru hexagonal; no Take it easy.

### 867/4 KK TORX® bits

Ballpoint: the ballpoint drive profile means that it is possible to swivel the tool axis away from the screwdriving axis, thus enabling “round the corner” screwdriving. Tough viscous for universal use. 1/4" hexagon, suitable for holders as per DIN ISO 1173-F 6.3.

- 1/4" hexagon drive (Wera connecting series 4)

### 867/4 KK TORX® bits

| | EAN | | | | | | | |
|---|---|---|---|---|---|---|---|---|
| Code | 4013288 | | mm | | | | | |
| 05**059700**001 | *155979* | TX 10 | 89 | 3 1/2" | | | | 5 |
| 05**059701**001 | *155986* | TX 15 | 89 | 3 1/2" | | | | 5 |
| 05**059702**001 | *155993* | TX 20 | 89 | 3 1/2" | | | | 5 |
| 05**059703**001 | *156006* | TX 25 | 89 | 3 1/2" | | | | 5 |
| 05**059704**001 | *156013* | TX 30 | 89 | 3 1/2" | | | | 5 |
| 05**059705**001 | *156020* | TX 40 | 89 | 3 1/2" | | | | 5 |

## 867/4 Z TORX® bits

Premium bits for TORX® socket screws. Tough, for universal use. 1/4" hexagonal, suitable for holders as per DIN ISO 1173-F 6.3.

### 867/4 Z TORX® bits

| Code | EAN 4013288 | | mm | | mm | | | |
|---|---|---|---|---|---|---|---|---|
| 05**135200**001 | *107138* | TX 1 | 50 | 2" | 2,0 | | | 10 |
| 05**135201**001 | *107145* | TX 2 | 50 | 2" | 2,0 | | | 10 |
| 05**135202**001 | *112620* | TX 3 | 50 | 2" | 2,0 | | | 10 |
| 05**135204**001 | *041333* | TX 4 | 50 | 2" | 3,0 | | | 10 |
| 05**135205**001 | *031808* | TX 5 | 50 | 2" | 3,0 | | | 10 |
| 05**308428**001 | *041340* | TX 6 | 50 | 2" | 3,0 | | | 10 |
| 05**134740**001 | *035905* | TX 6 | 70 | 2 3/4" | 3,0 | | | 10 |
| 05**332600**001 | *033895* | TX 6 | 89 | 3 1/2" | 3,0 | | | 10 |
| 05**328448**001 | *038432* | TX 6 | 152 | 6" | 3,0 | | | 10 |
| 05**160830**001 | *113283* | TX 7 | 50 | 2" | 3,0 | | | 10 |
| 05**345047**001 | *128423* | TX 7 | 70 | 2 3/4" | 3,0 | | | 10 |
| 05**060131**001 | *030498* | TX 8 | 50 | 2" | 3,0 | | | 10 |
| 05**060098**001 | *030504* | TX 8 | 70 | 2 3/4" | 3,0 | | | 10 |
| 05**060185**001 | *030511* | TX 8 | 89 | 3 1/2" | 3,0 | | | 10 |
| 05**060195**001 | *030528* | TX 8 | 152 | 6" | 3,0 | | | 10 |
| 05**319835**001 | *128430* | TX 9 | 70 | 2 3/4" | 3,0 | | | 10 |
| 05**060193**001 | *155566* | TX 9 | 89 | 3 1/2" | 3,0 | | | 10 |
| 05**060194**001 | *156945* | TX 9 | 152 | 6" | 3,0 | | | 10 |
| 05**060132**001 | *030535* | TX 10 | 50 | 2" | 4,0 | | | 10 |
| 05**060100**001 | *016171* | TX 10 | 70 | 2 3/4" | 4,0 | | | 10 |
| 05**060186**001 | *030481* | TX 10 | 89 | 3 1/2" | 4,0 | | | 10 |
| 05**060196**001 | *030542* | TX 10 | 152 | 6" | 4,0 | | | 10 |
| 05**060133**001 | *030559* | TX 15 | 50 | 2" | 4,0 | | | 10 |
| 05**060105**001 | *016188* | TX 15 | 70 | 2 3/4" | 4,0 | | | 10 |
| 05**060187**001 | *030566* | TX 15 | 89 | 3 1/2" | 4,0 | | | 10 |
| 05**060197**001 | *030573* | TX 15 | 152 | 6" | 4,0 | | | 10 |
| 05**060134**001 | *030580* | TX 20 | 50 | 2" | 4,5 | | | 10 |
| 05**060110**001 | *016195* | TX 20 | 70 | 2 3/4" | 4,5 | | | 10 |
| 05**060188**001 | *030597* | TX 20 | 89 | 3 1/2" | 4,5 | | | 10 |
| 05**060198**001 | *030603* | TX 20 | 152 | 6" | 4,5 | | | 10 |
| 05**060135**001 | *030610* | TX 25 | 50 | 2" | 6,0 | | | 10 |
| 05**060115**001 | *016201* | TX 25 | 70 | 2 3/4" | 6,0 | | | 10 |
| 05**060189**001 | *030627* | TX 25 | 89 | 3 1/2" | 6,0 | | | 10 |
| 05**060199**001 | *030634* | TX 25 | 152 | 6" | 6,0 | | | 10 |
| 05**060136**001 | *030641* | TX 27 | 50 | 2" | 6,0 | | | 10 |
| 05**060120**001 | *016218* | TX 27 | 70 | 2 3/4" | 6,0 | | | 10 |
| 05**060190**001 | *030658* | TX 27 | 89 | 3 1/2" | 6,0 | | | 10 |
| 05**060200**001 | *030665* | TX 27 | 152 | 6" | 6,0 | | | 10 |
| 05**060137**001 | *030672* | TX 30 | 50 | 2" | 6,0 | | | 10 |
| 05**060125**001 | *016225* | TX 30 | 70 | 2 3/4" | 6,0 | | | 10 |
| 05**060191**001 | *030689* | TX 30 | 89 | 3 1/2" | 6,0 | | | 10 |
| 05**060201**001 | *030696* | TX 30 | 152 | 6" | 6,0 | | | 10 |
| 05**060138**001[1] | *030702* | TX 40 | 50 | 2" | - | | | 10 |
| 05**060130**001[1] | *016232* | TX 40 | 70 | 2 3/4" | - | | | 10 |
| 05**060192**001[1] | *030719* | TX 40 | 89 | 3 1/2" | - | | | 10 |
| 05**060202**001[1] | *030726* | TX 40 | 152 | 6" | - | | | 10 |

[1] Pound-thru hexagonal

### 867/4 Z TORX® SB bits

| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 05**073720**001 | *132789* | | **867/4 Z TORX®** 2x TX 10x50 | 3 |
| 05**073526**001 | *105929* | | **867/4 Z TORX®** 1x TX 10x89 | 5 |
| 05**073470**001 | *226273* | | **867/4 Z TORX®** 3x TX 10x89 | 1 |
| 05**136311**001 | *213891* | | **867/4 Z TORX®** 1x TX 10x152 | 3 |
| 05**073721**001 | *132796* | | **867/4 Z TORX®** 2x TX 15x50 | 3 |
| 05**073527**001 | *105936* | | **867/4 Z TORX®** 1x TX 15x89 | 5 |
| 05**073471**001 | *226228* | | **867/4 Z TORX®** 3x TX 15x89 | 1 |
| 05**136312**001 | *213907* | | **867/4 Z TORX®** 1x TX 15x152 | 3 |
| 05**073722**001 | *132802* | | **867/4 Z TORX®** 2x TX 20x50 | 3 |
| 05**073528**001 | *105943* | | **867/4 Z TORX®** 1x TX 20x89 | 5 |
| 05**073472**001 | *226235* | | **867/4 Z TORX®** 3x TX 20x89 | 1 |
| 05**136313**001 | *213914* | | **867/4 Z TORX®** 1x TX 20x152 | 3 |
| 05**073723**001 | *132826* | | **867/4 Z TORX®** 2x TX 25x50 | 3 |
| 05**073529**001 | *105950* | | **867/4 Z TORX®** 1x TX 25x89 | 5 |
| 05**073473**001 | *226242* | | **867/4 Z TORX®** 3x TX 25x89 | 1 |
| 05**136314**001 | *213921* | | **867/4 Z TORX®** 1x TX 25x152 | 3 |
| 05**073724**001 | *132833* | | **867/4 Z TORX®** 2x TX 30x50 | 3 |
| 05**073530**001 | *105967* | | **867/4 Z TORX®** 1x TX 30x89 | 5 |
| 05**073474**001 | *226259* | | **867/4 Z TORX®** 3x TX 30x89 | 1 |
| 05**136315**001 | *213938* | | **867/4 Z TORX®** 1x TX 30x152 | 3 |
| 05**073531**001 | *105974* | | **867/4 Z TORX®** 1x TX 40x89 | 5 |
| 05**136316**001 | *213945* | | **867/4 Z TORX®** 1x TX 40x152 | 3 |

## 867/0 Micro bits for TORX® socket screws

- 4 mm hexagonal drive

### 867/0 Micro bits for TORX® socket screws

| Code | EAN 4013288 | | mm | | mm | | | |
|---|---|---|---|---|---|---|---|---|
| 05**058129**001 | *234629* | TX 3 | 30 | 1 3/16" | 2,2 | | | 10 |
| 05**058102**001 | *209603* | TX 4 | 30 | 1 3/16" | 2,2 | | | 10 |
| 05**058130**001 | *189585* | TX 5 | 30 | 1 3/16" | 2,2 | | | 10 |
| 05**058131**001 | *189592* | TX 6 | 30 | 1 3/16" | 2,2 | | | 10 |
| 05**058132**001 | *234636* | TX 8 | 30 | 1 3/16" | 3,0 | | | 10 |
| 05**058133**001 | *234643* | TX 10 | 30 | 1 3/16" | 3,5 | | | 10 |

## 867/2 Z TORX® bits

5/16" hexagon, suitable for holders as per DIN ISO 1173-D 8.

### 867/2 Z TORX® bits

| Code | EAN 4013288 | | mm | | mm | | | |
|---|---|---|---|---|---|---|---|---|
| 05**066901**001 | *016096* | TX 20 | 35 | 1 3/8" | 4,5 | | | 10 |
| 05**066900**001 | *016102* | TX 25 | 35 | 1 3/8" | 5,8 | | | 10 |
| 05**066902**001 | *016119* | TX 27 | 35 | 1 3/8" | 5,8 | | | 10 |
| 05**066905**001 | *016126* | TX 30 | 35 | 1 3/8" | 6,0 | | | 10 |
| 05**066910**001 | *016133* | TX 40 | 35 | 1 3/8" | 7,0 | | | 10 |
| 05**066915**001 | *016140* | TX 45 | 35 | 1 3/8" | - | | | 10 |
| 05**066920**001 | *016157* | TX 50 | 35 | 1 3/8" | - | | | 10 |
| 05**066941**001 | *104007* | TX 50 | 50 | 2" | - | | | 10 |
| 05**066950**001 | *104526* | TX 50 | 70 | 2 3/4" | - | | | 10 |
| 05**066925**001 | *016164* | TX 55 | 35 | 1 3/8" | 12,0 | | | 10 |

## 867/12 TORX® bits

Thread drive M 5.

### 867/12 TORX® bits

| Code | EAN 4013288 | | mm | | mm | | | |
|---|---|---|---|---|---|---|---|---|
| 05**064155**001 | *026484* | TX 20 | 45 | 1 3/4" | 6,0 | | | 10 |

## 867/15 TORX® bits

Thread drive M 6.

### 867/15 TORX® bits

| Code | EAN 4013288 | | mm | | mm | | | |
|---|---|---|---|---|---|---|---|---|
| 05**064170**001 | *032607* | TX 20 | 45 | 1 3/4" | 8,0 | | | 10 |
| 05**064175**001 | *032980* | TX 25 | 45 | 1 3/4" | 8,0 | | | 10 |

## 867/9 C TORX® bits, halfmoon

Drive: 4 mm halfmoon for direct power tool connection.

### 867/9 C TORX® bits, halfmoon

| Code | EAN 4013288 | | mm | | mm | | | |
|---|---|---|---|---|---|---|---|---|
| 05**135220**001 | *112637* | TX 1 | 44 | 1 47/64" | 1,5 | | | 10 |
| 05**135221**001 | *112644* | TX 2 | 44 | 1 47/64" | 1,5 | | | 10 |
| 05**135222**001 | *112651* | TX 3 | 44 | 1 47/64" | 1,7 | | | 10 |
| 05**345352**001 | *113597* | TX 4 | 44 | 1 47/64" | 1,8 | | | 10 |
| 05**345018**001 | *113504* | TX 4 | 64 | 2 33/64" | 2,0 | | | 10 |
| 05**200496**001 | *214881* | TX 5 | 44 | 1 47/64" | 1,6 | | | 10 |
| 05**345351**001 | *113580* | TX 5 | 44 | 1 47/64" | 3,0 | | | 10 |
| 05**345032**001 | *113542* | TX 5 | 64 | 2 33/64" | 2,0 | | | 10 |
| 05**345350**001 | *113573* | TX 6 | 44 | 1 47/64" | 3,0 | | | 10 |
| 05**345056**001 | *113566* | TX 6 | 64 | 2 33/64" | 2,0 | | | 10 |
| 05**332610**001 | *035868* | TX 6 | 70 | 2 3/4" | 3,0 | | | 10 |
| 05**345035**001 | *113559* | TX 7 | 64 | 2 33/64" | 2,3 | | | 10 |
| 05**345026**001 | *113528* | TX 8 | 44 | 1 47/64" | 3,0 | | | 10 |
| 05**345028**001 | *113535* | TX 8 | 64 | 2 33/64" | 3,0 | | | 10 |
| 05**332609**001 | *035714* | TX 8 | 70 | 2 3/4" | 3,0 | | | 10 |
| 05**332607**001 | *037107* | TX 10 | 70 | 2 3/4" | 3,0 | | | 10 |

## 867/1 Z TORX® BO bits with bore hole

The bore hole in the bit and the pin in the TORX® BO screw prevent any unauthorised loosening – secure fastening.

Tough viscous for universal use. 1/4" hexagon, suitable for holders as per DIN ISO 1173-D 6.3.

### 867/1 Z TORX® BO bits with bore hole

| Code | EAN 4013288 | | mm | | | | | |
|---|---|---|---|---|---|---|---|---|
| 05**066497**001 | *015822* | TX 7 | 25 | 1" | | | | 10 |
| 05**066498**001 | *015839* | TX 8 | 25 | 1" | | | | 10 |
| 05**066499**001 | *015846* | TX 9 | 25 | 1" | | | | 10 |
| 05**066500**001 | *015853* | TX 10 | 25 | 1" | | | | 10 |
| 05**066505**001 | *015860* | TX 15 | 25 | 1" | | | | 10 |
| 05**066510**001 | *015877* | TX 20 | 25 | 1" | | | | 10 |
| 05**066515**001 | *015884* | TX 25 | 25 | 1" | | | | 10 |
| 05**066520**001 | *015891* | TX 27 | 25 | 1" | | | | 10 |
| 05**066525**001 | *015907* | TX 30 | 25 | 1" | | | | 10 |
| 05**066530**001 | *015914* | TX 40 | 25 | 1" | | | | 10 |

## 867/1 Z TORX® BO SB bits with bore hole

| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 05**073064**001 | *202666* | | **867/1 Z TORX® BO** 2x TX 20x25 | 5 |
| 05**073065**001 | *202673* | | **867/1 Z TORX® BO** 2x TX 25x25 | 5 |
| 05**073066**001 | *202680* | | **867/1 Z TORX® BO** 2x TX 30x25 | 5 |

## 3867/4 TORX® BO bits with bore hole, stainless

Wera stainless steel bits prevent the formation of unsightly extraneous rust. 1/4" hexagon, suitable for holders as per DIN ISO 1173-F 6.3.

## 3867/4 TORX® BO bits with bore hole, stainless

| Code | EAN 4013288 | | mm | | mm | | | |
|---|---|---|---|---|---|---|---|---|
| 05**071089**001 | *115546* | TX 10 | 89 | 3 1/2" | 4,0 | | | 10 |
| 05**071090**001 | *115553* | TX 15 | 89 | 3 1/2" | 4,0 | | | 10 |
| 05**071091**001 | *115560* | TX 20 | 89 | 3 1/2" | 4,5 | | | 10 |
| 05**071092**001 | *115577* | TX 25 | 89 | 3 1/2" | 5,5 | | | 10 |
| 05**071094**001 | *115584* | TX 30 | 89 | 3 1/2" | 6,0 | | | 10 |

## 867/4 Z TORX® BO bits with bore hole

Tough viscous for universal use. 1/4" hexagon, suitable for holders as per DIN ISO 1173-D F.3.

## 867/4 Z TORX® BO bits with bore hole

| Code | EAN 4013288 | | mm | | mm | | | |
|---|---|---|---|---|---|---|---|---|
| 05**060139**001 | *030733* | TX 8 | 70 | 2 3/4" | 3,0 | | | 10 |
| 05**060048**001 | *094513* | TX 8 | 89 | 3 1/2" | 3,0 | | | 5 |
| 05**060049**001 | *094520* | TX 9 | 89 | 3 1/2" | 3,0 | | | 5 |
| 05**060140**001 | *026897* | TX 10 | 70 | 2 3/4" | 4,0 | | | 10 |
| 05**060050**001 | *094537* | TX 10 | 89 | 3 1/2" | 4,0 | | | 5 |
| 05**060141**001 | *030740* | TX 15 | 70 | 2 3/4" | 4,0 | | | 10 |
| 05**060051**001 | *094544* | TX 15 | 89 | 3 1/2" | 4,0 | | | 5 |
| 05**060142**001 | *026903* | TX 20 | 70 | 2 3/4" | 4,5 | | | 10 |
| 05**060052**001 | *094551* | TX 20 | 89 | 3 1/2" | 4,5 | | | 5 |
| 05**060143**001 | *026910* | TX 25 | 70 | 2 3/4" | 6,0 | | | 10 |
| 05**060053**001 | *094568* | TX 25 | 89 | 3 1/2" | 6,0 | | | 5 |
| 05**060144**001 | *026927* | TX 27 | 70 | 2 3/4" | 6,0 | | | 10 |
| 05**060057**001 | *094643* | TX 27 | 89 | 3 1/2" | 6,0 | | | 5 |
| 05**060145**001 | *026934* | TX 30 | 70 | 2 3/4" | 6,0 | | | 10 |
| 05**060054**001 | *094575* | TX 30 | 89 | 3 1/2" | 6,0 | | | 5 |
| 05**060146**001 | *026941* | TX 40 | 70 | 2 3/4" | - | | | 10 |
| 05**060056**001 | *094582* | TX 40 | 89 | 3 1/2" | - | | | 5 |

## 867/4 Z TORX® BO SB bits with bore hole

| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 05**073070**001 | *202604* | | **867/4 Z TORX® BO** 2x TX 20x70 | 5 |
| 05**073071**001 | *202611* | | **867/4 Z TORX® BO** 2x TX 25x70 | 5 |
| 05**073072**001 | *202628* | | **867/4 Z TORX® BO** 2x TX 30x70 | 5 |
| 05**073073**001 | *202574* | | **867/4 Z TORX® BO** 2x TX 40x70 | 5 |

## 867/1 IP TORX PLUS® bits

High quality bits for recessed TORX PLUS® screws. TORX PLUS® profile: in comparison to normal TORX® profiles, the enlargement of the 6 torque-transferring flanks between the tool and the screw is effected by means of an ellipse-shaped profile design and not a circular one.

This means that the power applied when screwdriving is spread over a larger area. Higher torque is transferred and the service life of the screw and tool is also enhanced. Tough viscous. 1/4" hexagon, suitable for holders as per DIN ISO 1173-D 6.3.

## 867/1 IP TORX PLUS® bits

| Code | EAN 4013288 | | mm | | | | | |
|---|---|---|---|---|---|---|---|---|
| 05**135120**001 | *112606* | 1 IP | 25 | 1" | | | | 10 |
| 05**135121**001 | *112613* | 2 IP | 25 | 1" | | | | 10 |
| 05**160956**001 | *113313* | 3 IP | 25 | 1" | | | | 10 |
| 05**134695**001 | *103109* | 4 IP | 25 | 1" | | | | 10 |
| 05**066272**001 | *035684* | 5 IP | 25 | 1" | | | | 10 |
| 05**066274**001 | *031556* | 6 IP | 25 | 1" | | | | 10 |
| 05**066276**001 | *031563* | 7 IP | 25 | 1" | | | | 10 |
| 05**066278**001 | *031570* | 8 IP | 25 | 1" | | | | 10 |
| 05**066279**001 | *033635* | 9 IP | 25 | 1" | | | | 10 |
| 05**066280**001 | *031549* | 10 IP | 25 | 1" | | | | 10 |
| 05**066282**001 | *031587* | 15 IP | 25 | 1" | | | | 10 |
| 05**066284**001 | *031594* | 20 IP | 25 | 1" | | | | 10 |
| 05**066286**001 | *031600* | 25 IP | 25 | 1" | | | | 10 |
| 05**066287**001 | *031617* | 27 IP | 25 | 1" | | | | 10 |
| 05**066288**001 | *031624* | 30 IP | 25 | 1" | | | | 10 |
| 05**066290**001 | *031631* | 40 IP | 25 | 1" | | | | 10 |

## 867/4 IP TORX PLUS® bits

| Code | EAN 4013288 | | mm | | mm | | | |
|---|---|---|---|---|---|---|---|---|
| 05**134664**001 | *112514* | 1 IP | 50 | 2" | 2,0 | | | 10 |
| 05**134665**001 | *112521* | 2 IP | 50 | 2" | 2,0 | | | 10 |
| 05**134668**001 | *106568* | 3 IP | 50 | 2" | 2,0 | | | 10 |
| 05**134691**001 | *103093* | 4 IP | 50 | 2" | 3,0 | | | 10 |
| 05**134678**001 | *098030* | 5 IP | 50 | 2" | 3,0 | | | 10 |
| 05**134680**001 | *037220* | 6 IP | 50 | 2" | 3,0 | | | 10 |
| 05**134667**001 | *095596* | 6 IP | 89 | 3 1/2" | 3,0 | | | 10 |
| 05**134690**001 | *095602* | 6 IP | 152 | 6" | 3,0 | | | 10 |
| 05**134681**001 | *037237* | 7 IP | 50 | 2" | 3,0 | | | 10 |
| 05**134679**001 | *037190* | 8 IP | 50 | 2" | 3,0 | | | 10 |
| 05**134670**001 | *032812* | 8 IP | 89 | 3 1/2" | 3,0 | | | 10 |
| 05**134682**001 | *037244* | 8 IP | 152 | 6" | 3,0 | | | 10 |
| 05**160917**001 | *038951* | 9 IP | 50 | 2" | 3,0 | | | 10 |
| 05**134669**001 | *033871* | 9 IP | 89 | 3 1/2" | 3,0 | | | 10 |
| 05**134683**001 | *037251* | 10 IP | 50 | 2" | 4,0 | | | 10 |
| 05**134684**001 | *037268* | 10 IP | 70 | 2 3/4" | 4,0 | | | 10 |
| 05**134671**001 | *032829* | 10 IP | 89 | 3 1/2" | 4,0 | | | 10 |
| 05**134685**001 | *037275* | 15 IP | 50 | 2" | 4,0 | | | 10 |
| 05**134686**001 | *037282* | 15 IP | 70 | 2 3/4" | 4,0 | | | 10 |
| 05**134672**001 | *032836* | 15 IP | 89 | 3 1/2" | 4,0 | | | 10 |
| 05**134687**001 | *037299* | 20 IP | 50 | 2" | 4,5 | | | 10 |
| 05**134688**001 | *037305* | 20 IP | 70 | 2 3/4" | 4,5 | | | 10 |
| 05**134673**001 | *032843* | 20 IP | 89 | 3 1/2" | 4,5 | | | 10 |
| 05**134609**001 | *224767* | 25 IP | 50 | 2" | 6,0 | | | 10 |
| 05**134674**001 | *032850* | 25 IP | 89 | 3 1/2" | 6,0 | | | 10 |
| 05**134675**001 | *032867* | 27 IP | 89 | 3 1/2" | 6,0 | | | 10 |
| 05**320430**001 | *113382* | 30 IP | 50 | 2" | 6,0 | | | 10 |
| 05**134676**001 | *032874* | 30 IP | 89 | 3 1/2" | 6,0 | | | 10 |
| 05**134677**001 | *032881* | 40 IP | 89 | 3 1/2" | - | | | 10 |

## 867/9 C IP TORX PLUS® bits, halfmoon

Drive: 4 mm halfmoon for direct power tool connection.

## 867/9 C IP TORX PLUS® bits, halfmoon

| Code | EAN 4013288 | | mm | | mm | mm | | |
|---|---|---|---|---|---|---|---|---|
| 05**135230**001 | *112668* | 1 IP | 44 | 1 47/64" | 1,5 | 20 | 25/32" | 10 |
| 05**135231**001 | *112675* | 2 IP | 44 | 1 47/64" | 1,5 | 20 | 25/32" | 10 |
| 05**135232**001 | *112682* | 3 IP | 44 | 1 47/64" | 1,7 | 20 | 25/32" | 10 |
| 05**326310**001 | *113399* | 4 IP | 44 | 1 47/64" | 2,0 | 20 | 25/32" | 10 |
| 05**345019**001 | *113511* | 4 IP | 64 | 2 33/64" | 2,0 | 20 | 25/32" | 10 |
| 05**135233**001 | *112699* | 5 IP | 44 | 1 47/64" | 2,0 | 20 | 25/32" | 10 |
| 05**344900**001 | *113498* | 6 IP | 44 | 1 47/64" | 2,25 | 20 | 25/32" | 10 |
| 05**135234**001 | *112705* | 8 IP | 44 | 1 47/64" | 3,0 | 20 | 25/32" | 10 |
| 05**332606**001 | *037091* | 8 IP | 70 | 2 3/4" | 3,0 | 20 | 25/32" | 10 |
| 05**135235**001 | *112712* | 10 IP | 44 | 1 47/64" | 3,0 | 20 | 25/32" | 10 |

## IPR TORX PLUS®

A 5-flank TORX PLUS® profile with a borehole.

This drive geometry has only five flanks instead of the usual six and a borehole to protect safety screws against unauthorised unfastening. The screws cannot be turned with conventional, widely available tools.

### 867/1 IPR TORX PLUS® bits with bore hole

| Code | EAN 4013288 | | mm | | | | | |
|---|---|---|---|---|---|---|---|---|
| 05**134699**001 | *034878* | 8 IPR | 25 | 1" | | | | 10 |
| 05**134698**001 | *037817* | 9 IPR | 25 | 1" | | | | 10 |
| 05**134700**001 | *034823* | 10 IPR | 25 | 1" | | | | 10 |
| 05**134701**001 | *034724* | 15 IPR | 25 | 1" | | | | 10 |
| 05**134702**001 | *034731* | 20 IPR | 25 | 1" | | | | 10 |
| 05**134703**001 | *034748* | 25 IPR | 25 | 1" | | | | 10 |
| 05**134704**001 | *034847* | 27 IPR | 25 | 1" | | | | 10 |
| 05**134705**001 | *034830* | 30 IPR | 25 | 1" | | | | 10 |
| 05**134706**001 | *034854* | 40 IPR | 35 | 1 3/8" | | | | 10 |
| 05**134707**001 | *034861* | 45 IPR | 35 | 1 3/8" | | | | 10 |

## 867/4 IPR TORX PLUS® bits with bore hole

High quality bits for recessed TORX PLUS® screws. A 5-flank TORX PLUS® profile. 1/4" hexagon, suitable for holders as per DIN ISO 1173-F 6.3.

### 867/4 IPR TORX PLUS® bits with bore hole

| Code | EAN 4013288 | | mm | | mm | | | |
|---|---|---|---|---|---|---|---|---|
| 05**160821**001 | *160867* | 10 IPR | 50 | 2" | 4,0 | | | 10 |
| 05**134657**001 | *155665* | 10 IPR | 89 | 3 1/2" | 4,0 | | | 10 |
| 05**134654**001 | *155641* | 15 IPR | 50 | 2" | 4,0 | | | 10 |
| 05**134720**001 | *037206* | 15 IPR | 89 | 3 1/2" | 4,0 | | | 10 |
| 05**204126**001 | *160874* | 20 IPR | 50 | 2" | 4,5 | | | 10 |
| 05**259135**001 | *160881* | 20 IPR | 89 | 3 1/2" | 4,5 | | | 10 |
| 05**134655**001 | *155658* | 25 IPR | 50 | 2" | 6,0 | | | 10 |
| 05**134722**001 | *160904* | 25 IPR | 89 | 3 1/2" | 6,0 | | | 10 |
| 05**134656**001 | *156952* | 27 IPR | 50 | 2" | 6,0 | | | 10 |
| 05**134658**001 | *155672* | 27 IPR | 89 | 3 1/2" | 6,0 | | | 10 |
| 05**134732**001 | *160911* | 30 IPR | 50 | 2" | 6,0 | | | 10 |
| 05**134723**001 | *160935* | 30 IPR | 89 | 3 1/2" | 6,0 | | | 10 |

## BiTorsion system - for longer service life

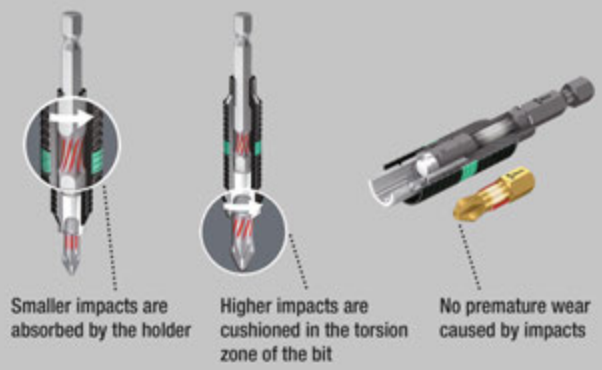


## 800/1 BDC bits

Bits with tiny diamond particles on the bit tip. This ensures a secure fit of the bit in the screw, reduces the contact pressure required and lowers the risk of slipping.

Comes with Torsion zone – where kinetic energy is diverted from peak loads. This greatly extends the product service life; 1/4" hexagon, suitable for holders as per DIN ISO 1173-D 6.3.

### 800/1 BDC bits

BITORSION DIAMOND TAKE IT EASY TOOL FINDER

| Code | EAN 4013288 | mm | mm | mm | | | | |
|---|---|---|---|---|---|---|---|---|
| 05**056172**001 | *033949* | 0,8 | 5,5 | 25 | 1" | | | 10 |
| 05**056174**001 | *033956* | 1,0 | 5,5 | 25 | 1" | | | 10 |
| 05**056176**001 | *033963* | 1,2 | 6,5 | 25 | 1" | | | 10 |

## 800/1 BTZ bits

Comes with Torsion zone – where kinetic energy is diverted from peak loads.

This greatly extends the product service life. Tough viscous, for universal use; 1/4" inch hexagon, suitable for holders as per DIN ISO 1173-D 6.3.

### 800/1 BTZ bits

| | EAN | | | | | | | |
|---|---|---|---|---|---|---|---|---|
| Code | 4013288 | mm | mm | mm | | | | |
| 05**056064**001 | *034427* | 0,8 | 5,5 | 25 | 1" | | | 10 |
| 05**056066**001 | *034434* | 1,0 | 5,5 | 25 | 1" | | | 10 |
| 05**056068**001 | *034441* | 1,2 | 6,5 | 25 | 1" | | | 10 |

## 800/1 TZ bits

Bits with Torsion zone to combat premature wear.

Tough viscous for universal use; 1/4" hexagon, suitable for holders as per DIN ISO 1173-D 6.3.

### 800/1 TZ bits

| | EAN | | | | | ∅ | | |
|---|---|---|---|---|---|---|---|---|
| Code | 4013288 | mm | mm | mm | | mm | | |
| 05**056203**001 | *011145* | 0,5 | 4,0 | 25 | 1" | 4,0 | | 10 |
| 05**056210**001 | *011152* | 0,6 | 4,5 | 25 | 1" | 4,5 | | 10 |
| 05**056220**001 | *011169* | 0,8 | 5,5 | 25 | 1" | 5,5 | | 10 |
| 05**056225**001 | *011176* | 1,0 | 5,5 | 25 | 1" | 5,5 | | 10 |
| 05**056233**001 | *011183* | 1,2 | 6,5 | 25 | 1" | 6,2 | | 10 |
| 05**056240**001 | *011190* | 1,6 | 8,0 | 25 | 1" | 8,0 | | 10 |

## 800/1 Z bits

Tough viscous Wera bits for universal use. 1/4" hexagon, suitable for holders as per DIN ISO 1173-D 6.3.

### 800/1 Z bits

| | EAN | | | | | ∅ | | |
|---|---|---|---|---|---|---|---|---|
| Code | 4013288 | mm | mm | mm | | mm | | |
| 05**056200**001 | *040831* | 0,5 | 3,0 | 25 | 1" | 3,0 | | 10 |
| 05**072050**001 | *030467* | 0,5 | 4,0 | 25 | 1" | 4,0 | | 10 |
| 05**072055**001 | *010933* | 0,6 | 4,5 | 25 | 1" | 4,5 | | 10 |
| 05**072057**001 | *010940* | 0,8 | 5,5 | 25 | 1" | 5,5 | | 10 |
| 05**072059**001 | *010957* | 1,0 | 5,5 | 25 | 1" | 5,5 | | 10 |
| 05**072061**001 | *010964* | 1,2 | 6,5 | 25 | 1" | 6,2 | | 10 |
| 05**072063**001 | *030450* | 1,2 | 8,0 | 25 | 1" | 8,0 | | 10 |
| 05**072065**001 | *010971* | 1,6 | 8,0 | 25 | 1" | 8,0 | | 10 |

## Kraftform Stainless - stainless steel to prevent rust

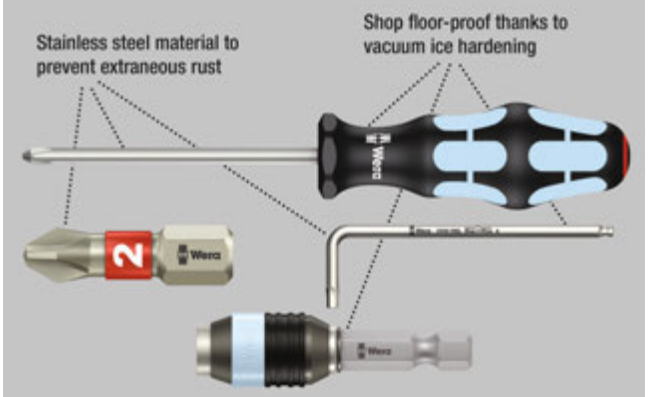


High quality stainless steel bits for slotted screws. Made out of stainless steel which prevents the formation of unsightly extraneous rust. 1/4" hexagon, suitable for holders as per DIN ISO 1173-F 6.3.

### 3800/4 bits, stainless

| | EAN | | | | | | | |
|---|---|---|---|---|---|---|---|---|
| Code | 4013288 | mm | mm | mm | | | | |
| 05**071080**001 | *115669* | 1,0 | 5,5 | 89 | 3 1/2" | | | 10 |

## 800/4 Z bits

Tough viscous Wera bits for universal use. 1/4" hexagon, suitable for holders as per DIN ISO 1173-F 6.3.

### 800/4 Z bits

| Code | EAN 4013288 | mm | mm | mm | | mm | | |
|---|---|---|---|---|---|---|---|---|
| 05**059305**001 | *011480* | 0,5 | 3,0 | 50 | 2" | 3,0 | | 10 |
| 05**059466**001 | *011497* | 0,5 | 3,0 | 70 | 2 3/4" | 3,0 | | 10 |
| 05**059307**001 | *011503* | 0,5 | 4,0 | 50 | 2" | 4,0 | | 10 |
| 05**059310**001 | *011510* | 0,6 | 3,5 | 50 | 2" | 3,5 | | 10 |
| 05**059472**001 | *011527* | 0,6 | 3,5 | 70 | 2 3/4" | 3,5 | | 10 |
| 05**059450**001 | *031471* | 0,6 | 3,5 | 152 | 6" | 3,5 | | 10 |
| 05**059315**001 | *011534* | 0,6 | 4,5 | 50 | 2" | 4,5 | | 10 |
| 05**059489**001 | *094230* | 0,6 | 4,5 | 89 | 3 1/2" | 4,5 | | 10 |
| 05**059320**001 | *011541* | 0,8 | 4,0 | 50 | 2" | 4,0 | | 10 |
| 05**059478**001 | *011558* | 0,8 | 4,0 | 70 | 2 3/4" | 4,0 | | 10 |
| 05**059480**001 | *011565* | 0,8 | 4,0 | 89 | 3 1/2" | 4,0 | | 10 |
| 05**059451**001 | *031389* | 0,8 | 4,0 | 152 | 6" | 4,0 | | 10 |
| 05**059325**001 | *011572* | 0,8 | 5,5 | 50 | 2" | 5,5 | | 10 |
| 05**059330**001 | *011589* | 1,0 | 5,5 | 50 | 2" | 5,5 | | 10 |
| 05**059486**001 | *011596* | 1,0 | 5,5 | 70 | 2 3/4" | 5,5 | | 10 |
| 05**059488**001 | *011602* | 1,0 | 5,5 | 89 | 3 1/2" | 5,5 | | 10 |
| 05**059452**001 | *031235* | 1,0 | 5,5 | 152 | 6" | 5,5 | | 10 |
| 05**059335**001 | *035004* | 1,0 | 6,0 | 50 | 2" | 6,0 | | 10 |
| 05**059337**001 | *011619* | 1,2 | 6,5 | 50 | 2" | 6,2 | | 10 |
| 05**059492**001 | *011626* | 1,2 | 6,5 | 70 | 2 3/4" | 6,2 | | 10 |
| 05**059490**001 | *094247* | 1,2 | 6,5 | 89 | 3 1/2" | 6,2 | | 10 |
| 05**059453**001 | *031488* | 1,2 | 6,5 | 152 | 6" | 6,2 | | 10 |
| 05**059340**001 | *011633* | 1,2 | 8,0 | 50 | 2" | 8,0 | | 10 |
| 05**059496**001 | *011640* | 1,2 | 8,0 | 89 | 3 1/2" | 8,0 | | 10 |
| 05**059345**001 | *011657* | 1,6 | 8,0 | 50 | 2" | 8,0 | | 10 |
| 05**059500**001 | *011664* | 1,6 | 8,0 | 89 | 3 1/2" | 8,0 | | 10 |

## 800/0 Micro bits for slotted screws

- 4 mm hexagonal drive

### 800/0 Micro bits for slotted screws

| Code | EAN 4013288 | mm | mm | mm | | mm | | |
|---|---|---|---|---|---|---|---|---|
| 05**058104**001 | *234513* | 0,3 | 1,5 | 30 | 1 3/16" | 1,5 | | 10 |
| 05**058101**001 | *189608* | 0,40 | 2,5 | 30 | 1 3/16" | 2,5 | | 10 |
| 05**058105**001 | *234520* | 0,50 | 3,0 | 30 | 1 3/16" | 3,0 | | 10 |

## 800/2 Z bits

5/16" hexagon, suitable for holders as per DIN ISO 1173-D 8.

### 800/2 Z bits

| Code | EAN 4013288 | mm | mm | mm | | mm | | |
|---|---|---|---|---|---|---|---|---|
| 05**057225**001 | *011275* | 1,2 | 8,0 | 41 | 1 19/32" | 7,8 | | 10 |
| 05**057235**001 | *011299* | 1,6 | 10,0 | 41 | 1 19/32" | 7,8 | | 10 |
| 05**057240**001 | *011305* | 2,0 | 12,0 | 41 | 1 19/32" | 12,0 | | 10 |

## 800/9 C bits

Hard bits against premature breakage.
Drive: halfmoon, 4 mm.

### 800/9 C bits

| Code | EAN 4013288 | mm | mm | mm | | mm | | |
|---|---|---|---|---|---|---|---|---|
| 05**135265**001 | *168276* | 0,23 | 1,5 | 44 | 1 47/64" | 1,5 | | 10 |
| 05**135264**001 | *194770* | 0,35 | 2,5 | 44 | 1 47/64" | 2,5 | | 10 |
| 05**135266**001 | *168283* | 0,40 | 2,0 | 44 | 1 47/64" | 2,0 | | 10 |
| 05**135267**001 | *168290* | 0,50 | 3,0 | 44 | 1 47/64" | 3,0 | | 10 |

## Impaktor system - For an above-average service life

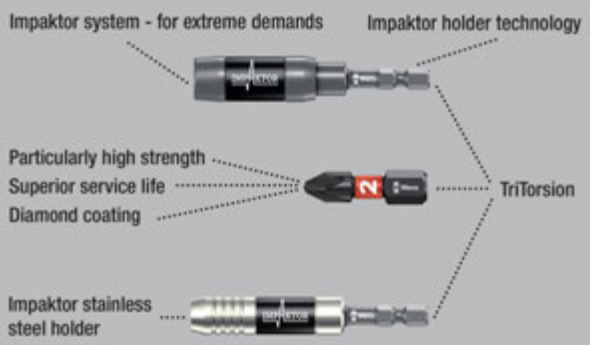


High quality Impaktor bits for hexagon socket screws. The Impaktor technology offers an above-average service life even under extreme circumstances.

Enhanced friction resistance, thanks to the rough diamond-particle coating on the bit tip, prevents any slipping out of the screw head. Hex-Plus ensures a greater contact surface in the head of the screw.

The notching effect is therefore reduced to a minimum and damage to the screw head more or less eliminated. 1/4" hexagon, suitable for holders as per DIN ISO 1173-D 6.3.

## 840/1 IMP DC Hex-Plus DIY Impaktor bits

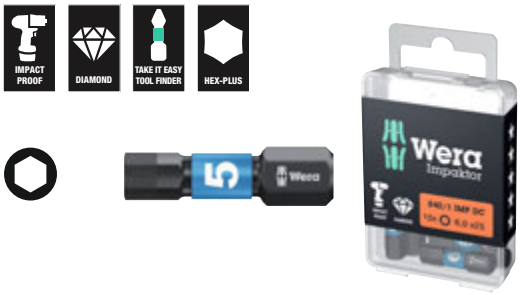


| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 05**057603**001 | *178701* | | **840/1 IMP DC** 10x 3.0x25 | 1 |
| 05**057604**001 | *157560* | | **840/1 IMP DC** 10x 4.0x25 | 1 |
| 05**057605**001 | *157423* | | **840/1 IMP DC** 10x 5.0x25 | 1 |
| 05**057606**001 | *157430* | | **840/4 IMP DC** 10x 6.0x25 | 1 |

## 840/1 IMP DC SB Impaktor bits

| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 05**073904**001 | *158338* | | **840/1 IMP DC** 1x 4.0x25 | 5 |
| 05**073905**001 | *158345* | | **840/1 IMP DC** 1x 5.0x25 | 5 |
| 05**073906**001 | *158352* | | **840/1 IMP DC** 1x 6.0x25 | 5 |

## Kraftform Stainless - stainless steel to prevent rust

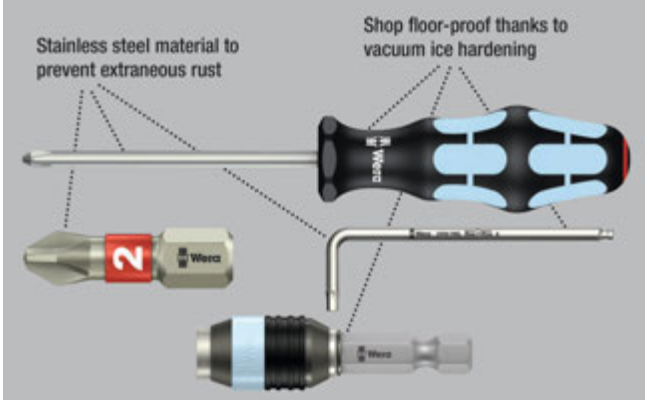


High quality bits out of stainless steel for hexagon socket screws. Prevents the formation of unsightly extraneous rust.

The Hex-Plus profile offers a greater contact surface in the head of the screw. The notching effect is therefore reduced to a minimum and damage to the screw head more or less eliminated.

Come with Torsion zone: Torsion bits take-up torque peaks and absorb them in the Torsion zone. This prevents premature wear and extends the service life of the bit. 1/4" hexagon, suitable for holders as per DIN ISO 1173-D 6.3.

## 3840/1 TS bits, stainless

| Code | EAN 4013288 | mm | | mm | | | | |
|---|---|---|---|---|---|---|---|---|
| 05**071070**001 | *111197* | 1,5 | | 25 | 1" | | | 10 |
| 05**071071**001 | *111203* | 2,0 | | 25 | 1" | | | 10 |
| 05**071072**001 | *111210* | 2,5 | | 25 | 1" | | | 10 |
| 05**071073**001 | *111227* | 3,0 | | 25 | 1" | | | 10 |
| 05**071074**001 | *111234* | 4,0 | | 25 | 1" | | | 10 |
| 05**071075**001 | *111241* | 5,0 | | 25 | 1" | | | 10 |
| 05**071077**001 | *115478* | 5,5 | | 25 | 1" | | | 10 |
| 05**071076**001 | *111258* | 6,0 | | 25 | 1" | | | 10 |

## BiTorsion system - for longer service life

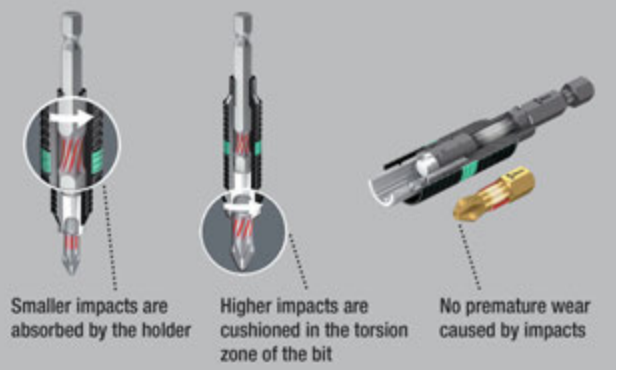


BiTorsion with Torsion zone – where kinetic energy is diverted from peak loads. This greatly extends the product service life.

Tough viscous; 1/4" hexagon, suitable for holders as per DIN ISO 1173-D 6.3.

### 840/1 BTZ bits

| | EAN | | | | | | | |
|---|---|---|---|---|---|---|---|---|
| Code | 4013288 | mm | mm | | | | | |
| 05**056680**001 | *182418* | 1,5 | 25 | 1" | | | | 10 |
| 05**056681**001 | *182425* | 2,0 | 25 | 1" | | | | 10 |
| 05**056682**001 | *182432* | 2,5 | 25 | 1" | | | | 10 |
| 05**056683**001 | *182449* | 3,0 | 25 | 1" | | | | 10 |
| 05**056684**001 | *182456* | 4,0 | 25 | 1" | | | | 10 |
| 05**056685**001 | *182463* | 5,0 | 25 | 1" | | | | 10 |
| 05**056686**001 | *182470* | 5,5 | 25 | 1" | | | | 10 |
| 05**056687**001 | *182487* | 6,0 | 25 | 1" | | | | 10 |

## Hex-Plus - lets hexagon socket screws last longer

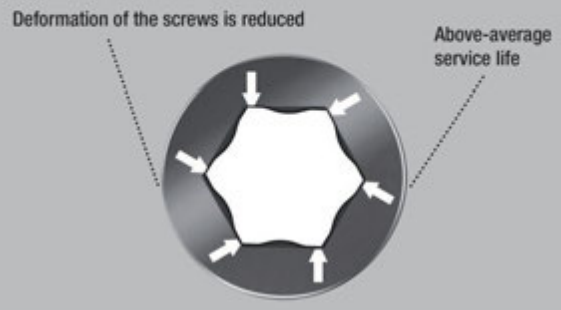


Tough viscous Wera bits for universal use. Hex-Plus offers a greater contact surface in the head of the screw.

The notching effect is therefore reduced to a minimum and damage to the screw head more or less eliminated. 1/4" hexagon, suitable for holders as per DIN ISO 1173-D 6.3.

### 840/1 Z bits

| | EAN | | | | | | | |
|---|---|---|---|---|---|---|---|---|
| Code | 4013288 | mm | | mm | | | | |
| 05**056303**001 | *012623* | 1,5 | | 25 | 1" | | | 10 |
| 05**056305**001 | *012630* | 2,0 | | 25 | 1" | | | 10 |
| 05**056310**001 | *012647* | 2,5 | | 25 | 1" | | | 10 |
| 05**056315**001 | *012654* | 3,0 | | 25 | 1" | | | 10 |
| 05**056320**001 | *012661* | 4,0 | | 25 | 1" | | | 10 |
| 05**056325**001 | *012678* | 5,0 | | 25 | 1" | | | 10 |
| 05**056330**001 | *012685* | 6,0 | | 25 | 1" | | | 10 |
| 05**056332**001 | *038173* | 7,0 | | 25 | 1" | | | 10 |
| 05**056335**001 | *012692* | 8,0 | | 25 | 1" | | | 10 |
| 05**056340**001 | *012708* | 10,0 | | 25 | 1" | | | 10 |
| 05**135060**001 | *106636* | | 0,05" | 25 | 1" | | | 10 |
| 05**135070**001 | *040862* | | 1/16" | 25 | 1" | | | 10 |
| 05**135071**001 | *040879* | | 5/64" | 25 | 1" | | | 10 |
| 05**135072**001 | *037725* | | 3/32" | 25 | 1" | | | 10 |
| 05**135078**001 | *036599* | | 7/64" | 25 | 1" | | | 10 |
| 05**135073**001 | *038067* | | 1/8" | 25 | 1" | | | 10 |
| 05**135069**001 | *040855* | | 9/64" | 25 | 1" | | | 10 |
| 05**135074**001 | *036506* | | 5/32" | 25 | 1" | | | 10 |
| 05**135075**001 | *037930* | | 3/16" | 25 | 1" | | | 10 |
| 05**135079**001 | *040893* | | 7/32" | 25 | 1" | | | 10 |
| 05**135076**001 | *040886* | | 1/4" | 25 | 1" | | | 10 |
| 05**135077**001 | *036360* | | 5/16" | 25 | 1" | | | 10 |
| 05**135068**001 | *040848* | | 3/8" | 25 | 1" | | | 10 |

## 840/1 Z Sets SB

| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 05**073050**001 | *202567* | | **840/1 Z Hex-Plus** 2x 2.0x25 | 5 |
| 05**073051**001 | *202550* | | **840/1 Z Hex-Plus** 2x 2.5x25 | 5 |
| 05**073052**001 | *202512* | | **840/1 Z Hex-Plus** 2x 3.0x25 | 5 |
| 05**073053**001 | *202529* | | **840/1 Z Hex-Plus** 2x 4.0x25 | 5 |
| 05**073054**001 | *202536* | | **840/1 Z Hex-Plus** 2x 5.0x25 | 5 |
| 05**073055**001 | *202543* | | **840/1 Z Hex-Plus** 2x 6.0x25 | 5 |
| 05**073342**001 | *029607* | | **840/1 Z Hex-Plus** 1x 2.0x25; 1x 2.5x25; 1x 3.0x25 | 5 |
| 05**073344**001 | *029614* | | **840/1 Z Hex-Plus** 1x 4.0x25; 1x 5.0x25; 1x 6.0x25 | 5 |

### 842/1 Z bits

The ballpoint drive profile means that it is possible to swivel the tool axis away from the screwdriving axis, thus enabling „round the corner“ screwdriving.
1/4" hexagon, suitable for holders as per DIN ISO 1173-D 6.3.

## 842/1 Z bits

| Code | EAN 4013288 | mm | mm | | | | |
|---|---|---|---|---|---|---|---|
| 05**056350**001 | *013156* | 2,5 | 25 | 1" | | | 10 |
| 05**056352**001 | *013163* | 3,0 | 25 | 1" | | | 10 |
| 05**056354**001 | *013170* | 4,0 | 25 | 1" | | | 10 |
| 05**056356**001 | *013187* | 5,0 | 25 | 1" | | | 10 |
| 05**056358**001 | *013194* | 6,0 | 25 | 1" | | | 10 |

## Impaktor system - For an above-average service life

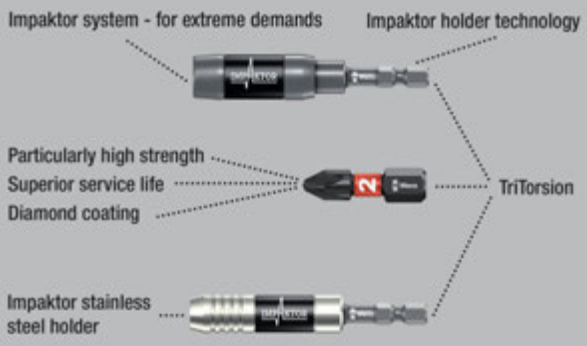


High quality Impaktor bits for hexagonal socket screws.
The Impaktor technology offers an above-average service life even under extreme circumstances.

Enhanced friction resistance, thanks to the rough diamond-particle coating on the bit tip, prevents any slipping out of the screw head.

Hex-Plus ensures a greater contact surface in the head of the screw. The notching effect is therefore reduced to a minimum and damage to the screw head more or less eliminated.
1/4" hexagon, suitable for holders as per DIN ISO 1173-F 6.3.

## 840/4 IMP DC Hex-Plus DIY Impaktor bits

| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 05**057644**001 | *157577* | | **840/4 IMP DC** 5x 4.0x50 | 1 |
| 05**057645**001 | *157492* | | **840/4 IMP DC** 5x 5.0x50 | 1 |
| 05**057646**001 | *157508* | | **840/4 IMP DC** 5x 6.0x50 | 1 |

## 840/4 IMP DC Impaktor bits SB

| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 05**073944**001 | *158451* | | **840/4 IMP DC** 1x 4.0x50 | 5 |
| 05**073945**001 | *158468* | | **840/4 IMP DC** 1x 5.0x50 | 5 |
| 05**073946**001 | *158475* | | **840/4 IMP DC** 1x 6.0x50 | 5 |

## Kraftform Stainless - stainless steel to prevent rust

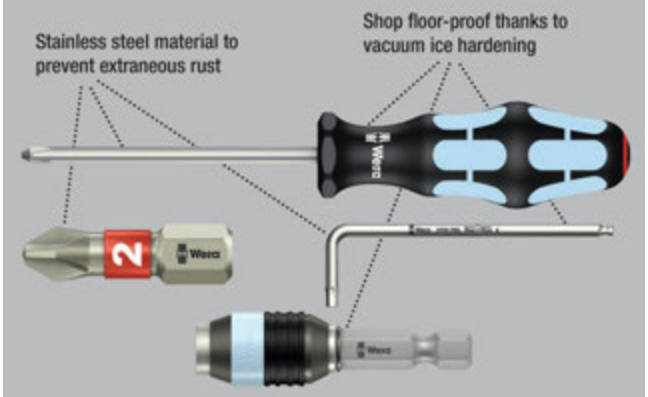


Wera stainless steel bits prevent the formation of unsightly extraneous rust. The Hex-Plus profile offers a greater contact surface in the head of the screw.

The notching effect is therefore reduced to a minimum and damage to the screw head more or less eliminated. 1/4" hexagon, suitable for holders as per DIN ISO 1173-F 6.3.

## 3840/4 Bits, stainless

| Code | EAN 4013288 | mm | | mm | | | | |
|---|---|---|---|---|---|---|---|---|
| 05**071101**001 | *115621* | 3,0 | | 89 | 3 1/2" | | | 10 |
| 05**071102**001 | *115638* | 4,0 | | 89 | 3 1/2" | | | 10 |
| 05**071103**001 | *115645* | 5,0 | | 89 | 3 1/2" | | | 10 |
| 05**071104**001 | *115652* | 6,0 | | 89 | 3 1/2" | | | 10 |
| 05**071105**001 | *115676* | | 3/32" | 89 | 3 1/2" | | | 10 |
| 05**071106**001 | *115683* | | 1/8" | 89 | 3 1/2" | | | 10 |
| 05**071107**001 | *115690* | | 5/32" | 89 | 3 1/2" | | | 10 |
| 05**071108**001 | *115706* | | 3/16" | 89 | 3 1/2" | | | 10 |

## Hex-Plus - lets hexagon socket screws last longer

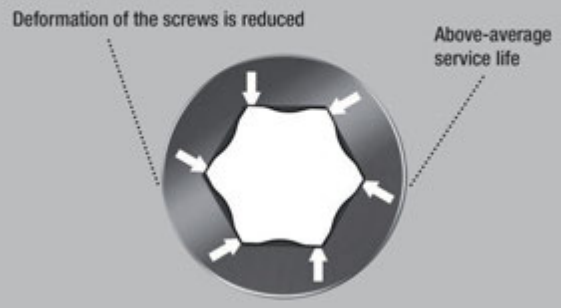


### 840/4 Z Take it easy bits

- Take it easy tool finder: colour coding according to profile and size

## 840/4 Z bits

| Code | EAN 4013288 | mm | | mm | | mm | | |
|---|---|---|---|---|---|---|---|---|
| 05160885001 | *200976* | 0,9 | | 50 | 2" | 2,6 | | 10 |
| 05059602001 | *112408* | 1,5 | | 50 | 2" | 2,0 | | 10 |
| 05059603001 | *034694* | 2,0 | | 50 | 2" | 4,0 | | 10 |
| 05059628001 | *155450* | 2,0 | | 89 | 3 1/2" | 4,0 | | 5 |
| 05059604001 | *034700* | 2,5 | | 50 | 2" | 4,0 | | 10 |
| 05059629001 | *155467* | 2,5 | | 89 | 3 1/2" | 4,0 | | 5 |
| 05059605001 | *012906* | 3,0 | | 50 | 2" | 4,0 | | 10 |
| 05059630001 | *094254* | 3,0 | | 89 | 3 1/2" | 4,0 | | 5 |
| 05380033001 | *156433* | 3,0 | | 152 | 6" | 4,0 | | 5 |
| 05059610001 | *012913* | 4,0 | | 50 | 2" | 5,0 | | 10 |
| 05059631001 | *094261* | 4,0 | | 89 | 3 1/2" | 5,0 | | 5 |
| 05059634001 | *122964* | 4,0 | | 152 | 6" | 5,0 | | 5 |
| 05059615001 | *012920* | 5,0 | | 50 | 2" | 6,0 | | 10 |
| 05059632001 | *094278* | 5,0 | | 89 | 3 1/2" | 6,0 | | 5 |
| 05059635001 | *122971* | 5,0 | | 152 | 6" | 6,0 | | 5 |
| 05059620001 | *012937* | 6,0 | | 50 | 2" | 5,0 | | 10 |
| 05059633001 | *094285* | 6,0 | | 89 | 3 1/2" | - | | 5 |
| 05059636001 | *122988* | 6,0 | | 152 | 6" | - | | 5 |
| 05059625001 | *012944* | 8,0 | | 50 | 2" | - | | 10 |
| 05059637001 | *215031* | 8,0 | | 89 | 3 1/2" | - | | 5 |
| 05350430001 | *161406* | | 0,05" | 50 | 2" | 2,5 | | 10 |
| 05135090001 | *107053* | | 1/16" | 50 | 2" | 2,5 | | 10 |
| 05380045001 | *156730* | | 1/8" | 152 | 6" | 4,0 | | 5 |
| 05135091001 | *036414* | | 5/64" | 50 | 2" | 3,0 | | 10 |
| 05059660001 | *155474* | | 5/64" | 89 | 3 1/2" | 3,0 | | 5 |
| 05135092001 | *036421* | | 3/32" | 50 | 2" | 3,0 | | 10 |
| 05059661001 | *155481* | | 3/32" | 89 | 3 1/2" | 3,5 | | 5 |
| 05135093001 | *036438* | | 7/64" | 50 | 2" | 3,5 | | 10 |
| 05059662001 | *155498* | | 7/64" | 89 | 3 1/2" | 4,0 | | 5 |
| 05135094001 | *036445* | | 1/8" | 50 | 2" | 4,0 | | 10 |
| 05059663001 | *155504* | | 1/8" | 89 | 3 1/2" | 4,0 | | 5 |
| 05135095001 | *036377* | | 9/64" | 50 | 2" | 4,5 | | 10 |
| 05059664001 | *155511* | | 9/64" | 89 | 3 1/2" | 4,5 | | 5 |
| 05380046001 | *156822* | | 9/64" | 152 | 6" | 4,5 | | 5 |
| 05135096001 | *036384* | | 5/32" | 50 | 2" | 5,0 | | 10 |
| 05059665001 | *155528* | | 5/32" | 89 | 3 1/2" | 5,0 | | 5 |
| 05380047001 | *156839* | | 5/32" | 152 | 6" | 5,0 | | 5 |
| 05135097001 | *036391* | | 3/16" | 50 | 2" | 6,0 | | 10 |
| 05059666001 | *155535* | | 3/16" | 89 | 3 1/2" | 6,0 | | 5 |
| 05380048001 | *156846* | | 3/16" | 152 | 6" | 6,0 | | 5 |
| 05135098001 | *036407* | | 7/32" | 50 | 2" | - | | 10 |
| 05059667001 | *155542* | | 7/32" | 89 | 3 1/2" | - | | 5 |
| 05380049001 | *156853* | | 7/32" | 152 | 6" | - | | 5 |
| 05135099001 | *095589* | | 1/4" | 50 | 2" | - | | 10 |
| 05059668001 | *155559* | | 1/4" | 89 | 3 1/2" | - | | 5 |
| 05380050001 | *156860* | | 1/4" | 152 | 6" | - | | 5 |
| 05346288001 | *103895* | | 5/16" | 50 | 2" | - | | 10 |

## 840/4 Z SB bits

| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 05073056001 | *202468* | | **840/4 Z Hex-Plus** 2x 2.0x50 | 3 |
| 05073057001 | *202475* | | **840/4 Z Hex-Plus** 2x 2.5x50 | 3 |
| 05073058001 | *202482* | | **840/4 Z Hex-Plus** 2x 3.0x50 | 3 |
| 05136301001 | *213792* | | **840/4 Z Hex-Plus** 1x 3.0x152 | 3 |
| 05073059001 | *202499* | | **840/4 Z Hex-Plus** 2x 4.0x50 | 3 |
| 05136302001 | *213808* | | **840/4 Z Hex-Plus** 1x 4.0x152 | 3 |
| 05073060001 | *202505* | | **840/4 Z Hex-Plus** 2x 5.0x50 | 3 |
| 05136303001 | *213815* | | **840/4 Z Hex-Plus** 1x 5.0x152 | 3 |
| 05073061001 | *202444* | | **840/4 Z Hex-Plus** 2x 6.0x50 | 3 |
| 05136304001 | *213822* | | **840/4 Z Hex-Plus** 1x 6.0x152 | 3 |

## 842/4 Bits

The ballpoint drive profile means that it is possible to swivel the tool axis away from the screwdriving axis, thus enabling „round the corner“ screwdriving. 1/4" hexagon, suitable for holders as per DIN ISO 1173-F 6.3.

### 842/4 Bits

| Code | EAN 4013288 | mm | | mm | | | | |
|---|---|---|---|---|---|---|---|---|
| 05**059680**001 | *155931* | 3,0 | | 89 | 3 1/2" | | | 5 |
| 05**059681**001 | *155948* | 4,0 | | 89 | 3 1/2" | | | 5 |
| 05**059682**001 | *155955* | 5,0 | | 89 | 3 1/2" | | | 5 |
| 05**059683**001 | *155962* | 6,0 | | 89 | 3 1/2" | | | 5 |
| 05**380124**001 | *156587* | | 3/32" | 89 | 3 1/2" | | | 5 |
| 05**380125**001 | *156594* | | 7/64" | 89 | 3 1/2" | | | 5 |
| 05**380126**001 | *156600* | | 1/8" | 89 | 3 1/2" | | | 5 |
| 05**380127**001 | *156617* | | 9/64" | 89 | 3 1/2" | | | 5 |
| 05**380128**001 | *156624* | | 5/32" | 89 | 3 1/2" | | | 5 |
| 05**380129**001 | *156631* | | 3/16" | 89 | 3 1/2" | | | 5 |
| 05**380130**001 | *156648* | | 7/32" | 89 | 3 1/2" | | | 5 |
| 05**380131**001 | *156655* | | 1/4" | 89 | 3 1/2" | | | 5 |

## 840/0 Hex-Plus Micro bits for hexagonal socket head screws

- 4 mm hexagonal drive

### 840/0 Hex-Plus Micro bits for hexagonal socket head screws

| Code | EAN 4013288 | mm | mm | | mm | | | |
|---|---|---|---|---|---|---|---|---|
| 05**058108**001 | *234537* | 0,9 | 30 | 1 3/16" | 2,0 | | | 10 |
| 05**058109**001 | *234544* | 1,3 | 30 | 1 3/16" | 2,6 | | | 10 |
| 05**058110**001 | *189578* | 1,5 | 30 | 1 3/16" | 2,6 | | | 10 |
| 05**058111**001 | *189615* | 2,0 | 30 | 1 3/16" | 2,6 | | | 10 |
| 05**058112**001 | *234551* | 2,5 | 30 | 1 3/16" | 2,6 | | | 10 |

## 840/2 Z Bits

Tough viscous Wera bits for hexagon socket screws for universal use. Hex-Plus offers a greater contact surface in the head of the screw. The notching effect is therefore reduced to a minimum and damage to the screw head more or less eliminated. 5/16" hexagon, suitable for holders as per DIN ISO 1173-D 8.

### 840/2 Z Bits

| Code | EAN 4013288 | mm | | mm | | | | |
|---|---|---|---|---|---|---|---|---|
| 05**057505**001 | *012753* | 3 | | 30 | 1 3/16" | | | 10 |
| 05**057510**001 | *012760* | 4 | | 30 | 1 3/16" | | | 10 |
| 05**057515**001 | *012777* | 5 | | 30 | 1 3/16" | | | 10 |
| 05**057520**001 | *012784* | 6 | | 30 | 1 3/16" | | | 10 |
| 05**057525**001 | *012791* | 8 | | 30 | 1 3/16" | | | 10 |
| 05**057530**001 | *012807* | 10 | | 30 | 1 3/16" | | | 10 |

## 840/9 C Bits

Drive: 4 mm halfmoon for direct power tool connection.

### 840/9 C Bits

| Code | EAN 4013288 | mm | mm | | mm | | | |
|---|---|---|---|---|---|---|---|---|
| 05**135268**001 | *168306* | 1,5 | 44 | 1 47/64" | 2,6 | | | 10 |
| 05**135269**001 | *168313* | 2,0 | 44 | 1 47/64" | 2,6 | | | 10 |

## 840/1 Z Tamper-proof Hex-Plus BO bits

Hexagon socket BO screws have a protruding pin in their drive profile.

This prevents any unauthorised loosening since the “normal” hex tools cannot move these screws. 1/4" hexagon, suitable for holders as per DIN ISO 1173-D 6.3.

### 840/1 Z Tamper-proof Hex-Plus BO bits

| Code | EAN 4013288 | mm | mm | | | | | |
|---|---|---|---|---|---|---|---|---|
| 05**056341**001 | *038548* | 2,0 | 25 | 1" | | | | 10 |
| 05**056342**001 | *038555* | 2,5 | 25 | 1" | | | | 10 |
| 05**056343**001 | *038562* | 3,0 | 25 | 1" | | | | 10 |
| 05**056344**001 | *038593* | 4,0 | 25 | 1" | | | | 10 |
| 05**056345**001 | *038579* | 5,0 | 25 | 1" | | | | 10 |
| 05**056346**001 | *038586* | 6,0 | 25 | 1" | | | | 10 |

## 840/4 Z Tamper-proof Hex-Plus BO bits

1/4" hexagon, suitable for holders as per DIN ISO 1173-F 6.3.

### 840/4 Z Tamper-proof Hex-Plus BO bits

| Code | EAN 4013288 | mm | mm | | mm | | | |
|---|---|---|---|---|---|---|---|---|
| 05**059640**001 | *094292* | 2,0 | 89 | 3 1/2" | 4,0 | | | 5 |
| 05**059641**001 | *094308* | 2,5 | 89 | 3 1/2" | 4,0 | | | 5 |
| 05**059642**001 | *094315* | 3,0 | 89 | 3 1/2" | 4,0 | | | 5 |
| 05**059643**001 | *094322* | 4,0 | 89 | 3 1/2" | 5,0 | | | 5 |
| 05**059644**001 | *094339* | 5,0 | 89 | 3 1/2" | 6,0 | | | 5 |
| 05**059645**001 | *094346* | 6,0 | 89 | 3 1/2" | - | | | 5 |

## 9506 SB 4-in-1 Bit 1

Four different screw profiles (hexagonal socket screws sizes 3.0; 4.0; 5.0; 6.0) can be operated with only one bit. Significant weight savings of over 50 %.

The operability of the large profiles is made possible by the spring compression of the small tips.

The bit has a 1/4" hexagon drive (Wera connection series 1) and can therefore also be used with e.g. bit ratchets and bitholding screwdrivers with Rapidaptor.

- Innovative, extremely compact quadruple bit – only one bit for four different screw sizes
- Suitable for hexagonal socket screws sizes 3.0; 4.0; 5.0 and 6.0
- Tough for hard materials
- 1/4" hexagon drive (Wera connecting series 1)

### 9506 SB 4-in-1 Bit 1

| Code | EAN 4013288 | | |
|---|---|---|---|
| 05**073201**001 | *225269* | | 1 |
| | | **9506**<br>1x 3,0; 4,0; 5,0; 6,0x37 | |

## 9507 SB 4-in-1 Bit 2

Four different screw profiles (hexagonal socket screws sizes 2.5; 5.0; 6.0 and TORX® screws size TX 25) can be operated with just one bit.

The enormous space savings make the bit perfect for mobile use. Significant weight savings of over 50 %. The operability of the large profiles is made possible by the spring compression of the small tips.

The bit with a 1/4" hexagon drive (Wera connection series 1) can also be used with e.g. bit ratchets and bitholding screwdrivers with Rapidaptor.

- Innovative, extremely compact quadruple bit – only one bit for four different screw sizes
- Suitable for hexagonal socket screws sizes 2.5; 5.0; 6.0 and TORX® screws TX 25
- Tough for hard materials
- 1/4" hexagon drive (Wera connecting series 1)

### 9507 SB 4-in-1 Bit 2

| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 05**073202**001 | *225276* | | | 1 |
| | | | **9507**<br>1x 2,5; 5,0; 6,0; TX 25x37 | |

## Impaktor system - For an above-average service life

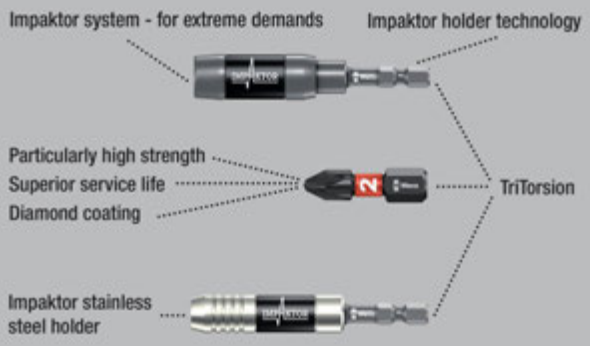


High quality bits for square socket screws. The Impaktor technology offers an above-average service life even under extreme circumstances.

Enhanced friction resistance, thanks to the rough diamond-particle coating on the bit tip, prevents any slipping out of the screw head. Particularly suitable for use with customary impact drivers. 1/4" hexagon, suitable for holders as per DIN ISO 1173-D 6.3.

### 868/1 IMP DC DIY Impaktor square head socket bits

| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 05**057631**001 | *157478* | | **868/1 IMP DC**<br>10x # 2x25 | 1 |
| 05**057632**001 | *157485* | | **868/1 IMP DC**<br>10x # 3x25 | 1 |

### 868/1 IMP DC SB Impaktor Square-Plus bits

| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 05**073931**001 | *158437* | | **868/1 IMP DC**<br>1x # 2x25 | 5 |
| 05**073932**001 | *158444* | | **868/1 IMP DC**<br>1x # 3x25 | 5 |

## 868/1 V Square-Plus bits

High quality bits for square socket screws with wedging function.

The wedging forces resulting from the contact pressure between the drive tip and the screw profile securely hold the screw on the tool. 1/4" hexagon, suitable for holders as per DIN ISO 1173-D 6.3.

### 868/1 V Square-Plus bits

| Code | EAN 4013288 | | mm | | mm | | | |
|---|---|---|---|---|---|---|---|---|
| 05**340245**001 | *118202* | # 1 | 25 | 1" | 6,1 | | | 10 |
| 05**066394**001 | *113603* | # 2 | 25 | 1" | 6,1 | | | 10 |
| 05**066396**001 | *169228* | # 3 | 25 | 1" | 6,1 | | | 10 |

### Bit-Box 20 V Robertson

| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 05**057790**001 | *188083* | | **868/1 V**<br>20x # 2x25 | 20 |

## 868/1 Z Square-Plus bits

High quality bits for square socket screws. Tough viscous for universal use. 1/4" hexagon, suitable for holders as per DIN ISO 1173-D 6.3.

### 868/1 Z Square-Plus bits

| Code | EAN 4013288 | | mm | | mm | | | |
|---|---|---|---|---|---|---|---|---|
| 05**066395**001 | *030214* | # 00 | 25 | 1" | 3,5 | | | 10 |
| 05**066400**001 | *030221* | # 0 | 25 | 1" | 3,5 | | | 10 |
| 05**066405**001 | *030207* | # 1 | 25 | 1" | 4,5 | | | 10 |
| 05**066410**001 | *030238* | # 2 | 25 | 1" | 6,0 | | | 10 |
| 05**066415**001 | *030245* | # 3 | 25 | 1" | 6,0 | | | 10 |
| 05**066420**001 | *030252* | # 4 | 25 | 1" | 8,0 | | | 10 |

### 868/1 Z SB Square-Plus bits

| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 05**073074**001 | *202727* | | **868/1 Z**<br>2x # 1x25 | 5 |
| 05**073075**001 | *202710* | | **868/1 Z**<br>2x # 2x25 | 5 |

## Impaktor system - For an above-average service life

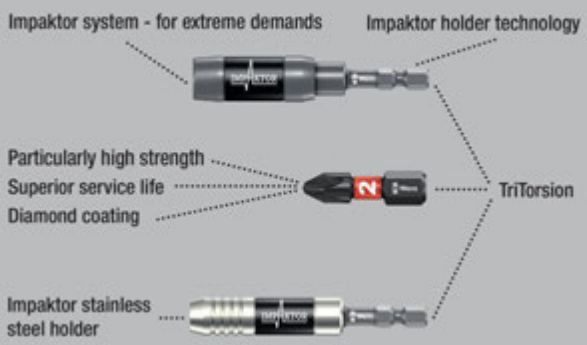


High quality bits for square socket screws.
The Impaktor technology offers an above-average service life even under extreme circumstances.

Enhanced friction resistance, thanks to the rough diamond-particle coating on the bit tip, prevents any slipping out of the screw head. Particularly suitable for use with customary impact drivers. 1/4" hexagon, suitable for holders as per DIN ISO 1173-F 6.3.

### 868/4 IMP DC DIY Impaktor square head socket bits

| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 05**057671**001 | *157546* | | **868/4 IMP DC**<br>5x # 2x50 | 1 |
| 05**057672**001 | *157553* | | **868/4 IMP DC**<br>5x # 3x50 | 1 |

## 868/4 IMP DC SB Impaktor square head socket bits

| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 05**073971**001 | *158550* | | **868/4 IMP DC** 1x # 2x50 | 5 |
| 05**073972**001 | *158567* | | **868/4 IMP DC** 1x # 3x50 | 5 |

## Kraftform Stainless - stainless steel to prevent rust

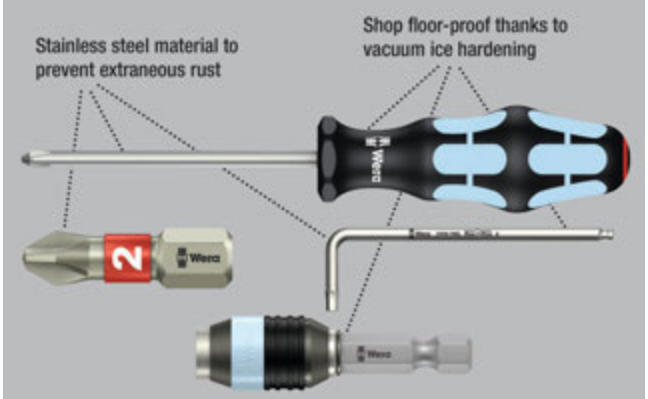


High quality bits out of stainless steel for square socket screws prevent the formation of unsightly extraneous rust. 1/4" hexagon, suitable for holders as per DIN ISO 1173-F 6.3.

## 3868/4 Square-Plus bits, stainless

| Code | EAN 4013288 | | mm | | mm | | | |
|---|---|---|---|---|---|---|---|---|
| 05**071097**001 | *115591* | # 1 | 89 | 3 1/2" | 4,5 | | | 10 |
| 05**071098**001 | *115607* | # 2 | 89 | 3 1/2" | 5,0 | | | 10 |
| 05**071099**001 | *115614* | # 3 | 89 | 3 1/2" | 5,5 | | | 10 |

## 868/4 BTZ Square-Plus bits

| Code | EAN 4013288 | | mm | | mm | | | |
|---|---|---|---|---|---|---|---|---|
| 05**060147**001 | *041272* | #1 | 50 | 2" | 4,2 | | | 10 |
| 05**060148**001 | *041289* | #2 | 50 | 2" | 4,2 | | | 10 |
| 05**060149**001 | *041296* | #3 | 50 | 2" | 5,5 | | | 10 |

## 868/4 Square-Plus bits

| Code | EAN 4013288 | | mm | | mm | | | |
|---|---|---|---|---|---|---|---|---|
| 05**060150**001 | *030269* | # 00 | 50 | 2" | 3,5 | | | 10 |
| 05**060155**001 | *030276* | # 0 | 50 | 2" | 3,5 | | | 10 |
| 05**060160**001 | *030283* | # 1 | 50 | 2" | 4,5 | | | 10 |
| 05**060180**001 | *041043* | # 1 | 70 | 2 3/4" | 4,5 | | | 10 |
| 05**134800**001 | *040930* | # 1 | 89 | 3 1/2" | 4,5 | | | 10 |
| 05**134805**001 | *040923* | # 1 | 152 | 6" | 4,5 | | | 10 |
| 05**060165**001 | *030290* | # 2 | 50 | 2" | 6,0 | | | 10 |
| 05**060182**001 | *041050* | # 2 | 70 | 2 3/4" | 6,0 | | | 10 |
| 05**134801**001 | *040947* | # 2 | 89 | 3 1/2" | 6,0 | | | 10 |
| 05**134806**001 | *040954* | # 2 | 152 | 6" | 6,0 | | | 10 |
| 05**060170**001 | *030306* | # 3 | 50 | 2" | 6,0 | | | 10 |
| 05**060184**001 | *032805* | # 3 | 70 | 2 3/4" | 6,0 | | | 10 |
| 05**134802**001 | *040961* | # 3 | 89 | 3 1/2" | 6,0 | | | 10 |
| 05**134807**001 | *040978* | # 3 | 152 | 6" | 6,0 | | | 10 |
| 05**060175**001 | *030313* | # 4 | 50 | 2" | 8,0 | | | 10 |

## 868/4 Z SB Square-Plus bits

| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 05**073076**001 | *202703* | | **868/4 Square-Plus** 2x # 1x50 | 5 |
| 05**073077**001 | *202697* | | **868/4 Square-Plus** 2x # 2x50 | 5 |

## 868/4 V Square-Plus bits

With wedging function.

### 868/4 V Square-Plus bits

| | EAN | | | | | | | |
|---|---|---|---|---|---|---|---|---|
| Code | 4013288 | | mm | | mm | | | |
| 05060300001 | *169211* | # 1 | 50 | 2" | 4,5 | | | 10 |
| 05060297001 | *169198* | # 1 | 89 | 3 1/2" | 4,5 | | | 10 |
| 05060301001 | *113610* | # 2 | 50 | 2" | 6,0 | | | 10 |
| 05060302001 | *113627* | # 2 | 70 | 2 3/4" | 6,0 | | | 10 |
| 05060303001 | *113634* | # 2 | 89 | 3 1/2" | 6,0 | | | 10 |
| 05060304001 | *113641* | # 2 | 152 | 6" | 6,0 | | | 10 |
| 05060296001 | *169181* | # 3 | 50 | 2" | 6,0 | | | 10 |
| 05060298001 | *169204* | # 3 | 89 | 3 1/2" | 6,0 | | | 10 |

## Diamond-coated bits

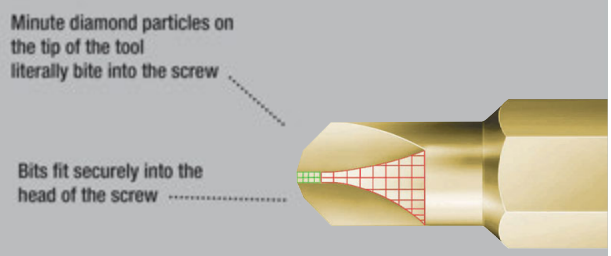


High quality bits with Mplus advantage for more breaking torque and thereby enhanced durability; diamond coating for a secure fit in the screw head.

### 871/1 DC TORQ-SET® Mplus bits

| | EAN | | | | | | | |
|---|---|---|---|---|---|---|---|---|
| Code | 4013288 | mm | | mm | | mm | | |
| 05066638001 | *099525* | 4 | | 25 | 1" | 4,7 | | 10 |
| 05066640001 | *033161* | 6 | | 25 | 1" | 4,7 | | 10 |
| 05066642001 | *033178* | 8 | | 25 | 1" | 6,0 | | 10 |
| 05066644001 | *033185* | 10 | | 25 | 1" | 6,0 | | 10 |
| 05066646001 | *033192* | -- | 1/4" | 32 | 1 1/4" | 11,0 | | 10 |

## 871/1 TORQ-SET® Mplus bits

TORQ-SET® Mplus: The stronger flanks – when compared with the conventional TORQ-SET® profile – result in 70% more breaking torque and thereby enhanced durability whilst at the same time providing a perfect fit in the screw head.

Tough viscous for universal use. 1/4" hexagon, suitable for holders as per DIN ISO 1173-D 6.3.

### 871/1 TORQ-SET® Mplus bits, 25 mm

| | EAN | | | | | | | |
|---|---|---|---|---|---|---|---|---|
| Code | 4013288 | mm | | mm | | mm | | |
| 05066618001 | *093073* | 0 | | 25 | 1" | 4,7 | | 10 |
| 05066619001 | *041562* | 1 | | 25 | 1" | 4,7 | | 10 |
| 05066620001 | *033086* | 2 | | 25 | 1" | 4,7 | | 10 |
| 05066622001 | *033093* | 3 | | 25 | 1" | 4,7 | | 10 |
| 05066624001 | *033109* | 4 | | 25 | 1" | 4,7 | | 10 |
| 05066626001 | *033116* | 5 | | 25 | 1" | 4,7 | | 10 |
| 05066628001 | *033123* | 6 | | 25 | 1" | 4,7 | | 10 |
| 05066630001 | *033130* | 8 | | 25 | 1" | 6,0 | | 10 |
| 05066632001 | *033147* | 10 | | 25 | 1" | 6,0 | | 10 |
| 05066633001 | *037558* | -- | 1/4" | 25 | 1" | 6,0 | | 10 |

### 871/1 TORQ-SET® Mplus bits, 32 mm

| | EAN | | | | | | | |
|---|---|---|---|---|---|---|---|---|
| Code | 4013288 | | mm | | mm | | | |
| 05066634001 | *033154* | 1/4" | 32 | 1 1/4" | 11,0 | | | 10 |
| 05066635001 | *093011* | 5/16" | 32 | 1 1/4" | 11,0 | | | 10 |

## 871/4 DC TORQ-SET® Mplus bits

High quality bits with Mplus advantage for more breaking torque and thereby enhanced durability; diamond coating for a secure fit in the screw head.

1/4" hexagon, suitable for holders as per DIN ISO 1173-F 6.3.

### 871/4 DC TORQ-SET® Mplus bits

| | EAN | | | | | | | |
|---|---|---|---|---|---|---|---|---|
| Code | 4013288 | | | mm | | | | |
| 05324901001 | *162984* | 2 | | 50 | 2" | | | 10 |
| 05066688001 | *099532* | 4 | | 50 | 2" | | | 10 |
| 05066690001 | *033345* | 6 | | 50 | 2" | | | 10 |
| 05066692001 | *033352* | 8 | | 50 | 2" | | | 10 |
| 05066694001 | *033369* | 10 | | 50 | 2" | | | 10 |
| 05066696001 | *033376* | -- | 1/4" | 50 | 2" | | | 10 |

## 871/4 TORQ-SET® Mplus bits

| Code | EAN 4013288 | | | mm | | | | |
|---|---|---|---|---|---|---|---|---|
| 05066660001 | *033239* | 2 | | 50 | 2" | | | 10 |
| 05066683001 | *094469* | 2 | | 89 | 3 1/2" | | | 5 |
| 05066662001 | *033246* | 3 | | 50 | 2" | | | 10 |
| 05066684001 | *094476* | 3 | | 89 | 3 1/2" | | | 5 |
| 05066664001 | *033253* | 4 | | 50 | 2" | | | 10 |
| 05066685001 | *094483* | 4 | | 89 | 3 1/2" | | | 5 |
| 05066666001 | *033260* | 5 | | 50 | 2" | | | 10 |
| 05066668001 | *033277* | 6 | | 50 | 2" | | | 10 |
| 05066676001 | *033307* | 6 | | 70 | 2 3/4" | | | 5 |
| 05066686001 | *094490* | 6 | | 89 | 3 1/2" | | | 10 |
| 05066670001 | *033055* | 8 | | 50 | 2" | | | 10 |
| 05066678001 | *033314* | 8 | | 70 | 2 3/4" | | | 5 |
| 05066687001 | *094506* | 8 | | 89 | 3 1/2" | | | 10 |
| 05066672001 | *033284* | 10 | | 50 | 2" | | | 10 |
| 05066680001 | *033321* | 10 | | 70 | 2 3/4" | | | 5 |
| 05066682001 | *033338* | 10 | | 89 | 3 1/2" | | | 5 |
| 05066674001 | *033291* | -- | 1/4" | 50 | 2" | | | 10 |
| 05221110001 | *035851* | -- | 5/16" | 50 | 2" | | | 10 |

## 871/2 TORQ-SET® Mplus bits

5/16" hexagon, suitable for holders as per DIN ISO 1173-D 8.

## 871/2 TORQ-SET® Mplus bits

| Code | EAN 4013288 | | mm | | | | |
|---|---|---|---|---|---|---|---|
| 05066654001 | *033208* | 1/4" | 32 | 1 1/4" | | | 5 |
| 05066656001 | *033215* | 5/16" | 32 | 1 1/4" | | | 5 |

## 875/1 TRI-WING® bits, 25 mm

High quality bits for TRI-WING® screws. Tough viscous for universal use. 1/4" hexagon, suitable for holders as per DIN ISO 1173-D 6.3.

## 875/1 TRI-WING® bits, 25 mm

| Code | EAN 4013288 | | mm | | mm | | | |
|---|---|---|---|---|---|---|---|---|
| 05066758001 | *093059* | 0 | 25 | 1" | 4,7 | | | 10 |
| 05066760001 | *033482* | 1 | 25 | 1" | 4,7 | | | 10 |
| 05066762001 | *033499* | 2 | 25 | 1" | 4,7 | | | 10 |
| 05066764001 | *033505* | 3 | 25 | 1" | 4,7 | | | 10 |
| 05066766001 | *033512* | 4 | 25 | 1" | 6,2 | | | 10 |
| 05066768001 | *033529* | 5 | 25 | 1" | 6,2 | | | 10 |

## 875/4 TRI-WING® bits

Tough viscous for universal use. 1/4" hexagon, suitable for holders as per DIN ISO 1173-F 6.3.

## 875/4 TRI-WING® bits

| Code | EAN 4013288 | | mm | | | | | |
|---|---|---|---|---|---|---|---|---|
| 05066785001 | *094605* | 1 | 89 | 3 1/2" | | | | 5 |
| 05066786001 | *094612* | 2 | 89 | 3 1/2" | | | | 5 |
| 05066787001 | *094629* | 3 | 89 | 3 1/2" | | | | 5 |
| 05066788001 | *094636* | 4 | 89 | 3 1/2" | | | | 5 |

## 860/1 XZN Multi-point bits

High quality bits for recessed multi-point screws. Tough viscous for universal use. 1/4" hexagon, suitable for holders as per DIN ISO 1173-D 6.3.

## 860/1 XZN Multi-point bits

| Code | EAN 4013288 | | mm | | mm | | | |
|---|---|---|---|---|---|---|---|---|
| 05066150001 | *034953* | M 4 | 25 | 1" | 4,17 | | | 10 |
| 05066155001 | *034960* | M 5 | 25 | 1" | 5,14 | | | 10 |
| 05066160001 | *034977* | M 6 | 25 | 1" | - | | | 10 |
| 05066165001 | *034984* | M 8 | 25 | 1" | 8,0 | | | 5 |
| 05066170001 | *034991* | M 10 | 25 | 1" | 10,0 | | | 5 |

## 872/9 bits for Microstix® screws

With 4 mm halfmoon drive for direct insertion in the power tool.

## 872/9 bits for Microstix® screws

| Code | EAN 4013288 | | mm | mm | | | | |
|---|---|---|---|---|---|---|---|---|
| 05066850001 | *179272* | m | 44 | 2,0 | 1 47/64" | | | 10 |
| 05066851001 | *179296* | 00 | 44 | 2,0 | 1 47/64" | | | 10 |
| 05066852001 | *179302* | F | 44 | 2,0 | 1 47/64" | | | 10 |
| 05066853001 | *179319* | 0 | 44 | 2,0 | 1 47/64" | | | 10 |
| 05066854001 | *179326* | 1 | 44 | 2,0 | 1 47/64" | | | 10 |

## 857/1 Z Spanner bits

Bits for spanner screws. Tough viscous for universal use. 1/4" hexagon, suitable for holders as per DIN ISO 1173-D 6.3.

### 857/1 Z Spanner bits

| | EAN | | | | | | | |
|---|---|---|---|---|---|---|---|---|
| Code | 4013288 | | mm | | mm | | | |
| 05**057150**001 | *038609* | 4 | 25 | 1" | 3,18 | | | 10 |
| 05**057151**001 | *038616* | 6 | 25 | 1" | 4,32 | | | 10 |
| 05**057152**001 | *038623* | 8 | 25 | 1" | 5,21 | | | 10 |
| 05**057153**001 | *038630* | 10 | 25 | 1" | 6,10 | | | 10 |

## 857/4 Z Spanner bits

Tough viscous for universal use. 1/4" hexagon, suitable for holders as per DIN ISO 1173-F 6.3.

### 857/4 Z Spanner bits

| | EAN | | | | | | | |
|---|---|---|---|---|---|---|---|---|
| Code | 4013288 | | mm | | mm | | | |
| 05**057160**001 | *094810* | 4 | 89 | 3 1/2" | 3,18 | | | 5 |
| 05**057161**001 | *094827* | 6 | 89 | 3 1/2" | 4,32 | | | 5 |
| 05**057162**001 | *094834* | 8 | 89 | 3 1/2" | 5,21 | | | 5 |
| 05**057163**001 | *094841* | 10 | 89 | 3 1/2" | 6,10 | | | 5 |

## Kraftform Stainless - stainless steel to prevent rust

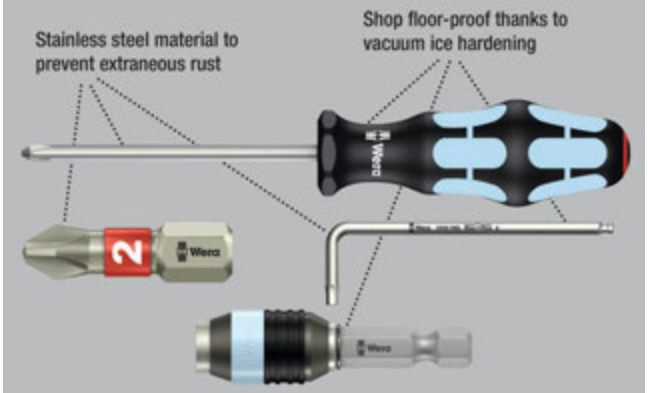


High quality nutsetter out of stainless steel for hexagon head screws. Stainless to prevent the risk of extraneous rust. Non-magnetic design with retaining spring. 1/4" hexagon, suitable for holders as per, DIN ISO 1173-F 6.3.

### 3869/4 Nutsetters, stainless

| | EAN | | | | | | | |
|---|---|---|---|---|---|---|---|---|
| Code | 4013288 | mm | | mm | mm | | | |
| 05**071222**001 | *118127* | 7,0 | | 50,0 | 12,5 | | | 5 |
| 05**071223**001 | *118257* | 8,0 | | 50,0 | 14,0 | | | 5 |
| 05**071224**001 | *118141* | 10,0 | | 50,0 | 16,0 | | | 5 |
| 05**071225**001 | *118158* | 13,0 | | 50,0 | 19,5 | | | 5 |
| 05**071228**001 | *118189* | | 3/8" | 50,0 | 16,0 | | | 5 |

## 869/4 Nutsetters

Non-magnetic design. 1/4" hexagon, suitable for holders as per DIN ISO 1173-F 6.3.

### 869/4 Nutsetters

| | EAN | | | | | | | |
|---|---|---|---|---|---|---|---|---|
| Code | 4013288 | mm | | mm | mm | | | |
| 05**060400**001 | *100948* | 5,5 | | 50,0 | 11,0 | | | 5 |
| 05**060272**001 | *016546* | 5,5 | | 65,0 | 9,0 | | | 5 |
| 05**060401**001 | *100955* | 6,0 | | 50,0 | 11,0 | | | 5 |
| 05**060274**001 | *016553* | 6,0 | | 65,0 | 11,0 | | | 5 |
| 05**060402**001 | *100962* | 7,0 | | 50,0 | 11,0 | | | 5 |
| 05**060276**001 | *016560* | 7,0 | | 65,0 | 11,0 | | | 5 |
| 05**060403**001 | *100979* | 8,0 | | 50,0 | 12,5 | | | 5 |
| 05**060278**001 | *016577* | 8,0 | | 65,0 | 12,5 | | | 5 |
| 05**060404**001 | *100986* | 9,0 | | 50,0 | 14,0 | | | 5 |
| 05**060280**001 | *016584* | 9,0 | | 65,0 | 14,0 | | | 5 |
| 05**060405**001 | *100993* | 10,0 | | 50,0 | 14,0 | | | 5 |
| 05**060282**001 | *016591* | 10,0 | | 65,0 | 14,0 | | | 5 |
| 05**060406**001 | *101006* | 11,0 | | 50,0 | 16,0 | | | 5 |
| 05**060281**001 | *031327* | 11,0 | | 65,0 | 16,0 | | | 5 |
| 05**060407**001 | *101013* | 12,0 | | 50,0 | 18,0 | | | 5 |
| 05**060283**001 | *031334* | 12,0 | | 65,0 | 18,0 | | | 5 |
| 05**060408**001 | *101020* | 13,0 | | 50,0 | 18,0 | | | 5 |
| 05**060284**001 | *016607* | 13,0 | | 65,0 | 19,0 | | | 5 |
| 05**060409**001 | *101037* | | 1/4" | 50,0 | 11,0 | | | 5 |
| 05**060286**001 | *016614* | | 1/4" | 65,0 | 11,0 | | | 5 |
| 05**060410**001 | *101044* | | 5/16" | 50,0 | 12,5 | | | 5 |
| 05**060290**001 | *016638* | | 5/16" | 65,0 | 12,5 | | | 5 |
| 05**060411**001 | *101051* | | 3/8" | 50,0 | 14,0 | | | 5 |
| 05**060288**001 | *016621* | | 3/8" | 65,0 | 14,0 | | | 5 |
| 05**060412**001 | *101068* | | 7/16" | 50,0 | 16,0 | | | 5 |

## 869/4 M Nutsetters, magnetic

| Code | EAN 4013288 | mm | | mm | mm | | | |
|---|---|---|---|---|---|---|---|---|
| 05**060420**001 | *101075* | 5,5 | | 50,0 | 11,0 | | | 5 |
| 05**060210**001 | *016652* | 5,5 | | 65,0 | 11,0 | | | 5 |
| 05**060421**001 | *101082* | 6,0 | | 50,0 | 11,0 | | | 5 |
| 05**060215**001 | *016669* | 6,0 | | 65,0 | 11,0 | | | 5 |
| 05**060422**001 | *101099* | 7,0 | | 50,0 | 11,0 | | | 5 |
| 05**060220**001 | *016676* | 7,0 | | 65,0 | 11,0 | | | 5 |
| 05**060423**001 | *101105* | 8,0 | | 50,0 | 12,5 | | | 5 |
| 05**060225**001 | *016683* | 8,0 | | 65,0 | 12,5 | | | 5 |
| 05**060424**001 | *101112* | 9,0 | | 50,0 | 14,0 | | | 5 |
| 05**060230**001 | *016690* | 9,0 | | 65,0 | 14,0 | | | 5 |
| 05**060425**001 | *101129* | 10,0 | | 50,0 | 14,0 | | | 5 |
| 05**060235**001 | *016706* | 10,0 | | 65,0 | 14,0 | | | 5 |
| 05**060426**001 | *101136* | 11,0 | | 50,0 | 16,0 | | | 5 |
| 05**060237**001 | *031501* | 11,0 | | 65,0 | 16,0 | | | 5 |
| 05**060427**001 | *101143* | 12,0 | | 50,0 | 18,0 | | | 5 |
| 05**060238**001 | *031495* | 12,0 | | 65,0 | 17,0 | | | 5 |
| 05**060428**001 | *101150* | 13,0 | | 50,0 | 18,0 | | | 5 |
| 05**060240**001 | *016713* | 13,0 | | 65,0 | 19,0 | | | 5 |
| 05**060429**001 | *101167* | | 1/4" | 50,0 | 11,0 | | | 5 |
| 05**060255**001 | *016720* | | 1/4" | 65,0 | 11,0 | | | 5 |
| 05**060430**001 | *101174* | | 5/16" | 50,0 | 12,5 | | | 5 |
| 05**060260**001 | *016737* | | 5/16" | 65,0 | 12,5 | | | 5 |
| 05**060431**001 | *101181* | | 3/8" | 50,0 | 14,0 | | | 5 |
| 05**060265**001 | *016744* | | 3/8" | 65,0 | 14,0 | | | 5 |
| 05**060432**001 | *101198* | | 7/16" | 50,0 | 16,0 | | | 5 |

## 869/4 M SB Nutsetters, magnetic

| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 05**073500**001 | *105691* | | **869/4 M** 1x 5.5x50.0 | 3 |
| 05**073501**001 | *105707* | | **869/4 M** 1x 6.0x50.0 | 3 |
| 05**073502**001 | *106506* | | **869/4 M** 1x 7.0x50.0 | 3 |
| 05**073503**001 | *105714* | | **869/4 M** 1x 8.0x50.0 | 3 |
| 05**073504**001 | *105721* | | **869/4 M** 1x 9.0x50.0 | 3 |
| 05**073505**001 | *105738* | | **869/4 M** 1x 10.0x50.0 | 3 |
| 05**073506**001 | *105745* | | **869/4 M** 1x 11.0x50.0 | 3 |
| 05**073507**001 | *105752* | | **869/4 M** 1x 12.0x50.0 | 3 |
| 05**073508**001 | *105769* | | **869/4 M** 1x 13.0x50.0 | 3 |
| 05**073509**001 | *105776* | | **869/4 M** 1x 1/4"x50.0 | 3 |
| 05**073510**001 | *105783* | | **869/4 M** 1x 3/8"x50.0 | 3 |

## 869/4 M Set A SB

| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 05**073495**001 | *144584* | | **869/4 M**<br>1x 7.0x50.0; 1x 8.0x50.0; 1x 10.0x50.0; 1x 12.0x50.0; 1x 13.0x50.0; 1x 1/4"x50.0; 1x 5/16"x50.0; 1x 3/8"x50.0 | 1 |

## 869/9 Nutsetters

Metric nutsetter for hexagon head screws. Non-magnetic design. With 4 mm halfmoon drive for direct insertion in the power tool.

### 869/9 Nutsetters

| | EAN | | | | | | | |
|---|---|---|---|---|---|---|---|---|
| Code | 4013288 | mm | mm | mm | | | | |
| 05**135224**001 | *190505* | 2,5 | 44,0 | 5,0 | | | | 10 |
| 05**135225**001 | *190499* | 3,0 | 44,0 | 5,0 | | | | 10 |

## 879/4 Internal thread insertion tool

Insertion tool with internal thread for hanger bolts and threaded rods. 1/4" hexagon, suitable for holders as per DIN ISO 1173-F 6.3.

### 879/4 Internal thread insertion tool

| | EAN | | | | | | | |
|---|---|---|---|---|---|---|---|---|
| Code | 4013288 | | mm | | mm | | | |
| 05**135903**001 | *035059* | M8 | 50,0 | 2" | 12,0 | | | 5 |
| 05**135904**001 | *035066* | M10 | 50,0 | 2" | 12,0 | | | 5 |

Wera
Wera

# Holders and Adaptors

## Impaktor system - For an above-average service life

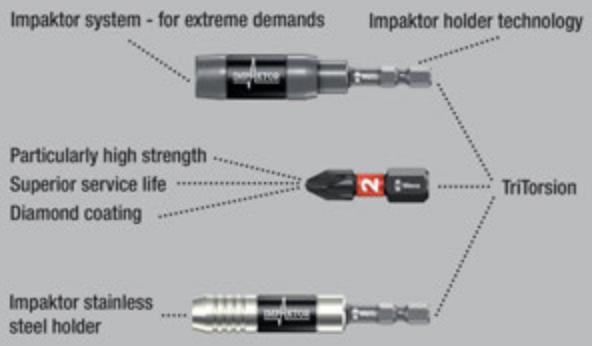


Wera Impaktor holder for the absorption of impulse peaks. Particular torsion effect thanks to the double-torsion spring.

The retaining ring ensures an optimum fit of the tool in the holder. The magnet provides for additional fixing of the bit and screw.

The Impaktor stainless holder with retaining ring and magnet meets the extremely dynamic demands by doing without any small, mechanical parts that are often susceptible.

Used mostly for industrial assembly applications such as e.g. with screwdriving robots. Output: suitable for bits with 1/4" hexagon head drive as per DIN ISO 1173-C 6.3. Drive: 1/4" hexagon, suitable for power screwdrivers with take-up as per DIN ISO 1173-F 6.3.

### 897/4 IMP Impaktor holder with retaining ring and magnet

| | EAN | | | | | | | |
|---|---|---|---|---|---|---|---|---|
| Code | 4013288 | | mm | | | | | |
| 05**057675**001 | *157805* | 1/4" | 75 | 3" | 1/4" | | | 5 |

## 897/4 IMP R Impaktor holder with retaining ring and ring magnet

The Impaktor holder additionally holds long and heavy screws extremely securely with its ring magnet. This enables rapid and dependable positioning of the screw.

Should, situation-related, the magnet not be desired e.g. when working with metal, it can be removed from the screwdriving zone and thereby be neutralised.

Used mostly for manual power tool applications. Output: suitable for bits with 1/4" hexagon head drive as per DIN ISO 1173-C 6.3. Drive: 1/4" hexagon, suitable for power screwdrivers with take-up as per DIN ISO 1173-F 6.3.

### 897/4 IMP R Impaktor holder with retaining ring and ring magnet

| | EAN | | | | | | | |
|---|---|---|---|---|---|---|---|---|
| Code | 4013288 | | mm | | | | | |
| 05**057676**001 | *157812* | 1/4" | 75 | 3" | 1/4" | | | 5 |

### 897/4 IMP R SB Impaktor holder with retaining ring and ring magnet

| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 05**073990**001 | *157836* | | **897/4 Impaktor R** 1x 1/4"x75 | 3 |

## Radidaptor - the amazing compact multifunction tool

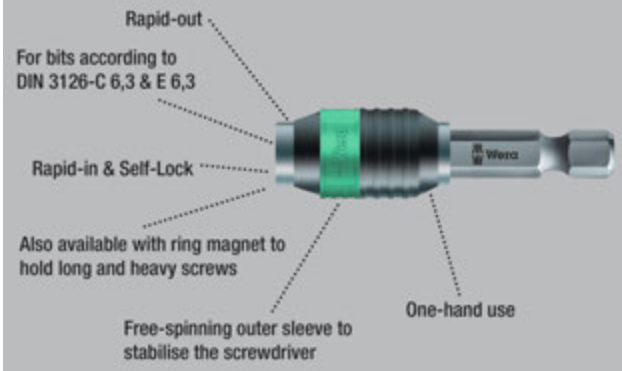


Universal holder for the take-up of bits with 1/4" hexagon head drive as per DIN ISO 1173-C 6.3 (ISO 1173). Stainless design to prevent extraneous rust.

Comes with Rapidaptor technology, which allows bits to be attached without any need to actuate the sleeve. The removal of the bit is simple, just by pushing the sleeve forward – for rapid bit change with just one hand. 1/4" hexagon, suitable for power screwdrivers with take-up as per DIN ISO 1173-F 6.3.

### 3888/4/1 K Rapidaptor Universal Bit Holder, stainless

| | EAN | | | | | | | |
|---|---|---|---|---|---|---|---|---|
| Code | 4013288 | | mm | | | mm | | |
| 05**071100**001 | *111487* | 1/4" | 50 | 2" | 1/4" | 15,0 | | 5 |

### 3888/4/1 K SB Rapidaptor Universal Bit Holder, stainless

| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 05**073616**001 | *112170* | | **3888/4/1 K** 1x 1/4"x50 | 3 |

## BiTorsion system - for longer service life

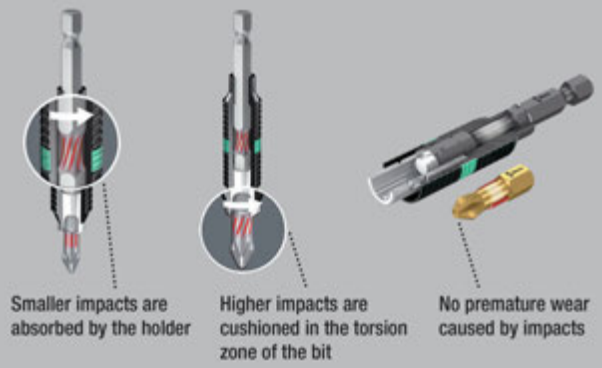


Universal holder for bits with 1/4" hexagon head drive as per DIN ISO 1173-C 6.3 and E 6.3 (ISO 1173). BiTorsion holders by Wera have a torsion spring that absorbs low peak loads during screwdriving jobs.

The combined use with BiTorsion bits and their torsion zones extends the service life of the tool considerably. BiTorsion holders by Wera can, however, also be used with conventional bits. The Rapidaptor technology allows bits to be attached without any need to actuate the sleeve.

The removal of the bit is simple, just by pushing the sleeve forward. This enables rapid bit change with just one hand. 1/4" hexagonal, suitable for power screwdrivers with take-up as per DIN ISO 1173-F 6.3.

### 897/4 R Rapidaptor BiTorsion Universal Bit Holder

| | EAN | | | | | | | |
|---|---|---|---|---|---|---|---|---|
| Code | 4013288 | | mm | | | mm | | |
| 05**053923**001 | *095633* | 1/4" | 75 | 3" | 1/4" | 15,0 | | 5 |

### 897/4 R SB Rapidaptor BiTorsion Universal Bit Holder

| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 05**073420**001 | *099464* | | **897/4 R** 1x 1/4"x75 | 3 |

## 889/4/1 K Rapidaptor Universal Bit Holder

Rapidaptor universal holder for bits with 1/4" hexagon head drive as per DIN ISO 1173-C 6.3 and E 6.3 (ISO 1173). The Rapidaptor allows bits to be attached without any need to actuate the sleeve.

The removal of the bit is simple, just by pushing the sleeve forward. This enables rapid bit change with just one hand. The strong permanent magnet holds the bits absolutely securely. 1/4" hexagonal, suitable for power screwdrivers with take-up as per DIN ISO 1173-F 6.3.

### 889/4/1 K Rapidaptor Universal Bit Holder

| | EAN | | | | | | | |
|---|---|---|---|---|---|---|---|---|
| Code | 4013288 | | mm | | | mm | | |
| 05**052502**001 | *095626* | 1/4" | 50 | 2" | 1/4" | 15,0 | | 5 |

### 889/4/1 K SB Rapidaptor Universal Bit Holder

| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 05**073421**001 | *099440* | | **889/4/1 K** 1x 1/4"x50 | 3 |

### 889/4/1 Rapidaptor Universal Bit Holder

| | EAN | | | | | | | |
|---|---|---|---|---|---|---|---|---|
| Code | 4013288 | | mm | | | mm | | |
| 05**052503**001 | *098016* | 1/4" | 75 | 3" | 1/4" | 15,0 | | 5 |

### 889/4 R Rapidaptor Universal Bit Holder

| | EAN | | | | | | | |
|---|---|---|---|---|---|---|---|---|
| Code | 4013288 | | mm | | | mm | | |
| 05**052504**001 | *101242* | 1/4" | 100 | 4" | 1/4" | 15,0 | | 2 |

## 888/4/1 K Rapidaptor Universal Bit holder

- Non-magnetic design

### 888/4/1 K Rapidaptor Universal Bit Holder

| | EAN | | | | | | | |
|---|---|---|---|---|---|---|---|---|
| Code | 4013288 | | mm | | | mm | | |
| 05**052500**001 | *095619* | 1/4" | 50 | 2" | 1/4" | 15,0 | | 5 |

## 887/4 RR Rapidaptor Universal Bit Holder with ring magnet

Rapidaptor universal holder for bits with hexagon head drive as per DIN ISO 1173-C 6.3 and E 6.3 (ISO 1173). The floating, free-turning magnetic sleeve securely holds even large and heavy screws. The Rapidaptor allows bits to be attached without any need to actuate the sleeve.

The removal of the bit is simple, just by pushing the sleeve forward. This enables rapid bit change with just one hand. 1/4" hexagonal, suitable for power screwdrivers with take-up as per DIN ISO 1173-F 6.3.

### 887/4 RR Rapidaptor Universal Bit Holder with ring magnet

| | EAN | | | | | | | |
|---|---|---|---|---|---|---|---|---|
| Code | 4013288 | | mm | | | mm | | |
| 05**052490**001 | *104045* | 1/4" | 57 | 2 1/4" | 1/4" | 16 | | 5 |

### 887/4 RR SB Rapidaptor Universal Bit Holder with ring magnet

| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 05**073511**001 | *105790* | | **887/4 RR** 1x 1/4"x57 | 3 |

## 889/4/1 F Rapidaptor free-running bit holder for torque screwdrivers with pistol handle

The free-running feature allows for a particularly quick return movement without having to remove the screwdriver when tightening screws.

Especially for application with Wera torque screwdrivers with pistol handle for fast and ergonomic working.

The Rapidaptor technology allows mounting bits without activating the sleeve. Remove the bits by simply pushing the sleeve forward - for rapid bit change, all with one hand.

- Avoids annoying re-positioning when tightening screws with Wera torque screwdrivers with pistol handle
- Fast and fatigue-free work due to precise free-running mechanism
- Maintenance-free construcion with especially slim and solid bearing by leading free-running manufacturer
- Maximum transmissable tightening moment 10,0 Nm
- Bit mounting with Rapidaptor technology for rapid bit change, suitable for bits with 1/4"- external hexagon drive as per DIN ISO 1173-C 6.3 and E 6.3 and Wera connection series 1 and 4

### 889/4/1 F Rapidaptor free-running bit holder for torque screwdrivers with pistol handle

| | EAN | | | | | | | |
|---|---|---|---|---|---|---|---|---|
| Code | 4013288 | | mm | | | mm | | |
| 05**052501**001 | *217585* | 1/4" | 64 | 2 33/64" | 1/4" | 16,5 | | 5 |

## 894/4/1 K Universal Bit Holder

Universal holder for the take-up of bits with 1/4" hexagon head drive as per DIN ISO 1173-C 6.3.

Quick-release chuck for rapid bit change. 1/4" hexagonal, suitable for power screwdrivers with take-up as per DIN ISO 1173-F 6.3.

### 894/4/1 K Universal Bit Holder

| | EAN | | | | | | | |
|---|---|---|---|---|---|---|---|---|
| Code | 4013288 | | mm | | | mm | | |
| 05**053522**001 | *017512* | 1/4" | 51 | 2" | 1/4" | 14,3 | | 5 |

### 894/4/1 Universal Bit Holder

| | EAN | | | | | | | |
|---|---|---|---|---|---|---|---|---|
| Code | 4013288 | | mm | | | mm | | |
| 05**053520**001 | *017505* | 1/4" | 75 | 3" | 1/4" | 14,3 | | 5 |

## 895/4/1 K Universal Bit Holder

Universal holder for the take-up of bits with 1/4" hexagon head drive as per DIN ISO 1173-C 6.3. Quick-release chuck for rapid bit change.

The strong permanent magnet holds the bits absolutely securely. 1/4" hexagonal, suitable for power screwdrivers with take-up as per DIN ISO 1173-F 6.3.

### 895/4/1 K Universal Bit Holder

| | EAN | | | | | | | |
|---|---|---|---|---|---|---|---|---|
| Code | 4013288 | | mm | | | mm | | |
| 05**053872**001 | *035158* | 1/4" | 52 | 2" | 1/4" | 14,3 | | 5 |

### 895/4/1 K SB Universal Bit Holder

| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 05**073318**001 | *029195* | | **895/4/1 K** 1x 1/4"x52 | 3 |

### 895/4/1 Universal Bit Holder

| | EAN | | | | | | | |
|---|---|---|---|---|---|---|---|---|
| Code | 4013288 | | mm | | | mm | | |
| 05**053870**001 | *017574* | 1/4" | 77 | 3" | 1/4" | 14,3 | | 5 |

## 898/4 Combination Bit Holder

Combination holder for bits with 4 mm halfmoon drive (Wera series 9) and 4 mm HIOS drive (Wera series 21): quick-release chuck, 1/4" hexagonal drive, suitable for power screwdrivers with a take-up as per DIN ISO 1173-F 6.3.

### 898/4 Combination Bit Holder

| | EAN | | | | | | | |
|---|---|---|---|---|---|---|---|---|
| Code | 4013288 | mm | | | mm | | | |
| 05**051500**001 | *184177* | 50 | 2" | 1/4" | 10,0 | | | 5 |

## 898/9 Combination Bit Holder

Suitable for bits with 4 mm halfmoon drive (Wera series 9) and 4 mm HIOS drive (Wera series 21): with quick-release chuck, 4 mm halfmoon drive.

### 898/9 Combination Bit Holder

| | EAN | | | | | | | |
|---|---|---|---|---|---|---|---|---|
| Code | 4013288 | mm | | mm | | | | |
| 05**051501**001 | *184184* | 50 | 2" | 10,0 | | | | 5 |

## 898/21 Combination Bit Holder

Suitable for bits with 4 mm halfmoon drive (Wera series 9) and 4 mm HIOS drive (Wera series 21): with quick-release chuck, 4 mm HIOS drive.

### 898/21 Combination Bit Holder

| | EAN | | | | | | | |
|---|---|---|---|---|---|---|---|---|
| Code | 4013288 | mm | | mm | | | | |
| 05**051502**001 | *184191* | 50 | 2" | 10,0 | | | | 5 |

## 890/4/1 Universal Bit Holder

Universal holder for the take-up of bits with 1/4" hexagon head drive as per DIN ISO 1173-C 6.3. The retaining ring ensures an optimum fit of the tool in the holder.

1/4" hexagonal, suitable for power screwdrivers with take-up as per DIN ISO 1173-F 6.3.

### 890/4/1 Universal Bit Holder

| | EAN | | | | | | | |
|---|---|---|---|---|---|---|---|---|
| Code | 4013288 | | mm | | | mm | | |
| 05**052575**001 | *017239* | 1/4" | 57 | 2 1/4" | 1/4" | 11,1 | | 5 |

## 893/4/1 K Universal Bit Holder

Universal holder for the take-up of bits with 1/4" hexagon head drive as per DIN ISO 1173-C 6.3.

Stainless sleeve for special corrosion protection. 1/4" hexagon, suitable for power screwdrivers with a take-up as per DIN ISO 1173-F 6.3.

### 893/4/1 K Universal Bit Holder

| | EAN | | | | | | | |
|---|---|---|---|---|---|---|---|---|
| Code | 4013288 | | mm | | | mm | | |
| 05**134480**001 | *017468* | 1/4" | 50 | 2" | 1/4" | 10,5 | | 5 |

### 893/4/1 K SB Universal Bit Holder

| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 05**073401**001 | *029133* | | **893/4/1 K**<br>1x 1/4"x50 | 3 |

## 899/3/1 Universal Bit Holder

Stainless steel sleeve for very special corrosion protection. The strong permanent magnet holds the bits absolutely securely.

Universal holder for the take-up of bits with 1/4" hexagon head drive as per DIN ISO 1173-C 6.3. 5.5 mm, suitable for power screwdrivers with take-up as per DIN ISO 1173-B 5.5.

### 899/3/1 Universal Bit Holder

| | EAN | | | | | | | |
|---|---|---|---|---|---|---|---|---|
| Code | 4013288 | | mm | | mm | mm | | |
| 05**053425**001 | *017659* | 1/4" | 72 | 2 3/4" | 5,5 | 10,5 | | 5 |

## 899/4/1 Universal Bit Holder

Stainless steel sleeve for very special corrosion protection.
The retaining ring ensures an optimum fit of the tool in the holder.
The strong permanent magnet holds the bits absolutely securely.

Universal holder for the take-up of bits with 1/4" hexagon head drive as per DIN ISO 1173-C 6.3. 1/4" hexagonal, suitable for power screwdrivers with take-up as per DIN ISO 1173-F 6.3.

### 899/4/1 Universal Bit Holder

| | EAN | | | | | | | |
|---|---|---|---|---|---|---|---|---|
| Code | 4013288 | Art.No. | | mm | | | mm | |
| 05**053457**001 | *017673* | 899/4/1 K | 1/4" | 50 | 2" | 1/4" | 10,5 | 5 |
| 05**053455**001 | *017666* | 899/4/1 75 | 1/4" | 75 | 3" | 1/4" | 10,5 | 5 |
| 05**053459**001 | *036711* | 899/4/1 100 | 1/4" | 100 | 4" | 1/4" | 10,5 | 5 |
| 05**053458**001 | *036728* | 899/4/1 152 | 1/4" | 152 | 6" | 1/4" | 10,5 | 5 |

### 899/4/1 SB Universal Bit Holder

| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 05**347100**001 | *095268* | | **899/4/1** 1x 1/4"x50 | 3 |
| 05**073357**001 | *029720* | | **899/4/1** 1x 1/4"x75 | 3 |
| 05**134398**001 | *099907* | | **899/4/1** 1x 1/4"x152 | 3 |

## 899/4/1 S Universal Bit Holder with strong retaining ring

The particularly strong retaining ring ensures an optimum fixing of the tool in the holder. The especially strong permanent magnet makes sure that the bits are held absolutely securely.

Universal holder for the take-up of bits with 1/4" hexagon head drive as per DIN ISO 1173-C 6.3. 1/4" hexagon, suitable for holders as per DIN ISO 1173-F 6.3.

### 899/4/1 S Universal Bit Holder with strong retaining ring

| | EAN | | | | | | | |
|---|---|---|---|---|---|---|---|---|
| Code | 4013288 | | mm | | | mm | | |
| 05**160976**001 | *105271* | 1/4" | 50 | 2" | 1/4" | 10,5 | | 5 |
| 05**160924**001 | *105264* | 1/4" | 75 | 3" | 1/4" | 10,5 | | 5 |
| 05**160977**001 | *105288* | 1/4" | 100 | 4" | 1/4" | 10,5 | | 5 |
| 05**160979**001 | *105301* | 1/4" | 200 | 8" | 1/4" | 10,5 | | 1 |
| 05**160981**001 | *105325* | 1/4" | 300 | 12" | 1/4" | 10,5 | | 1 |

## 899/14/1 Universal Bit Holder

Drive: SDS plus.

### 899/14/1 SB Universal Bit Holder

| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 05**134397**001 | *099891* | | **899/14/1** 1x 1/4"x79 | 3 |

## 881/4/1 SB Bit holder with variable screw depth limitation

For patio construction, the screws should be countersunk to be evenly flush with the decking.

The 881/4/1 bit holder with variable screw depth limitation and felt ring allows for a uniform depth and protects the surface from brush marks. Two spare felt rings included.

- Bit holder for evenly flush countersunk screws in patio construction
- With adjustable screw depth limitation
- Felt ring (exchangeable) prevents brush marks on decking
- Included: 2 spare felt rings

### 881/4/1 SB Bit holder with variable screw depth limitation

| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 05**130002**001 | *219282* | | | 1 |
| | | | **881/4/1**<br>1x 1/4"x90 [1] | |
| | | | **9201**<br>2x 27,0 | |

[1] The spare part kit with 5x felt rings can be ordered with the code number 05130003001.

## 9200 Spare part kit felt rings for 881/4/1 bit holder

- Five spare felt rings for the 881/4/1 SB bit holder with variable screw depth limitation.
- Felt rings prevent brush marks on decking.

### 9200 Spare part kit felt rings for 881/4/1 bit holder

| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 05**130003**001 | *219299* | | | 1 |
| | | | **9201**<br>5x 27,0 | |

## 896/4/1 SB Bit Holder with adjustable depth-control stop

High quality spacer out of aluminium: the screwdriving depth can be infinitely adjusted and allows the flush-mounting of screws.

### 896/4/1 SB Bit Holder with adjustable depth-control stop

| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 05**073210**001 | *178725* | | **896/4/1**<br>1x 1/4"x50 | 1 |

## 870/1 Adaptor

Tool shaft for nutsetters. Output: 1/4" square head; drive: 1/4" hexagon.

### 870/1 Adaptor

| Code | EAN 4013288 | | mm | | | | | |
|---|---|---|---|---|---|---|---|---|
| 05**136000**001 [1] | *016997* | 1/4" | 25 | 1" | 1/4" | | | 5 |

[1] With friction ball; for manual nut spinner sockets

## 870/4 Adaptor

Tool shaft for manual nutsetter inserts; with ball.
Output: Square head; drive 1/4" hexagon.

### 870/4 Adaptor

| Code | EAN 4013288 | | mm | | | | | |
|---|---|---|---|---|---|---|---|---|
| 05**311517**001 [1] | *098214* | 1/4" | 50 | 2" | 1/4" | | | 10 |
| 05**138006**001 [1] | *233387* | 1/4" | 72 | 2" | 2 53/64" | | | 10 |

[1] With friction ball; for manual nut spinner sockets

## 870/4 SB

| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 05**134399**001 | *099914* | | **870/4 A**<br>1x 1/4"x1/4"x50[1] | 3 |
| 05**073985**001 | *233271* | | **870/4 A**<br>1x 1/4"x1/2"x72[1] | 3 |

[1] With friction ball; for manual nut spinner sockets

### 870/2 Adaptor

Tool shaft for power tool nutsetter inserts with square head drive.
5/16" hexagon drive.

## 870/2 Adaptor

| Code | EAN 4013288 | | mm | | | | | |
|---|---|---|---|---|---|---|---|---|
| 05**136001**001[1] | *184245* | 3/8" | 30 | 1 3/16" | 5/16" | | | 5 |
| 05**136002**001[1] | *184269* | 1/2" | 35 | 1 3/8" | 5/16" | | | 5 |

[1] With friction ball; for manual nut spinner sockets

### 870/4 Adaptor

Tool shaft (adaptor) for power tool sockets with hexagon head drive by Wera.
Drive: 1/4" hexagon.

## 870/4 Adaptor

| Code | EAN 4013288 | | mm | | | | | |
|---|---|---|---|---|---|---|---|---|
| 05**050205**001[1] | *017055* | 1/4" | 50 | 2" | 1/4" | | | 5 |
| 05**050210**001[1] | *017062* | 1/4" | 100 | 4" | 1/4" | | | 5 |
| 05**050215**001[1] | *017079* | 3/8" | 50 | 2" | 1/4" | | | 5 |
| 05**050220**001[1] | *017086* | 3/8" | 100 | 4" | 1/4" | | | 5 |

[1] With locking pin; for machine-operated nut spinner sockets

## 870/4/7 Set A SB

| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 05**073200**001 | *139115* | | **870/4**<br>1x 1/4"x50 [1]; 1x 3/8"x50 [1] | 1 |
| | | | **870/7**<br>1x 1/2"x75 [1] | |

[1] With locking pin; for machine-operated nut spinner sockets

### 870/14 Adaptor

Tool shaft for power tool sockets with square head drive.
Drive: SDS plus.

## 870/14 Adaptor

SDS plus

| Code | EAN 4013288 | | mm | | | | | |
|---|---|---|---|---|---|---|---|---|
| 05**050650**001[1] | *017208* | 1/4" | 70 | 2 3/4" | | | | 5 |

[1] With locking pin; for machine-operated nut spinner sockets

### 870/7 Adaptor

Tool shank for power tool sockets; square head output.
7/16" hexagonal, suitable for power screwdrivers with take-up as per DIN ISO 1173-F 11.2.

## 870/7 Adaptor

| Code | EAN 4013288 | | mm | | | | | |
|---|---|---|---|---|---|---|---|---|
| 05**050510**001[1] | *017178* | 1/2" | 75 | 3" | 7/16" | | | 5 |

[1] With locking pin; for machine-operated nut spinner sockets

## 781 A 1/4" Connection parts

Connection part 1/4" square head socket to 3/8" (1/2") external square head. For manual and machine-operated tools (non-impact), with ball stop groove to safely lock the socket, knurling at the rear end for manageability during manual use; chrome-vanadium, brushed chrome-plated finish.

- With 1/4" square head socket drive
- With secure socket fixing
- Made of chrome-vanadium for high load capacity

### 781 A 1/4" Connection parts

| Code | EAN 4013288 | Art.No. | | mm | | | | |
|---|---|---|---|---|---|---|---|---|
| 05**042670**001 | *221193* | 781 A/B | 3/8" | 25,2 | 1" | 1/4" | | 1 |
| 05**042671**001 | *221209* | 781 A/C | 1/2" | 36,0 | 1 27/64" | 1/4" | | 1 |

## 781 B 3/8" Connection parts

Connection part 3/8" square head socket to 1/4" (1/2") external square head. For manual and machine-operated tools (non-impact), with ball stop groove to safely lock the socket, knurling at the rear end for manageability during manual use; chrome-vanadium, brushed chrome-plated finish.

- With 3/8" square head socket drive
- With secure socket fixing
- Made of chrome-vanadium for high load capacity

### 781 B 3/8" Connection parts

| Code | EAN 4013288 | Art.No. | | mm | | | | |
|---|---|---|---|---|---|---|---|---|
| 05**042672**001 | *221247* | 781 B/A | 1/4" | 27,0 | 1 1/16" | 3/8" | | 1 |
| 05**042673**001 | *221056* | 781 B/C | 1/2" | 36,0 | 1 27/64" | 3/8" | | 1 |

## 781 C 1/2" Connection parts

Connection part 1/2" square head socket to 3/8" external square head. For manual and machine-operated tools (non-impact), with ball stop groove to safely lock the socket, knurling at the rear end for manageability during manual use; chrome-vanadium, brushed chrome-plated finish.

- With 1/2" square head socket drive
- With secure socket fixing
- Made of chrome-vanadium for high load capacity

### 781 C 1/2" Connection parts

| Code | EAN 4013288 | Art.No. | | mm | | | | |
|---|---|---|---|---|---|---|---|---|
| 05**042674**001 | *221216* | 781 C/B | 3/8" | 35,5 | 1 25/64" | 1/2" | | 1 |

## 781/5 Set 1

Robust textile belt with 5 connection parts: 781 A: 1/4" square head socket drive, for 3/8" and 1/2" square head socket wrench inserts with ball lock; 781 B: 3/8" square head socket drive, for 1/4" and 1/2" square head socket wrench inserts with ball lock; 781 C: 1/2" square head socket drive, for 3/8" square head socket wrench inserts with ball lock.

- Set with 5 connection parts (adapters) for square head socket wrench inserts
- With secure socket fixing
- With square head socket drive
- With external square head drive
- Made of chrome-vanadium for high load capacity

### 781/5 Set 1

| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 05**042680**001 | *221223* | | | 1 |
| | | | **781 A**<br>1x 781 A/B, 3/8"x25,2x1/4";<br>1x 781 A/C, 1/2"x36,0x1/4" | |
| | | | **781 B**<br>1x 781 B/A, 1/4"x27,0x3/8";<br>1x 781 B/C, 1/2"x36,0x3/8" | |
| | | | **781 C**<br>1x 781 C/B, 3/8"x35,5x1/2" | |
| | | | **Belt 781 0/5**<br>1x 45,0x210,0 | |

## 784 A 1/4" Adaptor with quick-release chuck

Adaptor from square to hexagonal. Comes with quick-release chuck for rapid bit change.

Suitable for the attachment of bits with 1/4" hexagon drive as per DIN ISO 1173-C 6.3. Drive: 1/4" square.

### 784 A 1/4" Adaptor with quick-release chuck

| | EAN | | | | | | | |
|---|---|---|---|---|---|---|---|---|
| Code | 4013288 | Art.No. | | mm | | | | |
| 05**042750**001 | *008022* | 784 A/1 | 1/4" | 30 | 1 3/16" | 1/4" | | 5 |

### 784 B 3/8" Adaptor with quick-release chuck

| | EAN | | | | | | | |
|---|---|---|---|---|---|---|---|---|
| Code | 4013288 | Art.No. | | mm | | | | |
| 05**042755**001 | *008039* | 784 B/1 | 1/4" | 43 | 1 5/8" | 3/8" | | 5 |
| 05**042765**001 | *008046* | 784 B/2 | 5/16" | 50 | 2" | 3/8" | | 5 |

### 784 C 1/2" Adaptor with quick-release chuck

| | EAN | | | | | | | |
|---|---|---|---|---|---|---|---|---|
| Code | 4013288 | Art.No. | | mm | | | | |
| 05**042760**001 | *008053* | 784 C/1 | 1/4" | 50 | 2" | 1/2" | | 5 |
| 05**042768**001 | *008060* | 784 C/2 | 5/16" | 50 | 2" | 1/2" | | 5 |

## 780 A 1/4" Adaptor

Adaptor from square to hexagonal. Suitable for bits with 1/4" hexagon drive as per DIN ISO 1173-C 6.3.
Drive: 1/4" square.

### 780 A 1/4" Adaptor

| | EAN | | | | | | | |
|---|---|---|---|---|---|---|---|---|
| Code | 4013288 | Art.No. | | mm | | | | |
| 05**042605**001 | *007940* | 780 A/1 | 1/4" | 25 | 1" | 1/4" | | 5 |

### 780 B 3/8" Adaptor

| | EAN | | | | | | | |
|---|---|---|---|---|---|---|---|---|
| Code | 4013288 | Art.No. | | mm | | | | |
| 05**042655**001 | *007971* | 780 B/1 | 1/4" | 30 | 1 3/16" | 3/8" | | 5 |
| 05**344511**001 [1] | *113450* | 780 B/1-S | 1/4" | 30 | 1 3/16" | 3/8" | | 5 |
| 05**042665**001 | *007988* | 780 B/2 | 5/16" | 30 | 1 3/16" | 3/8" | | 5 |
| 05**344512**001 [1] | *113467* | 780 B/2-S | 5/16" | 30 | 1 3/16" | 3/8" | | 5 |

[1] S = extra strong

### 780 C 1/2" Adaptor

| | EAN | | | | | | | |
|---|---|---|---|---|---|---|---|---|
| Code | 4013288 | Art.No. | | mm | | | | |
| 05**042705**001 | *007995* | 780 C/1 | 1/4" | 35 | 1 3/8" | 1/2" | | 5 |
| 05**344513**001 | *113474* | 780 C/1-S | 1/4" | 35 | 1 3/8" | 1/2" | | 5 |
| 05**042715**001 | *008008* | 780 C/2 | 5/16" | 35 | 1 3/8" | 1/2" | | 5 |
| 05**344514**001 [1] | *113481* | 780 C/2-S | 5/16" | 35 | 1 3/8" | 1/2" | | 5 |

[1] S = extra strong

Wera

# Bit Sets

## Impaktor system - For an above-average service life

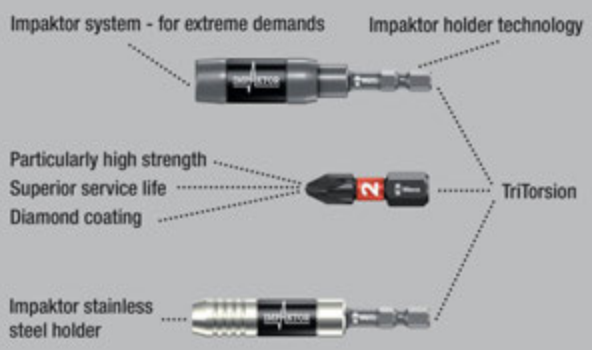


The Impaktor technology offers an above-average service life even under extreme circumstances thanks to the best possible utilisation of the material properties and the optimised geometry; particularly suitable for use with customary impact drivers.

The rough diamond-coating of the bits reduces the risk of a slipping out of the screw head thanks to the enhanced frictional resistance.

The profile and size of the bits are easy to recognise thanks to the Wera Take it easy Tool Finder with its colour coding and clearly visible imprint.

The multi-component Bit-Check is convincing on account of its low weight and the maximum possible degree of compactness. In this respect, the soft material in the lower section of the Bit-Check ensures that the bits are securely held whilst being simple to remove at the same time.

### Bit-Check 30 Impaktor 1

| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 05**057690**001 | *156778* | | | 1 |
| | | | **897/4 Impaktor R**<br>1x 1/4"x75 | |
| | | | **851/1 IMP DC**<br>2x PH 1x25; 3x PH 2x25; 2x PH 3x25 | |
| | | | **855/1 IMP DC**<br>2x PZ 1x25; 3x PZ 2x25; 2x PZ 3x25 | |
| | | | **867/1 IMP DC**<br>1x TX 10x25; 1x TX 15x25; 2x TX 20x25; 3x TX 25x25; 2x TX 30x25; 2x TX 40x25 | |
| | | | **840/1 IMP DC**<br>1x 3,0x25; 1x 4,0x25; 1x 5,0x25; 1x 6,0x25 | |

### Bit-Check 30 Impaktor 2

| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 05**057697**001 | *203946* | | | 1 |
| | | | **897/4 Impaktor**<br>1x 1/4"x75 | |
| | | | **851/1 IMP DC**<br>2x PH 1x25; 3x PH 2x25; 2x PH 3x25 | |
| | | | **855/1 IMP DC**<br>2x PZ 1x25; 3x PZ 2x25; 2x PZ 3x25 | |
| | | | **867/1 IMP DC**<br>1x TX 10x25; 1x TX 15x25; 2x TX 20x25; 3x TX 25x25; 2x TX 30x25; 2x TX 40x25 | |
| | | | **840/1 IMP DC**<br>1x 3,0x25; 1x 4,0x25; 1x 5,0x25; 1x 6,0x25 | |

### Bit-Check 10 Impaktor 1

| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 05**057680**001 | *156785* | | | 10 |
| | | | **897/4 Impaktor R**<br>1x 1/4"x75 | |
| | | | **851/1 IMP DC**<br>1x PH 2x25; 1x PH 3x25 | |
| | | | **855/1 IMP DC**<br>1x PZ 2x25; 1x PZ 3x25 | |
| | | | **867/1 IMP DC**<br>1x TX 20x25; 1x TX 25x25; 1x TX 30x25 | |
| | | | **840/1 IMP DC**<br>1x 4,0x25; 1x 5,0x25 | |

## Bit-Check 10 Impaktor 1 SB

| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 05**073980**001 | *158574* | | **897/4 Impaktor R**<br>1x 1/4"x75 | 1 |
| | | | **851/1 IMP DC**<br>1x PH 2x251x PH 3x25 | |
| | | | **855/1 IMP DC**<br>1x PZ 2x251x PZ 3x25 | |
| | | | **867/1 IMP DC**<br>1x TX 20x251x TX 25x251x TX 30x25 | |
| | | | **840/1 IMP DC**<br>1x 4.0x251x 5.0x25 | |

## Bit-Check 10 Impaktor 2

| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 05**057682**001 | *156792* | | | 10 |
| | | | **897/4 Impaktor R**<br>1x 1/4"x75 | |
| | | | **851/1 IMP DC**<br>3x PH 2x25; 1x PH 3x25 | |
| | | | **867/1 IMP DC**<br>3x TX 25x25; 1x TX 30x25; 1x TX 40x25 | |

## Bit-Check 10 Impaktor 3

| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 05**057683**001 | *156761* | | | 10 |
| | | | **897/4 Impaktor R**<br>1x 1/4"x75 | |
| | | | **855/1 IMP DC**<br>3x PZ 2x25; 1x PZ 3x25 | |
| | | | **867/1 IMP DC**<br>3x TX 25x25; 1x TX 30x25; 1x TX 40x25 | |

## Bit-Check 10 Impaktor 4

| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 05**057417**001 | *180148* | | | 10 |
| | | | **897/4 Impaktor**<br>1x 1/4"x75 | |
| | | | **855/1 IMP DC**<br>3x PZ 2x25; 1x PZ 3x25 | |
| | | | **867/1 IMP DC**<br>2x TX 20x25; 2x TX 25x25; 1x TX 30x25 | |

## Bit-Check 10 PZ Impaktor 1

| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 05**057684**001 | *157829* | | | 10 |
| | | | **897/4 Impaktor R**<br>1x 1/4"x75 | |
| | | | **855/1 IMP DC**<br>7x PZ 2x25; 2x PZ 3x25 | |

## Bit-Check 10 TX Impaktor 1

| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 05**057688**001 | *163394* | | | 10 |
| | | | **897/4 Impaktor R**<br>1x 1/4"x75 | |
| | | | **867/1 IMP DC**<br>3x TX 20x25; 3x TX 25x25; 2x TX 30x25;<br>1x TX 40x25 | |

## Bit-Check 6 Impaktor 1

| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 05**057695**001 | *157751* | | | 10 |
| | | | **851/4 IMP DC**<br>1x PH 2x50; 1x PH 3x50 | |
| | | | **855/4 IMP DC**<br>1x PZ 2x50; 1x PZ 3x50 | |
| | | | **867/4 IMP DC**<br>1x TX 25x50; 1x TX 30x50 | |

## Bit-Check 6 Impaktor 1 SB

| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 05**073890**001 | *158635* | | **851/4 IMP DC**<br>1x PH 2x501x PH 3x50 | 1 |
| | | | **855/4 IMP DC**<br>1x PZ 2x501x PZ 3x50 | |
| | | | **867/4 IMP DC**<br>1x TX 25x501x TX 30x50 | |

## Bit-Check 6 PH Impaktor 1

| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 05**057691**001 | *157713* | | | 20 |
| | | | **851/4 IMP DC**<br>4x PH 2x50; 2x PH 3x50 | |

## Bit-Check 6 PZ Impaktor 1

| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 05**057692**001 | *157737* | | | 20 |
| | | | **855/4 IMP DC**<br>4x PZ 2x50; 2x PZ 3x50 | |

## Bit-Check 6 TX Impaktor 1

| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 05**057693**001 | *157744* | | | 20 |
| | | | **867/4 IMP DC**<br>2x TX 20x50; 2x TX 25x50; 1x TX 30x50;<br>1x TX 40x50 | |

## Kraftform Stainless - stainless steel to prevent rust

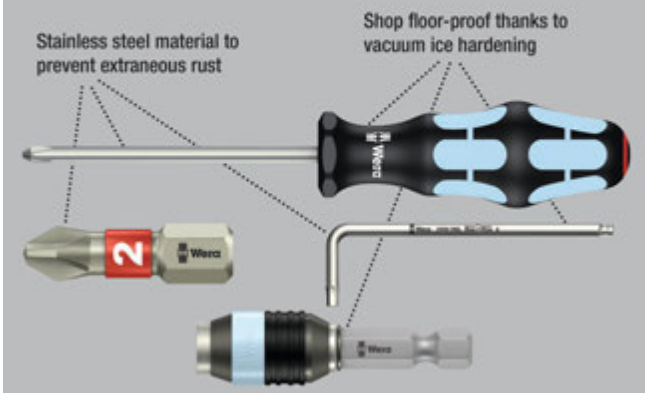


Bit-Check that can be positioned upright with high quality bits out of stainless steel. Wera stainless tools are manufactured out of stainless steel, thus preventing the formation of unsightly extraneous rust. The multi-component Bit-Check is convincing on account of its low weight and the maximum possible degree of compactness.

In this respect, the soft material in the lower section of the Bit-Check ensures that the bits are securely held whilst being simple to remove at the same time. The profile and size of the bits are easy to recognise thanks to the Wera Take it easy Tool Finder with its colour coding and clearly visible imprint.

## Bit-Check 30 Stainless 1

| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 05**071109**001 | *115126* | | | 1 |
| | | | **3888/4/1 K**<br>1x 1/4"x50 | |
| | | | **3851/1 TS PH**<br>1x PH 1x25; 3x PH 2x25; 1x PH 3x25 | |
| | | | **3855/1 TS PZ**<br>2x PZ 1x25; 3x PZ 2x25; 1x PZ 3x25 | |
| | | | **3867/1 TS TORX®**<br>2x TX 10x25; 2x TX 15x25; 3x TX 20x25;<br>3x TX 25x25; 2x TX 30x25; 1x TX 40x25 | |
| | | | **3840/1 TS**<br>1x 2,5x25; 1x 3,0x25; 1x 4,0x25;<br>1x 5,0x25; 1x 5,5x25 [1] | |

[1] Without Torsion zone

## Bit-Check 10 Stainless 1

| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 05**071110**001 | *111494* | | | 10 |
| | | | **3888/4/1 K**<br>1x 1/4"x50 | |
| | | | **3851/1 TS PH**<br>1x PH 2x25 | |
| | | | **3855/1 TS PZ**<br>1x PZ 1x25; 2x PZ 2x25 | |
| | | | **3867/1 TS TORX®**<br>1x TX 10x25; 1x TX 15x25; 1x TX 20x25;<br>1x TX 25x25; 1x TX 30x25 | |

## Bit-Check 10 Stainless 1 SB

| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 05**073630**001 | *112163* | | **3888/4/1 K**<br>1x 1/4"x50 | 1 |
| | | | **3851/1 TS PH**<br>1x PH 2x25 | |
| | | | **3855/1 TS PZ**<br>1x PZ 1x252x PZ 2x25 | |
| | | | **3867/1 TS TORX®**<br>1x TX 10x25; 1x TX 15x25; 1x TX 20x25;<br>1x TX 25x25; 1x TX 30x25 | |

## Bit-Check 6 Stainless 1 SB

| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 05**073634**001 | *164636* | | **3855/4**<br>2x PZ 2x50 | 1 |
| | | | **3867/4 TORX®**<br>1x TX 20x50; 2x TX 25x50 | |
| | | | **3840/4 Hex-Plus**<br>1x 5.5x50 | |

## BiTorsion system - for longer service life

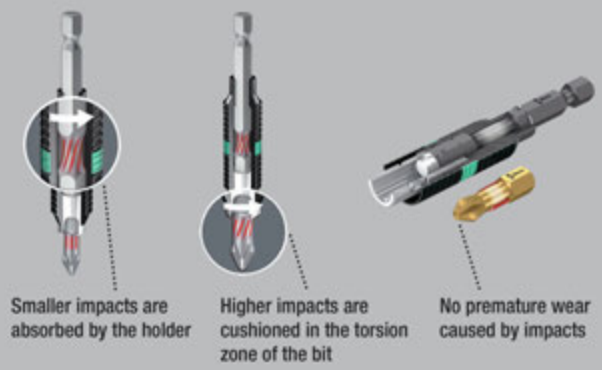


### Bit-Safe 61 BiTorsion 1

Robust textile box with bits and holder, 61-piece. 49 BiTorsion bits for long service life, in diamond-coated design (BDC) for a secure fit in the screw head, tough-absorbing (BTZ), for universal use, extra hard (BTH); 11 bits, tough-absorbing (Z), for universal use. 1 universal holder 889/4/1 K with quick-release chuck for take-up in the power screwdriver or use in the chuck of the power drill.

The profile and size of the bits are easy to recognise thanks to the Wera Take it easy Tool Finder with its colour coding and clearly visible imprint. The textile box allows users a high degree of mobility with a minimum space requirement.

The greatly reduced weight of a set makes carrying far more pleasant. Sensitive surfaces are protected when the box is set down – yet the textile box is still very robust. The box and the tools will even survive a fall unscathed.

### Bit-Safe 61 BiTorsion 1

| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 05**057441**001 | *179937* | | | 1 |
| | | | **889/4/1 K**<br>1x 1/4"x50 | |
| | | | **851/1 BDC PH**<br>1x PH 1x25; 2x PH 2x25; 1x PH 3x25 | |
| | | | **851/1 BTZ PH**<br>2x PH 1x25; 8x PH 2x25; 1x PH 3x25 | |
| | | | **855/1 BDC PZ**<br>1x PZ 1x25; 2x PZ 2x25; 1x PZ 3x25 | |
| | | | **855/1 BTH PZ**<br>2x PZ 1x25; 8x PZ 2x25; 1x PZ 3x25 | |
| | | | **867/1 TORX® BTZ**<br>3x TX 10x25; 2x TX 15x25; 4x TX 20x25; 4x TX 25x25; 2x TX 30x25; 1x TX 40x25 | |
| | | | **800/1 BDC**<br>1x 0,8x5,5x25; 1x 1,0x5,5x25; 1x 1,2x6,5x25 | |
| | | | **840/1 BTZ Hex-Plus**<br>3x 2,5x25; 3x 3,0x25; 3x 4,0x25; 2x 5,0x25 | |
| | | | **Hook and Loop Fastener Strip 120**<br>1x 50,0x120,0 | |

## Bit-Checks BiTorsion

BiTorsion bits with an torsion zone – where kinetic energy is diverted from peak loads. This greatly extends the product service life. Offer the best possible service life with the appropriate holder.

The multi-component Bit-Check is convincing on account of its low weight and the maximum possible degree of compactness.

In this respect, the soft material in the lower section of the Bit-Check ensures that the bits are securely held whilst being simple to remove at the same time.

The profile and size of the bits are easy to recognise thanks to the Wera Take it easy Tool Finder with its colour coding and clearly visible imprint.

### Bit-Check 30 BiTorsion 1

| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 05**057430**001 | *179821* | | | 1 |
| | | | **889/4/1 K**<br>1x 1/4"x50 | |
| | | | **851/1 BTZ PH**<br>2x PH 1x25; 5x PH 2x25; 2x PH 3x25 | |
| | | | **855/1 BTZ PZ**<br>2x PZ 1x25; 6x PZ 2x25; 2x PZ 3x25 | |
| | | | **867/1 TORX® BTZ**<br>1x TX 10x25; 2x TX 15x25; 2x TX 20x25; 2x TX 25x25; 2x TX 30x25; 1x TX 40x25 | |

### Bit-Check 12 BiTorsion 1

| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 05**057420**001 | *179869* | | | 10 |
| | | | **889/4/1 K**<br>1x 1/4"x50 | |
| | | | **851/1 BTZ PH**<br>1x PH 1x25; 2x PH 2x25 | |
| | | | **855/1 BTZ PZ**<br>1x PZ 1x25; 2x PZ 2x25 | |
| | | | **867/1 TORX® BTZ**<br>1x TX 10x25; 1x TX 15x25; 1x TX 20x25; 1x TX 25x25; 1x TX 30x25 | |

### Bit-Check 12 BiTorsion 1 SB

| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 05**136385**001 | *213969* | | **889/4/1 K**<br>1x 1/4"x50 | 1 |
| | | | **851/1 BTZ PH**<br>1x PH 1x252x PH 2x25 | |
| | | | **855/1 BTZ PZ**<br>1x PZ 1x252x PZ 2x25 | |
| | | | **867/1 TORX® BTZ**<br>1x TX 10x25; 1x TX 15x25; 1x TX 20x25; 1x TX 25x25; 1x TX 30x25 | |

## Bit-Check 10 BiTorsion 1

| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 05**056374**001 | *095688* | | | 10 |
| | | | **897/4 R**<br>1x 1/4"x75 | |
| | | | **851/1 BTZ PH**<br>1x PH 1x25; 1x PH 2x25; 1x PH 3x25 | |
| | | | **855/1 BTZ PZ**<br>1x PZ 1x25; 1x PZ 2x25; 1x PZ 3x25 | |
| | | | **800/1 BTZ**<br>1x 0,8x5,5x25; 1x 1,0x5,5x25; 1x 1,2x6,5x25 | |

## Bit-Check 10 BiTorsion 3 SB

| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 05**073418**001 | *128157* | | **897/4 R**<br>1x 1/4"x75 | 1 |
| | | | **851/1 BTZ PH**<br>1x PH 2x25 | |
| | | | **855/1 BTZ PZ**<br>1x PZ 1x251x PZ 2x251x PZ 3x25 | |
| | | | **867/1 TORX® BTZ**<br>1x TX 10x25; 1x TX 15x25; 1x TX 20x25;<br>1x TX 25x25; 1x TX 30x25 | |

## Bit-Check 10 PZ BiTorsion 2

| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 05**347153**001 | *107152* | | | 10 |
| | | | **897/4 R**<br>1x 1/4"x75 | |
| | | | **855/1 BTH PZ**<br>1x PZ 1x25; 7x PZ 2x25; 1x PZ 3x25 | |

## Diamond-coated bits

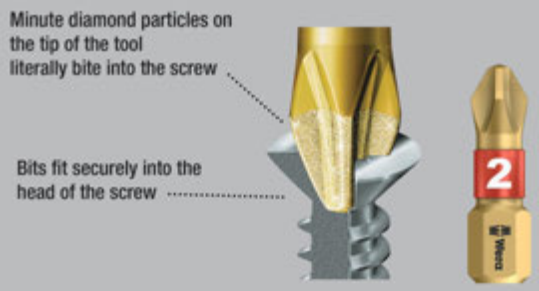


Bits with tiny diamond particles on the bit tip. This ensures a secure fit in the screw head, reduces the contact pressure required and lowers the risk of slipping.

BiTorsion bits with an torsion zone – where kinetic energy is diverted from peak loads. This greatly extends the product service life.

The multi-component Bit-Check is convincing on account of its low weight and the maximum possible degree of compactness. In this respect, the soft material in the lower section of the Bit-Check ensures that the bits are securely held whilst being simple to remove at the same time.

The profile and size of the bits are easy to recognise thanks to the Wera Take it easy Tool Finder with its colour coding and clearly visible imprint.

## Bit-Check 30 Diamond 1

| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 05**057431**001 | *179814* | | | 1 |
| | | | **889/4/1 K**<br>1x 1/4"x50 | |
| | | | **851/1 BDC PH**<br>2x PH 1x25; 4x PH 2x25; 1x PH 3x25 | |
| | | | **855/1 BDC PZ**<br>2x PZ 1x25; 4x PZ 2x25; 1x PZ 3x25 | |
| | | | **867/1 TORX® BDC**<br>2x TX 10x25; 2x TX 15x25; 3x TX 20x25;<br>3x TX 25x25; 1x TX 30x25; 1x TX 40x25 | |
| | | | **800/1 BDC**<br>1x 0,8x5,5x25; 1x 1,0x5,5x25; 1x 1,2x6,5x25 | |

## Bit-Check 12 Diamond 1

| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 05**057421**001 | *180025* | | | 10 |
| | | | **889/4/1 K**<br>1x 1/4"x50 | |
| | | | **851/1 BDC PH**<br>1x PH 1x25; 2x PH 2x25 | |
| | | | **855/1 BDC PZ**<br>1x PZ 1x25; 2x PZ 2x25 | |
| | | | **867/1 TORX® BDC**<br>1x TX 10x25; 1x TX 15x25; 1x TX 20x25;<br>1x TX 25x25; 1x TX 30x25 | |

## Bit-Check 12 Diamond 1 SB

| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 05**136392**001 | *213976* | | **889/4/1 K**<br>1x 1/4"x50 | 1 |
| | | | **851/1 BDC PH**<br>1x PH 1x252x PH 2x25 | |
| | | | **855/1 BDC PZ**<br>1x PZ 1x252x PZ 2x25 | |
| | | | **867/1 TORX® BDC**<br>1x TX 10x25; 1x TX 15x25; 1x TX 20x25;<br>1x TX 25x25; 1x TX 30x25 | |

## Bit-Check 7 Diamond 1

| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 05**057416**001 | *179999* | | | 10 |
| | | | **889/4/1 K**<br>1x 1/4"x50 | |
| | | | **851/1 BDC PH**<br>1x PH 1x25; 1x PH 2x25 | |
| | | | **855/1 BDC PZ**<br>1x PZ 1x25; 1x PZ 2x25 | |
| | | | **800/1 BDC**<br>1x 1,0x5,5x25; 1x 1,2x6,5x25 | |

## Bit-Check 7 Diamond 1 SB

| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 05**073419**001 | *183682* | | **889/4/1 K**<br>1x 1/4"x50 | 1 |
| | | | **851/1 BDC PH**<br>1x PH 1x25; 1x PH 2x25 | |
| | | | **855/1 BDC PZ**<br>1x PZ 1x25; 1x PZ 2x25 | |
| | | | **800/1 BDC**<br>1x 1.0x5.5x25; 1x 1.2x6.5x25 | |

## Bit-Check 7 PZ Diamond 1

| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 05**057412**001 | *180001* | | | 10 |
| | | | **889/4/1 K**<br>1x 1/4"x50 | |
| | | | **855/1 BDC PZ**<br>2x PZ 1x25; 3x PZ 2x25; 1x PZ 3x25 | |

## Bit-Check 7 TX Diamond 1

| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 05**057415**001 | *180018* | | | 10 |
| | | | **889/4/1 K**<br>1x 1/4"x50 | |
| | | | **867/1 TORX® BDC**<br>1x TX 10x25; 1x TX 15x25; 1x TX 20x25;<br>1x TX 25x25; 1x TX 30x25; 1x TX 40x25 | |

## Textile boxes

### Bit-Safe 61 Universal 1

Comprehensive 61-piece bit set in a robust Bit-Safe. Provides a quick overview of the tools available and bits not needed are simply reinserted into the set and do not get lost.

1 universal holder with Rapidaptor technology: allows bits to be attached without any need to actuate the sleeve. The removal of the bit is simple, just by pushing the sleeve forward – for rapid bit change with just one hand.

The strong permanent magnet holds the bits absolutely securely. Can be inserted in the power screwdriver or for use in the chuck of the electric drill.

## Bit-Safe 61 Universal 1

| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 05**057122**001 | *100689* | | | 1 |
| | | | **889/4/1 K**<br>1x 1/4"x50 | |
| | | | **851/1 TZ**<br>3x PH 1x25; 10x PH 2x25;<br>2x PH 3x25 | |
| | | | **855/1 TZ**<br>3x PZ 1x25; 10x PZ 2x25;<br>2x PZ 3x25 | |
| | | | **867/1 TZ TORX®**<br>2x TX 10x25; 3x TX 15x25;<br>3x TX 20x25; 3x TX 25x25;<br>3x TX 30x25; 2x TX 40x25 | |
| | | | **800/1 TZ**<br>1x 0,6x4,5x25; 1x 1,0x5,5x25;<br>1x 1,2x6,5x25 | |
| | | | **840/1 Z**<br>3x 2,5x25; 3x 3,0x25; 3x 4,0x25;<br>2x 5,0x25 | |
| | | | **Hook and Loop Fastener Strip 120**<br>1x 50,0x120,0 | |

## Bit-Safe 43 Universal 1

43-piece; robust textile box with bits for universal applications.

1 universal holder 899/4/1 with stainless sleeve, retaining ring and strong permanent magnet for insertion in the power screwdriver or for use in the chuck of the electric drill.

## Bit-Safe 43 Universal 1

| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 05**057450**001 | *179951* | | | 1 |
| | | | **899/4/1**<br>1x 1/4"x50 | |
| | | | **851/1 Z**<br>1x PH 2x25 | |
| | | | **851/4 TZ**<br>1x PH 1x50; 2x PH 2x50 | |
| | | | **855/1 Z**<br>2x PZ 1x25; 5x PZ 2x25; 2x PZ 3x25 | |
| | | | **855/4 TZ**<br>1x PZ 1x50; 2x PZ 2x50 | |
| | | | **867/1 TORX®**<br>3x TX 10x25; 4x TX 15x25; 4x TX 20x25;<br>4x TX 25x25; 4x TX 30x25; 1x TX 40x25 | |
| | | | **867/4 Z TORX®**<br>1x TX 10x50; 1x TX 15x50; 1x TX 20x50;<br>1x TX 25x50; 1x TX 30x50; 1x TX 40x50 | |
| | | | **Hook and Loop Fastener Strip 120**<br>1x 50,0x120,0 | |

## Bit-Check 30 Universal 1

29 bits in a minimum of space; simple removal and reinsertion of the bits. Rapidaptor holder ensures rapid bit change.

Universal bits fitted for diverse applications.

### Bit-Check 30 Universal 1

| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 05**056440**001 | *115096* | | | 1 |
| | | | **889/4/1 K**<br>1x 1/4"x50 | |
| | | | **851/1 TZ PH**<br>2x PH 1x25; 3x PH 2x25; 1x PH 3x25 | |
| | | | **855/1 TH PZ**<br>2x PZ 1x25; 3x PZ 2x25; 1x PZ 3x25 | |
| | | | **867/1 TZ TORX®**<br>1x TX 10x25; 1x TX 15x25; 1x TX 20x25; 1x TX 25x25; 1x TX 30x25; 1x TX 40x25 | |
| | | | **867/1 Z TORX® BO**<br>1x TX 10x25; 1x TX 15x25; 1x TX 20x25; 1x TX 25x25; 1x TX 30x25 | |
| | | | **800/1 TZ**<br>1x 1,0x5,5x25 | |
| | | | **840/1 Z Hex-Plus**<br>1x 3,0x25; 1x 4,0x25; 1x 5,0x25; 1x 6,0x25; 1x 8,0x25 | |

## Bit-Check 30 TX Universal 1

30-piece. Tough-absorbing bits for universal use. 1 universal holder 899/4/1 K for take-up in the power screwdriver or use in the chuck of the power drill.

Comes with tough viscous TORX® bits for universal use.

### Bit-Check 30 TX Universal 1

| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 05**057908**001 | *163820* | | | 10 |
| | | | **899/4/1**<br>1x 1/4"x50 | |
| | | | **867/1 TORX®**<br>3x TX 10x25; 5x TX 15x25; 8x TX 20x25; 7x TX 25x25; 4x TX 30x25; 2x TX 40x25 | |

### Bit-Check 30 TX Universal 1 SB

| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 05**057900**001 | *229618* | | **899/4/1**<br>1x 1/4"x50 | 1 |
| | | | **867/1 TORX®**<br>3x TX 10x25; 5x TX 15x25; 8x TX 20x25; 7x TX 25x25; 4x TX 30x25; 2x TX 40x25 | |

## Bit-Check 10 Universal 1

- Tough viscous bits for universal use
- Universal holder with quick-release chuck for rapid bit change

### Bit-Check 10 Universal 1

| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 05**056161**001 | *033772* | | | 10 |
| | | | **895/4/1 K**<br>1x 1/4"x52 | |
| | | | **851/1 TZ PH**<br>1x PH 1x25; 1x PH 2x25; 1x PH 3x25 | |
| | | | **855/1 TZ PZ**<br>1x PZ 1x25; 1x PZ 2x25; 1x PZ 3x25 | |
| | | | **800/1 TZ**<br>1x 0,8x5,5x25; 1x 1,0x5,5x25; 1x 1,2x6,5x25 | |

## Bit-Check 10 Universal 2

- Extra-hard bits
- Torsion design against premature wear
- Universal holder with quick-release chuck and strong permanent magnet

### Bit-Check 10 Universal 2

| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 05**134200**001 | *038821* | | | 10 |
| | | | **895/4/1 K**<br>1x 1/4"x52 | |
| | | | **855/1 TH PZ**<br>1x PZ 1x25; 2x PZ 2x25 | |
| | | | **867/1 TORX®**<br>1x TX 10x25; 1x TX 15x25; 1x TX 20x25;<br>1x TX 25x25; 1x TX 30x25; 1x TX 40x25 | |

## Bit-Check 10 Universal 3

- Tough viscous bits for universal use
- Rapidaptor holder for rapid bit change

### Bit-Check 10 Universal 3

| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 05**056375**001 | *095695* | | | 10 |
| | | | **889/4/1 K**<br>1x 1/4"x50 | |
| | | | **851/1 TZ PH**<br>1x PH 1x25; 1x PH 2x25; 1x PH 3x25 | |
| | | | **855/1 TZ PZ**<br>1x PZ 1x25; 1x PZ 2x25; 1x PZ 3x25 | |
| | | | **800/1 TZ**<br>1x 0,8x5,5x25; 1x 1,0x5,5x25; 1x 1,2x6,5x25 | |

### Bit-Check 10 Universal 3 SB

| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 05**073410**001 | *099495* | | **889/4/1 K**<br>1x 1/4"x50 | 1 |
| | | | **800/1 TZ**<br>1x 0,8x5,5x25; 1x 1,0x5,5x25; 1x 1,2x6,5x25 | |
| | | | **851/1 TZ PH**<br>1x PH 1x25; 1x PH 2x25; 1x PH 3x25 | |
| | | | **855/1 TZ PZ**<br>1x PZ 1x25; 1x PZ 2x25; 1x PZ 3x25 | |

## Bit-Check 10 Universal 4

- Tough viscous bits for universal use
- Universal holder with stainless sleeve, retaining ring and strong permanent magnet

### Bit-Check 10 Universal 4

| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 05**056159**001 | *033758* | | | 10 |
| | | | **899/4/1**<br>1x 1/4"x50 | |
| | | | **851/1 TZ PH**<br>1x PH 1x25; 1x PH 2x25; 1x PH 3x25 | |
| | | | **855/1 TZ PZ**<br>1x PZ 1x25; 1x PZ 2x25; 1x PZ 3x25 | |
| | | | **800/1 TZ**<br>1x 0,8x5,5x25; 1x 1,0x5,5x25; 1x 1,2x6,5x25 | |

## Bit-Check 10 Universal 5 SB

- Tough viscous bits for universal use
- Includes universal holder for the take-up of bits with 1/4" hex head drive

### Bit-Check 10 Universal 5 SB

| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 05**073416**001 | *128164* | | **899/4/1**<br>1x 1/4"x50 | 1 |
| | | | **851/1 Z PH**<br>1x PH 2x25 | |
| | | | **855/1 Z PZ**<br>1x PZ 1x25; 1x PZ 2x25; 1x PZ 3x25 | |
| | | | **867/1 TORX®**<br>1x TX 10x25; 1x TX 15x25; 1x TX 20x25; 1x TX 25x25; 1x TX 30x25 | |

## Bit-Check 10 TX Universal 1

- Tough viscous bits for universal use
- Torsion design against premature wear
- Universal holder with quick-release chuck for rapid bit change

### Bit-Check 10 TX Universal 1

| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 05**056164**001 | *033802* | | | 10 |
| | | | **894/4/1 K**<br>1x 1/4"x51 | |
| | | | **867/1 TZ TORX®**<br>1x TX 8x25; 1x TX 9x25; 1x TX 10x25; 1x TX 15x25; 1x TX 20x25; 1x TX 25x25; 1x TX 27x25; 1x TX 30x25; 1x TX 40x25 | |

## Bit-Check 10 TX Universal 2

- Tough viscous bits for universal use
- Rapidaptor holder for rapid bit change

### Bit-Check 10 TX Universal 2

| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 05**057115**001 | *127747* | | | 10 |
| | | | **888/4/1 K**<br>1x 1/4"x50 | |
| | | | **867/1 TORX®**<br>1x TX 6x25; 1x TX 8x25; 1x TX 9x25; 1x TX 10x25; 1x TX 15x25; 1x TX 20x25; 1x TX 25x25; 1x TX 30x25; 1x TX 40x25 | |

## Bit-Check 7 Universal 1

- Tough viscous bits for universal use
- Universal holder with stainless sleeve and strong permanent magnet

### Bit-Check 7 Universal 1

| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 05**056295**001 | *038166* | | | 20 |
| | | | **893/4/1 K**<br>1x 1/4"x50 | |
| | | | **851/1 Z PH**<br>1x PH 1x25; 1x PH 2x25 | |
| | | | **855/1 Z PZ**<br>1x PZ 1x25; 1x PZ 2x25 | |
| | | | **800/1 Z**<br>1x 1,0x5,5x25; 1x 1,2x6,5x25 | |

### Bit-Check 7 Universal 1 SB

| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 05**073406**001 | *036186* | | **893/4/1 K**<br>1x 1/4"x50 | 1 |
| | | | **851/1 Z PH**<br>1x PH 1x25; 1x PH 2x25 | |
| | | | **855/1 Z PZ**<br>1x PZ 1x25; 1x PZ 2x25 | |
| | | | **800/1 Z**<br>1x 1.0x5.5x25; 1x 1.2x6.5x25 | |

### Bit-Check 7 Universal 4

| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 05**135810**001 | *179265* | | | 20 |
| | | | **893/4/1 K**<br>1x 1/4"x50 | |
| | | | **851/1 Z PH**<br>1x PH 2x25 | |
| | | | **855/1 Z PZ**<br>1x PZ 1x25; 1x PZ 2x25 | |
| | | | **867/1 TORX®**<br>1x TX 15x25; 1x TX 20x25; 1x TX 25x25 | |

### Bit-Check 7 PZ Universal 1

| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 05**056296**001 | *038135* | | | 20 |
| | | | **893/4/1 K**<br>1x 1/4"x50 | |
| | | | **855/1 Z PZ**<br>2x PZ 1x25; 3x PZ 2x25; 1x PZ 3x25 | |

## Bit-Check 7 TX Universal 1

- Tough viscous bits for universal use
- Universal holder with stainless sleeve and strong permanent magnet

### Bit-Check 7 TX Universal 1

| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 05**056294**001 | *041500* | | | 20 |
| | | | **893/4/1 K**<br>1x 1/4"x50 | |
| | | | **867/1 TORX®**<br>1x TX 10x25; 1x TX 15x25; 1x TX 20x25;<br>1x TX 25x25; 1x TX 30x25; 1x TX 40x25 | |

### Bit-Check 7 TX Universal 1 SB

| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 05**073404**001 | *038111* | | **893/4/1 K**<br>1x 1/4"x50 | 1 |
| | | | **867/1 TORX®**<br>1x TX 10x25; 1x TX 15x25; 1x TX 20x25;<br>1x TX 25x25; 1x TX 30x25; 1x TX 40x25 | |

## Bit-Check 7 TX BO Universal 1

- Tough viscous bits for universal use
- Universal holder with quick-release chuck for rapid bit change

### Bit-Check 7 TX BO Universal 1

| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 05**056158**001 | *033741* | | | 20 |
| | | | **894/4/1 K**<br>1x 1/4"x51 | |
| | | | **867/1 Z TORX® BO**<br>1x TX 10x25; 1x TX 15x25; 1x TX 20x25;<br>1x TX 25x25; 1x TX 30x25; 1x TX 40x25 | |

## Hex-Plus - lets hexagon socket screws last longer

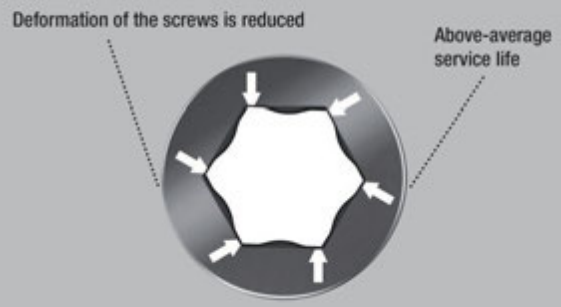


### Bit-Check 7 Hex-Plus 1

| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 05**056168**001 | *033840* | | | 20 |
| | | | **895/4/1 K**<br>1x 1/4"x52 | |
| | | | **840/1 Z Hex-Plus**<br>1x 2,0x25; 1x 2,5x25; 1x 3,0x25; 1x 4,0x25;<br>1x 5,0x25; 1x 6,0x25 | |

## Bit-Check 6 Universal 1

- Tough viscous bits for universal use
- The Torsion design absorbs torque peaks
- Prevents premature breakage of the drive tip

### Bit-Check 6 Universal 1

| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 05**056474**001 | *156143* | | | 20 |
| | | | **851/4 TZ PH**<br>1x PH 1x50; 1x PH 2x50 | |
| | | | **855/4 TZ PZ**<br>1x PZ 1x50; 1x PZ 2x50 | |
| | | | **800/4 Z**<br>1x 1,0x5,5x50; 1x 1,2x6,5x50 | |

### Bit-Check 6 Universal 1 SB

| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 05**073635**001 | *155276* | | **851/4 TZ PH**<br>1x PH 1x50; 1x PH 2x50 | 1 |
| | | | **855/4 TZ PZ**<br>1x PZ 1x50; 1x PZ 2x50 | |
| | | | **800/4 Z**<br>1x 1,0x5,5x50; 1x 1,2x6,5x50 | |

### Bit-Check 6 Universal 2

| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 05**056473**001 | *156136* | | | 20 |
| | | | **851/4 TZ PH**<br>1x PH 2x50 | |
| | | | **855/4 TZ PZ**<br>1x PZ 1x50; 1x PZ 2x50 | |
| | | | **867/4 Z TORX®**<br>1x TX 15x50; 1x TX 20x50; 1x TX 25x50 | |

### Bit-Check 6 Universal 2 SB

| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 05**073638**001 | *155245* | | **851/4 TZ PH**<br>1x PH 2x50 | 1 |
| | | | **855/4 TZ PZ**<br>1x PZ 1x50; 1x PZ 2x50 | |
| | | | **867/4 Z TORX®**<br>1x TX 15x50; 1x TX 20x50; 1x TX 25x50 | |

## Bit-Check 6 TX Universal 1

- Tough viscous bits for universal use

### Bit-Check 6 TX Universal 1

| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 05**056472**001 | *156112* | | | 20 |
| | | | **867/4 Z TORX®**<br>1x TX 10x50; 1x TX 15x50; 1x TX 20x50;<br>1x TX 25x50; 1x TX 30x50; 1x TX 40x50 | |

### Bit-Check 6 TX Universal 1 SB

| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 05**073637**001 | *155252* | | **867/4 Z TORX®**<br>1x TX 10x50; 1x TX 15x50; 1x TX 20x50;<br>1x TX 25x50; 1x TX 30x50; 1x TX 40x50 | 1 |

## Bit-Check 6 PZ Universal 1

6 50 mm-long Pozidriv bits tidily arranged in a minimum of space in a practical Bit-Check.
The tough viscous bits are suitable for universal use. Torsion design to combat premature wear.

### Bit-Check 6 PZ Universal 1

TORSION

| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 05**056471**001 | *156105* | | | 20 |
| | | | **855/4 TZ PZ**<br>2x PZ 1x50; 3x PZ 2x50; 1x PZ 3x50 | |

## Bit-Check 6 V Universal 1

6 50 mm-long bits tidily arranged in a minimum of space in a practical Bit-Check. Bits for square socket screws with holding function.

The wedging forces resulting from the contact pressure between the drive tip and the screw profile securely hold the screw on the tool. 1/4" hexagon, suitable for holders as per DIN ISO 1173-F 6.3.

### Bit-Check 6 V Universal 1

| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 05**056478**001 | *190802* | | | 10 |
| | | | **868/4 V**<br>1x # 1x50; 3x # 2x50; 2x # 3x50 | |

## Bit-Check 30 Wood TX HF 1

Bits and holder set, particularly suitable for woodworking. With their special geometry and as per the Acument Intellectual Properties specification, the 867/1 TORX® HF bits hold TORX® screws securely on the tool!

This is particularly helpful in hard-to-reach work areas where the second hand cannot be used to hold the screw.

They are also suitable for Würth ASSY screws as well as Altenloh SPAX T-STAR plus screws.

With Take it easy tool finder: Colour coding by size. Rapidaptor holder for lightning-fast bit changes. The Bit-Check allows a quick overview of the available tools.

Unused bits are simply put back in the holder and will not be lost. Easy transport e.g. in the shirt pocket. The Bit-Check can be set up at the work place, which allows for quick access of the tools.

- Holding function for recessed TORX® screws
- Also suitable for Würth ASSY screws as well as Altenloh SPAX T-STAR plus screws

### Bit-Check 30 Wood TX HF 1

| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 05**057436**001 | *226204* | | | 10 |
| | | | **887/4 RR**<br>1x 1/4"x57 | |
| | | | **851/1 TZ**<br>2x PH 2x25; 1x PH 3x25 | |
| | | | **855/1 TH**<br>3x PZ 1x25; 6x PZ 2x25; 2x PZ 3x25 | |
| | | | **867/1 TORX® HF**<br>2x TX 10x25; 2x TX 15x25; 4x TX 20x25;<br>4x TX 25x25; 2x TX 30x25; 1x TX 40x25 [1] | |

[1] Pound-thru hexagonal; no Take it easy.

### Bit-Check 30 Wood TX HF 1 SB

| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 05**057437**001 | *227522* | | | 1 |
| | | | **1x Bit-Check 30 Wood TX HF 1** | |
| | | | **887/4 RR**<br>1x 1/4"x57 | |
| | | | **851/1 TZ**<br>2x PH 2x25; 1x PH 3x25 | |
| | | | **855/1 TH**<br>3x PZ 1x25; 6x PZ 2x25; 2x PZ 3x25 | |
| | | | **867/1 TORX® HF**<br>2x TX 10x25; 2x TX 15x25; 4x TX 20x25;<br>4x TX 25x25; 2x TX 30x25; 1x TX 40x25 [1] | |

[1] Pound-thru hexagonal; not Take it easy.

## Bit-Check 30 Wood 1

- Ring magnet Rapidaptor, holder for holding even longer and heavier screws

### Bit-Check 30 Wood 1

| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 05**057433**001 | *179807* | | | 1 |
| | | | **887/4 RR**<br>1x 1/4"x57 | |
| | | | **851/1 TZ PH**<br>2x PH 2x25; 1x PH 3x25 | |
| | | | **855/1 TH PZ**<br>3x PZ 1x25; 6x PZ 2x25; 2x PZ 3x25 | |
| | | | **867/1 TZ TORX®**<br>2x TX 10x25; 2x TX 15x25; 4x TX 20x25;<br>4x TX 25x25; 2x TX 30x25; 1x TX 40x25 | |

## Bit-Check 30 Wood 2

- Universal holder with stainless sleeve

### Bit-Check 30 Wood 2

| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 05**057432**001 | *179845* | | | 10 |
| | | | **899/4/1**<br>1x 1/4"x50 | |
| | | | **851/1 Z PH**<br>1x PH 2x25 | |
| | | | **855/1 Z PZ**<br>2x PZ 1x25; 5x PZ 2x25; 2x PZ 3x25 | |
| | | | **867/1 TORX®**<br>3x TX 10x25; 4x TX 15x25; 4x TX 20x25;<br>4x TX 25x25; 3x TX 30x25; 1x TX 40x25 | |

### Bit-Check 30 Wood 2 SB

| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 05**057438**001 | *229625* | | **899/4/1**<br>1x 1/4"x50 | 1 |
| | | | **851/1 Z**<br>1x PH 2x25 | |
| | | | **855/1 Z**<br>2x PZ 1x25; 5x PZ 2x25; 2x PZ 3x25 | |
| | | | **867/1 TORX®**<br>3x TX 10x25; 4x TX 15x25; 4x TX 20x25;<br>4x TX 25x25; 3x TX 30x25; 1x TX 40x25 | |

## Bit-Check 12 Wood TX HF 1

Bits and holder set, particularly suitable for woodworking. With their special geometry and as per the Acument Intellectual Properties specification, the 867/1 TORX® HF bits hold TORX® screws securely on the tool!

This is particularly helpful in hard-to-reach work areas where the second hand cannot be used to hold the screw. They are also suitable for Würth ASSY screws as well as Altenloh SPAX T-STAR plus screws.

With Take it easy tool finder: Colour coding by size. Ring magnet Rapidaptor holding tool to hold long and heavy screws.

The Bit-Check allows a quick overview of the available tools. Unused bits are simply put back in the holder and will not be lost.

Easy transport e.g. in the shirt pocket. The Bit-Check can be set up at the work place, which allows for quick access of the tools.

- 867/1 TORX® HF bits with holding function for TORX® screws as per the Acument Intellectual Properties specification
- Also suitable for Würth ASSY screws as well as Altenloh SPAX T-STAR plus screws

### Bit-Check 12 Wood TX HF 1

| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 05**057435**001 | *226198* | | | 10 |
| | | | **887/4 RR**<br>1x 1/4"x57 | |
| | | | **855/1 Z**<br>1x PZ 1x25; 1x PZ 2x25 | |
| | | | **867/1 TORX® HF**<br>1x TX 10x25; 1x TX 15x25; 1x TX 20x25;<br>2x TX 25x25; 1x TX 30x25; 1x TX 40x25 [1] | |
| | | | **867/1 TORX®**<br>1x TX 20x25; 1x TX 25x25 | |

[1] Pound-thru hexagonal; no Take it easy.

## Bit-Check 12 Wood TX HF 1 SB

| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 05**073641**001 | *227515* | | | 1 |
| | | | **1x Bit-Check 12 Wood TX HF 1** | |
| | | | **887/4 RR**<br>1x 1/4"x57 | |
| | | | **855/1 Z**<br>1x PZ 1x25; 1x PZ 2x25 | |
| | | | **867/1 TORX® HF**<br>1x TX 10x25; 1x TX 15x25; 1x TX 20x25;<br>2x TX 25x25; 1x TX 30x25; 1x TX 40x25 [1] | |
| | | | **867/1 TORX®**<br>1x TX 20x25; 1x TX 25x25 | |

[1] Pound-thru hexagonal; not Take it easy.

## Bit-Check 12 Wood 1

- Ring magnet Rapidaptor, holder for holding even longer and heavier screws

## Bit-Check 12 Wood 1

| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 05**057423**001 | *179876* | | | 10 |
| | | | **887/4 RR**<br>1x 1/4"x57 | |
| | | | **855/1 TH PZ**<br>1x PZ 1x25; 2x PZ 2x25; 1x PZ 3x25 | |
| | | | **851/1 TH PH**<br>1x PH 2x25 | |
| | | | **867/1 TORX®**<br>1x TX 10x25; 1x TX 15x25; 1x TX 20x25;<br>1x TX 25x25; 1x TX 30x25; 1x TX 40x25 | |

## Bit-Check 12 Wood 1 SB

| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 05**136390**001 | *214010* | | **887/4 RR**<br>1x 1/4"x57 | 1 |
| | | | **851/1 TH PH**<br>1x PH 2x25 | |
| | | | **855/1 TH PZ**<br>1x PZ 1x25; 2x PZ 2x25; 1x PZ 3x25 | |
| | | | **867/1 TORX®**<br>**1x** TX **10**x**25; 1x** TX **15**x**25; 1x** TX **20**x**25;**<br>**1x** TX **25**x**25; 1x** TX **30**x**25; 1x** TX **40**x**25** | |

## Bit-Check 12 Wood 2

- Universal holder with stainless sleeve

## Bit-Check 12 Wood 2

| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 05**057422**001 | *179890* | | | 10 |
| | | | **899/4/1**<br>1x 1/4"x50 | |
| | | | **851/1 Z PH**<br>1x PH 2x25 | |
| | | | **855/1 Z PZ**<br>1x PZ 1x25; 2x PZ 2x25; 1x PZ 3x25 | |
| | | | **867/1 TORX®**<br>1x TX 10x25; 1x TX 15x25; 1x TX 20x25;<br>1x TX 25x25; 1x TX 30x25; 1x TX 40x25 | |

## Bit-Check 12 Wood 2 SB

| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 05**136391**001 | *214027* | | **899/4/1**<br>1x 1/4"x50 | 1 |
| | | | **851/1 Z PH**<br>1x PH 2x25 | |
| | | | **855/1 Z PZ**<br>1x PZ 1x25; 2x PZ 2x25; 1x PZ 3x25 | |
| | | | **867/1 TORX®**<br>1x TX 10x25; 1x TX 15x25; 1x TX 20x25;<br>1x TX 25x25; 1x TX 30x25; 1x TX 40x25 | |

### Bit-Check 6 Wood TX HF 1

Bit-Set, particularly suitable for woodworking. With their special geometry and as per the Acument Intellectual Properties specification, the 867/4 TORX® HF bits hold TORX® screws securely on the tool!

This is particularly helpful in hard-to-reach work areas where the second hand cannot be used to hold the screw. They are also suitable for Würth ASSY screws as well as Altenloh SPAX T-STAR plus screws.

With Take it easy tool finder: Colour coding by size.

The Bit-Check allows a quick overview of the available tools. Unused bits are simply put back in the holder and will not be lost.

Easy transport e.g. in the shirt pocket. The Bit-Check can be set up at the work place, which allows for quick access of the tools.

- Particularly for wood applications
- For TORX® socket screws
- Holding function for TORX® screws
- Also suitable for Würth ASSY screws as well as Altenloh SPAX T-STAR plus screws
- 50 mm-long bits

## Bit-Check 6 Wood TX HF 1

| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 05**056470**001 | *226181* | | | 20 |
| | | | **867/4 TORX® HF**<br>2x TX 20x50; 2x TX 25x50; 1x TX 30x50;<br>1x TX 40x50 [1] | |

[1] Pound-thru hexagonal; no Take it easy.

## Bit-Check 6 Wood TX HF 1 SB

| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 05**073639**001 | *227508* | | | 1 |
| 1x Bit-Check 6 Wood TX HF 1 | | | | |
| | | | **867/4 TORX® HF**<br>2x TX 20x50; 2x TX 25x50; 1x TX 30x50;<br>1x TX 40x50 [1] | |

[1] Pound-thru hexagonal; not Take it easy.

## Bit-Check 30 Metal 1

- Tough viscous bits for universal use
- Universal holder with stainless sleeve and strong permanent magnet

### Bit-Check 30 Metal 1

| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 05**057434**001 | *179838* | | | 10 |
| | | | **899/4/1**<br>1x 1/4"x50 | |
| | | | **851/1 Z PH**<br>3x PH 1x25; 3x PH 2x25; 2x PH 3x25 | |
| | | | **855/1 Z PZ**<br>3x PZ 1x25; 3x PZ 2x25; 3x PZ 3x25 | |
| | | | **867/1 TORX®**<br>1x TX 10x25; 1x TX 15x25; 1x TX 20x25;<br>1x TX 25x25; 1x TX 30x25; 1x TX 40x25 | |
| | | | **800/1 Z**<br>1x 0,6x4,5x25; 1x 1,0x5,5x25; 1x 1,2x6,5x25 | |
| | | | **840/1 Z Hex-Plus**<br>1x 4,0x25; 1x 5,0x25; 1x 6,0x25 | |

### Bit-Check 30 Metal 1 SB

| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 05**057440**001 | *229632* | | **899/4/1**<br>1x 1/4"x50 | 1 |
| | | | **851/1 Z**<br>3x PH 1x25; 3x PH 2x25; 2x PH 3x25 | |
| | | | **855/1 Z**<br>3x PZ 1x25; 3x PZ 2x25; 3x PZ 3x25 | |
| | | | **867/1 TORX®**<br>1x TX 10x25; 1x TX 15x25; 1x TX 20x25;<br>1x TX 25x25; 1x TX 30x25; 1x TX 40x25 | |
| | | | **800/1 Z**<br>1x 0.6x4.5x25; 1x 1.0x5.5x25; 1x 1.2x6.5x25 | |
| | | | **840/1 Z**<br>1x 4.0x25; 1x 5.0x25; 1x 6.0x25 | |

## Bit-Check 12 Metal 1

| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 05**057424**001 | *179883* | | | 10 |
| | | | **899/4/1**<br>1x 1/4"x50 | |
| | | | **851/1 Z PH**<br>1x PH 1x25; 1x PH 2x25 | |
| | | | **855/1 Z PZ**<br>1x PZ 1x25; 1x PZ 2x25 | |
| | | | **867/1 TORX®**<br>1x TX 15x25; 1x TX 20x25; 1x TX 25x25;<br>1x TX 30x25 | |
| | | | **840/1 Z Hex-Plus**<br>1x 3,0x25; 1x 4,0x25; 1x 5,0x25 | |

## Bit-Check 12 Metal 1 SB

| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 05**136393**001 | *214003* | | **899/4/1**<br>1x 1/4"x50 | 1 |
| | | | **851/1 Z PH**<br>1x PH 1x25; 1x PH 2x25 | |
| | | | **855/1 Z PZ**<br>1x PZ 1x25; 1x PZ 2x25 | |
| | | | **867/1 TORX®**<br>1x TX 15x25; 1x TX 20x25; 1x TX 25x25;<br>1x TX 30x25 | |
| | | | **840/1 Z Hex-Plus**<br>1x 3,0x25; 1x 4,0x25; 1x 5,0x25 | |

## 843 Stepped drill bits, 4-20 mm

9 drill steps increasing by 2 mm for material with a maximum thickness of 4.5 mm. Comes with edge breaker for 1 mm sheet metal. 1/4" hexagon, suitable for holders as per DIN ISO 1173-D 6.3.

### 843 Stepped drill bits, 4-20 mm

| Code | EAN 4013288 | mm | | | | | | |
|---|---|---|---|---|---|---|---|---|
| 05**104672**001 | *117632* | 75,0 | | | | | | 1 |

## 844 Single Tap Bits

To cut metric threads. The hexagonal shaft ensures very good power transfer. The finely-tuned material elasticity provides for great durability.

Perfect chip removal and a low tilt risk.
1/4" hexagon, suitable for holders as per DIN ISO 1173-D 6.3.

### 844 Single Tap Bits

| Code | EAN 4013288 | mm | mm | mm | | | | |
|---|---|---|---|---|---|---|---|---|
| 05**104666**001 | *117571* | 3,0 | 10,00 | 33,0 | M 3 | | | 1 |
| 05**104667**001 | *117588* | 4,0 | 11,00 | 35,0 | M 4 | | | 1 |
| 05**104668**001 | *117595* | 5,0 | 12,50 | 36,0 | M 5 | | | 1 |
| 05**104669**001 | *117601* | 6,0 | 18,00 | 40,0 | M 6 | | | 1 |
| 05**104670**001 | *117618* | 8,0 | 20,00 | 40,0 | M 8 | | | 1 |
| 05**104671**001 | *117625* | 10,0 | 20,00 | 40,0 | M 10 | | | 1 |

## 844/7 Tap Bits Set

Rapidaptor universal holder for bits with 1/4" hexagon drive. Non-magnetic design.

### 844/7 Tap Bits Set

| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 051**04754**001 | *233042* | | | 1 |
| | | | **888/4/1 K**<br>1x 1/4"x50 | |
| | | | **844**<br>1x 3,0x33,0; 1x 4,0x35,0; 1x 5,0x36,0;<br>1x 6,0x40,0; 1x 8,0x40,0; 1x 10,0x40,0 | |

## 845 1-flute Countersink Bits

1-flute countersink bit by Wera. For countersinking and de-burring. The hexagon shaft ensures very good power transfer, vibration-free and score-free working.

Perfect chip removal and long service life. 1/4" hexagon, suitable for holders as per DIN ISO 1173-D 6.3.

### 845 1-flute Countersink Bits

| Code | EAN 4013288 | mm | mm | mm | | | | |
|---|---|---|---|---|---|---|---|---|
| 051**04660**001 | *117519* | 6,30 | 21,00 | 32,0 | M 3 | | | 1 |
| 051**04661**001 | *117526* | 8,30 | 21,00 | 32,0 | M 4 | | | 1 |
| 051**04662**001 | *117533* | 10,40 | 21,00 | 34,0 | M 5 | | | 1 |
| 051**04663**001 | *117540* | 12,40 | 21,00 | 36,0 | M 6 | | | 1 |
| 051**04664**001 | *117557* | 16,50 | 22,00 | 40,0 | M 8 | | | 1 |
| 051**04665**001 | *117564* | 20,50 | 22,00 | 43,0 | M 10 | | | 1 |

## 816 R

Bit holder with Rapidaptor quick-release chuck for bits with 1/4" hexagon drive.

## 888/4/1 K

Rapidaptor universal holder for bits with 1/4" hexagon drive. Non-magnetic design.

### 845/8 1-flute Countersink Bits Set

| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 051**04655**001 | *119285* | | | 1 |
| | | | **816 R**<br>1x 1/4"x119 | |
| | | | **888/4/1 K**<br>1x 1/4"x50 | |
| | | | **845**<br>1x 6,30x32,0; 1x 8,30x32,0; 1x 10,40x34,0;<br>1x 12,40x36,0; 1x 16,50x40,0; 1x 20,50x43,0 | |

## 846 3-flute Countersink Bit

3-flute countersink bit for deburring, chamfering and countersinking. A finely-tuned material elasticity provides for great durability.

Perfect chip removal and a low tilt risk ensure pleasant working. Cutting section as per DIN 335-C, 90° with 3 cutters. 1/4" hexagon, suitable for holders with take-up as per DIN ISO 1173-D 6.3.

### 846 3-flute Countersink Bit

| Code | EAN 4013288 | mm | mm | mm | | | | |
|---|---|---|---|---|---|---|---|---|
| 051**04630**001 | *101440* | 6,30 | 20,00 | 31,0 | M 3 | | | 1 |
| 051**04631**001 | *101457* | 8,30 | 20,00 | 31,0 | M 4 | | | 1 |
| 051**04632**001 | *101464* | 10,40 | 20,00 | 34,0 | M 5 | | | 1 |
| 051**04633**001 | *101471* | 12,40 | 20,00 | 35,0 | M 6 | | | 1 |
| 051**04634**001 | *101488* | 16,50 | 20,00 | 40,0 | M 8 | | | 1 |
| 051**04635**001 | *101495* | 20,50 | 20,00 | 41,0 | M 10 | | | 1 |

## 816 R

Bit holder with Rapidaptor quick-release chuck for bits with 1/4" hexagon drive.

## 888/4/1 K

Rapidaptor universal holder for bits with 1/4" hexagon drive. Non-magnetic design.

### 846/8 3-flute Countersink Bits Set

| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 05**104650**001 | *111678* | | | 1 |
| | | | **816 R**<br>1x 1/4"x119 | |
| | | | **888/4/1 K**<br>1x 1/4"x50 | |
| | | | **846 HSS**<br>1x 6,30x31,0; 1x 8,30x31,0; 1x 10,40x34,0;<br>1x 12,40x35,0; 1x 16,50x40,0; 1x 20,50x41,0 | |

## 847 HSS Combined Tap Bits

Combination tapping drill bits for drilling, tapping and deburring. Made out of high speed steel (HSS). A finely-tuned material elasticity provides for great durability.

The very good centring properties, perfect chip removal and a low tilt risk ensure pleasant working. The hexagonal shaft ensures very good power transfer. Drive: 1/4" hexagon, suitable for holders with take-up as per DIN ISO 1173-D 6.3.

### 847 HSS Combined Tap Bits

| Code | EAN 4013288 | mm | mm | mm | | | | |
|---|---|---|---|---|---|---|---|---|
| 05**104640**001 | *101501* | 2,5 | 12,00 | 36,0 | M 3 | | | 1 |
| 05**104641**001 | *101518* | 3,3 | 12,00 | 39,0 | M 4 | | | 1 |
| 05**104642**001 | *101525* | 4,2 | 12,00 | 41,0 | M 5 | | | 1 |
| 05**104643**001 | *101532* | 5,0 | 12,00 | 44,0 | M 6 | | | 1 |
| 05**104644**001 | *101549* | 6,8 | 12,00 | 51,0 | M 8 | | | 1 |
| 05**104645**001 | *101556* | 8,5 | 12,00 | 59,0 | M 10 | | | 1 |

## 888/4/1 K Rapidaptor Universal Bit holder

- Non-magnetic design

### 847/7 Set Combination Drill Bits Set

| Code | EAN 4013288 | | |
|---|---|---|---|
| 05**104751**001 | *233035* | | 1 |
| | | | **888/4/1 K**<br>1x 1/4"x50 |
| | | | **847 HSS**<br>1x 2,5x36,0; 1x 3,3x39,0; 1x 4,2x41,0;<br>1x 5,0x44,0; 1x 6,8x51,0; 1x 8,5x59,0 |

## 848 HSS Metal Twist Drill Bits

Metal twist drill bits for precise drilling in metal. Made out of high speed steel (HSS). A finely-tuned material elasticity provides for a long service life. Very good concentricity.

Tough viscous tempered bits ensure a particularly long service life. The hexagonal shaft ensures very good power transfer.
Drive: 1/4" hexagon, suitable for holders as per
DIN ISO 1173-D 6.3.

### 848 HSS Metal Twist Drill Bits

| Code | EAN 4013288 | mm | mm | mm | | | | |
|---|---|---|---|---|---|---|---|---|
| 05**104610**001 | *101310* | 3,0 | 16,00 | 38,0 | | | | 1 |
| 05**104611**001 | *101327* | 3,1 | 18,00 | 40,0 | | | | 1 |
| 05**104612**001 | *101334* | 3,3 | 18,00 | 40,0 | | | | 1 |
| 05**104613**001 | *101341* | 4,0 | 20,00 | 44,0 | | | | 1 |
| 05**104614**001 | *101358* | 4,1 | 20,00 | 44,0 | | | | 1 |
| 05**104615**001 | *101365* | 4,2 | 20,00 | 45,0 | | | | 1 |
| 05**104616**001 | *101372* | 5,0 | 26,00 | 50,0 | | | | 1 |
| 05**104617**001 | *101389* | 5,1 | 26,00 | 50,0 | | | | 1 |
| 05**104618**001 | *101396* | 6,0 | 26,00 | 50,0 | | | | 1 |
| 05**104619**001 | *101402* | 6,8 | 30,00 | 50,0 | | | | 1 |
| 05**104620**001 | *101419* | 8,0 | 32,00 | 51,0 | | | | 1 |
| 05**104621**001 | *101426* | 8,5 | 33,00 | 53,0 | | | | 1 |
| 05**104622**001 | *101433* | 10,0 | 38,00 | 54,0 | | | | 1 |

## 849 HSS Twist Wood Drill Bits

Wood twist drill bits for precise, splinter-free drilling in soft wood, hard wood and laminated panel material. Made out of high speed steel (HSS).

The hexagonal shaft ensures very good power transfer.
A finely-tuned material elasticity provides for a long service life.
Very good concentricity. 1/4" drive suitable for holders as per
DIN ISO 1173-D 6.3.

### 849 HSS Twist Wood Drill Bits

| Code | EAN 4013288 | mm | mm | mm | | | | |
|---|---|---|---|---|---|---|---|---|
| 05**104600**001 | *101259* | 3,0 | 32,00 | 70,0 | | | | 1 |
| 05**104601**001 | *101266* | 4,0 | 32,00 | 74,0 | | | | 1 |
| 05**104602**001 | *101273* | 5,0 | 43,00 | 85,0 | | | | 1 |
| 05**104603**001 | *101280* | 6,0 | 45,00 | 95,0 | | | | 1 |
| 05**104604**001 | *101297* | 8,0 | 60,00 | 110,0 | | | | 1 |
| 05**104605**001 | *101303* | 10,0 | 70,00 | 120,0 | | | | 1 |

## 848/851/867/19 Metal Twist Drill Bits and Bits Set

19-piece metal twist drill bit and bit set. High quality metal twist drill bits for precise drilling in metal.

Made out of high speed steel (HSS). A finely-tuned material elasticity provides for great durability.

Very good concentricity. The hexagonal shaft ensures very good power transfer. Tough viscous bits for universal use.

Drive: 1/4" hexagon, suitable for holders as per DIN ISO 1173-D 6.3.
Includes robust belt pouch for secure storage.

### 848/851/867/19 Metal Twist Drill Bits and Bits Set

| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 05**104652**001 | *111654* | | | 1 |
| | | | **888/4/1 K**<br>1x 1/4"x50 | |
| | | | **851/1 TZ PH**<br>2x PH 1x25; 3x PH 2x25; 1x PH 3x25 | |
| | | | **848 HSS**<br>1x 3,0x38,0; 1x 4,0x44,0; 1x 4,2x45,0;<br>1x 5,0x50,0; 1x 6,0x50,0; 1x 8,0x51,0 | |
| | | | **867/1 TORX®**<br>1x TX 10x25; 1x TX 15x25; 1x TX 20x25;<br>1x TX 25x25; 1x TX 30x25; 1x TX 40x25 | |

## 849/855/867/18 Wood Twist Drill Bits and Bits Set

18-piece wood twist drill bit and bit set. High quality, metal twist drill bits for precise, splinter-free drilling in soft wood, hard wood and laminated panel material.

Made out of high speed steel (HSS). A finely-tuned material elasticity provides for great durability. Very good concentricity.

The hexagonal shaft ensures very good power transfer. The Rapidaptor universal holder ensures rapid bit change without any extra tools. Drive: 1/4" hexagon, suitable for holders with take-up as per DIN ISO 1173-D 6.3.

### 849/855/867/18 Wood Twist Drill Bits and Bits Set

| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 05**104653**001 | *111661* | | | 1 |
| | | | **889/4/1 K**<br>1x 1/4"x50 | |
| | | | **849 HSS**<br>1x 3,0x70,0; 1x 4,0x74,0; 1x 5,0x85,0;<br>1x 6,0x95,0; 1x 8,0x110,0 | |
| | | | **855/1 TH PZ**<br>2x PZ 1x25; 3x PZ 2x25; 1x PZ 3x25 | |
| | | | **867/1 TORX®**<br>1x TX 10x25; 1x TX 15x25; 1x TX 20x25;<br>1x TX 25x25; 1x TX 30x25; 1x TX 40x25 | |

## Patio construction set T 1

Compact Wera tool set with the 17 most common screwdriving tools for patio construction. Bits in stainless steel design prevent extraneous rust.

With extra smart bit holder, which enables a uniform depth thanks to the variable screw depth limitation, and prevents damage to decking with the fitted felt ring.

- High-quality 17-piece tool set for evenly flush countersunk screw heads for decking in patio construction
- Bit holder with adjustable screw depth limitation and protective felt ring for surface protection
- 15 bits (TORX®, PH, PZ) made from stainless steel to prevent extraneous rust plus 3888/4/1 K Rapidaptor stainless steel bit holder
- Take it easy tool finder: colour coding according to profile and size
- Compact folding bag with Wera 2go compatibility incl. 4 spare felt rings

### Patio construction set T 1

| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 05**134021**001 | *219510* | | | 1 |
| | | | **881/4/1**<br>1x 1/4"x90 [1] | |
| | | | **3888/4/1 K**<br>1x 1/4"x50 | |
| | | | **3851/1 TS PH**<br>1x PH 1x25; 1x PH 2x25; 1x PH 3x25 | |
| | | | **3855/1 TS PZ**<br>1x PZ 1x25; 2x PZ 2x25; 1x PZ 3x25 | |
| | | | **3867/1 TS TORX®**<br>1x TX 10x25; 1x TX 15x25; 1x TX 20x25;<br>1x TX 25x25; 1x TX 30x25; 1x TX 40x25 | |
| | | | **3867/1 TS P TORX®**<br>2x TX 25x25 | |
| | | | **9201**<br>4x 27,0 | |

[1] The spare part kit with 5x felt rings can be ordered with the code number 05**130003**001.

## Bit-Check 10 Drywall 1

Bit-Check for drywall construction. High quality spacer out of aluminium; the screwdriving depth can be infinitely adjusted and allows the flush-mounting of screws; 9 drywall bits with modified output shaft, 25 mm in length.

### Bit-Check 10 Drywall 1

| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 05**136011**001 | *178657* | | | 1 |
| | | | **896/4/1**<br>1x 1/4"x50 | |
| | | | **851/1 RZ PH**<br>9x PH 2x25 | |

## Bit-Check 6 SHK 1 SB

6 Wera bits (50 mm length) neatly arranged in the smallest of spaces in the practical Bit-Check. Particularly suitable for plumbing, heating and air conditioning; Bit-Checks allow a quick overview of the available tools. Unused bits are simply put back in the holder and will not be lost. Easy transport e.g. in your shirt pocket. The tough bits are suitable for universal use.

- Included bits particularly suitable for HVAC applications
- Tough viscous bits for universal use
- The tough design of the bits prevents the tip from breaking prematurely
- Hex-Plus allows socket head screws to live longer
- 50 mm-long bits
- Upright positionable, multi-component Bit-Check
- Bit-Check plastic material ensures robustness and durability

### Bit-Check 6 SHK 1 SB

| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 05**073631**001 | *227997* | | | 1 |
| | | | **851/4 TZ**<br>1x PH 1x50 | |
| | | | **867/4 Z TORX®**<br>1x TX 15x50; 1x TX 20x50; 1x TX 25x50 | |
| | | | **840/4 Z**<br>1x 5,0x50; 1x 6,0x50 [1] | |

[1] Hexagonal blade

40-200 Nm
Wera

# Torque Tools

## Series 7400 Kraftform adjustable torque screwdrivers with Rapidaptor quick-release chuck

Variable torque setting option with highest precision. Simple adjustment of the required torque value without any special tools. Easy-to-read scale value; audible click signal. Rapidaptor quick-release technology for rapid bit change. Unlimited torque to loosen seized screws.

Multi-component Kraftform handle with hard and soft zones for high working speeds, whilst being easy on the hand.

Suitable for bits with 1/4" hexagon head drive as per DIN ISO 1173-C 6.3 and E 6.3 (ISO 1173).

### Series 7400 Kraftform adjustable torque screwdrivers (0.1-3.0 Nm) with Rapidaptor quick-release chuck

| Code | EAN 4013288 | Art.No. | | Nm | Nm | mm | mm | |
|---|---|---|---|---|---|---|---|---|
| 05**074770**001 [1] | *179012* | 7430 | 1/4" | 0,10-0,34 | 0,015 | 89 | 142 | 1 |
| 05**074772**001 [1] | *179128* | 7431 | 1/4" | 0,30-1,00 | 0,05 | 89 | 142 | 1 |
| 05**074774**001 [1] | *179135* | 7432 | 1/4" | 0,90-1,50 | 0,05 | 89 | 142 | 1 |
| 05**074700**001 | *100641* | 7440 | 1/4" | 0,3-1,2 | 0,05 | 105 | 155 | 1 |
| 05**074701**001 | *100658* | 7441 | 1/4" | 1,2-3,0 | 0,10 | 105 | 155 | 1 |

[1] With attachable magnifying glass, significantly improving readability.

### Series 7400 Kraftform adjustable torque screwdrivers (2.5-29.0 in. lbs.) with Rapidaptor quick-release chuck

| Code | EAN 4013288 | Art.No. | | in. lbs. | in. lbs. | mm | mm | |
|---|---|---|---|---|---|---|---|---|
| 05**074710**001 | *102881* | 7445 | 1/4" | 2,5-11,5 | 0,5 | 105 | 155 | 1 |
| 05**074711**001 | *102898* | 7446 | 1/4" | 11,0-29,0 | 1,0 | 105 | 155 | 1 |

### Series 7400 Kraftform pistol grip, adjustable torque screwdrivers (3.0-8.8 Nm) with Rapidaptor quick-release chuck

| Code | EAN 4013288 | Art.No. | | Nm | Nm | mm | mm | |
|---|---|---|---|---|---|---|---|---|
| 05**074702**001 | *101730* | 7442 | 1/4" | 3,0-6,0 | 0,25 | 150 | 100 | 1 |
| 05**074705**001 | *119308* | 7443 | 1/4" | 4,0-8,8 | 0,40 | 150 | 100 | 1 |

### Series 7400 Kraftform pistol grip, adjustable torque screwdrivers (25.0-55.0 in. lbs.) with Rapidaptor quick-release chuck

| Code | EAN 4013288 | Art.No. | | in. lbs. | in. lbs. | mm | mm | |
|---|---|---|---|---|---|---|---|---|
| 05**074712**001 | *102904* | 7447 | 1/4" | 25,0-55,0 | 2,5 | 150 | 100 | 1 |

## 9524 Photovoltaic mounting tool set 1

7-piece tool set for installing photovoltaic systems. One adjustable torque screwdriver (pistol handle) 7442 for the measuring range 3.0-6.0 Nm. Digital torque value display. Reliable slip-over mechanism and audible signal when the set torque is reached. One 889/4/1 F Rapidaptor bitholding screwdriver with fast-rotating function for a particularly quick return movement without having to remove the tool during clockwise torque operation. One 6003 Joker ring spanner. The special open end geometry expands the placement possibilities of the tool which makes the ring spanner particularly suitable for narrow spaces.

2 installation tools for MC4 solar connectors (Multi-Contact). One socket 1/2" (with side wire cutout) size 17 for installing panel connectors, one tool shaft (adapter 1/4" to 1/2") for manually operated socket wrench inserts.

- Screwdriving tool set for installing photovoltaic systems
- Includes 2x 9108 installation tools for MC4 solar connectors (Multi-Contact)
- Includes 7442 adjustable torque screwdriver (3.0-6.0 Nm) with pistol handle
- Includes Rapidaptor 889/4/1 F bitholder with fast-rotating function for a particularly quick return movement without having to remove the tool during clockwise torque operation
- Includes Joker 6003 ring spanner, particularly suitable for narrow spaces; the special open end geometry expands the placement possibilities of the tool
- Includes 1/2" socket (with side wire cutout) size 17 for installing panel connectors
- Includes tool shaft 870/4 (adapter 1/4" hexagon to 1/2" square head) for manually operated 1/2" socket wrench inserts

### 9524 Photovoltaic mounting tool set 1

| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 05**136043**001 | *228017* | | | 1 |
| | | | **7400 pistol grip**<br>1x 7442, 3,0-6,0 Nm | |
| | | | **8790 HMC Deep with cutout**<br>1x 17,0x76,0 | |
| | | | **870/4 A**<br>1x 1/4"x1/2"x72 | |
| | | | **889/4/1 F**<br>1x 1/4"x64 | |
| | | | **6003 Joker**<br>1x 17x190 | |
| | | | **9108**<br>2x 115 | |
| | | | **Hook and Loop Fastener Strip 120**<br>1x 50,0x120,0 | |

## 7443/12 Assembly set for tyre pressure control systems

12-piece tool set for the proper assembly and disassembly of tyre pressure control systems. Comes with torque technology for controlled screw tightening. Hand tool with multi-component Kraftform handle for high working speeds and ergonomic working. Five pre-set tools to connect the union nut with the screw and to fasten the sensor component to the valve.

Two pre-set valve insertion tools with 0.25 and 0.45 Nm. An adjustable Kraftform pistol handle for torque values of between 4.0 and 8.8 Nm. Suitable for all customary tyre pressure control systems. Dependable fastening thanks to distinctly coloured marking of the pre-set torque values (Beru/Huf®: TX 10 yellow 1.25 Nm; Schrader®: TX 10 green 1.4 Nm; Cup®/RTS®: TX 20 grey 2.0 Nm).

Two TX bits with holding function, socket adaptor, two sockets plus a valve dolly (for applications up to 4.5 Nm). Suitable for tyre control, systems from e.g. Schrader®, Alligator®, VDO®. The pre-set torque screwdriver fixed at 3.3 Nm actuates both the union nut as well as the connecting screw on the sensors of the Alligator system. Additionally included: socket adaptor, two bits, valve dolly (for applications up to 4.5 Nm).

### 7443/12 Assembly set for tyre pressure control systems

| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 05**074746**001 | *178404* | | | 1 |
| | | | **7400 pistol grip**<br>1x 7443, 4,0-8,8 Nm | |
| | | | **Series 7400 Kraftform torque screwdrivers with a factory pre-set measurement value**<br>1x 7464, 3,3 Nm, 3,0-6,0 Nm | |
| | | | **300 TX**<br>1x TX 10x1,25; 1x TX 10x1,4 | |
| | | | **790 A/50**<br>1x 11,0x50,0; 1x 12,0x50,0 | |
| | | | **867/4 TORX® HF**<br>1x TX 15x50; 1x TX 20x50 | |
| | | | **870/1**<br>1x 1/4"x25 [1] | |
| | | | **300 V**<br>1x 0,25; 1x 0,45 | |
| | | | **327**<br>1x 32x70 | |

[1] With friction ball; for manual nut spinner sockets

## 7440/41 Kraftform torque screwdriver set 0.3-3.0 Nm

Wera torque screwdriver set. Two torque screwdrivers with variable torque setting option with highest precision.

Simple adjustment of the required torque value without any special tools. Easy-to-read scale value.

Rapidaptor quick-release technology for rapid bit change.

Unlimited torque to loosen seized screws. Multi-component Kraftform handle with hard and soft zones for high working speeds, whilst being easy on the hand.

Includes bit assortment in a high quality and stable plastic case.

### 7440/41 Kraftform torque screwdriver set 0.3-3.0 Nm

| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 05**074738**001 | *112354* | | | 1 |
| | | | **7400**<br>1x 7440, 1/4", 0,3-1,2 Nm;<br>1x 7441, 1/4", 1,2-3,0 Nm | |
| | | | **867/1 TZ TORX®**<br>1x TX 6x25; 1x TX 7x25; 1x TX 8x25; 1x TX 9x25; 1x TX 10x25; 1x TX 15x25; 1x TX 20x25; 1x TX 25x25; 1x TX 30x25 | |
| | | | **867/1 IP TORX PLUS®**<br>1x 6 IPx25; 1x 7 IPx25; 1x 8 IPx25; 1x 9 IPx25; 1x 10 IPx25; 1x 15 IPx25; 1x 20 IPx25; 1x 25 IPx25; 1x 30 IPx25 | |
| | | | **840/1 Z Hex-Plus**<br>1x 2,0x25; 1x 2,5x25; 1x 3,0x25; 1x 4,0x25; 1x 5,0x25; 1x 6,0x25 | |

## 7440/41/42 Kraftform torque screwdriver set 0.3-6.0 Nm

| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 05**074739**001 | *113924* | | | 1 |
| | | | **7400**<br>1x 7440, 0,3-1,2 Nm; 1x 7441, 1,2-3,0 Nm | |
| | | | **7400 pistol grip**<br>1x 7442, 3,0-6,0 Nm | |
| | | | **867/1 TZ TORX®**<br>1x TX 6x25; 1x TX 7x25; 1x TX 8x25; 1x TX 9x25;<br>1x TX 10x25; 1x TX 15x25; 1x TX 20x25;<br>1x TX 25x25; 1x TX 30x25 | |
| | | | **867/1 IP TORX PLUS®**<br>1x 6 IPx25; 1x 7 IPx25; 1x 8 IPx25; 1x 9 IPx25;<br>1x 10 IPx25; 1x 15 IPx25; 1x 20 IPx25;<br>1x 25 IPx25; 1x 30 IPx25 | |
| | | | **840/1 Z**<br>1x 2,0x25; 1x 2,5x25; 1x 3,0x25; 1x 4,0x25;<br>1x 5,0x25; 1x 6,0x25 | |

## 7445/46/47 Kraftform torque screwdriver set 2.5-55.0 in. lbs.

| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 05**350451**001 | *161383* | | | 1 |
| | | | **7400 Imperial**<br>1x 7445, 2,5-11,5 in. lbs.;<br>1x 7446, 11,0-29,0 in. lbs. | |
| | | | **7400 Imperial pistol grip**<br>1x 7447, 25,0-55,0 in. lbs. | |
| | | | **867/1 TZ TORX®**<br>1x TX 6x25; 1x TX 7x25; 1x TX 8x25; 1x TX 9x25;<br>1x TX 10x25; 1x TX 15x25; 1x TX 20x25;<br>1x TX 25x25; 1x TX 30x25 | |
| | | | **867/1 IP TORX PLUS®**<br>1x 6 IPx25; 1x 7 IPx25; 1x 8 IPx25; 1x 9 IPx25;<br>1x 10 IPx25; 1x 15 IPx25; 1x 20 IPx25;<br>1x 25 IPx25; 1x 30 IPx25 | |
| | | | **840/1 Z**<br>1x 2,0x25; 1x 2,5x25; 1x 3,0x25; 1x 4,0x25;<br>1x 5,0x25; 1x 6,0x25 | |

## 7443/61/9 Assembly set for tyre pressure control systems

9-piece tool set for the proper assembly and disassembly of tyre pressure control systems. Comes with torque technology for controlled screw tightening.

Hand tool with multi-component Kraftform handle for high working speeds and ergonomic working. Two pre-set tools to connect the union nut with the screw and to fasten the sensor component to the valve.

An adjustable Kraftform pistol handle for torque values of between 4.0 and 8.8 Nm. Two TX bits with holding function, socket adaptor, two sockets plus a valve dolly (for applications up to 4.5 Nm). Suitable for tyre control, systems from e.g. Schrader®, Alligator®, VDO®.

## 7443/61/9 Assembly set for tyre pressure control systems

| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 05**074745**001 | *168818* | | | 1 |
| | | | **Series 7400 Kraftform torque screwdrivers with a factory pre-set measurement value**<br>1x 7461, 1,2 Nm, 1,2-3,0 Nm [1] | |
| | | | **7400 pistol grip**<br>1x 7443, 4,0-8,8 Nm | |
| | | | **300 TX**<br>1x TX 10x1,4 | |
| | | | **870/1**<br>1x 1/4"x25 [2] | |
| | | | **790 A/50**<br>1x 11,0x50,0; 1x 12,0x50,0 | |
| | | | **867/4 TORX® HF**<br>1x TX 15x50; 1x TX 20x50 | |
| | | | **327**<br>1x 32x70 | |

[1] The preset torque can be changed. However, this requires the use of special tools and Torque Test Equipment. Please contact the Wera Torque Service.

[2] With friction ball; for manual nut spinner sockets

## 1430 Kraftform Micro ESD adjustable torque screwdrivers (0.02-0.11 Nm) with quick-release chuck

- ESD-safe tool thanks to surface resistance of ≤ $10^9$ Ohm
- Suitable for bits with 4 mm halfmoon and 4 mm HIOS drive
- Applications e.g. on smartphones, mobile phones, cameras, electronic equipment

### 1430 Kraftform Micro ESD adjustable torque screwdrivers (0.02-0.11 Nm) with quick-release chuck



| | EAN | | | | | | | |
|---|---|---|---|---|---|---|---|---|
| Code | 4013288 | Art.No. | Nm | Nm | mm | | | |
| 05**074802**001 [1] | *179043* | 1430 ESD | 0,02-0,06 | 0,0025 | 141 | 5 7/16" | | 1 |
| 05**074804**001 [1] | *179104* | 1431 ESD | 0,05-0,11 | 0,005 | 141 | 5 7/16" | | 1 |

[1] With attachable magnifying glass, significantly improving readability.

## Series 7400 Kraftform ESD adjustable torque screwdrivers (0.1-3.0 Nm) with Rapidaptor quick-release chuck

- ESD-safe tool thanks to surface resistance of ≤ $10^9$ Ohm

### Series 7400 Kraftform ESD adjustable torque screwdrivers (0.1-3.0 Nm) with Rapidaptor quick-release chuck

| | EAN | | | | | | | |
|---|---|---|---|---|---|---|---|---|
| Code | 4013288 | Art.No. | | Nm | Nm | mm | mm | |
| 05**074780**001 [1] | *179159* | 7430 ESD | 1/4" | 0,10-0,34 | 0,015 | 89 | 142 | 1 |
| 05**074782**001 [1] | *179166* | 7431 ESD | 1/4" | 0,30-1,00 | 0,05 | 89 | 142 | 1 |
| 05**074784**001 [1] | *179173* | 7432 ESD | 1/4" | 0,90-1,50 | 0,05 | 89 | 142 | 1 |
| 05**074730**001 | *106964* | 7440 ESD | 1/4" | 0,3-1,2 | 0,05 | 105 | 155 | 1 |
| 05**074731**001 | *106971* | 7441 ESD | 1/4" | 1,2-3,0 | 0,10 | 105 | 155 | 1 |

[1] With attachable magnifying glass, significantly improving readability.

## Series 7400 Kraftform ESD adjustable torque screwdrivers (2.5-29.0 in. lbs.) with Rapidaptor quick-release chuck

- ESD-safe tool thanks to surface resistance of ≤ $10^9$ Ohm

### Series 7400 Kraftform ESD adjustable torque screwdrivers (2.5-29.0 in. lbs.) with Rapidaptor quick-release chuck

| | EAN | | | | | | | |
|---|---|---|---|---|---|---|---|---|
| Code | 4013288 | Art.No. | | in. lbs. | in. lbs. | mm | mm | |
| 05**074733**001 | *106988* | 7445 ESD | 1/4" | 2,5-11,5 | 0,5 | 105 | 155 | 1 |
| 05**074734**001 | *106995* | 7446 ESD | 1/4" | 11,0-29,0 | 1,0 | 105 | 155 | 1 |

## Series 7400 Kraftform ESD adjustable torque screwdrivers (0.1-1.0 Nm)

- ESD-safe tool thanks to surface resistance of ≤ $10^9$ Ohm
- Suitable for bits with 4 mm halfmoon and 4 mm HIOS drive

### Series 7400 Kraftform ESD adjustable torque screwdrivers (0.1-1.0 Nm)

| | EAN | | | | | | | |
|---|---|---|---|---|---|---|---|---|
| Code | 4013288 | Art.No. | Nm | Nm | mm | mm | | |
| 05**074786**001 [1] | *179036* | 7435 ESD | 0,10-0,34 | 0,015 | 89 | 142 | 5 7/16" | 1 |
| 05**074788**001 [1] | *179029* | 7436 ESD | 0,30-1,00 | 0,05 | 89 | 142 | 5 7/16" | 1 |

[1] With attachable magnifying glass, significantly improving readability.

## Series 7400 Kraftform Torque Screwdrivers, with a factory pre-set measurement value

Wera torque screwdriver. With a factory pre-set torque value set to the smallest scale value. For all applications, where the same constant torque and repeat accuracy are required.

The torque can be changed with an extra tool within the measuring range (re-calibration kit can be ordered with the code number 05**137003**001).

Afterwards you can check the set value using an off-the-shelf torque tester. Unlimited loosening torque for slackening stuck screws. Rapidaptor quick-release technology for rapid bit changes.

Suitable for bits with a 1/4" external hexagon drive as per DIN ISO 1173-C 6.3 and E 6.3 (ISO 1173). Multi-component Kraftform handle with hard and soft zones for high working speeds, whilst being easy on the hand.

Please note: 1 Ncm = 0.01 Nm.

### 7400 series Kraftform Torque screwdrivers, with factory pre-set value (0.1-1.5 Nm) and Rapidaptor quick-release chuck, handle size 89 mm

| | EAN | | | | | | | |
|---|---|---|---|---|---|---|---|---|
| Code | 4013288 | Art.No. | | Nm | Nm | mm | mm | |
| 05**074790**001 [1] | *179395* | 7450 | 1/4" | 0,1 | 0,1-0,34 | 89 | 133 | 1 |
| 05**074792**001 [1] | *179203* | 7451 | 1/4" | 0,3 | 0,3-1,0 | 89 | 133 | 1 |
| 05**074794**001 [1] | *179197* | 7452 | 1/4" | 0,9 | 0,9-1,5 | 89 | 133 | 1 |

[1] The preset torque can be changed. However, this requires the use of special tools and Torque Test Equipment. Please contact the Wera Torque Service.

## 7400 series Kraftform Torque screwdrivers, with factory pre-set value (0.3-3.0 Nm) and Rapidaptor quick-release chuck, handle size 105 mm

Wera torque screwdrivers. With a factory pre-set torque value set to the smallest scale value. For all applications, where the same constant torque and repeat accuracy are required. The torque can be changed with an extra tool within the measuring range (re-calibration kit can be ordered with the code number 05**137001**001).

Afterwards you can check the set value using an off-the-shelf torque tester. Unlimited loosening torque for slackening stuck screws. Rapidaptor quick-release technology for rapid bit changes.

Suitable for bits with a 1/4" external hexagon drive as per DIN ISO 1173-C 6.3 and E 6.3 (ISO 1173).

Multi-component Kraftform handle with hard and soft zones for high working speeds, whilst being easy on the hand.

Please note: 1 Ncm = 0.01 Nm.

### 7400 series Kraftform Torque screwdrivers, with factory pre-set value (0.3-3.0 Nm) and Rapidaptor quick-release chuck, handle size 105 mm

| | EAN | | | | | | | |
|---|---|---|---|---|---|---|---|---|
| Code | 4013288 | Art.No. | | Nm | Nm | mm | mm | |
| 05**074715**001 [1] | *102911* | 7460 | 1/4" | 0,3 | 0,3-1,2 | 105 | 155 | 1 |
| 05**074716**001 [1] | *102928* | 7461 | 1/4" | 1,2 | 1,2-3,0 | 105 | 155 | 1 |

[1] The preset torque can be changed. However, this requires the use of special tools and Torque Test Equipment. Please contact the Wera Torque Service.

## 7400 series Kraftform Torque screwdrivers, with factory pre-set value (3.0-8.8 Nm) and Rapidaptor quick-release chuck, pistol handle

Wera torque screwdriver. Kraftform pistol handle for particularly high torque transmission, multi-component for high working speeds and particularly ergonomic screwdriving. With a factory pre-set torque value set to the smallest scale value. For all applications, where the same constant torque and repeat accuracy are required. The torque can be changed with an extra tool within the measuring range (re-calibration kit can be ordered with the code number 05**137002**001).

Afterwards you can check the set value using an off-the-shelf torque tester. Unlimited loosening torque for slackening stuck screws. Rapidaptor quick-release technology for rapid bit changes.

Suitable for bits with a 1/4" external hexagon drive as per DIN ISO 1173-C 6.3 and E 6.3 (ISO 1173).

Multi-component Kraftform handle with hard and soft zones for high working speeds, whilst being easy on the hand.

Suitable for bits with a 1/4" hexagon drive as per DIN ISO 1173-C 6.3 and E 6.3 (ISO 1173).

Please note: 1 Ncm = 0.01 Nm.

### 7400 series Kraftform Torque screwdrivers, with factory pre-set value (3.0-8.8 Nm) and Rapidaptor quick-release chuck, pistol handle

| | EAN | | | | | | | |
|---|---|---|---|---|---|---|---|---|
| Code | 4013288 | Art.No. | | Nm | Nm | mm | mm | |
| 05**074717**001 [1] | *102935* | 7462 | 1/4" | 3,0 | 3,0-6,0 | 150 | 100 | 1 |
| 05**074728**001 [1] | *156167* | 7463 | 1/4" | 4,0 | 4,0-8,8 | 150 | 100 | 1 |

[1] The preset torque can be changed. However, this requires the use of special tools and Torque Test Equipment. Please contact the Wera Torque Service.

## 7400 Imperial series Kraftform Torque screwdrivers, with factory pre-set value (2.5-29.0 in. lbs.) and Rapidaptor quick-release chuck, handle size 105 mm

Wera torque screwdrivers. With a factory pre-set torque value set to the smallest scale value. For all applications, where the same constant torque and repeat accuracy are required.

The torque can be changed with an extra tool within the measuring range (re-calibration kit can be ordered with the code number 05**137001**001).

Afterwards you can check the set value using an off-the-shelf torque tester. Unlimited loosening torque for slackening stuck screws. Rapidaptor quick-release technology for rapid bit changes.

Suitable for bits with a 1/4" external hexagon drive as per DIN ISO 1173-C 6.3 and E 6.3 (ISO 1173).

Multi-component Kraftform handle with hard and soft zones for high working speeds, whilst being easy on the hand.

Please note: 1 Ncm = 0.01 Nm.

### 7400 Imperial series Kraftform Torque screwdrivers, with factory pre-set value (2.5-29.0 in. lbs.) and Rapidaptor quick-release chuck, handle size 105 mm

| | EAN | | | | | | | |
|---|---|---|---|---|---|---|---|---|
| Code | 4013288 | Art.No. | | in. lbs. | in. lbs. | mm | mm | |
| 05**074720**001 [1] | *102942* | 7465 | 1/4" | 2,5 | 2,5-11,5 | 105 | 155 | 1 |
| 05**074722**001 [1] | *103116* | 7466 | 1/4" | 11,0 | 11,0-29,0 | 105 | 155 | 1 |

[1] The preset torque can be changed. However, this requires the use of special tools and Torque Test Equipment. Please contact the Wera Torque Service.

## 7400 Imperial series Kraftform Torque screwdrivers, with factory pre-set value (25.0-55.0 in. lbs.) and Rapidaptor quick-release chuck, pistol handle

Wera torque screwdriver. Kraftform pistol handle for particularly high torque transmission, multi-component for high working speeds and particularly ergonomic screwdriving. With a factory pre-set torque value set to the smallest scale value. '

For all applications, where the same constant torque and repeat accuracy are required. The torque can be changed with an extra tool within the measuring range (re-calibration kit can be ordered with the code number 05**137002**001).

Afterwards you can check the set value using an off-the-shelf torque tester.

Unlimited loosening torque for slackening stuck screws. Rapidaptor quick-release technology for rapid bit changes.

Suitable for bits with a 1/4" external hexagon drive as per DIN ISO 1173-C 6.3 and E 6.3 (ISO 1173).

Multi-component Kraftform handle with hard and soft zones for high working speeds, whilst being easy on the hand.

Please note: 1 Ncm = 0.01 Nm.

### 7400 Imperial series Kraftform Torque screwdrivers, with factory pre-set value (25.0-55.0 in. lbs.) and Rapidaptor quick-release chuck, pistol handle

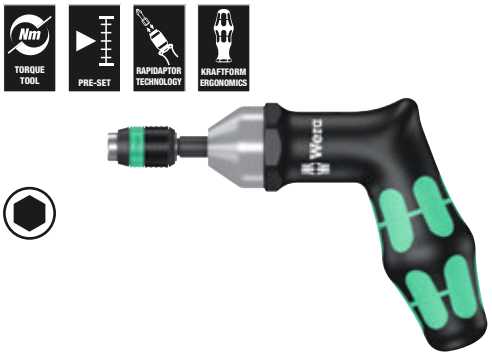


| | EAN | | | in. lbs. | in. lbs. | mm | mm | |
|---|---|---|---|---|---|---|---|---|
| Code | 4013288 | Art.No. | | | | | | |
| 05**074721**001 [1] | *102959* | 7467 | 1/4" | 25,0 | 25,0-55,0 | 150 | 100 | 1 |

[1] The preset torque can be changed. However, this requires the use of special tools and Torque Test Equipment. Please contact the Wera Torque Service.

## 7400 ESD series Kraftform Torque screwdrivers, with factory pre-set value (0.1-1.5 Nm) and Rapidaptor quick-release chuck, handle size 105 mm

Wera torque screwdriver. Safe protection against electrostatic charge and associated damage. With a factory pre-set torque value set to the smallest scale value.

For all applications, where the same constant torque and repeat accuracy are required. The torque can be changed with an extra tool within the measuring range (re-calibration kit can be ordered with the code number 05**137003**001).

Afterwards you can check the set value using an off-the-shelf torque tester. Unlimited loosening torque for slackening stuck screws. Rapidaptor quick-release technology for rapid bit changes.

Suitable for bits with a 1/4" hexagon drive as per DIN ISO 1173-C 6.3 and E 6.3 (ISO 1173).

Multi-component Kraftform handle with hard and soft zones for high working speeds, whilst being easy on the hand.

Please note: 1 Ncm = 0.01 Nm.

- ESD-safe tool thanks to surface resistance of ≤ $10^9$ Ohm

### 7400 ESD series Kraftform Torque screwdrivers, with factory pre-set value (0.1-1.5 Nm) and Rapidaptor quick-release chuck, handle size 105 mm

| | EAN | | | Nm | Nm | mm | mm | |
|---|---|---|---|---|---|---|---|---|
| Code | 4013288 | Art.No. | | | | | | |
| 05**074840**001 [1] | *179487* | 7460 ESD | 1/4" | 0,3 | 0,3-1,2 | 105 | 155 | 1 |
| 05**074842**001 [1] | *179098* | 7461 ESD | 1/4" | 1,2 | 1,2-3,0 | 105 | 155 | 1 |

[1] The preset torque can be changed. However, this requires the use of special tools and Torque Test Equipment. Please contact the Wera Torque Service.

## 7400 ESD series Kraftform Torque screwdrivers, with factory pre-set value (0.1-1.5 Nm) and Rapidaptor quick-release chuck, handle size 89 mm

Wera torque screwdriver. Safe protection against electrostatic charge and associated damage. With a factory pre-set torque value set to the smallest scale value. For all applications, where the same constant torque and repeat accuracy are required.

The torque can be changed with an extra tool within the measuring range (re-calibration kit can be ordered with the code number 05**137003**001).

Afterwards you can check the set value using an off-the-shelf torque tester. Rapidaptor quick-release technology for rapid bit changes. Unlimited loosening torque for slackening stuck screws.

Multi-component Kraftform handle with hard and soft zones for high working speeds, whilst being easy on the hand.

Suitable for bits with a 1/4" hexagon drive as per DIN ISO 1173-C 6.3 and E 6.3 (ISO 1173).

Please note: 1 Ncm = 0.01 Nm.

- ESD-safe tool thanks to surface resistance of ≤ $10^9$ Ohm

### 7400 ESD series Kraftform Torque screwdrivers, with factory pre-set value (0.1-1.5 Nm) and Rapidaptor quick-release chuck, handle size 89 mm

| | EAN | | | | | | | |
|---|---|---|---|---|---|---|---|---|
| Code | 4013288 | Art.No. | | Nm | Nm | mm | mm | |
| 05**074820**001 [1] | *179210* | 7450 ESD | 1/4" | 0,1 | 0,1-0,34 | 89 | 133 | 1 |
| 05**074822**001 [1] | *179470* | 7451 ESD | 1/4" | 0,3 | 0,3-1,0 | 89 | 133 | 1 |
| 05**074824**001 [1] | *179227* | 7452 ESD | 1/4" | 0,9 | 0,9-1,5 | 89 | 133 | 1 |

[1] The preset torque can be changed. However, this requires the use of special tools and Torque Test Equipment. Please contact the Wera Torque Service.

## 7400 ESD series Kraftform Torque screwdrivers, with factory pre-set value (0.1-1.0 Nm) and quick-release chuck

Wera torque screwdriver. Safe protection against electrostatic charge and associated damage. With a factory pre-set torque value set to the smallest scale value.

For all applications, where the same constant torque and repeat accuracy are required. The torque can be changed with an extra tool within the measuring range (re-calibration kit can be ordered with the code number 05**137003**001).

Afterwards you can check the set value using an off-the-shelf torque tester. With quick-release chuck for rapid bit change. Unlimited loosening torque for slackening stuck screws.

Multi-component Kraftform handle with hard and soft zones for high working speeds, whilst being easy on the hand.

Suitable for bits with a 4 mm Halfmoon drive (Wera series 9) and a 4 mm HIOS drive (Wera series 21).

Please note: 1 Ncm = 0.01 Nm.

- ESD-safe tool thanks to surface resistance of ≤ $10^9$ Ohm
- Suitable for bits with 4 mm halfmoon and 4 mm HIOS drive

### 7400 ESD series Kraftform Torque screwdrivers, with factory pre-set value (0.1-1.0 Nm) and quick-release chuck

| | EAN | | | | | | | |
|---|---|---|---|---|---|---|---|---|
| Code | 4013288 | Art.No. | Nm | Nm | mm | mm | | |
| 05**074826**001 [1] | *179067* | 7455 ESD | 0,1 | 0,1-0,34 | 89 | 138 | 5 1/4" | 1 |
| 05**074828**001 [1] | *179050* | 7456 ESD | 0,3 | 0,3-1,0 | 89 | 138 | 5 1/4" | 1 |

[1] The preset torque can be changed. However, this requires the use of special tools and Torque Test Equipment. Please contact the Wera Torque Service.

## 1460 ESD Kraftform Micro torque screwdrivers, with factory pre-set value (0.02-0.11 Nm) and quick-release chuck

With a factory pre-set torque value set to the smallest scale value. For all applications, where the same constant torque and repeat accuracy are required. The torque can be changed within the measuring range with the extra tool 05**137004**001.

Afterwards you can check the set value using an off-the-shelf torque tester.

Compact handle/interchangeable blades system for torque-controlled precision screwdriving. The Kraftform Micro ESD torque screwdriver is ideal for torque-controlled jobs on electrostatically sensitive components. Suitable for bits with a 4 mm Halfmoon drive (Wera series 9) and a 4 mm HIOS drive (Wera series 21). Tamper-proof. Clearly audible and tactile signal when the set torque is reached. Repeatability is 100% guaranteed. Unlimited manual loosening torque.

Electrical surface resistance ≤ $10^9$ ohms for safe protection against electrostatic charge.

Manufactured as per DIN EN 61340-5-1. Handle/interchangeable blades system for rapid blade changes. Kraftform Micro handle with rotating cap and free-turning zone for rapid turning, making any time-consuming repositioning of the fingers unnecessary.

Power zone with integrated soft zones ensures the transmission of high tightening and loosening torques. Precision zone directly above the blade for the correct rotation angle for adjustment work.

Rapid bit fixing: Simply push the bit into the holder for automatic locking and a secure fit. To change the bit, simply push the sleeve forward and remove the bit. Free-running actuating sleeve for easy handling of the tool during the screwdriving process.

Bits suitable for manual and machine operated screwdriving connections with electric screwdrivers (including HIOS, Delvo, Sehan). Use with e.g. smartphones, mobile phones, cameras, electronic devices, in dental laboratories and dental surgeries.

Please note: 1 Ncm = 0.01 Nm.

- ESD-safe tool thanks to surface resistance of ≤ $10^9$ Ohm
- Suitable for the take-up of bits with 4 mm halfmoon drive and 4 mm HIOS drive
- Applications e.g. on smartphones, mobile phones, cameras, electronic equipment

### 1460 ESD Kraftform Micro torque screwdrivers, with factory pre-set value (0.02-0.11 Nm) and quick-release chuck



| | EAN | | | | | | | |
|---|---|---|---|---|---|---|---|---|
| Code | 4013288 | Art.No. | Nm | Nm | mm | | | |
| 05**074800**001 [1] | *168351* | 1460 ESD | 0,035 | 0,02-0,06 | 131 | 5 1/4" | | 1 |
| 05**074810**001 [1] | *179463* | 1461 ESD | 0,050 | 0,05-0,11 | 131 | 5 1/4" | | 1 |

[1] The preset torque can be changed. However, this requires the use of special tools and Torque Test Equipment. Please contact the Wera Torque Service.

## Series 7400 Kraftform torque screwdrivers with a customised factory pre-set measurement value, handle size 89 mm

Wera torque screwdriver. With a customised factory pre-set torque value. For all applications, where the same constant torque and repeat accuracy are required.

The torque can be changed with an extra tool within the measuring range (re-calibration kit can be ordered with the code number 05**137003**001). Afterwards you can check the set value using an off-the-shelf torque tester.

Unlimited loosening torque for slackening stuck screws. Rapidaptor quick-release technology for rapid bit changes.

Suitable for bits with a 1/4" external hexagon drive as per DIN ISO 1173-C 6.3 and E 6.3 (ISO 1173).

Multi-component Kraftform handle with hard and soft zones for high working speeds, whilst being easy on the hand.

Please note: 1 Ncm = 0.01 Nm.

### Series 7400 Kraftform torque screwdrivers with a customised factory pre-set measurement value, handle size 89 mm

| | EAN | | | | | | | |
|---|---|---|---|---|---|---|---|---|
| Code | 4013288 | Art.No. | | Nm | mm | mm | | |
| 05**074790**010 | *188106* | 7450 | 1/4" | 0,1-0,34 | 89 | 133 | 5 1/4" | 1 |
| 05**074792**010 | *188113* | 7451 | 1/4" | 0,3-1,0 | 89 | 133 | 5 1/4" | 1 |
| 05**074794**010 | *188137* | 7452 | 1/4" | 0,9-1,5 | 89 | 133 | 5 1/4" | 1 |

*)The desired settings can be made in the following units: Nm, kgf. m, lbf. ft., ozf. in., dN. m, kgf. cm, lbf. in, in. oz, cN. m, gf. m, ft. lb, gf. cm, in. lb.

## Series 7400 Kraftform torque screwdrivers with a customised factory pre-set measurement value, handle size 105 mm

Wera torque screwdriver. With a customised factory pre-set torque value. For all applications, where the same constant torque and repeat accuracy are required.

The torque can be changed with an extra tool within the measuring range (re-calibration kit can be ordered with the code number 05**137001**001). Afterwards you can check the set value using an off-the-shelf torque tester.

Unlimited loosening torque for slackening stuck screws. Rapidaptor quick-release technology for rapid bit changes.

Suitable for bits with a 1/4" external hexagon drive as per DIN ISO 1173-C 6.3 and E 6.3 (ISO 1173).

Multi-component Kraftform handle with hard and soft zones for high working speeds, whilst being easy on the hand.

Please note: 1 Ncm = 0.01 Nm.

- Customized pre-set torque screwdriver with Rapidaptor quick-release chuck
- Only adjustable with an extra tool
- Suitable for bits with 1/4" hex head drive
- Distinct signal when pre-set value is reached
- Multi-component Kraftform handle for high working speeds

### Series 7400 Kraftform torque screwdrivers with a customised factory pre-set measurement value, handle size 105 mm

| | EAN | | | | | | | |
|---|---|---|---|---|---|---|---|---|
| Code | 4013288 | Art.No. | | Nm | mm | mm | | |
| 05**074715**010 | *188144* | 7460 | 1/4" | 0,3-1,2 | 105 | 155 | 6" | 1 |
| 05**074716**010 | *188151* | 7461 | 1/4" | 1,2-3,0 | 105 | 155 | 6" | 1 |

*)The desired settings can be made in the following units: Nm, kgf. m, lbf. ft., ozf. in., dN. m, kgf. cm, lbf. in, in. oz, cN. m, gf. m, ft. lb, gf. cm, in. lb.

## Series 7400 Kraftform torque screwdrivers with a customised factory pre-set measurement value, pistol handle

Wera torque screwdriver. Kraftform pistol handle for particularly high torque transmission, multi-component for high working speeds and particularly ergonomic screwdriving.

With a customised factory pre-set torque value. For all applications, where the same constant torque and repeat accuracy are required. The torque can be changed with an extra tool within the measuring range (re-calibration kit can be ordered with the code number 05**137002**001). Afterwards you can check the set value using an off-the-shelf torque tester.

Rapidaptor quick-release technology for rapid bit changes. Unlimited loosening torque for slackening stuck screws.

Multi-component Kraftform handle with hard and soft zones for high working speeds, whilst being easy on the hand.

Please note: 1 Ncm = 0.01 Nm.

### Series 7400 Kraftform torque screwdrivers with a customised factory pre-set measurement value, pistol handle

| | EAN | | | | | | | |
|---|---|---|---|---|---|---|---|---|
| Code | 4013288 | Art.No. | | Nm | mm | mm | | |
| 05**074717**010 | *188168* | 7462 | 1/4" | 3,0-6,0 | 150 | 100 | 6" | 1 |
| 05**074728**010 | *188199* | 7463 | 1/4" | 4,0-8,8 | 150 | 100 | 6" | 1 |

*)The desired settings can be made in the following units: Nm, kgf. m, lbf. ft., ozf. in., dN. m, kgf. cm, lbf. in, in. oz, cN. m, gf. m, ft. lb, gf. cm, in. lb.

## Series 7400 Imperial Kraftform torque screwdrivers with a customised factory pre-set measurement value, handle size 105 mm

Wera torque screwdriver. With a customised factory pre-set torque value.

For all applications, where the same constant torque and repeat accuracy are required.

The torque can be changed with an extra tool within the measuring range (re-calibration kit can be ordered with the code number 05**137001**001). Afterwards you can check the set value using an off-the-shelf torque tester.

Unlimited loosening torque for slackening stuck screws. Rapidaptor quick-release technology for rapid bit changes.

Suitable for bits with a 1/4" external hexagon drive as per DIN ISO 1173-C 6.3 and E 6.3 (ISO 1173).

Multi-component Kraftform handle with hard and soft zones for high working speeds, whilst being easy on the hand.

Please note: 1 Ncm = 0.01 Nm.

### Series 7400 Imperial Kraftform torque screwdrivers with a customised factory pre-set measurement value, handle size 105 mm

| | EAN | | | | | | | |
|---|---|---|---|---|---|---|---|---|
| Code | 4013288 | Art.No. | | in. lbs. | mm | mm | | |
| 05**074720**010 | *188250* | 7465 | 1/4" | 2,5-11,5 | 105 | 155 | 6" | 1 |
| 05**074722**010 | *188267* | 7466 | 1/4" | 11,0-29,0 | 105 | 155 | 6" | 1 |

*)The desired settings can be made in the following units: Nm, kgf. m, lbf. ft., ozf. in., dN. m, kgf. cm, lbf. in, in. oz, cN. m, gf. m, ft. lb, gf. cm, in. lb.

## Series 7400 Imperial Kraftform torque screwdrivers with a customised factory pre-set measurement value, pistol handle

Wera torque screwdriver. Kraftform pistol handle for particularly high torque transmission, multi-component for high working speeds and particularly ergonomic screwdriving.

With a customised factory pre-set torque value. For all applications, where the same constant torque and repeat accuracy are required.

The torque can be changed with an extra tool within the measuring range (re-calibration kit can be ordered with the code number 05**137002**001). Afterwards you can check the set value using an off-the-shelf torque tester.

Rapidaptor quick-release technology for rapid bit changes. Unlimited loosening torque for slackening stuck screws.

Multi-component Kraftform handle with hard and soft zones for high working speeds, whilst being easy on the hand.

Please note: 1 Ncm = 0.01 Nm.

**Series 7400 Imperial Kraftform torque screwdrivers with a customised factory pre-set measurement value, pistol handle**

| | EAN | | | | | | | |
|---|---|---|---|---|---|---|---|---|
| Code | 4013288 | Art.No. | | in. lbs. | mm | mm | | |
| 05**074721**010 | *188274* | 7467 | 1/4" | 25,0-55,0 | 150 | 100 | 6" | 1 |

*)The desired settings can be made in the following units: Nm, kgf. m, lbf. ft., ozf. in., dN. m, kgf. cm, lbf. in, in. oz, cN. m, gf. m, ft. lb, gf. cm, in. lb.

## 1460 ESD Kraftform Micro torque screwdrivers with a customised factory pre-set measurement value with quick-release chuck

With a customised factory pre-set torque value. The torque can be changed with an extra tool within the measuring range (re-calibration kit can be ordered with the code number 05**137004**001).

Afterwards you can check the set value using an off-the-shelf torque tester. Compact handle/interchangeable blades system for torque-controlled precision screwdriving.

The Kraftform Micro ESD torque screwdriver is ideal for torque-controlled jobs on electrostatically sensitive components. Suitable for bits with a 4 mm Halfmoon drive (Wera series 9) and a 4 mm HIOS drive (Wera series 21).

Tamper-proof. Clearly audible and tactile signal when the set torque is reached. Repeatability is 100% guaranteed. Unlimited manual loosening torque.

Electrical surface resistance ≤ $10^9$ ohms for safe protection against electrostatic charge.

Manufactured as per DIN EN 61340-5-1. Handle/interchangeable blades system for rapid blade changes.

Kraftform Micro handle with rotating cap and free-turning zone for rapid turning, making any time-consuming repositioning of the fingers unnecessary.

Power zone with integrated soft zones ensures the transmission of high tightening and loosening torques. Precision zone directly above the blade for the correct rotation angle for adjustment work. Rapid bit fixing: Simply push the bit into the holder for automatic locking and a secure fit.

To change the bit, simply push the sleeve forward and remove the bit. Free-running actuating sleeve for easy handling of the tool during the screwdriving process.

Bits suitable for manual and machine operated screwdriving connections with electric screwdrivers (including HIOS, Delvo, Sehan).

Use with e.g. smartphones, mobile phones, cameras, electronic devices, in dental laboratories and dental surgeries.

Please note: 1 Ncm = 0.01 Nm.

- ESD-safe tool thanks to surface resistance of ≤ $10^9$ Ohm
- Suitable for the take-up of bits with 4 mm halfmoon drive and 4 mm HIOS drive
- Applications e.g. on smartphones, mobile phones, cameras, electronic equipment

## 1460 ESD Kraftform Micro torque screwdrivers with a customised factory pre-set measurement value with quick-release chuck



| | EAN | | | | | | | |
|---|---|---|---|---|---|---|---|---|
| Code | 4013288 | Art.No. | Nm | mm | | | | |
| 05**074800**010 | *188304* | 1460 ESD | 0,02-0,06 | 131 | 5 ¼" | | | 1 |
| 05**074810**010 | *188311* | 1461 ESD | 0,05-0,11 | 131 | 5 ¼" | | | 1 |

*)The desired settings can be made in the following units: Nm, kgf. m, lbf. ft., ozf. in., dN. m, kgf. cm, lbf. in, in. oz, cN. m, gf. m, ft. lb, gf. cm, in. lb.

## Series 7400 ESD Kraftform torque screwdrivers with a customised factory pre-set measurement value, handle size 105 mm

Wera torque screwdriver. Safe protection against electrostatic charge and associated damage. With a customised factory pre-set torque value.

For all applications, where the same constant torque and repeat accuracy are required.

The torque can be changed with an extra tool within the measuring range (re-calibration kit can be ordered with the code number 05**137001**001). Afterwards you can check the set value using an off-the-shelf torque tester.

Rapidaptor quick-release technology for rapid bit changes. Unlimited loosening torque for slackening stuck screws.

Multi-component Kraftform handle with hard and soft zones for high working speeds, whilst being easy on the hand.

Suitable for bits with a ¼" external hexagon drive as per DIN ISO 1173-C 6.3 and E 6.3 (ISO 1173).

Please note: 1 Ncm = 0.01 Nm.

- ESD-safe tool thanks to surface resistance of ≤ $10^9$ Ohm

## Series 7400 ESD Kraftform torque screwdrivers with a customised factory pre-set measurement value, handle size 105 mm

| | EAN | | | | | | | |
|---|---|---|---|---|---|---|---|---|
| Code | 4013288 | Art.No. | | Nm | mm | mm | | |
| 05**074840**010 | *188236* | 7460 ESD | ¼" | 0,3-1,2 | 105 | 155 | 6" | 1 |
| 05**074842**010 | *188243* | 7461 ESD | ¼" | 1,2-3,0 | 105 | 155 | 6" | 1 |

*)The desired settings can be made in the following units: Nm, kgf. m, lbf. ft., ozf. in., dN. m, kgf. cm, lbf. in, in. oz, cN. m, gf. m, ft. lb, gf. cm, in. lb.

## Series 7400 ESD Kraftform torque screwdrivers with a customised factory pre-set measurement value, handle size 89 mm

Wera torque screwdriver. Safe protection against electrostatic charge and associated damage.

With a customised factory pre-set torque value.

For all applications, where the same constant torque and repeat accuracy are required.

The torque can be changed with an extra tool within the measuring range (re-calibration kit can be ordered with the code number 05**137003**001). Afterwards you can check the set value using an off-the-shelf torque tester.

Unlimited loosening torque for slackening stuck screws. Rapidaptor quick-release technology for rapid bit changes.

Suitable for bits with a 1/4" external hexagon drive as per DIN ISO 1173-C 6.3 and E 6.3 (ISO 1173).

Multi-component Kraftform handle with hard and soft zones for high working speeds, whilst being easy on the hand.

Please note: 1 Ncm = 0.01 Nm.

- ESD-safe tool thanks to surface resistance of ≤ $10^9$ Ohm

### Series 7400 ESD Kraftform torque screwdrivers with a customised factory pre-set measurement value, handle size 89 mm

| Code | EAN 4013288 | Art.No. | | Nm | mm | mm | | |
|---|---|---|---|---|---|---|---|---|
| 05**074820**010 | *188205* | 7450 ESD | 1/4" | 0,1-0,34 | 89 | 133 | 5 1/4" | 1 |
| 05**074822**010 | *188212* | 7451 ESD | 1/4" | 0,3-1,0 | 89 | 133 | 5 1/4" | 1 |
| 05**074824**010 | *188229* | 7452 ESD | 1/4" | 0,9-1,5 | 89 | 133 | 5 1/4" | 1 |

**)The desired settings can be made in the following units: Nm, kgf. m, lbf. ft., ozf. in., dN. m, kgf. cm, lbf. in, in. oz, cN. m, gf. m, ft. lb, gf. cm, in. lb.

## Series 7400 ESD Kraftform torque screwdrivers with a customised factory pre-set measurement value, with quick-release chuck

Wera torque screwdriver. Safe protection against electrostatic charge and associated damage. With a customised factory pre-set torque value.

For all applications, where the same constant torque and repeat accuracy are required.

The torque can be changed within the measuring range with the extra tool 05**137003**001. Afterwards you can check the set value using an off-the-shelf torque tester.

Rapidaptor quick-release technology for rapid bit changes. Unlimited loosening torque for slackening stuck screws.

Multi-component Kraftform handle with hard and soft zones for high working speeds, whilst being easy on the hand.

Suitable for bits with a 4 mm Halfmoon drive (Wera series 9) and a 4 mm HIOS drive (Wera series 21).

Please note: 1 Ncm = 0.01 Nm.

- ESD-safe tool thanks to surface resistance of ≤ $10^9$ Ohm
- Suitable for bits with 4 mm halfmoon and 4 mm HIOS drive

### Series 7400 ESD Kraftform torque screwdrivers with a customised factory pre-set measurement value, with quick-release chuck



| Code | EAN 4013288 | Art.No. | Nm | mm | mm | | | |
|---|---|---|---|---|---|---|---|---|
| 05**074826**010 | *188281* | 7455 ESD | 0,1-0,34 | 89 | 138 | 5 1/4" | | 1 |
| 05**074828**010 | *188298* | 7456 ESD | 0,3-1,0 | 89 | 138 | 5 1/4" | | 1 |

**)The desired settings can be made in the following units: Nm, kgf. m, lbf. ft., ozf. in., dN. m, kgf. cm, lbf. in, in. oz, cN. m, gf. m, ft. lb, gf. cm, in. lb.

## 7510 Kraftform Safe-Torque Speed Torque screwdriver, 1-3 Nm

- Torque screwdriver with quick torque adjustment
- Easy and quick torque setting
- Fixed position (Torque Lock) for unlimited tightening and loosening moments
- Secure slip-over torque function for clockwise/anti-clockwise torque-control
- Quick and easy setting of the selectable tightening torques (1.0; 1.5; 2.0; 2.5; 3.0 Nm)
- For bits with 1/4" external hexagon drive, also suitable for socket wrench inserts via adapter

### 7510 Kraftform Safe-Torque Speed Torque screwdriver, 1-3 Nm



| | EAN | | | | | | | |
|---|---|---|---|---|---|---|---|---|
| Code | 4013288 | | Nm | Nm | Nm | Nm | Nm | |
| 05**075810**001 | *230669* | 1/4" | 1,0 | 1,5 | 2,0 | 2,5 | 3,0 | 1 |

## 7510/14 Safe-Torque Speed Tool set for carbide inserts

14-piece tool set. For professional screwdriving/professional fine adjustment AND for torque-controlled screwdriving.

Secure slip-over torque mechanism with quick clockwise/counterclockwise setting and five selectable tightening torques (1.0; 1.5; 2.0; 2.5; 3.0 Nm) and one fixed position (Torque Lock) for unlimited loosening and tightening moments.

Quick-release holder for high robustness; suitable for bits with 1/4" external hexagon drive. 14 tough bits (25 mm length) for TORX PLUS®, TORX® and hexagonal socket screws.

The tool set is particularly suitable for bolting carbide inserts. The Safe-Torque Speed 7510 torque wrench with its five selectable torque values recommended by leading carbide tool manufacturers ensures a reliable torque-controlled screw connection of replaceable carbide inserts.

- Particularly suitable for bolting carbide inserts
- Quick and easy setting of the selectable tightening torques (1.0; 1.5; 2.0; 2.5; 3.0 Nm)
- Suitable for docking with the Wera 2go system

### 7510/14 Safe-Torque Speed Tool set for carbide inserts



| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 05**075840**001 | *230683* | | | 1 |
| | | | **7510**<br>1x 1/4"x1,0 Nm/1,5 Nm/2,0 Nm/ 2,5 Nm/3,0 Nm x 147,5 | |
| | | | **867/1 IP TORX PLUS®**<br>1x 7 IPx25; 1x 8 IPx25; 1x 9 IPx25; 1x 10 IPx25; 1x 15 IPx25 | |
| | | | **867/1 TORX®**<br>1x TX 7x25; 1x TX 8x25; 1x TX 9x25; 1x TX 10x25; 1x TX 15x25 | |
| | | | **840/1 Z**<br>1x 2,0x25; 1x 2,5x25; 1x 3,0x25 | |

## 7515 Kraftform Safe-Torque Speed Torque screwdriver, 2-6 Nm

- Torque screwdriver with quick torque adjustment
- Easy and quick torque setting
- Fixed position (Torque Lock) for unlimited tightening and loosening moments
- Secure slip-over torque function for clockwise/anti-clockwise torque-control
- Quick and easy setting of the selectable tightening torques (2.0; 3.0; 4.0; 5.0; 6.0 Nm)
- For bits with 1/4" external hexagon drive, also suitable for socket wrench inserts via adapter
- For bits with 1/4" external hexagon drive, also suitable for socket wrench inserts via adapter

### 7515 Kraftform Safe-Torque Speed Torque screwdriver, 2-6 Nm



| | EAN | | | | | | | |
|---|---|---|---|---|---|---|---|---|
| Code | 4013288 | | Nm | Nm | Nm | Nm | Nm | |
| 05**075815**001 | *228314* | 1/4" | 2,0 | 3,0 | 4,0 | 5,0 | 6,0 | 1 |

## 7515/16 Kraftform Safe-Torque Speed Universal 1

16-piece tool set. For professional screwdriving/professional fine adjustment AND for torque-controlled screwdriving. Secure slip-over torque mechanism with quick clockwise/counterclockwise setting and five selectable tightening torques (2.0; 3.0; 4.0; 5.0; 6.0 Nm) and one fixed position (Torque Lock) for unlimited loosening and tightening moments.

Quick-release holder for high robustness. Suitable for bits with 1/4" external hexagon drive. 15 tough bits (89 mm length).

- Torque screwdriver with quick torque adjustment
- Quick and easy setting of the selectable tightening torques (2.0; 3.0; 4.0; 5.0; 6.0 Nm)
- Suitable for docking with the Wera 2go system

### 7515/16 Kraftform Safe-Torque Speed Universal 1






| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 05**075851**001 | *228338* | | | 1 |
| | | | **7515**<br>1x 1/4"x2,0 Nm/3,0 Nm/4,0 Nm/<br>5,0 Nm/6,0 Nm x147,5 | |
| | | | **851/4 Z**<br>1x PH 2x89 | |
| | | | **867/4 Z TORX® BO**<br>1x TX 10x89; 1x TX 15x89; 1x TX 20x89;<br>1x TX 25x89; 1x TX 30x89 | |
| | | | **867/4 IP TORX PLUS®**<br>1x 10 IPx89; 1x 15 IPx89; 1x 20 IPx89;<br>1x 25 IPx89; 1x 30 IPx89 | |
| | | | **840/4 Z**<br>1x 3,0x89; 1x 4,0x89; 1x 5,0x89; 1x 6,0x89 [1] | |

[1] Hexagonal blade

## 7515/7 Kraftform Safe-Torque Speed Bicycle 1

7-piece tool set. For professional screwdriving/professional fine adjustment AND for torque-controlled screwdriving. Secure slip-over torque mechanism with quick clockwise/counterclockwise setting and five selectable tightening torques (2.0; 3.0; 4.0; 5.0; 6.0 Nm) and one fixed position (Torque Lock) for unlimited loosening and tightening moments. Quick-release holder for high robustness. Ideal for bike operations. Suitable for bits with 1/4" external hexagon drive.

6 tough bits (50 mm length), profile and size of the bits are easily recognized thanks to the Wera Take it easy Tool finder with its colour codes and labels.

- Bicycle tool set
- Torque screwdriver with quick torque adjustment
- Quick and easy setting of the selectable tightening torques (2.0; 3.0; 4.0; 5.0; 6.0 Nm)
- Take it easy tool finder: colour coding according to profile and size
- Suitable for docking with the Wera 2go system

### 7515/7 Kraftform Safe-Torque Speed Bicycle 1

| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 05**075850**001 | *228321* | | | 1 |
| | | | **7515**<br>1x 1/4"x2,0 Nm/3,0 Nm/4,0 Nm/ 5,0 Nm/6,0 Nm x147,5 | |
| | | | **867/4 TORX® BTZ**<br>1x TX 10x50; 1x TX 25x50 | |
| | | | **840/4 BTZ**<br>1x 2,5x50; 1x 3,0x50; 1x 4,0x50; 1x 5,0x50 | |

## 300 Hex Torque-indicator

Wera torque screwdriver with fixed torque for hexagon socket screws. Tamperproof and with a slim hex blade. Unlimited torque for loosening seized screws.

Multi-component Kraftform handle for pleasant, ergonomic working that prevents blisters and calluses. Hard gripping zones for high working speeds whereas soft zones ensure high torque transfer.

Comes with Hex-Plus profile which avoids any rounding of the screw head. The Black Point tip offers high corrosion protection and an exact fit.

### 300 Hex Torque-indicator

| Code | EAN 4013288 | | Nm | ft. lb. | mm | mm | mm | |
|---|---|---|---|---|---|---|---|---|
| 05**027910**001 | *096425* | 2,0 | 1,4 | 1,0 | 4 | 3,5 | 65 | 1 |
| 05**027911**001 | *096432* | 2,5 | 2,0 | 1,5 | 4 | 3,8 | 65 | 1 |
| 05**027912**001 | *096449* | 3,0 | 3,0 | 2,2 | 4 | 3,8 | 65 | 1 |

### 300 Hex Torque-indicator, pistol handle

| Code | EAN 4013288 | | Nm | ft.lb. | mm | mm | mm | |
|---|---|---|---|---|---|---|---|---|
| 05**027913**001 | *099150* | 4,0 | 5,0 | 3,7 | 160 | 100 | 65 | 1 |

## 300 TX TORX® Torque-indicator

- For recessed TORX® screws

### 300 TX TORX® Torque-indicator

| Code | EAN 4013288 | | Nm | ft. lb. | mm | mm | mm | |
|---|---|---|---|---|---|---|---|---|
| 05**027930**001 | *093325* | TX 6 | 0,6 | 0,4 | 4 | 3,5 | 65 | 1 |
| 05**027931**001 | *093332* | TX 7 | 0,9 | 0,7 | 4 | 3,5 | 65 | 1 |
| 05**027932**001 | *093349* | TX 8 | 1,2 | 0,9 | 4 | 3,5 | 65 | 1 |
| 05**027933**001 | *093356* | TX 9 | 1,4 | 1,0 | 4 | 3,5 | 65 | 1 |
| 05**027934**001 | *093370* | TX 10 | 2,0 | 1,5 | 4 | 3,8 | 65 | 1 |
| 05**027935**001 | *093363* | TX 15 | 3,0 | 2,2 | 4 | 3,8 | 65 | 1 |

### 300 TX TORX® Torque-indicator, pistol handle

| | EAN | | | | | | | |
|---|---|---|---|---|---|---|---|---|
| Code | 4013288 | | Nm | ft.lb. | mm | mm | mm | |
| 05**027936**001 | *099143* | TX 20 | 5,0 | 3,7 | 160 | 100 | 65 | 1 |

## 300 IP TORX PLUS® Torque-indicator

- For TORX PLUS® screws

### 300 IP TORX PLUS® Torque-indicator

| | EAN | | | | | | | |
|---|---|---|---|---|---|---|---|---|
| Code | 4013288 | | Nm | ft. lb. | mm | mm | mm | |
| 05**028040**001 | *093387* | 6 IP | 0,6 | 0,4 | 4 | 3,5 | 65 | 1 |
| 05**028041**001 | *093394* | 7 IP | 0,9 | 0,7 | 4 | 3,5 | 65 | 1 |
| 05**028042**001 | *093431* | 8 IP | 1,2 | 0,9 | 4 | 3,5 | 65 | 1 |
| 05**028043**001 | *093400* | 9 IP | 1,4 | 1,0 | 4 | 3,5 | 65 | 1 |
| 05**028044**001 | *093417* | 10 IP | 2,0 | 1,5 | 4 | 3,8 | 65 | 1 |
| 05**028045**001 | *093424* | 15 IP | 3,0 | 2,2 | 4 | 3,8 | 65 | 1 |

### 300 IP TORX PLUS® Torque-indicator, pistol handle

| | EAN | | | | | | | |
|---|---|---|---|---|---|---|---|---|
| Code | 4013288 | | Nm | ft.lb. | mm | mm | mm | |
| 05**028046**001 | *099136* | 20 IP | 5,0 | 3,7 | 160 | 100 | 65 | 1 |

## 400 Hex Torque-indicator

Wera torque indicator with fixed torque for hexagon sockets. Tamper proof. The robust slip clutch guarantees a clearly audible and tactile trigger signal when the set torque value is reached, and it is therefore impossible to apply any further torque.

The loosening torque is significantly higher than the set tightening torque, therefore no additional tools are needed for loosening screw connections. The shape of the handle fills the whole hand well and the fingers lie in the softly rounded recessed grips. This ensures optimal, ergonomic power transmission.

### 400 Hex Torque-indicator

| | EAN | | | | | | | |
|---|---|---|---|---|---|---|---|---|
| Code | 4013288 | | Nm | mm | mm | mm | | |
| 05**005080**001 | *208835* | 4,0 | 4,0 | 60 | 48 | 100 | 2 3/8" | 1 |
| 05**005081**001 | *208842* | 5,0 | 5,0 | 60 | 48 | 100 | 2 3/8" | 1 |

## 400 TX Torque-indicator

- For recessed TORX® screws

### 400 TX Torque-indicator

| | EAN | | | | | | | |
|---|---|---|---|---|---|---|---|---|
| Code | 4013288 | | Nm | mm | mm | mm | | |
| 05**005090**001 | *208811* | TX 20 | 4,0 | 60 | 48 | 100 | 2 3/8" | 1 |
| 05**005091**001 | *208828* | TX 25 | 5,0 | 60 | 48 | 100 | 2 3/8" | 1 |

## Safe-Torque A 1 torque wrench with 1/4" square head drive, 2-12 Nm

Torque wrench with slide-over mechanism. Once the set torque has been reached, the tool cannot be overtightened, so that excessive torque cannot be applied. Setting range of 2 to 12 Nm for controlled clockwise and counterclockwise torque operation.

Easy setting and saving of the default value: The audible and tactile clicks on reaching the scale values facilitate the safe setting of the desired torque value. With Torque Lock function for use as a standard ratchet without torque function.

Max. breaking torque of the ¼" square head as per DIN 3122. The return angle of only 5° allows the ratchet to be used even in confined spaces and therefore also for applications with angles of rotation.

- Slip-over release mechanism - the set torque can never be overtightened
- Torque Lock function: The torque function can be deactivated and the tool can then be used as a standard ratchet with high loosening moments and for applications with defined angles of rotation
- For controlled clockwise and counterclockwise torque operation – tightening and loosening with or without torque
- Easy setting and saving of the desired torque value with audible and tactile clicks when reaching the scale values
- Comfortable working thanks to a small release angle of only 30°
- 1/4" square head drive with socket locking

### Safe-Torque A 1 torque wrench with 1/4" square head drive, 2-12 Nm

| | EAN | | | | | | | | | | | | | | | |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| Code | 4013288 | | Nm | Nm | lbf. ft. | mm | mm | mm | mm | mm | | | | | | |
| 05**075800**001 | *223012* | 1/4" | 2-12 | 0,10 | 2-9 | 244 | 94 | 38,5 | 31,6 | 23,7 | 9 39/64" | 3 45/64" | 1 33/64" | 1 15/64" | 15/16" | 1 |

## Safe-Torque A 2 torque wrench with 1/4" hexagon drive, 2-12 Nm

- 1/4" hexagon drive for the use of 1/4" bits

### Safe-Torque A 2 torque wrench with 1/4" hexagon drive, 2-12 Nm

| | EAN | | | | | | | | | | | | | | | |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| Code | 4013288 | | Nm | Nm | lbf. ft. | mm | mm | mm | mm | mm | | | | | | |
| 05**075801**001 | *223036* | 1/4" | 2-12 | 0,10 | 2-9 | 244 | 94 | 38,5 | 31,6 | 23,7 | 9 39/64" | 3 45/64" | 1 33/64" | 1 15/64" | 15/16" | 1 |

## Safe-Torque A 1 Set 1, 1/4" square head drive, 2-12 Nm

10-piece 1/4" torque wrench set in a robust textile box; torque wrench with slide-over mechanism. Once the set torque has been reached, the tool cannot be overtightened, so that excessive torque cannot be applied.

Setting range of 2 to 12 Nm for controlled clockwise and counterclockwise torque operation. Easy setting and saving of the default value: The audible and tactile clicks on reaching the scale values facilitate the safe setting of the desired torque value.

The Torque Lock function allows use as a standard ratchet without torque function. Thus also usable for applications with angles of rotation. Max. breaking torque of the 1/4" square head as per DIN 3122. The return angle of only 5° allows the ratchet to be used even in confined spaces.

Included are: Safe-Torque A 1 torque wrench, 1/4" square head, 2-12 Nm, 8 sockets with 1/4" drive and one short extension.

- 1/4" square head drive with socket locking

### Safe-Torque A 1 Set 1, 1/4" square head drive, 2-12 Nm

| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 05**075830**001 | *223005* | | | 1 |
| | | | **Safe-Torque A 1**<br>1x 1/4", 2-12 Nm | |
| | | | **8790 HMA**<br>1x 5,5x23,0; 1x 6,0x23,0; 1x 7,0x23,0;<br>1x 8,0x23,0; 1x 10,0x23,0; 1x 11,0x23,0;<br>1x 12,0x23,0; 1x 13,0x23,0 | |
| | | | **8794 SA**<br>1x 1/4"x75,0 | |
| | | | **Hook and Loop Fastener Strip 240**<br>1x 50,0x240,0 | |

## Safe-Torque A 1 Imperial Set 1, 1/4" square head drive, 2-12 Nm

10-piece 1/4" torque wrench set in a robust textile box; torque wrench with slide-over mechanism. Once the set torque has been reached, the tool cannot be overtightened, so that excessive torque cannot be applied.

Setting range of 2 to 12 Nm for controlled clockwise and counterclockwise torque operation. Easy setting and saving of the default value: The audible and tactile clicks on reaching the scale values facilitate the safe setting of the desired torque value.

The Torque Lock function allows use as a standard ratchet without torque function. Thus also usable for applications with angles of rotation. Max. breaking torque of the ¼" square head as per DIN 3122. The return angle of only 5° allows the ratchet to be used even in confined spaces.

Included are: Safe-Torque A 1 torque wrench, 1/4" square head, 2-12 Nm, 8 sockets with 1/4" drive and one short extension.

- 1/4" square head drive with socket locking

### Safe-Torque A 1 Imperial Set 1, 1/4" square head drive, 2-12 Nm

| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 05**075831**001 | *223074* | | | 1 |
| | | | **Safe-Torque A 1**<br>1x 1/4", 2-12 Nm | |
| | | | **8790 HMA**<br>1x 3/16"x23,0; 1x 7/32"x23,0; 1x 1/4"x23,0;<br>1x 9/32"x23,0; 1x 5/16"x23,0; 1x 3/8"x23,0;<br>1x 7/16"x23,0; 1x 1/2"x23,0 | |
| | | | **8794 SA**<br>1x 1/4"x75,0 | |
| | | | **Hook and Loop Fastener Strip 240**<br>1x 50,0x240,0 | |

## Safe-Torque A 1 SHK Set 1, 1/4" square head, 2-12 Nm

20-piece set in a robust textile box, especially for HVAC applications. One Safe-Torque A 1 torque wrench with 1/4" square head drive, 2-12 Nm, with slide-over mechanism. Once the set torque has been reached, the tool cannot be overtightened, so that excessive torque cannot be applied. Setting range of 2 to 12 Nm for controlled clockwise and counterclockwise torque operation. Easy setting and saving of the default value: The audible and tactile clicks on reaching the scale values facilitate the safe setting of the desired torque value.

With Torque Lock function for use as a standard ratchet without torque function and thus also usable for applications with angles of rotation. Max. breaking torque of the ¼" square head as per DIN 3122. The return angle of only 5° allows the ratchet to be used even in confined spaces.

Included are: Safe-Torque A 1 torque wrench, 1/4" square head, 2-12 Nm, 8 sockets with 1/4" drive, 9 bit sockets (hexagonal socket, TORX®) with 1/4" drive, one short extension.

- For operations in plumbing, heating and air conditioning, especially for installing shower cubicles and for assembly and maintenance of gas boilers and condensing boilers

### Safe-Torque A 1 SHK Set 1, 1/4" square head, 2-12 Nm

| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 051**36073**001 | *228376* | | | 1 |
| | | | **Safe-Torque A 1**<br>1x 1/4", 2-12 Nm | |
| | | | **8790 HMA**<br>1x 5,5x23,0; 1x 6,0x23,0; 1x 7,0x23,0;<br>1x 8,0x23,0; 1x 10,0x23,0; 1x 11,0x23,0;<br>1x 12,0x23,0; 1x 13,0x23,0 | |
| | | | **8767 A HF**<br>1x TX 15x28,0; 1x TX 20x28,0; 1x TX 25x28,0;<br>1x TX 30x28,0 | |
| | | | **8740 A HF**<br>1x 3,0x28,0; 1x 4,0x28,0; 1x 5,0x28,0;<br>1x 6,0x28,0; 1x 8,0x28,0 | |
| | | | **Belt A 0/9**<br>1x 39,0x238,0 | |
| | | | **8794 SA**<br>1x 1/4"x75,0 | |
| | | | **Hook and Loop Fastener Strip 240**<br>1x 50,0x240,0 | |

## Safe-Torque A 2 Set 1, 1/4" hexagonal, 2-12 Nm

23-piece set; in surface-friendly, compact and extremely robust textile box. Small size and low weight for better mobility.

1 Safe-Torque A 2 torque wrench with 1/4" hexagonal drive, measuring range 2-12 Nm; for controlled clockwise and counterclockwise torque operation; tightening and loosening with or without torque, disengageable torque function (Torque Lock function); 72 teeth; low return angle of 5°; easy setting and saving of the desired torque value, with audible and tactile locking when the scale values are reached, slip-over release mechanism when the set torque is reached; ergonomic 2-component handle; 9 Zyklop sockets, 12 bits (1/4", 50 mm long), one connector for sockets (1/4" external hexagon to 1/4" external square head).

- 1/4" hexagon drive for the use of 1/4" bits
- Use of 1/4" sockets also possible with the Wera adaptor 870/1

### Safe-Torque A 2 Set 1, 1/4" hexagonal, 2-12 Nm

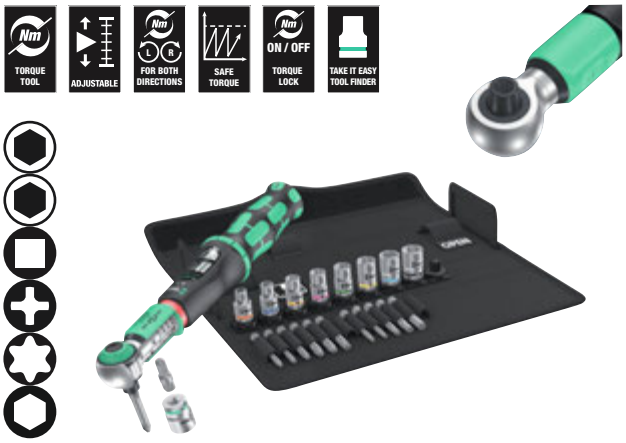


| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 05**075832**001 | *223043* | | | 1 |
| | | | **Safe-Torque A 2**<br>1x 1/4", 2-12 Nm | |
| | | | **8790 HMA**<br>1x 5,5x23,0; 1x 6,0x23,0; 1x 7,0x23,0;<br>1x 8,0x23,0; 1x 9,0x23,0; 1x 10,0x23,0;<br>1x 11,0x23,0; 1x 12,0x23,0; 1x 13,0x23,0 | |
| | | | **870/1**<br>1x 1/4"x25 [1] | |
| | | | **851/4 Z**<br>1x PH 2x50 | |
| | | | **867/4 Z TORX®**<br>1x TX 10x50; 1x TX 15x50; 1x TX 20x50;<br>1x TX 25x50; 1x TX 27x50; 1x TX 30x50 | |
| | | | **840/4 Z**<br>1x 2,5x50; 1x 3,0x50; 1x 4,0x50; 1x 5,0x50;<br>1x 6,0x50 [2] | |
| | | | **Hook and Loop Fastener Strip 240**<br>1x 50,0x240,0 | |

[1] With friction ball; for manual nut spinner sockets
[2] Hexagonal blade

## Click-Torque A 5 torque wrench with reversible ratchet

Click-Torque wrench in the unmistakable, robust Wera design with high accuracy as per DIN EN ISO 6789-1: 2017-07.
Easy setting and saving of the default value.

The audible and tactile clicks on reaching the scale values also facilitate the safe setting of the desired torque value.
The robust release mechanism guarantees a clearly audible and tactile release signal when the set torque is reached.

For right-hand use (clockwise torque-control) and with 45-tooth reversible ratchet mechanism.

- With 1/4" square drive, reversible ratchet, 45 teeth
- Measuring range: 2.5-25 Nm; precise to +/- 4% as per DIN EN ISO 6789-1:2017-07

### Click-Torque A 5 torque wrench with reversible ratchet, 2.5-25 Nm

| | EAN | | | | | | | | | | | | | | | | |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| Code | 4013288 | | Nm | Nm | lbf. ft. | mm | mm | mm | mm | mm | | | | | | | |
| 05**075604**001 | *193179* | 1/4" | 2,5-25 | 0,10 | 1-18 | 290 | 121 | 42 | 25 | 11,5 | 11 27/64" | 4 49/64" | 1 21/32" | 1" | 7/16" | | 1 |

## Click-Torque A 6 torque wrench with reversible ratchet, 2.5-25 Nm

- With ¼" hex drive, reversible ratchet, 45 teeth
- Measuring range: 2.5-25 Nm; Precise to +/- 4% as per DIN EN ISO 6789-1:2017-07

### Click-Torque A 6 torque wrench with reversible ratchet, 2.5-25 Nm

| | EAN | | | | | | | | | | | | | | | | |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| Code | 4013288 | | Nm | Nm | lbf. ft. | mm | mm | mm | mm | mm | | | | | | | |
| 05**075605**001 | *193186* | 1/4" | 2,5-25 | 0,10 | 1-18 | 290 | 121 | 42 | 25 | 11,5 | 11 27/64" | 4 49/64" | 1 21/32" | 1" | 7/16" | | 1 |

## Click-Torque A 6 Set 1

Click torque wrench in the unmistakable Wera design.
Very robust design with high accuracy as per
DIN EN ISO 6789-1: 2017-07.

Easy setting and saving of the default value. The audible and tactile clicks on reaching the scale values facilitate the safe setting of the desired torque value.

The robust release mechanism guarantees a clearly audible and tactile release signal when the set torque is reached.

Provides clockwise torque-control and 45-tooth ratchet mechanism. The Wera click torque wrench is accompanied with various accessories in a compact set arrangement.

Included are: Click-Torque A 6 ¼" from 2.5 to 25 Nm, 6 sockets with ¼" drive, 11 Hex-Plus hexagon bits, Phillips head bits and TORX® bits, plus an extension and socket adaptor.

## Click-Torque A 6 Set 1, 2.5-25 Nm

| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 05**130110**001 | *205643* | | | 1 |
| | | | **Click-Torque A 6**<br>1x ¼", 2,5-25 Nm | |
| | | | **851/4 TZ**<br>1x PH 2x50 | |
| | | | **867/4 Z TORX®**<br>1x TX 15x50; 1x TX 20x50; 1x TX 25x50;<br>1x TX 27x50; 1x TX 30x50; 1x TX 40x50 | |
| | | | **840/4 Z**<br>1x 3,0x50; 1x 4,0x50; 1x 5,0x50; 1x 6,0x50 [1] | |
| | | | **870/1**<br>1x ¼"x25 [2] | |
| | | | **8794 SA**<br>1x ¼"x75,0 | |
| | | | **8790 HMA**<br>1x 6,0x23,0; 1x 7,0x23,0; 1x 8,0x23,0;<br>1x 10,0x23,0; 1x 12,0x23,0; 1x 13,0x23,0 | |
| | | | **Hook and Loop Fastener Strip 240**<br>1x 50,0x240,0 | |

[1] Hexagonal blade
[2] With friction ball; for manual nut spinner sockets

## Bicycle Set Torque 1, 2.5-25 Nm

The 16-piece set from the screwdriving tool specialist Wera solves the most important screwdriving problems associated with bicycles, with reliable control of applied torque to protect sensitive components. With a click-torque wrench in the unmistakable Wera design.

Very robust design with high accuracy as per DIN EN ISO 6789-1: 2017-07. Easy setting and saving of the default values. The audible and tactile snapping on reaching the scale values also facilitates the safe setting of the desired torque values.

The robust release mechanism guarantees a clearly audible and tactile trigger signal when the set torque is reached.

For clockwise torque-control and with a reversible 45-tooth ratchet. The torque wrench is extremely space-saving and supplemented with accessories that are suitable for the torque range and adapted to the most common screwed connections on bicycles; in a robust, surface-friendly textile box.

Included are: Click Torque A 5, 1/4 „, 2.5 - 25 Nm, 4 sockets with 1/4" drive, 7 Hex Plus hexagon bit sockets and 4 TORX® bit sockets. Sockets and bit sockets with Take it easy tool finder with colour coding by size - for easy and quick location of the required tool.

Bit sockets with holding function for extra comfortable screwdriving without the screw falling off the tool. Incredibly compact arrangement for a lot of tools in a small space.

Textile box with very high robustness and longevity. Additional surface protection through the textile outer material.

Low weight and volume for easier mobility. Bit sockets with all the benefits of Wera bit technology such as fitting accuracy, wear resistance and concentric run-out properties.

### Bicycle Set Torque 1, 2.5-25 Nm

| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 05**004180**001 | *207685* | | | 1 |
| | | | **Click-Torque A 5**<br>1x 1/4", 2,5-25 Nm | |
| | | | **8790 HMA**<br>1x 10,0x23,0; 1x 13,0x23,0; 1x 14,0x23,0; 1x 15,0x23,0 | |
| | | | **8767 A**<br>1x TX 10x28,0; 1x TX 20x28,0; 1x TX 25x28,0; 1x TX 30x28,0 | |
| | | | **8740 A HF**<br>1x 3,0x28,0; 1x 4,0x28,0; 1x 5,0x28,0; 1x 5,0x100,0; 1x 6,0x28,0; 1x 6,0x100,0; 1x 8,0x28,0 | |
| | | | **Hook and Loop Fastener Strip 240**<br>1x 50,0x240,0 | |

## Click-Torque B 1 torque wrench with reversible ratchet, 10-50 Nm

- With 3/8" square drive, reversible ratchet, 45 teeth
- Measuring range: 10-50 Nm; Precise to +/- 3% as per DIN EN ISO 6789-1:2017-07
- The Click-Torque collar is placed around the tube of the Wera Click-Torque torque wrench. It prevents the handle from touching the ground. Dirt and damage are avoided

### Click-Torque B 1 torque wrench with reversible ratchet, 10-50 Nm

| | EAN | | | | | | | | | | | | | | | | |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| Code | 4013288 | | Nm | Nm | lbf. ft. | mm | mm | mm | mm | mm | | | | | | | |
| 05**075610**001 | *193193* | 3/8" | 10-50 | 0,25 | 8-36 | 360 | 140 | 47 | 35 | 16,5 | 14 11/64" | 5 33/64" | 1 27/32" | 1 3/8" | 5/8" | | 1 |

## Click-Torque B 2 torque wrench with reversible ratchet, 20-100 Nm

- With 3/8" square drive, reversible ratchet, 45 teeth
- Measuring range: 20-100 Nm; precise to +/- 3% as per DIN EN ISO 6789-1:2017-07
- The Click-Torque collar is placed around the tube of the Wera Click-Torque torque wrench. It prevents the handle from touching the ground. Dirt and damage are avoided

### Click-Torque B 2 torque wrench with reversible ratchet, 20-100 Nm

| | EAN | | | | | | | | | | | | | | | | |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| Code | 4013288 | | Nm | Nm | lbf. ft. | mm | mm | mm | mm | mm | | | | | | | |
| 05**075611**001 | *193209* | 3/8" | 20-100 | 0,5 | 15-73 | 405 | 140 | 47 | 43 | 18,5 | 15 15/16" | 5 33/64" | 1 27/32" | 1 11/16" | 45/64" | | 1 |

## Click-Torque C 1 torque wrench with reversible ratchet, 10-50 Nm

- With 1/2" square drive, reversible ratchet, 45 teeth
- Measuring range: 10-50 Nm; Precise to +/- 3% as per DIN EN ISO 6789-1:2017-07
- The Click-Torque collar is placed around the tube of the Wera Click-Torque torque wrench. It prevents the handle from touching the ground. Dirt and damage are avoided

### Click-Torque C 1 torque wrench with reversible ratchet, 10-50 Nm



| | EAN | | | | | | | | | | | | | | | | |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| Code | 4013288 | | Nm | Nm | lbf. ft. | mm | mm | mm | mm | mm | | | | | | | |
| 05**075620**001 | *193216* | 1/2" | 10-50 | 0,25 | 8-36 | 360 | 140 | 47 | 35 | 16,5 | 14 11/64" | 5 33/64" | 1 27/32" | 1 3/8" | 5/8" | | 1 |

## Click-Torque C 2 torque wrench with reversible ratchet, 20-100 Nm

- With 1/2" square drive, reversible ratchet, 45 teeth
- Measuring range: 20-100 Nm; precise to +/- 3% as per DIN EN ISO 6789-1:2017-07
- The Click-Torque collar is placed around the tube of the Wera Click-Torque torque wrench. It prevents the handle from touching the ground. Dirt and damage are avoided

### Click-Torque C 2 torque wrench with reversible ratchet, 20-100 Nm



| | EAN | | | | | | | | | | | | | | | | |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| Code | 4013288 | | Nm | Nm | lbf. ft. | mm | mm | mm | mm | mm | | | | | | | |
| 05**075621**001 | *193223* | 1/2" | 20-100 | 0,5 | 15-73 | 405 | 140 | 47 | 43 | 18,5 | 15 15/16" | 5 33/64" | 1 27/32" | 1 11/16" | 45/64" | | 1 |

## Click-Torque C 3 torque wrench with reversible ratchet, 40-200 Nm

- With 1/2" square drive, reversible ratchet, 45 teeth
- Measuring range: 40-200 Nm; precise to +/- 3% as per DIN EN ISO 6789-1:2017-07
- The Click-Torque collar is placed around the tube of the Wera Click-Torque torque wrench. It prevents the handle from touching the ground. Dirt and damage are avoided

### Click-Torque C 3 torque wrench with reversible ratchet, 40-200 Nm



| | EAN | | | | | | | | | | | | | | | | |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| Code | 4013288 | | Nm | Nm | lbf. ft. | mm | mm | mm | mm | mm | | | | | | | |
| 05**075622**001 | *193230* | 1/2" | 40-200 | 1,0 | 30-146 | 510 | 140 | 47 | 43 | 18,5 | 20 5/64" | 5 33/64" | 1 27/32" | 1 11/16" | 45/64" | | 1 |

## Click-Torque C 3 Set 1, 40-200 Nm

Click torque wrench set in the unmistakable Wera design. Very robust design with high accuracy as per DIN EN ISO 6789-1: 2017-07.

Easy setting and saving of the default values. The audible and tactile snapping on reaching the scale values also facilitates the safe setting of the desired torque values.

The robust release mechanism guarantees a clearly audible and tactile trigger signal when the set torque is reached. For clockwise torque-control and with reversible 45-tooth ratchet.

Torque wrenches and torque-compatible accessories are packed in an extremely space-saving, robust, surface-friendly textile box.

Contains: Click Torque C 3, 1/2", 40-200 Nm, 4 sockets with 1/2" drive, 7 hex plus hexagon socket and TORX® bit sockets plus extension.

### Click-Torque C 3 Set 1, 40-200 Nm

| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 05**075680**001 | *207609* | | | 1 |
| | | | **Click-Torque C 3**<br>1x 1/2", 40-200 Nm | |
| | | | **8790 HMC**<br>1x 10,0x37,0; 1x 13,0x37,0; 1x 17,0x37,0; 1x 19,0x37,0 | |
| | | | **8767 C HF**<br>1x TX 30x60,0; 1x TX 40x60,0; 1x TX 45x60,0; 1x TX 50x60,0 | |
| | | | **8740 C HF**<br>1x 6,0x60,0; 1x 8,0x60,0; 1x 10,0x60,0 | |
| | | | **8794 SC**<br>1x 1/2"x125,0 | |

## Click-Torque C 3 set 2 for cement screwdriving, 40-200 Nm

11-piece set for fitting security-relevant cement screws with defined torque moments as per screw manufacturer instructions.

With Take it easy tool finder with colour coding and size stamping - for easy and fast location of the required tool.

- For fitting security-relevant cement screws with defined torque moments as per screw manufacturer instructions
- 8790 C Impaktor socket wrench inserts for the application with compressed air or electrically driven impact wrenches with 12.5 mm = 1/2" drive (13 mm to 21 mm)
- Click-Torque C 3 torque wrench with reversible ratchet (measuring range: 40-200 Nm; precision ± 3 % as per DIN EN ISO 6789-1:2017-07)
- 11-piece set in premium textile tool box

### Click-Torque C 3 set 2 for cement screwdriving, 40-200 Nm

| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 05**075681**001 | *217561* | | | 1 |
| | | | **Click-Torque C 3**<br>1x 1/2", 40-200 Nm | |
| | | | **8790 C Impaktor**<br>1x 13,0x38,0; 1x 14,0x38,0; 1x 15,0x38,0; 1x 16,0x38,0; 1x 17,0x38,0; 1x 18,0x38,0; 1x 19,0x38,0; 1x 20,0x38,0; 1x 21,0x38,0 | |
| | | | **8894 SC**<br>1x 1/2"x125,0 | |

## Click-Torque C 4 torque wrench with reversible ratchet, 60-300 Nm

- With 1/2" square drive, reversible ratchet, 45 teeth
- Measuring range: 60-300 Nm; Precise to +/- 3% as per DIN EN ISO 6789-1:2017-07
- The Click-Torque collar is placed around the tube of the Wera Click-Torque torque wrench. It prevents the handle from touching the ground. Dirt and damage are avoided

### Click-Torque C 4 torque wrench with reversible ratchet, 60-300 Nm

| | EAN | | | | | | | | | | | | | | | | |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| Code | 4013288 | | Nm | Nm | lbf. ft. | mm | mm | mm | mm | mm | | | | | | | |
| 05**075623**001 | *193247* | 1/2" | 60-300 | 1,0 | 45-220 | 595 | 140 | 47 | 43 | 18,5 | 23 27/64" | 5 33/64" | 1 27/32" | 1 11/16" | 45/64" | | 1 |

## Click-Torque C 5 torque wrench with reversible ratchet, 80-400 Nm

- With 1/2" square drive, reversible ratchet, 45 teeth
- Measuring range: 80-400 Nm; Precise to +/- 3% as per DIN EN ISO 6789-1:2017-07
- The Click-Torque collar is placed around the tube of the Wera Click-Torque torque wrench. It prevents the handle from touching the ground. Dirt and damage are avoided

### Click-Torque C 5 torque wrench with reversible ratchet, 80-400 Nm

| | EAN | | | | | | | | | | | | | | | | |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| Code | 4013288 | | Nm | Nm | lbf. ft. | mm | mm | mm | mm | mm | | | | | | | |
| 05**075624**001 | *193254* | 1/2" | 80-400 | 1,0 | 60-295 | 680 | 140 | 47 | 43 | 18,5 | 26 49/64" | 5 33/64" | 1 27/32" | 1 11/16" | 45/64" | | 1 |

## Click-Torque E 1 torque wrench with reversible ratchet, 200-1000 Nm

- With 3/4" square drive, reversible ratchet, 45 teeth
- Measuring range: 200-1000 Nm; precise to +/- 3% as per DIN EN ISO 6789-1:2017-07
- The Click-Torque collar is placed around the tube of the Wera Click-Torque torque wrench. It prevents the handle from touching the ground. Dirt and damage are avoided

### Click-Torque E 1 torque wrench with reversible ratchet, 200-1000 Nm

| | EAN | | | | | | | | | | | | | | | | |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| Code | 4013288 | | Nm | Nm | lbf. ft. | mm | mm | mm | mm | mm | | | | | | | |
| 05**075630**001 | *193261* | 3/4" | 200-1000 | 1,00 | 148-737 | 1250 | 140 | 47 | 63 | 30 | 49 7/32" | 5 33/64" | 1 27/32" | 2 31/64" | 1 3/16" | | 1 |

## Click-Torque Lock Torque wrench with Torque Lock function.

- Torque Lock function: The torque function can be deactivated so that the tool can also be used for loosening
- Extra click: audible and tactile torque setting
- Torque wrench gives an audible and tactile signal

## Click-Torque Lock A 5 Torque wrench, adjustable, Torque Lock function, reversible ratchet, clockwise torque operation, 2.5-25 Nm

- With ¼" square head drive
- Reversible ratchet
- 45 teeth
- Measuring range: 2.5-25 Nm; precision ± 4 % as per DIN EN ISO 6789-1:2017-07

### Click-Torque Lock A 5 Torque wrench, adjustable, Torque Lock function, reversible ratchet, clockwise torque operation, 2.5-25 Nm

| | EAN | | | | | | | | | | | | | | | | |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| Code | 4013288 | | Nm | Nm | lbf. ft. | mm | mm | mm | mm | mm | | | | | | | |
| 05**075690**001 | *234179* | ¼" | 2,5-25 | 0,10 | 1-18 | 299 | 123 | 42 | 26 | 11,75 | 11 49/64" | 4 53/64" | 1 41/64" | 1 1/64" | 29/64" | | 1 |

## Click-Torque Lock A 6 Torque wrench, adjustable, Torque Lock function, reversible ratchet, clockwise torque operation, 2.5-25 Nm

- With ¼" bit mounting for controlled clockwise torque operation
- Reversible ratchet
- 45 teeth
- Measuring range: 2.5-25 Nm; precision ± 4 % as per DIN EN ISO 6789-1:2017-07

### Click-Torque Lock A 6 Torque wrench, adjustable, Torque Lock function, reversible ratchet, clockwise torque operation, 2.5-25 Nm

| | EAN | | | | | | | | | | | | | | | | |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| Code | 4013288 | | Nm | Nm | lbf. ft. | mm | mm | mm | mm | mm | | | | | | | |
| 05**075691**001 | *234186* | ¼" | 2,5-25 | 0,10 | 1-18 | 299 | 123 | 42 | 26 | 11,75 | 11 49/64" | 4 53/64" | 1 41/64" | 1 1/64" | 29/64" | | 1 |

## Click-Torque Lock C 3 Torque wrench, adjustable, reversible ratchet, Torque Lock function, 40-200 Nm

- With 1/2" square head drive
- Reversible ratchet
- 45 teeth
- Measuring range: 40-200 Nm; precision ± 3 % as per DIN EN ISO 6789-1:2017-07

### Click-Torque Lock C 3 Torque wrench, adjustable, reversible ratchet, Torque Lock function, 40-200 Nm

| | EAN | | Nm | Nm | lbf. ft. | mm | mm | mm | mm | mm | | | | | | | |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| Code | 4013288 | | | | | | | | | | | | | | | | |
| 05**075692**001 | *234193* | 1/2" | 40-200 | 1,0 | 30-146 | 512 | 140 | 47 | 43 | 18,4 | 20 5/32" | 5 1/2" | 1 27/32" | 1 11/16" | 23/32" | | 1 |

## Click-Torque Push R/L adjustable torque wrenches for clockwise and anti-clockwise torque-control

Click torque wrench in the unmistakable Wera design. For clockwise and anti-clockwise torque-control. Very robust design with high accuracy as per DIN EN ISO 6789-1: 2017-07. Easy setting and saving of the default value. The audible and tactile clicks on reaching the scale values facilitate the safe setting of the desired torque value. The robust release mechanism guarantees a clearly audible and tactile release signal when the set torque is reached.

With captive 3/4" square head insert to change direction. 1/2" square head drive with socket locking.

- For clockwise and anti-clockwise torque-control thanks to the smooth reversing of the captive square head insert
- Measuring range: 20-100 Nm; precise to +/- 3% as per DIN EN ISO 6789-1:2017-07
- 45 teeth and 1/2" square head drive with socket locking
- Easy setting and saving of the desired torque value with audible and tactile clicks when reaching the scale values
- Audible and tactile release mechanism when the set torque value is reached
- The Click-Torque collar is placed around the tube of the Wera Click-Torque torque wrench. It prevents the handle from touching the ground. Dirt and damage are avoided

### Click-Torque C 2 Push R/L adjustable torque wrench for clockwise and anti-clockwise torque-control, 20-100 Nm

| | EAN | | Nm | Nm | lbf. ft. | mm | mm | mm | mm | mm | | | | | | | |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| Code | 4013288 | | | | | | | | | | | | | | | | |
| 05**075625**001 | *218926* | 1/2" | 20-100 | 0,5 | 15-73 | 405 | 140 | 47 | 43 | 18,5 | 15 15/16" | 5 33/64" | 1 27/32" | 1 11/16" | 45/64" | | 1 |

## Click-Torque C 3 Push R/L adjustable torque wrench for clockwise and anti-clockwise torque-control, 40-200 Nm

- Measuring range: 40-200 Nm; precise to +/- 3% as per DIN EN ISO 6789-1:2017-07
- For clockwise and anti-clockwise torque-control thanks to the smooth reversing of the captive square head insert
- 45 teeth and 1/2" square head drive with socket locking
- The Click-Torque collar is placed around the tube of the Wera Click-Torque torque wrench. It prevents the handle from touching the ground. Dirt and damage are avoided

### Click-Torque C 3 Push R/L adjustable torque wrench for clockwise and anti-clockwise torque-control, 40-200 Nm



| | EAN | | | | | | | | | | | | | | | | |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| Code | 4013288 | | Nm | Nm | lbf. ft. | mm | mm | mm | mm | mm | | | | | | | |
| 05**075626**001 | *218933* | 1/2" | 40-200 | 1,0 | 30-146 | 510 | 140 | 47 | 43 | 18,5 | 20 5/64" | 5 33/64" | 1 27/32" | 1 11/16" | 45/64" | | 1 |

## Click-Torque E 1 Push R/L adjustable torque wrench for clockwise and anti-clockwise torque-control, 200-1000 Nm

- For clockwise and anti-clockwise torque-control thanks to smooth reversing of the captive square head insert
- Measuring range: 200-1000 Nm; precise to +/- 3% as per DIN EN ISO 6789-1:2017-07
- 45 teeth and 3/4" square head drive
- The Click-Torque collar is placed around the tube of the Wera Click-Torque torque wrench. It prevents the handle from touching the ground. Dirt and damage are avoided

### Click-Torque E 1 Push R/L adjustable torque wrench for clockwise and anti-clockwise torque-control, 200-1000 Nm



| | EAN | | | | | | | | | | | | | | | |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| Code | 4013288 | | Nm | Nm | lbf. ft. | mm | mm | mm | mm | mm | | | | | | |
| 05**075631**001 | *219053* | 3/4" | 200-1000 | 1,0 | 148-737 | 1250 | 140 | 47 | 63 | 30 | 49 7/32" | 5 33/64" | 1 27/32" | 2 31/64" | 1 3/16" | 1 |

## Click-Torque Lock Torque wrench with Torque Lock function.

- Torque Lock function: The torque function can be deactivated so that the tool can also be used for loosening
- Extra click: audible and tactile torque setting
- Torque wrench gives an audible and tactile signal

## Click-Torque Lock A 5 R/L Torque wrench, adjustable, Torque Lock function, square head insert (1/4"), clockwise/ counterclockwise torque operation, 2,5-25 Nm

- For clockwise and counterclockwise operation
- With ¼" square head drive
- Reversible ratchet
- 45 teeth
- Measuring range: 2.5-25 Nm; precision ± 4 % as per DIN EN ISO 6789-1:2017-07

### Click-Torque Lock A 5 R/L Torque wrench, adjustable, Torque Lock function, square head insert (1/4"), clockwise/ counterclockwise torque operation, 2,5-25 Nm

| | EAN | | | | | | | | | | | | | | | | |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| Code | 4013288 | | Nm | Nm | lbf. ft. | mm | mm | mm | mm | mm | | | | | | | |
| 05**075693**001 [1] | *233646* | 1/4" | 2,5-25 | 0,10 | 1-18 | 299 | 123 | 42 | 26 | 11,75 | 11 49/64" | 4 53/64" | 1 41/64" | 1 1/64" | 29/64" | | 1 |

[1] Available from September 2025

## Click-Torque Lock A 6 R/L Torque wrench, adjustable, Torque Lock function, continuous bit mounting (1/4"), 2.5-25 Nm

- For clockwise and counterclockwise operation
- With 1/4" bit mounting for controlled clockwise torque operation
- Reversible ratchet
- 45 teeth
- Measuring range: 2.5-25 Nm; precision ± 4 % as per DIN EN ISO 6789-1:2017-07

### Click-Torque Lock A 6 R/L Torque wrench, adjustable, Torque Lock function, continuous bit mounting (1/4"), 2,5-25 Nm

| | EAN | | | | | | | | | | | | | | | | |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| Code | 4013288 | | Nm | Nm | lbf. ft. | mm | mm | mm | mm | mm | | | | | | | |
| 05**075694**001 [1] | *233653* | 1/4" | 2,5-25 | 0,10 | 1-18 | 299 | 123 | 42 | 26 | 11,75 | 11 49/64" | 4 53/64" | 1 41/64" | 1 1/64" | 29/64" | | 1 |

[1] Available from September 2025

## Click-Torque Lock C 3 R/L Torque wrench, adjustable, Torque function, square head insert (1/2"), clockwise/ counterclockwise torque operation, 40-200 Nm

- For clockwise and counterclockwise operation
- With 1/2" square head drive
- Reversible ratchet
- 45 teeth
- Measuring range: 40-200 Nm; precision ± 3 % as per DIN EN ISO 6789-1:2017-07

### Click-Torque Lock C 3 R/L Torque wrench, adjustable, Torque function, square head insert (1/2"), clockwise/counterclockwise torque operation, 40-200 Nm

| | EAN | | | | | | | | | | | | | | | | |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| Code | 4013288 | | Nm | Nm | lbf. ft. | mm | mm | mm | mm | mm | | | | | | | |
| 05**075695**001 [1] | *233660* | 1/2" | 40-200 | 1,0 | 30-146 | 512 | 140 | 47 | 43 | 18,4 | 20 5/32" | 5 1/2" | 1 27/32" | 1 11/16" | 23/32" | | 1 |

[1] Available from September 2025

## Click-Torque X 1 torque wrench for insert tools, 2.5-25 Nm

Click-Torque wrench in the unmistakable, robust Wera design with high accuracy as per DIN EN ISO 6789-1: 2017-07. Easy setting and saving of the default value.

The audible and tactile clicks on reaching the scale values also facilitate the safe setting of the desired torque value. The robust release mechanism guarantees a clearly audible and tactile release signal when the set torque is reached. For right-hand and left-hand use and with 9x12mm insert square for the insertion of insert tools.

- For 9x12 mm interchangeable insert tools
- Measuring range: 2.5-25 Nm; Precise to +/- 4% as per DIN EN ISO 6789-1:2017-07

### Click-Torque X 1 torque wrench for insert tools, 2.5-25 Nm

| | EAN | | | | | | $S_k$ | $l_k$ | | | | | | | | | |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| Code | 4013288 | | Nm | Nm | lbf. ft. | mm | mm | mm | mm | mm | mm | mm | | | | | |
| 05**075651**001 | *193773* | 9x12 | 2,5-25 | 0,10 | 1-18 | 292 | 17,5 | 240,0 | 121 | 42 | 24 | 20 | 11 9/64" | 4 49/64" | 1 21/32" | 15/16" | 1 |

[1] $S_k$ = Depth gauge of test attachment to pivot point; $l_k$ = Length of holding position to torque measurement point

## Click-Torque X 2 torque wrench for insert tools, 10-50 Nm

- For 9x12 mm interchangeable insert tools
- Measuring range: 10-50 Nm; Precise to +/- 3% as per DIN EN ISO 6789-1:2017-07
- The Click-Torque collar is placed around the tube of the Wera Click-Torque torque wrench. It prevents the handle from touching the ground. Dirt and damage are avoided

### Click-Torque X 2 torque wrench for insert tools, 10-50 Nm

| | EAN | | | | | | $S_k$ | $l_k$ | | | | | | | | | |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| Code | 4013288 | | Nm | Nm | lbf. ft. | mm | mm | mm | mm | mm | mm | mm | | | | | |
| 05**075652**001 | *193797* | 9x12 | 10-50 | 0,25 | 8-36 | 338 | 17,5 | 285,0 | 140 | 47 | 29 | 20 | 13 5/16" | 5 33/64" | 1 27/32" | 1 9/64" | 1 |

¹) $S_k$ = Depth gauge of test attachment to pivot point; $l_k$ = Length of holding position to torque measurement point

## Click-Torque X 3 torque wrench for insert tools, 20-100 Nm

- For 9x12 mm interchangeable insert tools
- Measuring range: 20-100 Nm; precise to +/- 3% as per DIN EN ISO 6789-1:2017-07
- The Click-Torque collar is placed around the tube of the Wera Click-Torque torque wrench. It prevents the handle from touching the ground. Dirt and damage are avoided

### Click-Torque X 3 torque wrench for insert tools, 20-100 Nm

| | EAN | | | | | | $S_k$ | $l_k$ | | | | | | | | | |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| Code | 4013288 | | Nm | Nm | lbf. ft. | mm | mm | mm | mm | mm | mm | mm | | | | | |
| 07**5653** | *193780* | 9x12 | 20-100 | 0,5 | 15-73 | 390 | 17,5 | 329,0 | 140 | 47 | 29 | 20 | 14 41/64" | 5 33/64" | 1 27/32" | 1 9/64" | 1 |

¹) $S_k$ = Depth gauge of test attachment to pivot point; $l_k$ = Length of holding position to torque measurement point

## Click-Torque X 4 torque wrench for insert tools, 40-200 Nm

- For 14x18 mm interchangeable insert tools
- Measuring range: 40-200 Nm; precise to +/- 3% as per DIN EN ISO 6789-1:2017-07
- The Click-Torque collar is placed around the tube of the Wera Click-Torque torque wrench. It prevents the handle from touching the ground. Dirt and damage are avoided

### Click-Torque X 4 torque wrench for insert tools, 40-200 Nm

| | EAN | | | | | | $S_k$ | $l_k$ | | | | | | | | | |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| Code | 4013288 | | Nm | Nm | lbf. ft. | mm | mm | mm | mm | mm | mm | mm | | | | | |
| 05**075654**001 | *193803* | 14x18 | 40-200 | 1,0 | 30-146 | 487 | 25,5 | 435,0 | 140 | 47 | 32 | 26 | 18 57/64" | 5 33/64" | 1 27/32" | 1 17/64" | 1 |

¹) $S_k$ = Depth gauge of test attachment to pivot point; $l_k$ = Length of holding position to torque measurement point

## Click-Torque X 5 torque wrench for insert tools, 60-300 Nm

- For 14x18 mm interchangeable insert tools
- Measuring range: 60-300 Nm; Precise to +/- 3% as per DIN EN ISO 6789-1:2017-07
- The Click-Torque collar is placed around the tube of the Wera Click-Torque torque wrench. It prevents the handle from touching the ground. Dirt and damage are avoided

### Click-Torque X 5 torque wrench for insert tools, 60-300 Nm

| | EAN | | | | | | $S_k$ | $l_k$ | | | | | | | | | |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| Code | 4013288 | | Nm | Nm | lbf. ft. | mm | mm | mm | mm | mm | mm | mm | | | | | |
| 05**075655**001 | *193810* | 14x18 | 60-300 | 1,0 | 45-220 | 578 | 25,5 | 525,0 | 140 | 47 | 32 | 26 | 22 7/16" | 5 33/64" | 1 27/32" | 1 17/64" | 1 |

*) $S_k$ = Depth gauge of test attachment to pivot point; $l_k$ = Length of holding position to torque measurement point

## Click-Torque X 6 torque wrench for insert tools, 80-400 Nm

- For 14x18 mm interchangeable insert tools
- Measuring range: 80-400 Nm; Precise to +/- 3% as per DIN EN ISO 6789-1:2017-07
- The Click-Torque collar is placed around the tube of the Wera Click-Torque torque wrench. It prevents the handle from touching the ground. Dirt and damage are avoided

### Click-Torque X 6 torque wrench for insert tools, 80-400 Nm

| | EAN | | | | | | $S_k$ | $l_k$ | | | | | | | | | |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| Code | 4013288 | | Nm | Nm | lbf. ft. | mm | mm | mm | mm | mm | mm | mm | | | | | |
| 05**075656**001 | *193827* | 14x18 | 80-400 | 1,0 | 60-295 | 665 | 25,5 | 615,0 | 140 | 47 | 32 | 26 | 25 25/32" | 5 33/64" | 1 27/32" | 1 17/64" | 1 |

*) $S_k$ = Depth gauge of test attachment to pivot point; $l_k$ = Length of holding position to torque measurement point

## Click-Torque X 7 torque wrench for insert tools, 10-100 Nm

- For 14x18 mm interchangeable insert tools
- Measuring range: 10-100 Nm; precision ± 4 % as per DIN EN ISO 6789-1:2017-07
- The Click-Torque collar is placed around the tube of the Wera Click-Torque torque wrench. It prevents the handle from touching the ground. Dirt and damage are avoided. Also serves as “anti-roll protection”
- The laser-engraved, abrasion-proof QR code makes it easier to determine the correct torque value depending on the torque wrench and insert tool used

### Click-Torque X 7 torque wrench for insert tools, 10-100 Nm



| | EAN | | | | | | Sk | lk | | | | | | | | | |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| Code | 4013288 | | Nm | Nm | lbf. ft. | mm | mm | mm | mm | mm | mm | mm | | | | | |
| 05**075657**001 | *229335* | 14x18 | 10-100 | 0,5 | 8-73 | 395 | 25,5 | 343,0 | 140 | 47 | 29 | 20 | 14 41/64" | 5 33/64" | 1 27/32" | 1 9/64" | 1 |

*) Sk = Actual dimension of the test attachment; lk = Distance from the force application point to the test device axis

## 9530 Torque wrench set for heat pumps/air conditioning

4-piece Click-Torque torque wrench set with three self-setting exchangeable Joker insert spanners. For the proper tightening of screw connections when installing and repairing refrigeration and air conditioning systems as well as heat pumps. Click torque wrench in the distinctive Wera design.

Very robust design with high accuracy as per DIN EN ISO 6789-1:2017-07. Easy setting and saving of the default value. The audible and tactile clicks on reaching the scale values facilitate the safe setting of the desired torque value. The robust release mechanism guarantees a clearly audible and tactile release signal when the set torque value is reached. For clockwise and anti-clockwise torque-control and with 14x18 mm square head insert for mounting corresponding insert tools.

With its continuous and parallel jaws, the three self-setting Joker 7880 insert spanners replace several single spanner sizes.

The required size is automatically and continuously set when attaching the tool to the hexagon bolt or screw. The ratchet feature ensures fast and consistent screwdriving without removing the tool. By using the corner-width rectangular prisms, a return angle of only 30° can be achieved.

- Set for the proper tightening of screw connections when installing and repairing refrigeration and air conditioning systems as well as heat pumps
- Click-Torque X 7 torque wrench with mounting for exchangeable insert tools 14x18 mm
- Measuring range: 10-100 Nm; precision ± 4 % as per DIN EN ISO 6789-1:2017-07
- The adjustable 7880 Joker covers all metric and imperial dimensions in the respective field of application
- Automatic and continuous gripping of the hexagon screw or bolt
- Fast and consistent screwdriving without removing the wrench thanks to mechanical ratchet function
- The laser-engraved, abrasion-proof QR code makes it easier to determine the correct torque value depending on the torque wrench and insert tool used

### 9530 Torque wrench set for heat pumps/air conditioning

| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 05**136076**001 | *228987* | | | 1 |
| | | | **Click-Torque X 7**<br>1x 14x18, 10-100 Nm | |
| | | | **7880 Joker XXL**<br>1x 14x18x24-32x($^{15}/_{16}$"-1 $^{1}/_{4}$")x113,5 | |
| | | | **7880 Joker XL**<br>1x 14x18x19-24x($^{3}/_{4}$"-$^{15}/_{16}$")x95,0 | |
| | | | **7880 Joker L**<br>1x 14x18x16-19x($^{5}/_{8}$"-$^{3}/_{4}$")x85,5 | |

## Click-Torque XP 1 pre-set adjustable torque wrench for insert tools, 2.5-25 Nm, 2.5 Nm

Torque wrench with pre-set torque value for all applications where the same torque and repeat accuracy is required.
The torque value can be changed within the metered range.

The robust release mechanism guarantees a clearly audible and tactile trigger signal when the set torque value is reached. Square socket for interchangeable plug-in tools for clockwise and anti-clockwise torque-control. A presetting which deviates from this value to a desired torque value within the specified metered range is possible on request.

- With square socket (9x12 mm) for interchangeable plug-in tools; clockwise and anti-clockwise torque-control
- Pre-set click torque wrench in unmistakable Wera design
- Measuring range: 2.5-25 Nm; Precise to +/- 2% as per DIN EN ISO 6789-1:2017-07
- Pre-set torque values can be changed within the metered range in the test laboratory

### Click-Torque XP 1 pre-set adjustable torque wrench for insert tools, 2.5-25 Nm, 2.5 Nm

| | EAN | | | | | | $S_k$ | $l_k$ | | | | | | | | | |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| Code | 4013288 | | Nm | Nm | lbf. ft. | mm | mm | mm | mm | mm | mm | mm | | | | | |
| 05**075670**001 | *206169* | 9x12 | 2,5 | 2,5-25 | 2-18 | 217 | 17,5 | 180,0 | 137 | 35 | 24 | 20 | 8 35/64" | 5 25/64" | 1 3/8" | 15/16" | 1 |
| 05**075670**010 [1] | *206206* | 9x12 | 2,5 | 2,5-25 | 2-18 | 217 | 17,5 | 180,0 | 137 | 35 | 24 | 20 | 8 35/64" | 5 25/64" | 1 3/8" | 15/16" | 1 |

[1] Any presetting which differs from this value, can be set to a desired torque value within the specified metered range upon request. The desired settings can be made in the following units: Nm, kgf. m, lbf. ft., ozf. in., dN. m, kgf. cm, lbf. in, in. oz, cN. m, gf. m, ft. lb, gf. cm, in. lb.
[*] $S_k$ = Depth gauge of test attachment to pivot point; $l_k$ = Length of holding position to torque measurement point

## Click-Torque XP 2 pre-set adjustable torque wrench for insert tools, 10-50 Nm, 10 Nm

- With square socket (9x12 mm) for interchangeable plug-in tools; clockwise and anti-clockwise torque-control
- Measuring range: 10-50 Nm; Precise to +/- 2% as per DIN EN ISO 6789-1:2017-07
- Pre-set torque values can be changed within the metered range in the test laboratory

### Click-Torque XP 2 pre-set adjustable torque wrench for insert tools, 10-50 Nm, 10 Nm

| | EAN | | | | | | $S_k$ | $l_k$ | | | | | | | | | |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| Code | 4013288 | | Nm | Nm | lbf. ft. | mm | mm | mm | mm | mm | mm | mm | | | | | |
| 05**075671**001 | *206176* | 9x12 | 10,0 | 10-50 | 8-36 | 262 | 17,5 | 225,0 | 137 | 35 | 24 | 20 | 10 5/16" | 5 25/64" | 1 3/8" | 15/16" | 1 |
| 05**075671**010 [1] | *206213* | 9x12 | 10,0 | 10-50 | 8-36 | 262 | 17,5 | 225,0 | 137 | 35 | 24 | 20 | 10 5/16" | 5 25/64" | 1 3/8" | 15/16" | 1 |

[1] Any presetting which differs from this value, can be set to a desired torque value within the specified metered range upon request. The desired settings can be made in the following units: Nm, kgf. m, lbf. ft., ozf. in., dN. m, kgf. cm, lbf. in, in. oz, cN. m, gf. m, ft. lb, gf. cm, in. lb.
[*] $S_k$ = Depth gauge of test attachment to pivot point; $l_k$ = Length of holding position to torque measurement point

## Click-Torque XP 3 pre-set adjustable torque wrench for insert tools, 15-100 Nm, 15 Nm

- With square socket (9x12 mm) for interchangeable plug-in tools; clockwise and anti-clockwise torque-control
- Measuring range: 15-100 Nm; Precise to +/- 2% as per DIN EN ISO 6789-1:2017-07
- Pre-set torque values can be changed within the metered range in the test laboratory

### Click-Torque XP 3 pre-set adjustable torque wrench for insert tools, 15-100 Nm, 15 Nm

| | EAN | | | | | | $S_k$ | $l_k$ | | | | | | | | | |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| Code | 4013288 | | Nm | Nm | lbf. ft. | mm | mm | mm | mm | mm | mm | mm | | | | | |
| 05**075672**001 | *206183* | 9x12 | 15,0 | 15-100 | 11-74 | 332 | 17,5 | 296,0 | 137 | 35 | 24 | 20 | 13 5/64" | 5 25/64" | 1 3/8" | 15/16" | 1 |
| 05**075672**010 [1] | *207999* | 9x12 | 15,0 | 15-100 | 11-74 | 332 | 17,5 | 296,0 | 137 | 35 | 24 | 20 | 13 5/64" | 5 25/64" | 1 3/8" | 15/16" | 1 |

[1] Any presetting which differs from this value, can be set to a desired torque value within the specified metered range upon request. The desired settings can be made in the following units: Nm, kgf. m, lbf. ft., ozf. in., dN. m, kgf. cm, lbf. in, in. oz, cN. m, gf. m, ft. lb, gf. cm, in. lb.
[*] $S_k$ = Depth gauge of test attachment to pivot point; $l_k$ = Length of holding position to torque measurement point

## Click-Torque XP 4 pre-set adjustable torque wrench for insert tools, 20-250 Nm, 20 Nm

- With square socket (14 x18) for interchangeable plug-in tools; clockwise and anti-clockwise torque-control
- Measuring range: 20-250 Nm; Precise to +/- 2% as per DIN EN ISO 6789-1:2017-07
- Pre-set torque values can be changed within the metered range in the test laboratory
- The Click-Torque collar is placed around the tube of the Wera Click-Torque torque wrench. It prevents the handle from touching the ground. Dirt and damage are avoided

### Click-Torque XP 4 pre-set adjustable torque wrench for insert tools, 20-250 Nm, 20 Nm

| | EAN | | | | | | $S_k$ | $l_k$ | | | | | | | | | |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| Code | 4013288 | | Nm | Nm | lbf. ft. | mm | mm | mm | mm | mm | mm | mm | | | | | |
| 05**075673**001 | *206190* | 14x18 | 20,0 | 20-250 | 15-184 | 457 | 25,5 | 430,0 | 145 | 41 | 32 | 26 | 17 63/64" | 5 45/64" | 1 39/64" | 1 17/64" | 1 |
| 05**075673**010 [1] | *206220* | 14x18 | 20,0 | 20-250 | 15-184 | 457 | 25,5 | 430,0 | 145 | 41 | 32 | 26 | 17 63/64" | 5 45/64" | 1 39/64" | 1 17/64" | 1 |

[1] Any presetting which differs from this value, can be set to a desired torque value within the specified metered range upon request. The desired settings can be made in the following units: Nm, kgf. m, lbf. ft., ozf. in., dN. m, kgf. cm, lbf. in, in. oz, cN. m, gf. m, ft. lb, gf. cm, in. lb.
[*] $S_k$ = Depth gauge of test attachment to pivot point; $l_k$ = Length of holding position to torque measurement point

## NEW

### Simple and error-free determination of the torque value

The laser-engraved, abrasion-proof QR code makes it easier to determine the correct torque value depending on the torque wrench and insert tool used. Simply scan with your smartphone and tablet (if available, both QR codes: Torque wrench and insert tool).

A website opens automatically which recognizes the scanned tools (no app needed!). Then enter the required torque value; the corrected value is determined automatically. No need to use formulas/calculations.

**www.wera.de/torque-advisor**

### 7870 Joker Self-setting insert spanner, 9x12 mm

- Square head insert tool 9x12 mm
- For torque wrenches from the Click-Torque X series with 9x12 mm mounting
- The adjustable 7870 Joker covers all metric and imperial dimensions in the respective field of application
- With mechanical ratchet functionality for fast and consistent screwdriving without removing the spanner
- Return angle of only 30° when using the corner-width rectangular prisms in the jaw
- The laser-engraved, abrasion-proof QR code makes it easier to determine the correct torque value depending on the torque wrench and insert tool used

### 7870 Joker S Self-setting insert spanner for wrench sizes 10-13 mm, 9x12 mm

RATCHETING ACTION · SELF ADJUSTING · SECURE SELF GRIPPING

| | EAN | □ | | | | | | | | |
|---|---|---|---|---|---|---|---|---|---|---|
| **Code** | 4013288 | mm | mm | mm | mm | | | | mm | |
| 05**020175**001 | *232953* | 9x12 | 10-13 | 10,0<br>11,0<br>12,0<br>13,0 | 32,2<br>33,6<br>34,3<br>34,4 | 7/16"-1/2" | 7/16"<br>1/2" | 33,7<br>34,4 | 57,7 | 1 |

### 7870 Joker M Self-setting insert spanner for wrench sizes 13-16 mm, 9x12 mm

RATCHETING ACTION · SELF ADJUSTING · SECURE SELF GRIPPING

| | EAN | □ | | | | | | | | |
|---|---|---|---|---|---|---|---|---|---|---|
| **Code** | 4013288 | mm | mm | mm | mm | | | | mm | |
| 05**020176**001 | *233059* | 9x12 | 13-16 | 13,0<br>14,0<br>15,0<br>16,0 | 41,2<br>41,9<br>42,3<br>42,4 | 5/8"-3/4" | 1/2"<br>17/32"<br>9/16"<br>19/32"<br>5/8" | 41,0<br>41,5<br>42,2<br>42,3<br>42,4 | 67,7 | 1 |

## 7870 Joker L Self-setting insert spanner for wrench sizes 16-19 mm, 9x12 mm

| | EAN | □ | | | | | | | | |
|---|---|---|---|---|---|---|---|---|---|---|
| Code | 4013288 | mm | mm | mm | mm | | | | mm | |
| 05**020177**001 | *233066* | 9x12 | 16-19 | 16,0<br>17,0<br>18,0<br>19,0 | 47,6<br>48,3<br>48,9<br>49,2 | 5/8"-3/4" | 5/8"<br>21/32"<br>11/16"<br>3/4" | 47,6<br>48,1<br>48,6<br>49,2 | 77,0 | 1 |

## 7880 Joker Self-setting insert spanner, 14x18 mm

- For torque wrenches of the Click-Torque X series with 14x18 mm holder
- The adjustable 7880 Joker covers all metric and imperial dimensions in the respective field of application
- Automatic and continuous gripping of the hexagon screw or bolt
- Lever mechanism when gripping avoids slippage and damage
- Fast and consistent screwdriving without removing the wrench thanks to mechanical ratchet function
- Return angle of only 30° through placement in the corner-width rectangular prisms in the open end
- The laser-engraved, abrasion-proof QR code makes it easier to determine the correct torque value depending on the torque wrench and insert tool used

## 7880 Joker 3XL Self-setting insert spanner for wrench sizes 32-41 mm, 14x18 mm

| | EAN | □ | | | | | | | | |
|---|---|---|---|---|---|---|---|---|---|---|
| Code | 4013288 | mm | mm | mm | mm | | | | mm | |
| 05**020174**001 | *233073* | 14x18 | 32-41 | 32,0<br>34,0<br>36,0<br>41,0 | 77,0<br>79,0<br>80,0<br>81,5 | 1 1/4"-1 5/8" | 1 1/4"<br>1 5/16"<br>1 3/8"<br>1 7/16"<br>1 1/2"<br>1 5/8" | 77,0<br>78,0<br>79,5<br>80,5<br>81,0<br>81,5 | 128,1 | 1 |

## 7880 Joker XXL Self-setting insert spanner for wrench sizes 24-32 mm, 14x18 mm

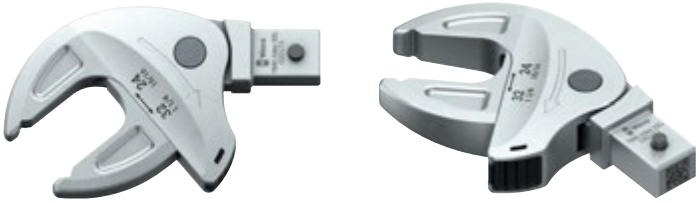

| | EAN | □ | | | | | | | | |
|---|---|---|---|---|---|---|---|---|---|---|
| **Code** | 4013288 | mm | mm | | mm | mm | | mm | mm | |
| 05**020173**001 | *229380* | 14x18 | 24-32 | 15/16"-1 1/4" | 24,0<br>27,0<br>30,0<br>32,0 | 62,2<br>68,0<br>70,2<br>70,4 | 15/16"<br>31/32"<br>1"<br>1 1/16"<br>1 1/8"<br>1 3/16"<br>1 1/4" | 62,2<br>63,9<br>65,4<br>66,4<br>69,5<br>70,1<br>70,2 | 113,5 | 1 |

## 7880 Joker XL Self-setting insert spanner for wrench sizes 19-24 mm, 14x18 mm

| | EAN | □ | | | | | | | | |
|---|---|---|---|---|---|---|---|---|---|---|
| **Code** | 4013288 | mm | mm | mm | mm | | mm | | mm | |
| 05**020172**001 | *229366* | 14x18 | 19-24 | 19,0<br>20,0<br>21,0<br>22,0<br>24,0 | 51,6<br>53,6<br>55,4<br>56,7<br>56,7 | 3/4"<br>25/32"<br>13/16"<br>7/8"<br>15/16" | 51,6<br>53,3<br>54,7<br>56,7<br>56,7 | 3/4"-15/16" | 95 | 1 |

## 7880 Joker L Self-setting insert spanner for wrench sizes 16-19 mm, 14x18mm

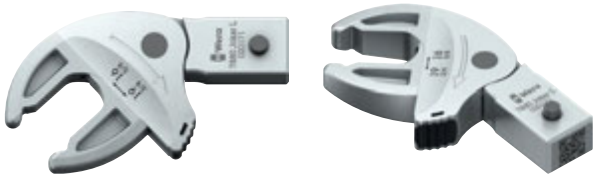

| | EAN | □ | | | | | | | | |
|---|---|---|---|---|---|---|---|---|---|---|
| Code | 4013288 | mm | mm | | mm | | | mm | mm | |
| 05**020171**001 | *229359* | 14x18 | 16-19 | 5/8"-3/4" | 16,0<br>17,0<br>18,0<br>19,0 | 44,6<br>46,7<br>48,2<br>49,1 | 5/8"<br>11/16"<br>3/4" | 44,4<br>47,3<br>49,1 | 85,5 | 1 |

## 7770 Open end insert, 9x12 mm

- Square insert tool 9x12 mm
- For torque wrenches of the Click-Torque X series with 9x12 mm holder
- Application: Hexagon screw heads or nuts
- With safety pin
- The chrome-vanadium steel version makes the plug-in tools suitable for heavy loads

## 7770 Open end insert, 9x12 mm

**Form A**

05**078600**001
05**078601**001
05**078602**001
05**078603**001
05**078604**001
05**078605**001

**Form B**

05**078606**001
05**078607**001
05**078608**001
05**078609**001
05**078610**001
05**078611**001
05**078612**001

| | EAN | □ | | | | | | | |
|---|---|---|---|---|---|---|---|---|---|
| Code | 4013288 | mm | mm | mm | mm | mm | mm | mm | |
| 05**078600**001 | *196101* | 9x12 | 7 | 17,5 | 39,0 | 22,0 | 22,0 | 5,0 | 1 |
| 05**078601**001 | *196095* | 9x12 | 8 | 17,5 | 39,0 | 22,0 | 22,0 | 5,0 | 1 |
| 05**078602**001 | *196088* | 9x12 | 9 | 17,5 | 39,0 | 22,0 | 22,0 | 5,0 | 1 |
| 05**078603**001 | *196071* | 9x12 | 10 | 17,5 | 39,0 | 22,0 | 22,0 | 5,0 | 1 |
| 05**078604**001 | *196064* | 9x12 | 11 | 17,5 | 39,0 | 22,0 | 22,0 | 5,0 | 1 |
| 05**078605**001 | *196057* | 9x12 | 12 | 17,5 | 39,0 | 22,0 | 22,0 | 5,0 | 1 |
| 05**078606**001 | *196040* | 9x12 | 13 | 17,5 | 41,0 | 24,0 | 30,0 | 7,0 | 1 |
| 05**078607**001 | *196033* | 9x12 | 14 | 17,5 | 41,0 | 24,0 | 30,0 | 7,0 | 1 |
| 05**078608**001 | *196026* | 9x12 | 15 | 17,5 | 41,0 | 24,0 | 30,0 | 7,0 | 1 |
| 05**078609**001 | *196019* | 9x12 | 16 | 17,5 | 41,0 | 24,0 | 30,0 | 7,0 | 1 |
| 05**078610**001 | *196002* | 9x12 | 17 | 17,5 | 41,0 | 24,0 | 30,0 | 7,0 | 1 |
| 05**078611**001 | *196118* | 9x12 | 18 | 17,5 | 41,0 | 24,0 | 30,0 | 7,0 | 1 |
| 05**078612**001 | *196125* | 9x12 | 19 | 17,5 | 41,0 | 24,0 | 30,0 | 7,0 | 1 |

## 7780 Open end insert, 14x18 mm

Open end insert, for hexagon screw heads or nuts; for torque wrenches of the Click-Torque X series with 14x18 mm holder.

### 7780 Open end insert, 14x18 mm

**Form A**

05**078670**001

**Form B**

05**078671**001
05**078672**001
05**078673**001
05**078674**001
05**078675**001
05**078676**001

**Form C**

05**078677**001
05**078678**001
05**078679**001
05**078680**001
05**078681**001

**Form D**

05**078682**001
05**078683**001
05**078684**001
05**078685**001
05**078686**001
05**078687**001

| | EAN | □ | | | | | | | |
|---|---|---|---|---|---|---|---|---|---|
| Code | 4013288 | mm | mm | mm | mm | mm | mm | mm | |
| 05**078670**001 | *196729* | 14x18 | 13 | 25,5 | 56,0 | 32,0 | 30,0 | 7,0 | 1 |
| 05**078671**001 | *196736* | 14x18 | 14 | 25,5 | 58,0 | 33,0 | 32,0 | 8,0 | 1 |
| 05**078672**001 | *196743* | 14x18 | 15 | 25,5 | 58,0 | 33,0 | 32,0 | 8,0 | 1 |
| 05**078673**001 | *196750* | 14x18 | 16 | 25,5 | 58,0 | 33,0 | 32,0 | 9,0 | 1 |
| 05**078674**001 | *196767* | 14x18 | 17 | 25,5 | 58,0 | 33,0 | 32,0 | 9,0 | 1 |
| 05**078675**001 | *196774* | 14x18 | 18 | 25,5 | 58,0 | 33,0 | 32,0 | 9,7 | 1 |
| 05**078676**001 | *196781* | 14x18 | 19 | 25,5 | 58,0 | 33,0 | 32,0 | 9,7 | 1 |
| 05**078677**001 | *196798* | 14x18 | 21 | 25,5 | 61,0 | 36,0 | 52,0 | 11,0 | 1 |
| 05**078678**001 | *196804* | 14x18 | 22 | 25,5 | 61,0 | 36,0 | 52,0 | 11,0 | 1 |
| 05**078679**001 | *196811* | 14x18 | 24 | 27,5 | 61,0 | 36,0 | 52,0 | 12,0 | 1 |
| 05**078680**001 | *196828* | 14x18 | 26 | 30,0 | 61,0 | 36,0 | 52,0 | 13,0 | 1 |
| 05**078681**001 | *196835* | 14x18 | 27 | 30,0 | 61,0 | 36,0 | 52,0 | 13,0 | 1 |
| 05**078682**001 | *196842* | 14x18 | 29 | 30,0 | 61,0 | 36,0 | 52,0 | 14,0 | 1 |
| 05**078683**001 | *196859* | 14x18 | 30 | 30,0 | 61,0 | 36,0 | 52,0 | 14,0 | 1 |
| 05**078684**001 | *196866* | 14x18 | 32 | 32,5 | 61,0 | 36,0 | 52,0 | 14,0 | 1 |
| 05**078685**001 | *196873* | 14x18 | 36 | 32,5 | 61,0 | 36,0 | 52,0 | 15,0 | 1 |
| 05**078686**001 | *196880* | 14x18 | 38 | 32,5 | 61,0 | 36,0 | 52,0 | 15,0 | 1 |
| 05**078687**001 | *196897* | 14x18 | 41 | 32,5 | 61,0 | 36,0 | 52,0 | 15,0 | 1 |

## 7771 Ring spanner insert, 9x12 mm

Ring spanner insert, for hexagon screw heads or nuts; for torque wrenches of the Click-Torque X series with 9x12 mm holder.

### 7771 Ring spanner insert, 9x12 mm

Form A

05**078620**001
05**078621**001
05**078622**001
05**078623**001
05**078624**001

Form B

05**078625**001
05**078626**001
05**078627**001
05**078628**001
05**078629**001
05**078630**001
05**078631**001
05**078632**001

Form C

05**078633**001

| | EAN | □ | | | | | | | |
|---|---|---|---|---|---|---|---|---|---|
| Code | 4013288 | mm | mm | mm | mm | mm | mm | mm | |
| 05**078620**001 | *196163* | 9x12 | 7 | 17,5 | 41,0 | 24,0 | 22,0 | 8,0 | 1 |
| 05**078621**001 | *196156* | 9x12 | 8 | 17,5 | 41,0 | 24,0 | 22,0 | 8,0 | 1 |
| 05**078622**001 | *196170* | 9x12 | 9 | 17,5 | 41,0 | 24,0 | 22,0 | 8,0 | 1 |
| 05**078623**001 | *196187* | 9x12 | 10 | 17,5 | 41,0 | 24,0 | 22,0 | 8,0 | 1 |
| 05**078624**001 | *196194* | 9x12 | 11 | 17,5 | 41,0 | 24,0 | 22,0 | 8,0 | 1 |
| 05**078625**001 | *196200* | 9x12 | 12 | 17,5 | 44,0 | 27,0 | 22,0 | 11,0 | 1 |
| 05**078626**001 | *196217* | 9x12 | 13 | 17,5 | 44,0 | 27,0 | 22,0 | 11,0 | 1 |
| 05**078627**001 | *196224* | 9x12 | 14 | 17,5 | 44,0 | 27,0 | 22,0 | 11,0 | 1 |
| 05**078628**001 | *196231* | 9x12 | 15 | 17,5 | 44,0 | 27,0 | 22,0 | 11,0 | 1 |
| 05**078629**001 | *196248* | 9x12 | 16 | 17,5 | 44,0 | 27,0 | 22,0 | 11,0 | 1 |
| 05**078630**001 | *196255* | 9x12 | 17 | 17,5 | 44,0 | 27,0 | 22,0 | 11,0 | 1 |
| 05**078631**001 | *196262* | 9x12 | 18 | 17,5 | 44,0 | 27,0 | 22,0 | 11,0 | 1 |
| 05**078632**001 | *196279* | 9x12 | 19 | 17,5 | 44,0 | 27,0 | 22,0 | 11,0 | 1 |
| 05**078633**001 | *196286* | 9x12 | 21 | 17,5 | 51,0 | 34,0 | 33,0 | 15,0 | 1 |

## 7781 Ring spanner insert, 14x18 mm

Ring spanner insert, for hexagon screw heads or nuts; for torque wrenches of the Click-Torque X series with 14x18 mm holder.

### 7781 Ring spanner insert, 14x18 mm

**Form A**

05**078690**001
05**078691**001
05**078692**001

**Form B**

05**078693**001
05**078694**001
05**078695**001
05**078696**001
05**078697**001
05**078698**001
05**078699**001

**Form C**

05**078700**001
05**078701**001
05**078702**001
05**078703**001
05**078704**001
05**078705**001

| | EAN | | | | | | | | |
|---|---|---|---|---|---|---|---|---|---|
| **Code** | 4013288 | mm | mm | mm | mm | mm | mm | mm | |
| 05**078690**001 | *196132* | 14x18 | 13 | 25,5 | 62,0 | 37,0 | 30,0 | 11,0 | 1 |
| 05**078691**001 | *196576* | 14x18 | 14 | 25,5 | 62,0 | 37,0 | 30,0 | 11,0 | 1 |
| 05**078692**001 | *196583* | 14x18 | 15 | 25,5 | 62,0 | 37,0 | 30,0 | 11,0 | 1 |
| 05**078693**001 | *196590* | 14x18 | 16 | 25,5 | 64,0 | 39,0 | 28,0 | 12,0 | 1 |
| 05**078694**001 | *196606* | 14x18 | 17 | 25,5 | 64,0 | 39,0 | 28,0 | 12,0 | 1 |
| 05**078695**001 | *196620* | 14x18 | 18 | 25,5 | 64,0 | 39,0 | 28,0 | 12,0 | 1 |
| 05**078696**001 | *196637* | 14x18 | 19 | 25,5 | 64,0 | 39,0 | 28,0 | 12,0 | 1 |
| 05**078697**001 | *196644* | 14x18 | 21 | 25,5 | 64,0 | 39,0 | 28,0 | 12,0 | 1 |
| 05**078698**001 | *196613* | 14x18 | 22 | 25,5 | 64,0 | 39,0 | 28,0 | 12,0 | 1 |
| 05**078699**001 | *196651* | 14x18 | 24 | 25,5 | 64,0 | 39,0 | 28,0 | 12,0 | 1 |
| 05**078700**001 | *196668* | 14x18 | 27 | 25,5 | 81,0 | 56,0 | 53,0 | 21,0 | 1 |
| 05**078701**001 | *196675* | 14x18 | 30 | 25,5 | 81,0 | 56,0 | 53,0 | 21,0 | 1 |
| 05**078702**001 | *196682* | 14x18 | 32 | 25,5 | 81,0 | 56,0 | 53,0 | 21,0 | 1 |
| 05**078703**001 | *196699* | 14x18 | 34 | 28,0 | 81,0 | 56,0 | 53,0 | 21,0 | 1 |
| 05**078704**001 | *196705* | 14x18 | 36 | 28,0 | 81,0 | 56,0 | 53,0 | 21,0 | 1 |
| 05**078705**001 | *196712* | 14x18 | 41 | 30,0 | 81,0 | 56,0 | 53,0 | 21,0 | 1 |

## 7772 A Ratchet insert, reversible, 9x12 mm

Ratchet insert, reversible, for 1/4" square socket wrench inserts and 1/4" connecting parts with square drive; for torque wrenches of the Click-Torque X series with 9x12 mm holder.

### 7772 A Ratchet insert, reversible, 9x12 mm

| | EAN | □ | ◘ | | | | | | |
|---|---|---|---|---|---|---|---|---|---|
| Code | 4013288 | mm | | mm | mm | mm | mm | mm | |
| 05**078635**001 | *196347* | 9x12 | 1/4" | 17,5 | 49,0 | 32,0 | 28,0 | 15,0 | 1 |

## 7772 B Ratchet insert, reversible, 9x12 mm

Ratchet insert, reversible, for 3/8" square socket wrench inserts and 3/8" connecting parts with square drive; for torque wrenches of the Click-Torque X series with 9x12 mm holder.

### 7772 B Ratchet insert, reversible, 9x12 mm

| | EAN | □ | ◘ | | | | | | |
|---|---|---|---|---|---|---|---|---|---|
| Code | 4013288 | mm | | mm | mm | mm | mm | mm | |
| 05**078636**001 | *196446* | 9x12 | 3/8" | 17,5 | 52,0 | 35,0 | 35,0 | 21,0 | 1 |

## 7772 C Ratchet insert, reversible, 9x12 mm

Ratchet insert, reversible, for 1/2" square socket wrench inserts and 1/2" connecting parts with square drive; for torque wrenches of the Click-Torque X series with 9x12 mm holder.

### 7772 C Ratchet insert, reversible, 9x12 mm

| | EAN | □ | ◘ | | | | | | |
|---|---|---|---|---|---|---|---|---|---|
| Code | 4013288 | mm | | mm | mm | mm | mm | mm | |
| 05**078637**001 | *196453* | 9x12 | 1/2" | 20,0 | 58,0 | 41,0 | 42,0 | 23,0 | 1 |

## 7782 C Ratchet insert, reversible, 14x18 mm

Ratchet insert, reversible, for 1/2" square socket wrench inserts and 1/2" connecting parts with square drive; for torque wrenches of the Click-Torque X series with 14x18 mm holder.

### 7782 C Ratchet insert, reversible, 14x18 mm

| | EAN | | | | | | | | |
|---|---|---|---|---|---|---|---|---|---|
| Code | 4013288 | mm | | mm | mm | mm | mm | mm | |
| 05**078707**001 | *196552* | 14x18 | 1/2" | 20,0 | 66,0 | 41,0 | 42,0 | 23,0 | 1 |

## 7782 E Ratchet insert, reversible, 14x18 mm

Ratchet insert, reversible, for 3/4" square socket wrench inserts and 3/4" connecting parts with square drive; for torque wrenches of the Click-Torque X series with 14x18 mm holder.

### 7782 E Ratchet insert, reversible, 14x18 mm

| | EAN | | | | | | | | |
|---|---|---|---|---|---|---|---|---|---|
| Code | 4013288 | mm | | mm | mm | mm | mm | mm | |
| 05**078708**001 | *196569* | 14x18 | 3/4" | 30,0 | 90,0 | 65,0 | 65,0 | 36,0 | 1 |

## 7773 A Square drive insert, 9x12 mm

Square drive insert, for 1/4" square socket wrench inserts and 1/4" connecting parts with square drive; for torque wrenches of the Click-Torque X series with 9x12 mm holder.

### 7773 A Square drive insert, 9x12 mm

| | EAN | | | | | | | | |
|---|---|---|---|---|---|---|---|---|---|
| Code | 4013288 | mm | | mm | mm | mm | | | |
| 05**078200**001 | *023742* | 9x12 | 1/4" | 17,5 | 44,0 | 28,0 | 21,0 | 14,0 | 1 |

## 7773 B Square drive insert, 9x12 mm

Square drive insert, for 3/8" square socket wrench inserts and 3/8" connecting parts with square drive; for torque wrenches of the Click-Torque X series with 9x12 mm holder.

### 7773 B Square drive insert, 9x12 mm



| | EAN | □ | ◘ | | | | | | |
|---|---|---|---|---|---|---|---|---|---|
| Code | 4013288 | mm | | mm | mm | mm | | | |
| 05**078205**001 | *023759* | 9x12 | 3/8" | 17,5 | 44,0 | 28,0 | 21,0 | 14,0 | 1 |

## 7773 C Square drive insert, 9x12 mm

Square drive insert, for 1/2" square socket wrench inserts and 1/2" connecting parts with square drive; for torque wrenches of the Click-Torque X series with 9x12 mm holder.

### 7773 C Square drive insert, 9x12 mm

| | EAN | □ | ◘ | | | | | | |
|---|---|---|---|---|---|---|---|---|---|
| Code | 4013288 | mm | | mm | mm | mm | mm | mm | |
| 05**078210**001 | *023766* | 9x12 | 1/2" | 17,5 | 44,0 | 28,0 | 21,0 | 14,0 | 1 |

## 7783 C Square drive insert, 14x18 mm

Square drive insert, for 1/2" square socket wrench inserts and 1/2" connecting parts with square drive; for torque wrenches of the Click-Torque X series with 14x18 mm holder.

### 7783 C Square drive insert, 14x18 mm

| | EAN | □ | ◘ | | | | | | |
|---|---|---|---|---|---|---|---|---|---|
| Code | 4013288 | mm | | mm | mm | mm | mm | mm | |
| 05**078345**001 | *024183* | 14x18 | 1/2" | 25,5 | 65,0 | 40,0 | 30,0 | 18,0 | 1 |

## 7783 E Push-through square insert tool, 14x18 mm

Square drive insert, for 3/4" square socket wrench inserts and 3/4" connecting parts with square drive; for torque wrenches of the Click-Torque X series with 14x18 mm holder.

### 7783 E Push-through square insert tool, 14x18 mm

| | EAN | □ | ⬢ | | | | | | |
|---|---|---|---|---|---|---|---|---|---|
| **Code** | 4013288 | mm | | mm | mm | mm | mm | mm | |
| 05**078710**001 | *196460* | 14x18 | 3/4" | 25,5 | 70,0 | 45,0 | 40,0 | 25,0 | 1 |

## 7774/1 Bit adapter insert, 1/4", 9x12 mm

Bit adapter insert, 1/4"; for torque wrenches of the Click-Torque X series with 9x12 mm holder.

### 7774/1 Bit adapter insert, 1/4", 9x12 mm

| | EAN | □ | ⬢ | | | | | | |
|---|---|---|---|---|---|---|---|---|---|
| **Code** | 4013288 | mm | | mm | mm | mm | mm | mm | |
| 05**078640**001 | *196316* | 9x12 | 1/4" | 17,5 | 42,0 | 25,0 | 22,0 | 12,5 | 1 |

## 7774/2 Bit adapter insert, 5/16", 9x12 mm

Bit adapter insert, 5/16"; for torque wrenches of the Click-Torque X series with 9x12 mm holder.

### 7774/2 Bit adapter insert, 5/16", 9x12 mm

| | EAN | □ | ⬢ | | | | | | |
|---|---|---|---|---|---|---|---|---|---|
| **Code** | 4013288 | mm | | mm | mm | mm | mm | mm | |
| 05**078641**001 | *196309* | 9x12 | 5/16" | 17,5 | 42,0 | 25,0 | 22,0 | 12,5 | 1 |

## 7774/3 Bit adapter insert, 5/16", 14x18 mm

Bit adapter insert, 5/16"; for torque wrenches of the Click-Torque X series with 14x18 mm holder.

### 7774/3 Bit adapter insert, 5/16", 14x18 mm

| | EAN | □ | ⬢ | | | | | | |
|---|---|---|---|---|---|---|---|---|---|
| Code | 4013288 | mm | | mm | mm | mm | mm | mm | |
| 05**078642**001 | *196293* | 14x18 | 5/16" | 25,5 | 58,0 | 33,0 | 30,0 | 13,0 | 1 |

## 7775 Open ring spanner insert, 9x12 mm

Open ring spanner insert, for hexagon screw heads or nuts; for torque wrenches of the Click-Torque X series with 9x12 mm holder.

### 7775 Open ring spanner insert, 9x12 mm

Form A

05**078650**001
05**078651**001
05**078652**001
05**078653**001
05**078654**001
05**078655**001

Form B

05**078656**001
05**078657**001
05**078658**001

| | EAN | □ | | | | | | | |
|---|---|---|---|---|---|---|---|---|---|
| Code | 4013288 | mm | mm | mm | mm | mm | mm | mm | |
| 05**078650**001 | *196330* | 9x12 | 10 | 17,5 | 44,0 | 27,0 | 22,0 | 11,0 | 1 |
| 05**078651**001 | *196361* | 9x12 | 11 | 17,5 | 44,0 | 27,0 | 22,0 | 11,0 | 1 |
| 05**078652**001 | *196378* | 9x12 | 12 | 17,5 | 44,0 | 27,0 | 22,0 | 11,0 | 1 |
| 05**078653**001 | *196385* | 9x12 | 13 | 17,5 | 44,0 | 27,0 | 22,0 | 11,0 | 1 |
| 05**078654**001 | *196392* | 9x12 | 14 | 17,5 | 44,0 | 27,0 | 22,0 | 11,0 | 1 |
| 05**078655**001 | *196408* | 9x12 | 17 | 17,5 | 44,0 | 27,0 | 22,0 | 11,0 | 1 |
| 05**078656**001 | *196415* | 9x12 | 18 | 17,5 | 49,0 | 32,0 | 33,0 | 15,0 | 1 |
| 05**078657**001 | *196422* | 9x12 | 19 | 17,5 | 49,0 | 32,0 | 33,0 | 15,0 | 1 |
| 05**078658**001 | *196439* | 9x12 | 22 | 17,5 | 49,0 | 32,0 | 33,0 | 15,0 | 1 |

## 7776 External TORX® insert, 9x12 mm

External TORX® insert; for torque wrenches of the Click-Torque X series with 9x12 mm holder.

### 7776 External TORX® insert, 9x12 mm

Form A

05**078660**001
05**078661**001
05**078662**001
05**078663**001

Form B

05**078664**001

| | EAN | □ | ✱ | | | | | | |
|---|---|---|---|---|---|---|---|---|---|
| Code | 4013288 | mm | | mm | mm | mm | mm | mm | |
| 05**078660**001 | *195968* | 9x12 | TX 6 | 17,5 | 40,0 | 23,0 | 22,0 | 8,0 | 1 |
| 05**078661**001 | *195975* | 9x12 | TX 8 | 17,5 | 40,0 | 23,0 | 22,0 | 8,0 | 1 |
| 05**078662**001 | *195982* | 9x12 | TX 10 | 17,5 | 40,0 | 23,0 | 22,0 | 8,0 | 1 |
| 05**078663**001 | *195999* | 9x12 | TX 12 | 17,5 | 40,0 | 23,0 | 22,0 | 8,0 | 1 |
| 05**078664**001 | *196149* | 9x12 | TX 14 | 17,5 | 45,0 | 28,0 | 22,0 | 11,0 | 1 |

## 7786 External TORX® insert, 14x18 mm

External TORX® insert; for torque wrenches of the Click-Torque X series with 14x18 mm holder.

### 7786 External TORX® insert, 14x18 mm

Form A
05**078714**001
05**078715**001

Form B
05**078716**001
05**078717**001

| | EAN | | | | | | | | |
|---|---|---|---|---|---|---|---|---|---|
| Code | 4013288 | mm | | mm | mm | mm | mm | mm | |
| 05**078714**001 | *196507* | 14x18 | TX 14 | 25,5 | 37,0 | 62,0 | 30,0 | 11,0 | 1 |
| 05**078715**001 | *196514* | 14x18 | TX 18 | 25,5 | 37,0 | 62,0 | 30,0 | 11,0 | 1 |
| 05**078716**001 | *196521* | 14x18 | TX 20 | 25,5 | 40,0 | 65,0 | 32,0 | 12,0 | 1 |
| 05**078717**001 | *196538* | 14x18 | TX 24 | 25,5 | 40,0 | 65,0 | 32,0 | 12,0 | 1 |

## 7779/1 Adapter insert, 9x12 mm

Adapter insert ror the use of square plug-in tools 14x18 mm in torque wrenches with internal square 9x12 mm; for torque wrenches of the Click-Torque X series with 9x12 mm holder.

### 7779/1 Adapter insert, 9x12 mm

| | EAN | | | | | | | |
|---|---|---|---|---|---|---|---|---|
| Code | 4013288 | mm | mm | mm | mm | mm | mm | |
| 05**078666**001 | *196323* | 9x12 | 14x18 | 49,0 | 33,0 | 32,0 | 26,0 | 1 |

## 7779/2 Adapter insert, 14x18 mm

Adapter insert ror the use of square plug-in tools 9x12 mm in torque wrenches with internal square 14x18 mm; for torque wrenches of the Click-Torque X series with 14x18 mm holder.

### 7779/2 Adapter insert, 14x18 mm

| | EAN | | | | | | | |
|---|---|---|---|---|---|---|---|---|
| Code | 4013288 | mm | mm | mm | mm | mm | mm | |
| 05**078667**001 | *196545* | 14x18 | 9x12 | 52,0 | 27,0 | 28,0 | 21,0 | 1 |

## 7790/1 Push-fit weld-on adapter, 9x12 mm

Push-fit weld-on adapter; for torque wrenches of the Click-Torque X series with 9x12 mm holder.

- For welding on specifically required tools
- Welding should ideally be carried out by a specialist welding company

### 7790/1 Push-fit weld-on adapter, 9x12 mm

| | EAN | □ | | | | | |
|---|---|---|---|---|---|---|---|
| **Code** | 4013288 | mm | mm | mm | mm | mm | |
| 05**078720**001 | *196354* | 9x12 | 24,0 | 8,0 | 22,0 | 14,0 | 1 |

## 7790/2 Push-fit weld-on adapter, 14x18 mm

Push-fit weld-on adapter; for torque wrenches of the Click-Torque X series with 14x18 mm holder.

- For welding on specifically required tools
- Welding should ideally be carried out by a specialist welding company

### 7790/2 Push-fit weld-on adapter, 14x18 mm

| | EAN | □ | | | | | |
|---|---|---|---|---|---|---|---|
| **Code** | 4013288 | mm | mm | mm | mm | mm | |
| 05**078721**001 | *196477* | 14x18 | 38,0 | 13,0 | 31,0 | 22,0 | 1 |

## Click-Torque collar

The collar prevents the handle of the Click-Torque torque wrench from touching the ground. Dirt and damage are avoided when putting down the tool while working.

Also prevents the tool from rolling away, and it serves to fix the Click-Torque torque wrench in the storage/transport box. The collar can be easily attached to the torque wrench tube and is removable.

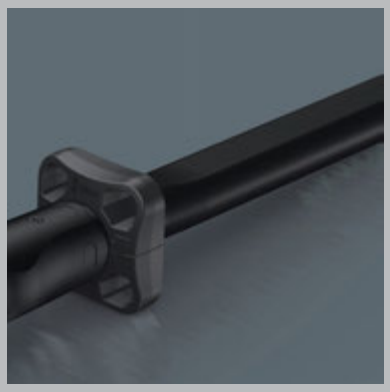

## 7762 Click-Torque collar M3

Click-Torque collar as an accessory for Click-Torque Torque wrenches B 1, B 2, C 1, C 2, C 3, C 4, X 2, X 3, X 4, X 5, XP 4, Click-Torque Push R/L C 2 and Click-Torque Push R/L C 3.

### 7762 Click-Torque collar M3

| | EAN | | | | | | | |
|---|---|---|---|---|---|---|---|---|
| Code | 4013288 | mm | mm | mm | | | | |
| 05**078709**001 | *211767* | 55,0 | 55,0 | 21,5 | | | | 1 |

## 7761 Click-Torque collar M4

Click-Torque collar as an accessory for Click-Torque Torque wrenches C 5 and X 6.

### 7761 Click-Torque collar M4

| | EAN | | | | | | | |
|---|---|---|---|---|---|---|---|---|
| Code | 4013288 | mm | mm | mm | | | | |
| 05**078706**001 | *211750* | 55,0 | 55,0 | 21,5 | | | | 1 |

## 7763 Click-Torque collar M5

Click-Torque collar as an accessory for Click-Torque Torque wrench E 1 and Click-Torque Push R/L E 1.

### 7763 Click-Torque collar M5

| | EAN | | | | | | | |
|---|---|---|---|---|---|---|---|---|
| Code | 4013288 | mm | mm | mm | | | | |
| 05**078711**001 | *211774* | 73,0 | 73,0 | 27,0 | | | | 1 |

## 2090 Impact driver 90 Nm

High quality impact driver that can loosen rigid connections without the use of power tools simply by the force of the impact. The Wera impact drivers have a particularly high efficiency thanks to their robust, double-curved design.

Impact forces are converted into rotary motion. The use of compressed air equipment becomes unnecessary.
For M 4 to M 8 screws. Drive: 5/16" hexagon socket.

- To loosen and tighten screws without the use of power tools
- Impact forces are converted into rotary motion
- The double-curved design is particularly efficient
- 5/16" hexagon socket take-up

### 2090 Impact driver 90 Nm

| | EAN | | | | | | | |
|---|---|---|---|---|---|---|---|---|
| Code | 4013288 | | mm | | | | | |
| 05**072014**001 | *180926* | 5/16" | 142,0 | 5 19/32" | | | | 1 |

## 2090/17 Impact driver set

- 2090 impact driver, 90 Nm with many accessories
- To loosen and tighten screws without the use of power tools
- Impact forces are converted into rotary motion
- The double-curved design is particularly efficient
- 5/16" hexagon socket take-up

### 2090/17 Impact driver set

| Code | EAN 4013288 | | | |
|---|---|---|---|---|
| 05**072017**001 | *179777* | | | 1 |
| | | | **2090 90 Nm**<br>1x 5/16"x142,0 | |
| | | | **851/2 Z PH**<br>1x PH 2x32; 1x PH 3x32 | |
| | | | **851/2 PH**<br>1x PH 4x32 | |
| | | | **800/2**<br>1x 2,0x12,0x41 | |
| | | | **840/2 Z**<br>1x 5x30; 1x 6x30; 1x 8x30; 1x 10x30 | |
| | | | **840/2**<br>1x 7,0x30 | |
| | | | **867/2 Z TORX®**<br>1x TX 30x35; 1x TX 40x35; 1x TX 45x35;<br>1x TX 50x35; 1x TX 55x35 | |
| | | | **870/2**<br>1x 3/8"x5/16" [1]; 1x 1/2"x5/16" [1] | |

[1] With friction ball; for manual nut spinner sockets

# TORQUE Test Values

**Slotted Tools**
Drives: DIN ISO 2380, VSM 35601.
TORQUE values evaluated in test gages according to DIN ISO 2380 on TORQUE testing equipment.

**Hexagon Tools**
Drives: DIN ISO 2936. TORQUE values evaluated in test gages according to DIN ISO 2936 on TORQUE testing equipment.

**PH and PZ Tools**
Drives: DIN 5260, ISO 8764 and SMS-SS 1687.
TORQUE values evaluated in test gages according to DIN 5261, ISO 8764 on TORQUE testing equipment.

**Tools with TORQ-SET® drive**
TORQUE values evaluated with testing gages of Phillips Screw Company, licensor of TORQ-SET®, on TORQUE testing equipment.

| a x b mm | TORQUE in Nm (min) handuse | TORQUE in Nm (min) poweruse |
|---|---|---|
| 0,3 x 2,0 | 0,18 | 0,20 |
| 0,4 x 2,0 | 0,30 | 0,35 |
| 0,4 x 2,5 | 0,40 | 0,45 |
| 0,5 x 3,0 | 0,70 | 0,80 |
| 0,5 x 3,5 | 0,90 | 0,98 |
| 0,6 x 3,5 | 1,30 | 1,40 |
| 0,6 x 4,0 | 1,40 | 1,61 |
| 0,6 x 4,5 | - | 1,80 |
| 0,8 x 4,0 | 2,60 | 2,90 |
| 0,8 x 4,5 | 2,88 | |
| 0,8 x 5,0 | 3,20 | 3,58 |
| 0,8 x 5,5 | 3,50 | 3,90 |
| 1,0 x 5,5 | 5,50 | 6,20 |
| 1,0 x 6,5 | 6,50 | 7,28 |
| 1,0 x 7,0 | 7,0 | 7,80 |
| 1,2 x 6,5 | 9,40 | 10,50 |
| 1,2 x 7,0 | 10,0 | 11,28 |
| 1,2 x 8,0 | 11,5 | 12,90 |
| 1,4 x 9,0 | 17,6 | 19,70 |
| 1,5 x 13 | 29 | 32 |
| 1,6 x 8,0 | 20,5 | 22,9 |
| 1,6 x 9,0 | 23 | 25 |
| 1,6 x 10 | 25,6 | 28,7 |
| 2,0 x 12 | 48,0 | 53 |
| 2,0 x 13 | 52 | 58 |
| 2,5 x 14 | 87 | 98 |
| 2,5 x 16 | 100 | 112 |
| 3,0 x 18 | 162 | 181 |

**Important note:**
After the torque test with the specified minimum value, the screwdriver must not show any permanent deformation or other damage to the tip of the screwdriver that would impair its usability.

| SW (mm) | TORQUE in Nm (min) |
|---|---|
| 0,7 | 0,08 |
| 0,9 | 0,18 |
| 1,3 | 0,53 |
| 1,5 | 0,82 |
| 2,0 | 1,9 |
| 2,5 | 3,8 |
| 3 | 6,6 |
| 3,5 | 11 |
| 4 | 16 |
| 4,5 | 24 |
| 5 | 30 |
| 6 | 52 |
| 7 | 78 |
| 8 | 120 |
| 9 | 180 |
| 10 | 220 |
| 11 | 295 |
| 12 | 370 |
| 13 | 480 |
| 14 | 590 |
| 17 | 1000 |
| 19 | 1000 |
| 22 | 1000 |
| 24 | 1000 |
| 27 | 1000 |

| | TORQUE in Nm (min) handuse | TORQUE in Nm (min) poweruse |
|---|---|---|
| 0 | 1,0 | 1,0 |
| 1 | 3,5 | 3,9 |
| 2 | 8,2 | 10,3 |
| 3 | 19,5 | 32,0 |
| 4 | 38,0 | 88,7 |

**Test torques for tools with TORX® and TORX PLUS® drives**
Test torques evaluated with testing gages from the TORX® and TORX PLUS® licensor (Acument Global Technologies Inc.)."

| | TORQUE in Nm (min) Bits | TORQUE in Nm (min) Screw-drivers |
|---|---|---|
| 2 | 1,1 | 1,1 |
| 3 | 1,7 | 1,7 |
| 4 | 2,8 | 2,8 |
| 5 | 4,0 | 4,0 |
| 6 | 5,1 | 5,1 |
| 8 | 8,5 | 8,5 |
| 10 | 11,3 | 11,3 |
| | | |
| 1/4" | 28 | 17 |
| 5/16" | 56 | 28 |
| 3/8" | 102 | 62 |
| 7/16" | 147 | |
| 1/2" | 249 | |
| 9/16" | 271 | |
| 5/8" | 339 | |

| | TORQUE in Nm (min.) TORX® Bit | TORX® Resis-Bit | TORX® Screw-driver | TORX PLUS® Bit | TORX PLUS® Resis-Bit | TORX PLUS® Screw-drivers |
|---|---|---|---|---|---|---|
| 1 | 0,10 | - | 0,08 | 0,11 | | |
| 2 | 0,14 | - | 0,12 | 0,16 | | |
| 3 | 0,25 | - | 0,21 | 0,28 | | |
| 4 | 0,37 | - | 0,31 | 0,44 | | |
| 5 | 0,51 | - | 0,43 | 0,61 | | |
| 6 | 0,91 | - | 0,75 | 1,11 | | 0,92 |
| 7 | 1,7 | 1,4 | 1,4 | 2,10 | | 1,68 |
| 8 | 2,6 | 2,2 | 2,2 | 3,21 | 2,5 | 2,79 |
| 9 | 3,4 | 2,9 | 2,8 | 4,19 | 3,3 | 3,49 |
| 10 | 4,5 | 3,8 | 3,7 | 5,42 | 4,3 | 4,47 |
| 15 | 7,7 | 6,5 | 6,4 | 9,62 | 7,3 | 8,06 |
| 20 | 12,7 | 10,8 | 10,5 | 16,15 | 11,9 | 13,41 |
| 25 | 19,0 | 16,1 | 15,9 | 23,50 | 17,4 | 19,58 |
| 27 | 26,9 | 22,9 | 22,5 | 34,62 | 25,1 | 28,95 |
| 30 | 37,4 | 31,8 | 31,1 | 47,18 | 33,5 | 39,34 |
| 40 | 65,1 | 55,3 | 54,1 | 82,08 | 59,4 | 68,40 |
| 45 | 104 | 88 | 86 | 137,38 | 97,3 | 114,44 |
| 50 | 159 | 135 | 132 | 194,54 | 152,4 | 162,14 |
| 55 | 257 | 218 | 218 | 352,10 | 291,5 | 299,25 |
| 60 | 445 | 379 | 379 | 566,11 | 483,0 | 481,24 |
| 70 | 701 | 596 | 600 | 910,40 | 713,3 | 773,91 |

# Dimensions Of Profiles

**TORX® Recess Screws**



| | A Ref. (mm) |
|---|---|
| TX 1 | 0,84 |
| TX 2 | 0,94 |
| TX 3 | 1,12 |
| TX 4 | 1,30 |
| TX 5 | 1,37 |
| TX 6 | 1,65 |
| TX 7 | 1,97 |
| TX 8 | 2,30 |
| TX 9 | 2,48 |
| TX 10 | 2,72 |
| TX 15 | 3,26 |
| TX 20 | 3,84 |
| TX 25 | 4,40 |
| TX 27 | 4,96 |
| TX 30 | 5,49 |
| TX 40 | 6,60 |
| TX 45 | 7,77 |
| TX 50 | 8,79 |
| TX 55 | 11,17 |
| TX 60 | 13,20 |
| TX 70 | 15,49 |

**TORX PLUS® Recess Screws**



| | A Ref. (mm) |
|---|---|
| 1 IP | 0,84 |
| 2 IP | 0,95 |
| 3 IP | 1,13 |
| 4 IP | 1,29 |
| 5 IP | 1,41 |
| 6 IP | 1,69 |
| 7 IP | 1,97 |
| 8 IP | 2,29 |
| 9 IP | 2,48 |
| 10 IP | 2,72 |
| 15 IP | 3,25 |
| 20 IP | 3,84 |
| 25 IP | 4,39 |
| 27 IP | 4,95 |
| 30 IP | 5,49 |
| 40 IP | 6,60 |
| 45 IP | 7,77 |
| 50 IP | 8,79 |
| 55 IP | 11,16 |
| 60 IP | 13,20 |
| 70 IP | 15,48 |

**TORQ-SET® Recess Screws**



| | A Ref. (mm) |
|---|---|
| 0 | 0,43 |
| 1 | 0,43 |
| 2 | 0,43 |
| 3 | 0,48 |
| 4 | 0,56 |
| 5 | 0,63 |
| 6 | 0,71 |
| 8 | 0,84 |
| 10 | 0,96 |
| $^{1}/_{4}$" | 1,27 |
| $^{5}/_{16}$" | 1,60 |
| $^{3}/_{8}$" | 1,90 |
| $^{7}/_{16}$" | 2,23 |
| $^{1}/_{2}$" | 2,54 |

**TRI-WING® Recess Screws**



| | A Ref. (mm) |
|---|---|
| 0 | 0,45 |
| 1 | 0,57 |
| 2 | 0,75 |
| 3 | 0,95 |
| 4 | 1,08 |
| 5 | 1,23 |
| 6 | 1,54 |
| 7 | 1,87 |
| 8 | 2,17 |
| 9 | 2,48 |
| 10 | 2,78 |

**XZN Recess Screws**



| | A Ref. (mm) |
|---|---|
| M 4 | 3,83 |
| M 5 | 4,80 |
| M 6 | 6,00 |
| M 8 | 7,20 |
| M 10 | 9,60 |
| M 12 | 11,41 |
| M 14 | 13,22 |
| M 16 | 15,63 |
| M 18 | 16,85 |
| M 20 | 19,25 |

**Square Recess Screws**



| | A Ref. (mm) | A Ref. (mm) |
|---|---|---|
| 00 | 1,27 | 1,4 |
| 0 | 1,78 | 2 |
| 1 | 2,31 | 2,5 |
| 2 | 2,85 | 3,1 |
| 3 | 3,37 | 3,7 |
| 4 | 4,84 | 5,1 |

**Spanner Recess Screws**



| | A Ref. (mm) |
|---|---|
| 4 | 1,52 |
| 6 | 2,41 |
| 8 | 2,79 |
| 10 | 3,30 |

# TORQUE Conversion Table

| Conversion Units | SI Units | | | Metric scale | | USA GB scale | | |
|---|---|---|---|---|---|---|---|---|
| | **cNm** | **dNm** | **Nm** | **cmkg** | **mkg** | **ft.lb** | **in.lb** | **in.oz** |
| **1 cNm =** | 1 | 0,1 | 0,01 | 0,1020 | 0,0010 | 0,0074 | 0,0885 | 1,4161 |
| **1 dNm =** | 10 | 1 | 0,1 | 1,0197 | 0,0102 | 0,0738 | 0,8851 | 14,1612 |
| **1 Nm =** | 100 | 10 | 1 | 10,1972 | 0,1020 | 0,7376 | 8,8508 | 141,6123 |
| **1 cmkg =** | 9,8067 | 0,9807 | 0,0981 | 1 | 0,0100 | 0,0723 | 0,8680 | 13,8874 |
| **1 mkg =** | 980,6650 | 98,0665 | 9,8067 | 100 | 1 | 7,2330 | 86,7964 | 1388,7422 |
| **1 ft.lb =** | 135,5818 | 13,5581 | 1,3558 | 13,8255 | 0,1383 | 1 | 12 | 192 |
| **1 in.lb =** | 11,2985 | 1,1298 | 0,1130 | 1,1521 | 0,0115 | 0,0833 | 1 | 16 |
| **1 in. oz =** | 0,7062 | 0,0706 | 0,0071 | 0,0720 | 0,0007 | 0,0052 | 0,0625 | 1 |

**Example 1**
1 Nm = 0,102 mkg
17,4 Nm = 17,4 x 0,102 mkg
17,4 Nm = 1,775 mkg

**Example 2**
1 mkg = 9,8067 Nm
12,5 mkg = 12,5 x 9,8067 Nm
12,5 mkg = 122,58 Nm

**Conversion Nm in mkg** — **1 Nm = 0,10197 mkg**

| Nm | 0 | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 |
|---|---|---|---|---|---|---|---|---|---|---|
| **0** | 0,00 | 0,10 | 0,20 | 0,31 | 0,41 | 0,51 | 0,61 | 0,71 | 0,82 | 0,92 |
| **10** | 1,02 | 1,12 | 1,22 | 1,33 | 1,43 | 1,53 | 1,63 | 1,73 | 1,84 | 1,94 |
| **20** | 2,04 | 2,14 | 2,24 | 2,35 | 2,45 | 2,55 | 2,65 | 2,75 | 2,86 | 2,96 |
| **30** | 3,06 | 3,16 | 3,26 | 3,37 | 3,47 | 3,57 | 3,67 | 3,77 | 3,87 | 3,98 |
| **40** | 4,08 | 4,18 | 4,28 | 4,38 | 4,49 | 4,59 | 4,69 | 4,79 | 4,89 | 5,00 |
| **50** | 5,10 | 5,20 | 5,30 | 5,40 | 5,51 | 5,61 | 5,71 | 5,81 | 5,91 | 6,02 |
| **60** | 6,12 | 6,22 | 6,32 | 6,42 | 6,53 | 6,63 | 6,73 | 6,83 | 6,93 | 7,04 |
| **70** | 7,14 | 7,24 | 7,34 | 7,44 | 7,55 | 7,65 | 7,75 | 7,85 | 7,95 | 8,06 |
| **80** | 8,16 | 8,26 | 8,36 | 8,46 | 8,57 | 8,67 | 8,77 | 8,87 | 8,97 | 9,08 |
| **90** | 9,18 | 9,28 | 9,38 | 9,48 | 9,59 | 9,69 | 9,79 | 9,89 | 9,99 | 10,10 |
| **100** | 10,20 | 10,30 | 10,40 | 10,50 | 10,60 | 10,71 | 10,81 | 10,91 | 11,01 | 11,11 |

**Conversion mkg in Nm** — **1 mkg = 9,80665 Nm**

| mkg | 0 | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 |
|---|---|---|---|---|---|---|---|---|---|---|
| **0** | 0,00 | 9,81 | 19,61 | 29,42 | 39,23 | 49,03 | 58,84 | 68,65 | 78,45 | 88,26 |
| **10** | 98,07 | 107,87 | 117,68 | 127,49 | 137,29 | 147,10 | 156,91 | 166,71 | 176,52 | 186,33 |
| **20** | 196,13 | 205,94 | 215,75 | 225,55 | 235,36 | 245,17 | 254,97 | 264,78 | 274,59 | 284,39 |
| **30** | 294,20 | 304,01 | 313,81 | 323,62 | 333,43 | 343,23 | 353,04 | 362,85 | 372,65 | 382,46 |
| **40** | 392,27 | 402,07 | 411,88 | 421,69 | 431,49 | 441,30 | 451,11 | 460,91 | 470,72 | 480,53 |
| **50** | 490,33 | 500,14 | 509,95 | 519,75 | 529,56 | 539,37 | 549,17 | 558,98 | 568,79 | 578,59 |
| **60** | 588,40 | 598,21 | 608,01 | 617,82 | 627,63 | 637,43 | 647,24 | 657,05 | 666,85 | 676,66 |
| **70** | 686,47 | 696,27 | 706,08 | 715,89 | 725,69 | 735,50 | 745,31 | 755,11 | 764,92 | 774,73 |
| **80** | 784,53 | 794,34 | 804,15 | 813,95 | 823,76 | 833,57 | 843,37 | 853,18 | 862,99 | 872,79 |
| **90** | 882,60 | 892,41 | 902,21 | 912,02 | 921,83 | 931,63 | 941,44 | 951,25 | 961,05 | 970,86 |
| **100** | 980,67 | 990,47 | 1000,28 | 1010,08 | 1019,89 | 1029,70 | 1039,50 | 1049,31 | 1059,12 | 1068,92 |

**Conversion Nm in ft.lb** — **1 Nm = 0,73756 ft.lb**

| Nm | 0 | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 |
|---|---|---|---|---|---|---|---|---|---|---|
| **0** | 0,00 | 0,74 | 1,48 | 2,21 | 2,95 | 3,69 | 4,43 | 5,16 | 5,90 | 6,64 |
| **10** | 7,38 | 8,11 | 8,85 | 9,59 | 10,33 | 11,06 | 11,80 | 12,54 | 13,28 | 14,01 |
| **20** | 14,75 | 15,49 | 16,23 | 16,96 | 17,70 | 18,44 | 19,18 | 19,91 | 20,65 | 21,39 |
| **30** | 22,13 | 22,86 | 23,60 | 24,34 | 25,08 | 25,81 | 26,55 | 27,29 | 28,03 | 28,76 |
| **40** | 29,50 | 30,24 | 30,98 | 31,72 | 32,45 | 33,19 | 33,93 | 34,67 | 35,40 | 36,14 |
| **50** | 36,88 | 37,62 | 38,35 | 39,09 | 39,83 | 40,57 | 41,30 | 42,04 | 42,78 | 43,52 |
| **60** | 44,25 | 44,99 | 45,73 | 46,47 | 47,20 | 47,94 | 48,68 | 49,42 | 50,15 | 50,89 |
| **70** | 51,63 | 52,37 | 53,10 | 53,84 | 54,58 | 55,32 | 56,05 | 56,79 | 57,53 | 58,27 |
| **80** | 59,00 | 59,74 | 60,48 | 61,22 | 61,96 | 62,69 | 63,43 | 64,17 | 64,91 | 65,64 |
| **90** | 66,38 | 67,12 | 67,86 | 68,59 | 69,33 | 70,07 | 70,81 | 71,54 | 72,28 | 73,02 |
| **100** | 73,76 | 74,49 | 75,23 | 75,97 | 76,71 | 77,44 | 78,18 | 78,92 | 79,66 | 80,39 |

**Conversion ft.lb in Nm** — **1 ft.lb = 1,35581 Nm**

| ft.lb | 0 | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 |
|---|---|---|---|---|---|---|---|---|---|---|
| **0** | 0,00 | 1,36 | 2,71 | 4,07 | 5,42 | 6,78 | 8,13 | 9,49 | 10,85 | 12,20 |
| **10** | 13,56 | 14,91 | 16,27 | 17,63 | 18,98 | 20,34 | 21,69 | 23,05 | 24,40 | 25,76 |
| **20** | 27,12 | 28,47 | 29,83 | 31,18 | 32,54 | 33,90 | 35,25 | 36,61 | 37,96 | 39,32 |
| **30** | 40,67 | 42,03 | 43,39 | 44,74 | 46,10 | 47,45 | 48,81 | 50,16 | 51,52 | 52,88 |
| **40** | 54,23 | 55,59 | 56,94 | 58,30 | 59,66 | 61,01 | 62,37 | 63,72 | 65,08 | 66,43 |
| **50** | 67,79 | 69,15 | 70,50 | 71,86 | 73,21 | 74,57 | 75,93 | 77,28 | 78,64 | 79,99 |
| **60** | 81,35 | 82,70 | 84,06 | 85,42 | 86,77 | 88,13 | 89,48 | 90,84 | 92,20 | 93,55 |
| **70** | 94,91 | 96,26 | 97,62 | 98,97 | 100,33 | 101,69 | 103,04 | 104,40 | 105,75 | 107,11 |
| **80** | 108,46 | 109,82 | 111,18 | 112,53 | 113,89 | 115,24 | 116,60 | 117,96 | 119,31 | 120,67 |
| **90** | 122,02 | 123,38 | 124,73 | 126,09 | 127,45 | 128,80 | 130,16 | 131,51 | 132,87 | 134,23 |
| **100** | 135,58 | 136,94 | 138,29 | 139,65 | 141,00 | 142,36 | 143,72 | 145,07 | 146,43 | 147,78 |

**Conversion Nm in in.lb** — **1 Nm = 8,85077 in.lb**

| Nm | 0 | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 |
|---|---|---|---|---|---|---|---|---|---|---|
| **0** | 0,00 | 8,85 | 17,70 | 26,55 | 35,40 | 44,25 | 53,10 | 61,96 | 70,81 | 79,66 |
| **10** | 88,51 | 97,36 | 106,21 | 115,06 | 123,91 | 132,76 | 141,61 | 150,46 | 159,31 | 168,16 |
| **20** | 177,02 | 185,87 | 194,72 | 203,57 | 212,42 | 221,27 | 230,12 | 238,97 | 247,82 | 256,67 |
| **30** | 265,52 | 274,37 | 283,22 | 292,08 | 300,93 | 309,78 | 318,63 | 327,48 | 336,33 | 345,18 |
| **40** | 354,03 | 362,88 | 371,73 | 380,58 | 389,43 | 398,28 | 407,14 | 415,99 | 424,84 | 433,69 |
| **50** | 442,54 | 451,39 | 460,24 | 469,09 | 477,94 | 486,79 | 495,64 | 504,49 | 513,34 | 522,20 |
| **60** | 531,05 | 539,90 | 548,75 | 557,60 | 566,45 | 575,30 | 584,15 | 593,00 | 601,85 | 610,70 |
| **70** | 619,55 | 628,40 | 637,26 | 646,11 | 654,96 | 663,81 | 672,66 | 681,51 | 690,36 | 699,21 |
| **80** | 708,06 | 716,91 | 725,76 | 734,61 | 743,46 | 752,32 | 761,17 | 770,02 | 778,87 | 787,72 |
| **90** | 796,57 | 805,42 | 814,27 | 823,12 | 831,97 | 840,82 | 849,67 | 858,52 | 867,38 | 876,23 |
| **100** | 885,08 | 893,93 | 902,78 | 911,63 | 920,48 | 929,33 | 938,18 | 947,03 | 955,88 | 964,73 |

**Conversion in.lb in Nm** — **1 in.lb = 0,11298 Nm**

| in.lb | 0 | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 |
|---|---|---|---|---|---|---|---|---|---|---|
| **0** | 0,00 | 0,11 | 0,23 | 0,34 | 0,45 | 0,56 | 0,68 | 0,79 | 0,90 | 1,02 |
| **10** | 1,13 | 1,24 | 1,36 | 1,47 | 1,58 | 1,69 | 1,81 | 1,92 | 2,03 | 2,15 |
| **20** | 2,26 | 2,37 | 2,49 | 2,60 | 2,71 | 2,82 | 2,94 | 3,05 | 3,16 | 3,28 |
| **30** | 3,39 | 3,50 | 3,62 | 3,73 | 3,84 | 3,95 | 4,07 | 4,18 | 4,29 | 4,41 |
| **40** | 4,52 | 4,63 | 4,75 | 4,86 | 4,97 | 5,08 | 5,20 | 5,31 | 5,42 | 5,54 |
| **50** | 5,65 | 5,76 | 5,87 | 5,99 | 6,10 | 6,21 | 6,33 | 6,44 | 6,55 | 6,67 |
| **60** | 6,78 | 6,89 | 7,00 | 7,12 | 7,23 | 7,34 | 7,46 | 7,57 | 7,68 | 7,80 |
| **70** | 7,91 | 8,02 | 8,13 | 8,25 | 8,36 | 8,47 | 8,59 | 8,70 | 8,81 | 8,93 |
| **80** | 9,04 | 9,15 | 9,26 | 9,38 | 9,49 | 9,60 | 9,72 | 9,83 | 9,94 | 10,06 |
| **90** | 10,17 | 10,28 | 10,39 | 10,51 | 10,62 | 10,73 | 10,85 | 10,96 | 11,07 | 11,19 |
| **100** | 11,30 | 11,41 | 11,52 | 11,64 | 11,75 | 11,86 | 11,98 | 12,09 | 12,20 | 12,31 |

# Conversion Of Inches To Millimeters

| Inches | | 0 | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 |
|---|---|---|---|---|---|---|---|---|---|---|---|
| | | | 25.400 | 50.800 | 76.200 | 101.600 | 127.000 | 152.400 | 177.800 | 203.200 | 228.600 |
| 1/64 | 0.015625 | 0.397 | 25.797 | 51.197 | 76.597 | 101.997 | 127.397 | 152.797 | 178.197 | 203.597 | 228.997 |
| 1/32 | 0.03125 | 0.794 | 26.194 | 51.594 | 76.994 | 102.394 | 127.794 | 153.194 | 178.594 | 203.994 | 229.394 |
| 3/64 | 0.046875 | 1.191 | 26.591 | 51.991 | 77.391 | 102.791 | 128.191 | 153.591 | 178.991 | 204.391 | 229.791 |
| 1/16 | 0.0625 | 1.588 | 26.988 | 52.388 | 77.788 | 103.188 | 128.588 | 153.988 | 179.388 | 204.788 | 230.188 |
| 5/64 | 0.078125 | 1.984 | 27.384 | 52.784 | 78.184 | 103.584 | 128.984 | 154.384 | 179.784 | 205.184 | 230.584 |
| 3/32 | 0.09375 | 2.381 | 27.781 | 53.181 | 78.581 | 103.981 | 129.381 | 154.781 | 180.181 | 205.581 | 230.981 |
| 7/64 | 0.109375 | 2.778 | 28.178 | 53.578 | 78.978 | 104.378 | 129.778 | 155.178 | 180.578 | 205.978 | 231.378 |
| 1/8 | 0.125 | 3.175 | 28.575 | 53.975 | 79.375 | 104.775 | 130.175 | 155.575 | 180.975 | 206.375 | 231.775 |
| 9/64 | 0.140625 | 3.572 | 28.972 | 54.372 | 79.772 | 105.172 | 130.572 | 155.972 | 181.372 | 206.772 | 232.172 |
| 5/32 | 0.15625 | 3.969 | 29.369 | 54.769 | 80.169 | 105.569 | 130.969 | 156.369 | 181.769 | 207.169 | 232.569 |
| 11/64 | 0.171875 | 4.366 | 29.766 | 55.166 | 80.566 | 105.966 | 131.366 | 156.766 | 182.166 | 207.566 | 232.966 |
| 3/16 | 0.1875 | 4.762 | 30.162 | 55.562 | 80.962 | 106.362 | 131.762 | 157.162 | 182.562 | 207.962 | 233.362 |
| 13/64 | 0.203125 | 5.159 | 30.559 | 55.959 | 81.359 | 106.759 | 132.159 | 157.559 | 182.959 | 208.359 | 233.759 |
| 7/32 | 0.21875 | 5.556 | 30.956 | 56.356 | 81.756 | 107.156 | 132.556 | 157.956 | 183.356 | 208.756 | 234.156 |
| 15/64 | 0.234375 | 5.953 | 31.353 | 56.753 | 82.153 | 107.553 | 132.953 | 158.353 | 183.753 | 209.153 | 234.553 |
| 1/4 | 0.25 | 6.350 | 31.750 | 57.150 | 82.550 | 107.950 | 133.350 | 158.750 | 184.150 | 209.550 | 234.950 |
| 17/64 | 0.265625 | 6.747 | 32.147 | 57.547 | 82.947 | 108.347 | 133.747 | 159.147 | 184.547 | 209.947 | 235.347 |
| 9/32 | 0.28125 | 7.144 | 32.544 | 57.944 | 83.344 | 108.744 | 134.144 | 159.544 | 184.944 | 210.344 | 235.744 |
| 19/64 | 0.296875 | 7.541 | 32.941 | 58.341 | 83.741 | 109.141 | 134.541 | 159.941 | 185.341 | 210.741 | 236.141 |
| 5/16 | 0.3125 | 7.938 | 33.338 | 58.738 | 84.138 | 109.538 | 134.938 | 160.338 | 185.738 | 211.138 | 236.538 |
| 21/64 | 0.328125 | 8.334 | 33.734 | 59.134 | 84.534 | 109.934 | 135.334 | 160.734 | 186.134 | 211.534 | 236.934 |
| 11/32 | 0.34375 | 8.731 | 34.131 | 59.531 | 84.931 | 110.331 | 135.731 | 161.131 | 186.531 | 211.931 | 237.331 |
| 23/64 | 0.359375 | 9.128 | 34.528 | 59.928 | 85.328 | 110.728 | 136.128 | 161.528 | 186.928 | 212.328 | 237.728 |
| 3/8 | 0.375 | 9.525 | 34.925 | 60.325 | 85.725 | 111.125 | 136.525 | 161.925 | 187.325 | 212.725 | 238.125 |
| 25/64 | 0.390625 | 9.922 | 35.322 | 60.722 | 86.122 | 111.522 | 136.922 | 162.322 | 187.722 | 213.122 | 238.522 |
| 13/32 | 0.40625 | 10.319 | 35.719 | 61.119 | 86.519 | 111.919 | 137.319 | 162.719 | 188.119 | 213.519 | 238.919 |
| 27/64 | 0.421875 | 10.716 | 36.116 | 61.516 | 86.916 | 112.316 | 137.716 | 163.116 | 188.516 | 213.916 | 239.316 |
| 7/16 | 0.4375 | 11.112 | 36.512 | 61.912 | 87.312 | 112.712 | 138.112 | 163.512 | 188.912 | 214.312 | 239.712 |
| 29/64 | 0.453125 | 11.509 | 36.909 | 62.309 | 87.709 | 113.109 | 138.509 | 163.909 | 189.309 | 214.709 | 240.109 |
| 15/32 | 0.46875 | 11.906 | 37.306 | 62.706 | 88.106 | 113.506 | 138.906 | 164.306 | 189.706 | 215.106 | 240.506 |
| 31/64 | 0.484375 | 12.303 | 37.703 | 63.103 | 88.503 | 113.903 | 139.303 | 164.703 | 190.103 | 215.503 | 240.903 |
| 1/2 | 0.5 | 12.700 | 38.100 | 63.500 | 88.900 | 114.300 | 139.700 | 165.100 | 190.500 | 215.900 | 241.300 |
| 33/64 | 0.515625 | 13.097 | 38.497 | 63.897 | 89.297 | 114.697 | 140.097 | 165.497 | 190.897 | 216.297 | 241.697 |
| 17/32 | 0.53125 | 13.494 | 38.894 | 64.294 | 89.694 | 115.094 | 140.494 | 165.894 | 191.294 | 216.694 | 242.094 |
| 35/64 | 0.546875 | 13.891 | 39.291 | 64.691 | 90.091 | 115.491 | 140.891 | 166.291 | 191.691 | 217.091 | 242.491 |
| 9/16 | 0.5625 | 14.288 | 39.688 | 65.088 | 90.488 | 115.888 | 141.288 | 166.688 | 192.088 | 217.488 | 242.888 |
| 37/64 | 0.578125 | 14.684 | 40.084 | 65.484 | 90.884 | 116.284 | 141.684 | 167.084 | 192.484 | 217.884 | 243.284 |
| 19/32 | 0.59375 | 15.081 | 40.481 | 65.881 | 91.281 | 116.681 | 142.081 | 167.481 | 192.881 | 218.281 | 243.681 |
| 39/64 | 0.609375 | 15.478 | 40.878 | 66.278 | 91.678 | 117.078 | 142.478 | 167.878 | 193.278 | 218.678 | 244.078 |
| 5/8 | 0.625 | 15.875 | 41.275 | 66.675 | 92.075 | 117.475 | 142.875 | 168.275 | 193.675 | 219.075 | 244.475 |
| 41/64 | 0.640625 | 16.272 | 41.672 | 67.072 | 92.472 | 117.872 | 143.272 | 168.672 | 194.072 | 219.472 | 244.872 |
| 21/32 | 0.65625 | 16.669 | 42.069 | 67.469 | 92.869 | 118.269 | 143.669 | 169.069 | 194.469 | 219.869 | 245.269 |
| 43/64 | 0.671875 | 17.066 | 42.466 | 67.866 | 93.266 | 118.666 | 144.066 | 169.466 | 194.866 | 220.266 | 245.666 |
| 11/16 | 0.6875 | 17.462 | 42.862 | 68.262 | 93.662 | 119.062 | 144.462 | 169.862 | 195.262 | 220.662 | 246.062 |
| 45/64 | 0.703125 | 17.859 | 43.259 | 68.659 | 94.059 | 119.459 | 144.859 | 170.259 | 195.659 | 221.059 | 246.459 |
| 23/32 | 0.71875 | 18.256 | 43.656 | 69.056 | 94.456 | 119.856 | 145.256 | 170.656 | 196.056 | 221.456 | 246.856 |
| 47/64 | 0.734375 | 18.653 | 44.053 | 69.453 | 94.853 | 120.253 | 145.653 | 171.053 | 196.453 | 221.853 | 247.253 |
| 3/4 | 0.75 | 19.050 | 44.450 | 69.850 | 95.250 | 120.650 | 146.050 | 171.450 | 196.850 | 222.250 | 247.650 |
| 49/64 | 0.765625 | 19.447 | 44.847 | 70.247 | 95.647 | 121.047 | 146.447 | 171.847 | 197.247 | 222.647 | 248.047 |
| 25/32 | 0.78125 | 19.844 | 45.244 | 70.644 | 96.044 | 121.444 | 146.844 | 172.244 | 197.644 | 223.044 | 248.444 |
| 51/64 | 0.796875 | 20.241 | 45.641 | 71.041 | 96.441 | 121.841 | 147.241 | 172.641 | 198.041 | 223.441 | 248.841 |
| 13/16 | 0.8125 | 20.638 | 46.038 | 71.438 | 96.838 | 122.238 | 147.638 | 173.038 | 198.438 | 223.838 | 249.238 |
| 53/64 | 0.828125 | 21.034 | 46.434 | 71.834 | 97.234 | 122.634 | 148.034 | 173.434 | 198.834 | 224.234 | 249.634 |
| 27/32 | 0.84375 | 21.431 | 46.831 | 72.231 | 97.631 | 123.031 | 148.431 | 173.831 | 199.231 | 224.631 | 250.031 |
| 55/64 | 0.859375 | 21.828 | 47.228 | 72.628 | 98.028 | 123.428 | 148.828 | 174.228 | 199.628 | 225.028 | 250.428 |
| 7/8 | 0.875 | 22.225 | 47.625 | 73.025 | 98.425 | 123.825 | 149.225 | 174.625 | 200.025 | 225.425 | 250.825 |
| 57/64 | 0.890625 | 22.622 | 48.022 | 73.422 | 98.822 | 124.222 | 149.622 | 175.022 | 200.422 | 225.822 | 251.222 |
| 29/32 | 0.90625 | 23.019 | 48.419 | 73.819 | 99.219 | 124.619 | 150.019 | 175.419 | 200.819 | 226.219 | 251.619 |
| 59/64 | 0.921875 | 23.416 | 48.816 | 74.216 | 99.616 | 125.016 | 150.416 | 175.816 | 201.216 | 226.616 | 252.016 |
| 15/16 | 0.9375 | 23.812 | 49.212 | 74.612 | 100.012 | 125.412 | 150.812 | 176.212 | 201.612 | 227.012 | 252.412 |
| 61/64 | 0.953125 | 24.209 | 49.609 | 75.009 | 100.409 | 125.809 | 151.209 | 176.609 | 202.009 | 227.409 | 252.809 |
| 31/32 | 0.96875 | 24.606 | 50.006 | 75.406 | 100.806 | 126.206 | 151.606 | 177.006 | 202.406 | 227.806 | 253.206 |
| 63/64 | 0.984375 | 25.003 | 50.403 | 75.803 | 101.203 | 126.603 | 152.003 | 177.403 | 202.803 | 228.203 | 253.603 |

Values in mm

# Code No. Index


| Code No. | Page | Code No. | Page | Code No. | Page | Code No. | Page |
|---|---|---|---|---|---|---|---|
| 05 **002900** 001 | 265 | 05 **003081** 001 | 139 | 05 **003387** 001 | 116 | 05 **003565** 001 | 131 |
| 05 **002910** 001 | 266 | 05 **003082** 001 | 139 | 05 **003388** 001 | 116 | 05 **003566** 001 | 131 |
| 05 **002913** 001 | 266 | 05 **003083** 001 | 139 | 05 **003389** 001 | 116 | 05 **003567** 001 | 131 |
| 05 **002920** 001 | 266 | 05 **003084** 001 | 139 | 05 **003390** 001 | 114 | 05 **003568** 001 | 131 |
| 05 **002923** 001 | 266 | 05 **003085** 001 | 139 | 05 **003391** 001 | 114 | 05 **003569** 001 | 131 |
| 05 **002926** 001 | 266 | 05 **003086** 001 | 139 | 05 **003392** 001 | 114 | 05 **003570** 001 | 131 |
| 05 **002930** 001 | 266 | 05 **003087** 001 | 139 | 05 **003393** 001 | 114 | 05 **003571** 001 | 131 |
| 05 **002933** 001 | 266 | 05 **003088** 001 | 139 | 05 **003460** 001 | 90 | 05 **003572** 001 | 131 |
| 05 **002936** 001 | 266 | 05 **003089** 001 | 139 | 05 **003461** 001 | 90 | 05 **003573** 001 | 131 |
| 05 **002938** 001 | 266 | 05 **003090** 001 | 139 | 05 **003462** 001 | 90 | 05 **003574** 001 | 131 |
| 05 **002940** 001 | 266 | 05 **003091** 001 | 139 | 05 **003463** 001 | 90 | 05 **003575** 001 | 131 |
| 05 **002943** 001 | 266 | 05 **003092** 001 | 139 | 05 **003499** 001 | 110 | 05 **003576** 001 | 131 |
| 05 **002946** 001 | 266 | 05 **003093** 001 | 139 | 05 **003500** 001 | 106 | 05 **003577** 001 | 131 |
| 05 **002948** 001 | 266 | 05 **003094** 001 | 139 | 05 **003501** 001 | 110 | 05 **003578** 001 | 131 |
| 05 **002950** 001 | 266 | 05 **003180** 001 | 141 | 05 **003502** 001 | 110 | 05 **003579** 001 | 131 |
| 05 **002960** 001 | 266 | 05 **003181** 001 | 141 | 05 **003503** 001 | 110 | 05 **003580** 001 | 131 |
| 05 **002966** 001 | 266 | 05 **003185** 001 | 139 | 05 **003504** 001 | 110 | 05 **003581** 001 | 143 |
| 05 **002968** 001 | 266 | 05 **003210** 001 | 265 | 05 **003505** 001 | 110 | 05 **003582** 001 | 143 |
| 05 **002970** 001 | 266 | 05 **003320** 001 | 117 | 05 **003506** 001 | 110 | 05 **003583** 001 | 143 |
| 05 **002973** 001 | 266 | 05 **003321** 001 | 117 | 05 **003507** 001 | 110 | 05 **003584** 001 | 143 |
| 05 **002976** 001 | 266 | 05 **003322** 001 | 117 | 05 **003508** 001 | 110 | 05 **003585** 001 | 143 |
| 05 **002980** 001 | 266 | 05 **003330** 001 | 116 | 05 **003509** 001 | 110 | 05 **003590** 001 | 143 |
| 05 **002990** 001 | 264 | 05 **003331** 001 | 116 | 05 **003510** 001 | 110 | 05 **003591** 001 | 143 |
| 05 **003010** 001 | 110 | 05 **003332** 001 | 116 | 05 **003511** 001 | 110 | 05 **003592** 001 | 142 |
| 05 **003030** 001 | 139 | 05 **003333** 001 | 116 | 05 **003512** 001 | 110 | 05 **003594** 001 | 122 |
| 05 **003031** 001 | 139 | 05 **003334** 001 | 116 | 05 **003513** 001 | 110 | 05 **003596** 001 | 122 |
| 05 **003032** 001 | 139 | 05 **003335** 001 | 116 | 05 **003514** 001 | 110 | 05 **003600** 001 | 147 |
| 05 **003033** 001 | 139 | 05 **003336** 001 | 116 | 05 **003515** 001 | 110 | 05 **003601** 001 | 155 |
| 05 **003034** 001 | 139 | 05 **003337** 001 | 116 | 05 **003516** 001 | 110 | 05 **003602** 001 | 155 |
| 05 **003035** 001 | 139 | 05 **003338** 001 | 116 | 05 **003517** 001 | 110 | 05 **003603** 001 | 155 |
| 05 **003036** 001 | 139 | 05 **003339** 001 | 116 | 05 **003518** 001 | 110 | 05 **003604** 001 | 155 |
| 05 **003037** 001 | 139 | 05 **003340** 001 | 116 | 05 **003519** 001 | 110 | 05 **003605** 001 | 155 |
| 05 **003038** 001 | 139 | 05 **003341** 001 | 116 | 05 **003520** 001 | 110 | 05 **003606** 001 | 155 |
| 05 **003039** 001 | 139 | 05 **003342** 001 | 116 | 05 **003521** 001 | 110 | 05 **003607** 001 | 155 |
| 05 **003040** 001 | 139 | 05 **003345** 001 | 117 | 05 **003522** 001 | 110 | 05 **003608** 001 | 155 |
| 05 **003041** 001 | 139 | 05 **003350** 001 | 117 | 05 **003523** 001 | 110 | 05 **003609** 001 | 155 |
| 05 **003042** 001 | 139 | 05 **003351** 001 | 117 | 05 **003524** 001 | 118 | 05 **003610** 001 | 155 |
| 05 **003043** 001 | 139 | 05 **003352** 001 | 117 | 05 **003525** 001 | 118 | 05 **003611** 001 | 155 |
| 05 **003044** 001 | 139 | 05 **003353** 001 | 117 | 05 **003526** 001 | 118 | 05 **003612** 001 | 155 |
| 05 **003050** 001 | 140 | 05 **003354** 001 | 117 | 05 **003527** 001 | 119 | 05 **003613** 001 | 155 |
| 05 **003051** 001 | 140 | 05 **003355** 001 | 117 | 05 **003528** 001 | 118 | 05 **003614** 001 | 155 |
| 05 **003052** 001 | 140 | 05 **003360** 001 | 114 | 05 **003529** 001 | 119 | 05 **003615** 001 | 155 |
| 05 **003054** 001 | 140 | 05 **003361** 001 | 114 | 05 **003530** 001 | 118 | 05 **003616** 001 | 155 |
| 05 **003056** 001 | 140 | 05 **003362** 001 | 114 | 05 **003531** 001 | 117 | 05 **003617** 001 | 155 |
| 05 **003059** 001 | 137 | 05 **003363** 001 | 114 | 05 **003533** 001 | 104 | 05 **003618** 001 | 155 |
| 05 **003060** 001 | 137 | 05 **003364** 001 | 114 | 05 **003535** 001 | 105 | 05 **003619** 001 | 155 |
| 05 **003061** 001 | 137 | 05 **003365** 001 | 114 | 05 **003536** 001 | 120 | 05 **003620** 001 | 155 |
| 05 **003062** 001 | 137 | 05 **003366** 001 | 114 | 05 **003550** 001 | 123 | 05 **003621** 001 | 155 |
| 05 **003063** 001 | 137 | 05 **003367** 001 | 114 | 05 **003551** 001 | 131 | 05 **003622** 001 | 155 |
| 05 **003064** 001 | 137 | 05 **003368** 001 | 114 | 05 **003552** 001 | 131 | 05 **003623** 001 | 155 |
| 05 **003065** 001 | 137 | 05 **003369** 001 | 114 | 05 **003553** 001 | 131 | 05 **003624** 001 | 155 |
| 05 **003066** 001 | 137 | 05 **003370** 001 | 114 | 05 **003554** 001 | 131 | 05 **003625** 001 | 155 |
| 05 **003067** 001 | 137 | 05 **003371** 001 | 114 | 05 **003555** 001 | 131 | 05 **003626** 001 | 155 |
| 05 **003068** 001 | 137 | 05 **003372** 001 | 114 | 05 **003556** 001 | 131 | 05 **003627** 001 | 155 |
| 05 **003069** 001 | 137 | 05 **003375** 001 | 115 | 05 **003557** 001 | 131 | 05 **003628** 001 | 155 |
| 05 **003070** 001 | 137 | 05 **003380** 001 | 116 | 05 **003558** 001 | 131 | 05 **003629** 001 | 155 |
| 05 **003071** 001 | 137 | 05 **003381** 001 | 116 | 05 **003559** 001 | 131 | 05 **003630** 001 | 155 |
| 05 **003072** 001 | 137 | 05 **003382** 001 | 116 | 05 **003560** 001 | 131 | 05 **003631** 001 | 155 |
| 05 **003073** 001 | 137 | 05 **003383** 001 | 116 | 05 **003561** 001 | 131 | 05 **003632** 001 | 155 |
| 05 **003074** 001 | 138 | 05 **003384** 001 | 116 | 05 **003562** 001 | 131 | 05 **003633** 001 | 155 |
| 05 **003075** 001 | 138 | 05 **003385** 001 | 116 | 05 **003563** 001 | 131 | 05 **003634** 001 | 155 |
| 05 **003080** 001 | 139 | 05 **003386** 001 | 116 | 05 **003564** 001 | 131 | 05 **003635** 001 | 155 |

# Code No. Index


| Code No. | Page |
|---|---|
| 05 **003636** 001 | 164 |
| 05 **003637** 001 | 164 |
| 05 **003638** 001 | 164 |
| 05 **003639** 001 | 165 |
| 05 **003640** 001 | 165 |
| 05 **003641** 001 | 165 |
| 05 **003642** 001 | 164 |
| 05 **003643** 001 | 164 |
| 05 **003645** 001 | 146 |
| 05 **003647** 001 | 147 |
| 05 **003660** 001 | 176 |
| 05 **003662** 001 | 176 |
| 05 **003665** 001 | 177 |
| 05 **003666** 001 | 177 |
| 05 **003667** 001 | 177 |
| 05 **003668** 001 | 177 |
| 05 **003669** 001 | 177 |
| 05 **003670** 001 | 177 |
| 05 **003675** 001 | 177 |
| 05 **003684** 001 | 177 |
| 05 **003685** 001 | 177 |
| 05 **003690** 001 | 177 |
| 05 **003692** 001 | 170 |
| 05 **003695** 001 | 170 |
| 05 **003696** 001 | 170 |
| 05 **003697** 001 | 170 |
| 05 **003717** 001 | 110 |
| 05 **003718** 001 | 110 |
| 05 **003719** 001 | 110 |
| 05 **003720** 001 | 110 |
| 05 **003721** 001 | 110 |
| 05 **003722** 001 | 110 |
| 05 **003723** 001 | 110 |
| 05 **003724** 001 | 110 |
| 05 **003725** 001 | 110 |
| 05 **003726** 001 | 110 |
| 05 **003727** 001 | 110 |
| 05 **003728** 001 | 110 |
| 05 **003729** 001 | 110 |
| 05 **003730** 001 | 155 |
| 05 **003731** 001 | 155 |
| 05 **003732** 001 | 155 |
| 05 **003733** 001 | 155 |
| 05 **003734** 001 | 155 |
| 05 **003735** 001 | 155 |
| 05 **003736** 001 | 155 |
| 05 **003737** 001 | 155 |
| 05 **003738** 001 | 155 |
| 05 **003739** 001 | 155 |
| 05 **003740** 001 | 131 |
| 05 **003741** 001 | 131 |
| 05 **003742** 001 | 131 |
| 05 **003743** 001 | 131 |
| 05 **003744** 001 | 131 |
| 05 **003745** 001 | 131 |
| 05 **003746** 001 | 131 |
| 05 **003747** 001 | 131 |
| 05 **003748** 001 | 131 |
| 05 **003749** 001 | 131 |
| 05 **003750** 001 | 131 |
| 05 **003751** 001 | 131 |
| 05 **003752** 001 | 131 |
| 05 **003753** 001 | 131 |
| 05 **003755** 001 | 102 |
| 05 **003756** 001 | 109 |
| 05 **003760** 001 | 199 |
| 05 **003765** 001 | 199 |
| 05 **003780** 001 | 148 |
| 05 **003781** 001 | 149 |
| 05 **003785** 001 | 129 |
| 05 **003793** 001 | 177 |
| 05 **003820** 001 | 162 |
| 05 **003821** 001 | 162 |
| 05 **003822** 001 | 162 |
| 05 **003823** 001 | 162 |
| 05 **003824** 001 | 162 |
| 05 **003825** 001 | 162 |
| 05 **003826** 001 | 162 |
| 05 **003827** 001 | 162 |
| 05 **003828** 001 | 162 |
| 05 **003829** 001 | 162 |
| 05 **003830** 001 | 160 |
| 05 **003831** 001 | 160 |
| 05 **003832** 001 | 160 |
| 05 **003833** 001 | 160 |
| 05 **003834** 001 | 160 |
| 05 **003835** 001 | 160 |
| 05 **003836** 001 | 160 |
| 05 **003837** 001 | 160 |
| 05 **003838** 001 | 160 |
| 05 **003840** 001 | 162 |
| 05 **003841** 001 | 162 |
| 05 **003842** 001 | 162 |
| 05 **003843** 001 | 162 |
| 05 **003844** 001 | 162 |
| 05 **003845** 001 | 162 |
| 05 **003850** 001 | 160 |
| 05 **003851** 001 | 160 |
| 05 **003852** 001 | 160 |
| 05 **003853** 001 | 160 |
| 05 **003854** 001 | 160 |
| 05 **003855** 001 | 160 |
| 05 **003856** 001 | 160 |
| 05 **003857** 001 | 160 |
| 05 **003858** 001 | 160 |
| 05 **003880** 001 | 111 |
| 05 **003881** 001 | 116 |
| 05 **003882** 001 | 115 |
| 05 **003883** 001 | 111 |
| 05 **003884** 001 | 112 |
| 05 **003890** 001 | 119 |
| 05 **003891** 001 | 119 |
| 05 **003892** 001 | 171 |
| 05 **003893** 001 | 171 |
| 05 **003970** 001 | 134 |
| 05 **003971** 001 | 140 |
| 05 **003972** 001 | 138 |
| 05 **003973** 001 | 134 |
| 05 **003974** 001 | 142 |
| 05 **003980** 001 | 144 |
| 05 **003981** 001 | 144 |
| 05 **003982** 001 | 97 |
| 05 **003990** 001 | 84 |
| 05 **003991** 001 | 70 |
| 05 **003995** 001 | 156 |
| 05 **003996** 001 | 163 |
| 05 **003997** 001 | 160 |
| 05 **004003** 001 | 108 |
| 05 **004004** 001 | 109 |
| 05 **004016** 001 | 103 |
| 05 **004017** 001 | 107 |
| 05 **004018** 001 | 108 |
| 05 **004019** 001 | 103 |
| 05 **004020** 001 | 107 |
| 05 **004021** 001 | 109 |
| 05 **004033** 001 | 127 |
| 05 **004034** 001 | 129 |
| 05 **004046** 001 | 121 |
| 05 **004047** 001 | 126 |
| 05 **004048** 001 | 128 |
| 05 **004049** 001 | 121 |
| 05 **004050** 001 | 127 |
| 05 **004051** 001 | 129 |
| 05 **004063** 001 | 150 |
| 05 **004064** 001 | 152 |
| 05 **004076** 001 | 145 |
| 05 **004077** 001 | 149 |
| 05 **004078** 001 | 151 |
| 05 **004079** 001 | 146 |
| 05 **004080** 001 | 150 |
| 05 **004081** 001 | 152 |
| 05 **004090** 001 | 148 |
| 05 **004095** 001 | 148 |
| 05 **004170** 001 | 175 |
| 05 **004171** 001 | 259 |
| 05 **004173** 001 | 220 |
| 05 **004174** 001 | 48 |
| 05 **004175** 001 | 123 |
| 05 **004176** 001 | 142 |
| 05 **004177** 001 | 175 |
| 05 **004178** 001 | 202 |
| 05 **004179** 001 | 264 |
| 05 **004180** 001 | 424 |
| 05 **004181** 001 | 202 |
| 05 **004182** 001 | 33 |
| 05 **004184** 001 | 33 |
| 05 **004186** 001 | 245 |
| 05 **004187** 001 | 187 |
| 05 **004188** 001 | 188 |
| 05 **004190** 001 | 27 |
| 05 **004201** 001 | 163 |
| 05 **004202** 001 | 161 |
| 05 **004203** 001 | 157 |
| 05 **004210** 001 | 163 |
| 05 **004211** 001 | 161 |
| 05 **004212** 001 | 162 |
| 05 **004280** 001 | 165 |
| 05 **004281** 001 | 167 |
| 05 **004282** 001 | 166 |
| 05 **004283** 001 | 167 |
| 05 **004284** 001 | 168 |
| 05 **004285** 001 | 169 |
| 05 **004310** 001 | 65 |
| 05 **004313** 001 | 22 |
| 05 **004350** 001 | 300 |
| 05 **004351** 001 | 300 |
| 05 **004351** 001 | 304 |
| 05 **004352** 001 | 301 |
| 05 **004353** 001 | 301 |
| 05 **004354** 001 | 301 |
| 05 **004355** 001 | 302 |
| 05 **004356** 001 | 302 |
| 05 **004357** 001 | 301 |
| 05 **004500** 001 | 113 |
| 05 **004501** 001 | 113 |
| 05 **004502** 001 | 113 |
| 05 **004503** 001 | 113 |
| 05 **004504** 001 | 113 |
| 05 **004505** 001 | 113 |
| 05 **004506** 001 | 113 |
| 05 **004507** 001 | 113 |
| 05 **004508** 001 | 113 |
| 05 **004509** 001 | 113 |
| 05 **004510** 001 | 113 |
| 05 **004511** 001 | 113 |
| 05 **004512** 001 | 113 |
| 05 **004525** 001 | 113 |
| 05 **004530** 001 | 136 |
| 05 **004531** 001 | 136 |
| 05 **004532** 001 | 136 |
| 05 **004533** 001 | 136 |
| 05 **004534** 001 | 136 |
| 05 **004535** 001 | 136 |
| 05 **004536** 001 | 136 |
| 05 **004537** 001 | 136 |
| 05 **004538** 001 | 136 |
| 05 **004539** 001 | 136 |
| 05 **004540** 001 | 136 |
| 05 **004541** 001 | 136 |
| 05 **004542** 001 | 136 |
| 05 **004543** 001 | 136 |
| 05 **004544** 001 | 136 |
| 05 **004545** 001 | 136 |
| 05 **004550** 001 | 158 |
| 05 **004551** 001 | 158 |
| 05 **004552** 001 | 158 |
| 05 **004553** 001 | 158 |
| 05 **004554** 001 | 158 |
| 05 **004555** 001 | 158 |
| 05 **004556** 001 | 158 |
| 05 **004557** 001 | 158 |
| 05 **004558** 001 | 158 |
| 05 **004559** 001 | 158 |
| 05 **004560** 001 | 158 |
| 05 **004561** 001 | 158 |
| 05 **004562** 001 | 158 |
| 05 **004563** 001 | 158 |
| 05 **004565** 001 | 159 |
| 05 **004570** 001 | 152 |
| 05 **004571** 001 | 152 |
| 05 **004572** 001 | 152 |
| 05 **004573** 001 | 152 |
| 05 **004574** 001 | 152 |
| 05 **004575** 001 | 152 |
| 05 **004576** 001 | 152 |
| 05 **004577** 001 | 152 |
| 05 **004578** 001 | 152 |
| 05 **004580** 001 | 153 |

| Code No. | Page | Code No. | Page | Code No. | Page | Code No. | Page |
|---|---|---|---|---|---|---|---|
| 05 **004590** 001 | 157 | 05 **005300** 001 | 64 | 05 **005561** 001 | 130 | 05 **006153** 001 | 61 |
| 05 **004591** 001 | 157 | 05 **005305** 001 | 64 | 05 **005562** 001 | 130 | 05 **006154** 001 | 61 |
| 05 **004592** 001 | 157 | 05 **005310** 001 | 64 | 05 **005563** 001 | 130 | 05 **006156** 001 | 61 |
| 05 **004595** 001 | 158 | 05 **005315** 001 | 64 | 05 **005564** 001 | 130 | 05 **006158** 001 | 61 |
| 05 **004780** 001 | 63 | 05 **005320** 001 | 64 | 05 **005565** 001 | 130 | 05 **006159** 001 | 61 |
| 05 **004781** 001 | 63 | 05 **005325** 001 | 64 | 05 **005566** 001 | 130 | 05 **006160** 001 | 61 |
| 05 **004782** 001 | 63 | 05 **005330** 001 | 64 | 05 **005567** 001 | 130 | 05 **006162** 001 | 61 |
| 05 **004783** 001 | 63 | 05 **005335** 001 | 64 | 05 **005568** 001 | 130 | 05 **006163** 001 | 61 |
| 05 **004784** 001 | 63 | 05 **005340** 001 | 64 | 05 **005569** 001 | 130 | 05 **006164** 001 | 61 |
| 05 **004830** 001 | 154 | 05 **005400** 001 | 112 | 05 **005570** 001 | 130 | 05 **006165** 001 | 61 |
| 05 **004831** 001 | 154 | 05 **005410** 001 | 114 | 05 **005571** 001 | 130 | 05 **006166** 001 | 61 |
| 05 **004832** 001 | 154 | 05 **005420** 001 | 112 | 05 **005572** 001 | 130 | 05 **006168** 001 | 61 |
| 05 **004833** 001 | 154 | 05 **005430** 001 | 135 | 05 **005573** 001 | 130 | 05 **006169** 001 | 63 |
| 05 **004834** 001 | 154 | 05 **005440** 001 | 137 | 05 **005574** 001 | 130 | 05 **006170** 001 | 63 |
| 05 **004835** 001 | 154 | 05 **005450** 001 | 135 | 05 **005575** 001 | 130 | 05 **006172** 001 | 63 |
| 05 **004836** 001 | 154 | 05 **005451** 001 | 132 | 05 **005576** 001 | 130 | 05 **006174** 001 | 63 |
| 05 **004837** 001 | 154 | 05 **005452** 001 | 132 | 05 **005580** 001 | 133 | 05 **006176** 001 | 63 |
| 05 **004838** 001 | 154 | 05 **005460** 001 | 161 | 05 **005581** 001 | 133 | 05 **006177** 001 | 63 |
| 05 **004839** 001 | 154 | 05 **005470** 001 | 159 | 05 **005590** 001 | 132 | 05 **006178** 001 | 63 |
| 05 **004840** 001 | 154 | 05 **005480** 001 | 156 | 05 **005591** 001 | 133 | 05 **006179** 001 | 63 |
| 05 **004841** 001 | 154 | 05 **005490** 001 | 153 | 05 **005655** 001 | 64 | 05 **006181** 001 | 63 |
| 05 **004900** 001 | 96 | 05 **005500** 001 | 130 | 05 **005900** 001 | 93 | 05 **006182** 001 | 63 |
| 05 **004901** 001 | 96 | 05 **005501** 001 | 130 | 05 **005901** 001 | 93 | 05 **006183** 001 | 63 |
| 05 **004902** 001 | 96 | 05 **005502** 001 | 130 | 05 **005902** 001 | 93 | 05 **006184** 001 | 63 |
| 05 **004903** 001 | 96 | 05 **005503** 001 | 130 | 05 **005903** 001 | 93 | 05 **006190** 001 | 62 |
| 05 **004920** 001 | 96 | 05 **005504** 001 | 130 | 05 **005904** 001 | 93 | 05 **006191** 001 | 62 |
| 05 **004921** 001 | 96 | 05 **005505** 001 | 130 | 05 **005920** 001 | 93 | 05 **006380** 001 | 62 |
| 05 **004922** 001 | 96 | 05 **005506** 001 | 130 | 05 **005921** 001 | 93 | 05 **006381** 001 | 62 |
| 05 **004923** 001 | 96 | 05 **005507** 001 | 130 | 05 **005922** 001 | 93 | 05 **006440** 001 | 60 |
| 05 **004924** 001 | 96 | 05 **005508** 001 | 130 | 05 **005923** 001 | 93 | 05 **006441** 001 | 60 |
| 05 **004925** 001 | 96 | 05 **005509** 001 | 130 | 05 **005924** 001 | 93 | 05 **006442** 001 | 60 |
| 05 **004930** 001 | 95 | 05 **005510** 001 | 130 | 05 **005925** 001 | 93 | 05 **006450** 001 | 61 |
| 05 **004940** 001 | 96 | 05 **005511** 001 | 130 | 05 **005926** 001 | 93 | 05 **006451** 001 | 61 |
| 05 **004941** 001 | 96 | 05 **005512** 001 | 130 | 05 **005930** 001 | 93 | 05 **006455** 001 | 62 |
| 05 **004942** 001 | 96 | 05 **005513** 001 | 130 | 05 **005931** 001 | 93 | 05 **006456** 001 | 62 |
| 05 **004950** 001 | 96 | 05 **005514** 001 | 130 | 05 **005932** 001 | 93 | 05 **006460** 001 | 62 |
| 05 **004951** 001 | 96 | 05 **005515** 001 | 130 | 05 **005933** 001 | 93 | 05 **006461** 001 | 62 |
| 05 **004952** 001 | 96 | 05 **005516** 001 | 130 | 05 **005934** 001 | 93 | 05 **006465** 001 | 63 |
| 05 **004953** 001 | 96 | 05 **005517** 001 | 130 | 05 **005935** 001 | 93 | 05 **006466** 001 | 63 |
| 05 **004954** 001 | 96 | 05 **005518** 001 | 130 | 05 **005936** 001 | 93 | 05 **006470** 001 | 67 |
| 05 **004955** 001 | 96 | 05 **005519** 001 | 130 | 05 **005937** 001 | 93 | 05 **006480** 001 | 66 |
| 05 **004956** 001 | 96 | 05 **005520** 001 | 130 | 05 **005938** 001 | 93 | 05 **006500** 001 | 85 |
| 05 **004957** 001 | 96 | 05 **005521** 001 | 130 | 05 **005939** 001 | 93 | 05 **006501** 001 | 85 |
| 05 **004958** 001 | 96 | 05 **005522** 001 | 130 | 05 **005940** 001 | 93 | 05 **006502** 001 | 85 |
| 05 **004959** 001 | 96 | 05 **005523** 001 | 130 | 05 **005950** 001 | 94 | 05 **006503** 001 | 85 |
| 05 **004960** 001 | 96 | 05 **005524** 001 | 130 | 05 **006100** 001 | 60 | 05 **006504** 001 | 85 |
| 05 **004961** 001 | 96 | 05 **005525** 001 | 130 | 05 **006105** 001 | 60 | 05 **006505** 001 | 85 |
| 05 **004962** 001 | 96 | 05 **005526** 001 | 130 | 05 **006110** 001 | 60 | 05 **006506** 001 | 86 |
| 05 **004963** 001 | 96 | 05 **005530** 001 | 124 | 05 **006115** 001 | 60 | 05 **006507** 001 | 86 |
| 05 **004964** 001 | 97 | 05 **005531** 001 | 125 | 05 **006116** 001 | 60 | 05 **006508** 001 | 86 |
| 05 **004965** 001 | 97 | 05 **005540** 001 | 125 | 05 **006120** 001 | 60 | 05 **006509** 001 | 86 |
| 05 **004966** 001 | 95 | 05 **005550** 001 | 130 | 05 **006121** 001 | 60 | 05 **006510** 001 | 86 |
| 05 **004970** 001 | 94 | 05 **005551** 001 | 130 | 05 **006125** 001 | 60 | 05 **006511** 001 | 86 |
| 05 **004980** 001 | 99 | 05 **005552** 001 | 130 | 05 **006126** 001 | 60 | 05 **006512** 001 | 86 |
| 05 **004981** 001 | 99 | 05 **005553** 001 | 130 | 05 **006130** 001 | 60 | 05 **006513** 001 | 86 |
| 05 **005080** 001 | 418 | 05 **005554** 001 | 130 | 05 **006135** 001 | 60 | 05 **006514** 001 | 87 |
| 05 **005081** 001 | 418 | 05 **005555** 001 | 130 | 05 **006140** 001 | 60 | 05 **006515** 001 | 87 |
| 05 **005090** 001 | 418 | 05 **005556** 001 | 130 | 05 **006145** 001 | 65 | 05 **006516** 001 | 87 |
| 05 **005091** 001 | 418 | 05 **005557** 001 | 130 | 05 **006147** 001 | 65 | 05 **006517** 001 | 87 |
| 05 **005120** 001 | 92 | 05 **005558** 001 | 130 | 05 **006148** 001 | 65 | 05 **006518** 001 | 90 |
| 05 **005121** 001 | 92 | 05 **005559** 001 | 130 | 05 **006150** 001 | 61 | 05 **006519** 001 | 90 |
| 05 **005122** 001 | 92 | 05 **005560** 001 | 130 | 05 **006152** 001 | 61 | 05 **006520** 001 | 90 |

# Code No. Index


| Code No. | Page |
|---|---|
| 05 **006521** 001 | 90 |
| 05 **006522** 001 | 90 |
| 05 **006523** 001 | 87 |
| 05 **006524** 001 | 87 |
| 05 **006525** 001 | 87 |
| 05 **006526** 001 | 87 |
| 05 **006527** 001 | 87 |
| 05 **006528** 001 | 88 |
| 05 **006529** 001 | 88 |
| 05 **006530** 001 | 88 |
| 05 **006531** 001 | 88 |
| 05 **006532** 001 | 88 |
| 05 **006533** 001 | 88 |
| 05 **006534** 001 | 88 |
| 05 **006535** 001 | 88 |
| 05 **006536** 001 | 88 |
| 05 **006537** 001 | 88 |
| 05 **006538** 001 | 88 |
| 05 **006539** 001 | 88 |
| 05 **006540** 001 | 89 |
| 05 **006541** 001 | 89 |
| 05 **006542** 001 | 89 |
| 05 **006543** 001 | 89 |
| 05 **006544** 001 | 89 |
| 05 **006545** 001 | 89 |
| 05 **006546** 001 | 89 |
| 05 **006550** 001 | 85 |
| 05 **006551** 001 | 85 |
| 05 **006552** 001 | 85 |
| 05 **006553** 001 | 85 |
| 05 **006554** 001 | 85 |
| 05 **006555** 001 | 85 |
| 05 **006556** 001 | 86 |
| 05 **006557** 001 | 86 |
| 05 **006558** 001 | 86 |
| 05 **006559** 001 | 86 |
| 05 **006560** 001 | 86 |
| 05 **006561** 001 | 90 |
| 05 **006562** 001 | 90 |
| 05 **006563** 001 | 90 |
| 05 **006564** 001 | 90 |
| 05 **006565** 001 | 90 |
| 05 **006566** 001 | 87 |
| 05 **006567** 001 | 87 |
| 05 **006568** 001 | 88 |
| 05 **006569** 001 | 88 |
| 05 **006570** 001 | 89 |
| 05 **006571** 001 | 89 |
| 05 **006572** 001 | 89 |
| 05 **006573** 001 | 89 |
| 05 **006574** 001 | 89 |
| 05 **006575** 001 | 71 |
| 05 **006576** 001 | 71 |
| 05 **006577** 001 | 71 |
| 05 **006578** 001 | 71 |
| 05 **006579** 001 | 71 |
| 05 **006580** 001 | 71 |
| 05 **006581** 001 | 71 |
| 05 **006582** 001 | 72 |
| 05 **006583** 001 | 72 |
| 05 **006584** 001 | 72 |
| 05 **006585** 001 | 72 |
| 05 **006586** 001 | 73 |
| 05 **006587** 001 | 73 |
| 05 **006588** 001 | 73 |
| 05 **006589** 001 | 73 |
| 05 **006590** 001 | 72 |
| 05 **006591** 001 | 72 |
| 05 **006592** 001 | 72 |
| 05 **006600** 001 | 82 |
| 05 **006601** 001 | 83 |
| 05 **006603** 001 | 82 |
| 05 **006604** 001 | 82 |
| 05 **006605** 001 | 76 |
| 05 **006607** 001 | 81 |
| 05 **006608** 001 | 81 |
| 05 **006609** 001 | 76 |
| 05 **006610** 001 | 80 |
| 05 **006611** 001 | 80 |
| 05 **006612** 001 | 79 |
| 05 **006613** 001 | 78 |
| 05 **006614** 001 | 79 |
| 05 **006616** 001 | 78 |
| 05 **006617** 001 | 77 |
| 05 **006618** 001 | 75 |
| 05 **006619** 001 | 75 |
| 05 **006630** 001 | 70 |
| 05 **006631** 001 | 69 |
| 05 **006632** 001 | 74 |
| 05 **006633** 001 | 68 |
| 05 **006640** 001 | 84 |
| 05 **006641** 001 | 85 |
| 05 **006642** 001 | 83 |
| 05 **007610** 001 | 12 |
| 05 **007620** 001 | 12 |
| 05 **007621** 001 | 12 |
| 05 **007635** 001 | 12 |
| 05 **007640** 001 | 12 |
| 05 **007670** 001 | 12 |
| 05 **007671** 001 | 12 |
| 05 **007672** 001 | 12 |
| 05 **007673** 001 | 12 |
| 05 **007674** 001 | 12 |
| 05 **007675** 001 | 12 |
| 05 **007676** 001 | 12 |
| 05 **007677** 001 | 12 |
| 05 **007680** 001 | 22 |
| 05 **007681** 001 | 22 |
| 05 **007900** 001 | 28 |
| 05 **007901** 001 | 28 |
| 05 **007905** 001 | 28 |
| 05 **007906** 001 | 28 |
| 05 **007907** 001 | 28 |
| 05 **007908** 001 | 28 |
| 05 **007910** 001 | 28 |
| 05 **008006** 001 | 11 |
| 05 **008007** 001 | 11 |
| 05 **008008** 001 | 11 |
| 05 **008009** 001 | 11 |
| 05 **008015** 001 | 11 |
| 05 **008027** 001 | 11 |
| 05 **008055** 001 | 11 |
| 05 **008060** 001 | 11 |
| 05 **008061** 001 | 11 |
| 05 **008100** 001 | 26 |
| 05 **008101** 001 | 18 |
| 05 **008102** 001 | 18 |
| 05 **008705** 001 | 13 |
| 05 **008706** 001 | 13 |
| 05 **008710** 001 | 13 |
| 05 **008712** 001 | 13 |
| 05 **008715** 001 | 13 |
| 05 **008720** 001 | 13 |
| 05 **008723** 001 | 13 |
| 05 **008725** 001 | 13 |
| 05 **008730** 001 | 13 |
| 05 **008735** 001 | 13 |
| 05 **008740** 001 | 13 |
| 05 **008750** 001 | 13 |
| 05 **008751** 001 | 13 |
| 05 **008752** 001 | 13 |
| 05 **008753** 001 | 13 |
| 05 **008840** 001 | 19 |
| 05 **008841** 001 | 19 |
| 05 **008842** 001 | 19 |
| 05 **008843** 001 | 19 |
| 05 **008844** 001 | 19 |
| 05 **008850** 001 | 19 |
| 05 **008851** 001 | 19 |
| 05 **008852** 001 | 19 |
| 05 **008853** 001 | 19 |
| 05 **008854** 001 | 19 |
| 05 **008855** 001 | 19 |
| 05 **008856** 001 | 19 |
| 05 **008857** 001 | 19 |
| 05 **008858** 001 | 19 |
| 05 **008859** 001 | 19 |
| 05 **008860** 001 | 19 |
| 05 **008861** 001 | 19 |
| 05 **008862** 001 | 19 |
| 05 **008863** 001 | 20 |
| 05 **008864** 001 | 20 |
| 05 **008870** 001 | 26 |
| 05 **008871** 001 | 27 |
| 05 **008872** 001 | 27 |
| 05 **008873** 001 | 262 |
| 05 **008874** 001 | 262 |
| 05 **008875** 001 | 263 |
| 05 **008876** 001 | 27 |
| 05 **008877** 001 | 263 |
| 05 **008878** 001 | 263 |
| 05 **008880** 001 | 279 |
| 05 **008881** 001 | 57 |
| 05 **008882** 001 | 57 |
| 05 **008891** 001 | 244 |
| 05 **008892** 001 | 245 |
| 05 **008893** 001 | 245 |
| 05 **009305** 001 | 14 |
| 05 **009310** 001 | 14 |
| 05 **009312** 001 | 14 |
| 05 **009313** 001 | 14 |
| 05 **009315** 001 | 14 |
| 05 **009317** 001 | 14 |
| 05 **009319** 001 | 14 |
| 05 **009320** 001 | 14 |
| 05 **009325** 001 | 14 |
| 05 **009340** 001 | 13 |
| 05 **009341** 001 | 13 |
| 05 **009342** 001 | 13 |
| 05 **009343** 001 | 13 |
| 05 **017005** 001 | 9 |
| 05 **017010** 001 | 9 |
| 05 **017015** 001 | 9 |
| 05 **017020** 001 | 9 |
| 05 **017040** 001 | 9 |
| 05 **017041** 001 | 9 |
| 05 **017050** 001 | 9 |
| 05 **017052** 001 | 9 |
| 05 **017054** 001 | 9 |
| 05 **017056** 001 | 9 |
| 05 **018100** 001 | 268 |
| 05 **018110** 001 | 267 |
| 05 **018111** 001 | 267 |
| 05 **018140** 001 | 269 |
| 05 **018141** 001 | 269 |
| 05 **018142** 001 | 269 |
| 05 **018150** 001 | 269 |
| 05 **018151** 001 | 269 |
| 05 **018152** 001 | 269 |
| 05 **018153** 001 | 269 |
| 05 **018154** 001 | 269 |
| 05 **018155** 001 | 269 |
| 05 **018156** 001 | 269 |
| 05 **018157** 001 | 269 |
| 05 **018160** 001 | 268 |
| 05 **018161** 001 | 268 |
| 05 **018162** 001 | 268 |
| 05 **018163** 001 | 268 |
| 05 **018164** 001 | 268 |
| 05 **018165** 001 | 268 |
| 05 **018166** 001 | 268 |
| 05 **018167** 001 | 268 |
| 05 **018168** 001 | 268 |
| 05 **018169** 001 | 268 |
| 05 **018170** 001 | 268 |
| 05 **018171** 001 | 269 |
| 05 **018172** 001 | 269 |
| 05 **018173** 001 | 269 |
| 05 **018260** 001 | 8 |
| 05 **018262** 001 | 8 |
| 05 **018264** 001 | 8 |
| 05 **018266** 001 | 8 |
| 05 **018268** 001 | 8 |
| 05 **018270** 001 | 8 |
| 05 **018272** 001 | 8 |
| 05 **018274** 001 | 8 |
| 05 **018282** 001 | 10 |
| 05 **018283** 001 | 10 |
| 05 **018287** 001 | 10 |
| 05 **018300** 001 | 8 |
| 05 **018301** 001 | 8 |
| 05 **018302** 001 | 8 |
| 05 **020012** 001 | 196 |
| 05 **020013** 001 | 196 |
| 05 **020014** 001 | 195 |
| 05 **020015** 001 | 195 |
| 05 **020016** 001 | 195 |
| 05 **020022** 001 | 196 |

| Code No. | Page | Code No. | Page | Code No. | Page | Code No. | Page |
|---|---|---|---|---|---|---|---|
| 05 **020064** 001 | 197 | 05 **020212** 001 | 199 | 05 **021070** 001 | 225 | 05 **022120** 001 | 225 |
| 05 **020065** 001 | 197 | 05 **020213** 001 | 199 | 05 **021075** 001 | 225 | 05 **022121** 001 | 225 |
| 05 **020066** 001 | 197 | 05 **020214** 001 | 199 | 05 **021080** 001 | 225 | 05 **022122** 001 | 225 |
| 05 **020067** 001 | 197 | 05 **020215** 001 | 199 | 05 **021085** 001 | 225 | 05 **022123** 001 | 225 |
| 05 **020068** 001 | 197 | 05 **020216** 001 | 199 | 05 **021090** 001 | 225 | 05 **022124** 001 | 225 |
| 05 **020069** 001 | 197 | 05 **020217** 001 | 199 | 05 **021095** 001 | 225 | 05 **022125** 001 | 225 |
| 05 **020070** 001 | 197 | 05 **020218** 001 | 199 | 05 **021406** 001 | 217 | 05 **022130** 001 | 216 |
| 05 **020071** 001 | 197 | 05 **020219** 001 | 199 | 05 **021600** 001 | 225 | 05 **022171** 001 | 220 |
| 05 **020072** 001 | 197 | 05 **020220** 001 | 199 | 05 **021605** 001 | 225 | 05 **022181** 001 | 218 |
| 05 **020073** 001 | 197 | 05 **020221** 001 | 200 | 05 **021610** 001 | 225 | 05 **022200** 001 | 222 |
| 05 **020074** 001 | 197 | 05 **020228** 001 | 203 | 05 **021615** 001 | 225 | 05 **022201** 001 | 222 |
| 05 **020075** 001 | 197 | 05 **020229** 001 | 204 | 05 **021620** 001 | 225 | 05 **022202** 001 | 222 |
| 05 **020076** 001 | 197 | 05 **020230** 001 | 201 | 05 **021625** 001 | 225 | 05 **022203** 001 | 222 |
| 05 **020077** 001 | 197 | 05 **020231** 001 | 201 | 05 **021630** 001 | 225 | 05 **022204** 001 | 222 |
| 05 **020078** 001 | 197 | 05 **020232** 001 | 200 | 05 **021632** 001 | 225 | 05 **022205** 001 | 222 |
| 05 **020079** 001 | 197 | 05 **020233** 001 | 204 | 05 **021635** 001 | 225 | 05 **022210** 001 | 213 |
| 05 **020080** 001 | 197 | 05 **020234** 001 | 204 | 05 **021640** 001 | 225 | 05 **022534** 001 | 216 |
| 05 **020081** 001 | 197 | 05 **020235** 001 | 204 | 05 **021645** 001 | 225 | 05 **022600** 001 | 223 |
| 05 **020082** 001 | 197 | 05 **020240** 001 | 203 | 05 **021721** 001 | 219 | 05 **022602** 001 | 223 |
| 05 **020090** 001 | 198 | 05 **020241** 001 | 201 | 05 **021728** 001 | 219 | 05 **022604** 001 | 223 |
| 05 **020091** 001 | 198 | 05 **020259** 001 | 199 | 05 **021737** 001 | 217 | 05 **022606** 001 | 223 |
| 05 **020092** 001 | 198 | 05 **020260** 001 | 199 | 05 **021909** 001 | 216 | 05 **022608** 001 | 223 |
| 05 **020093** 001 | 198 | 05 **020261** 001 | 199 | 05 **021909** 001 | 304 | 05 **022610** 001 | 223 |
| 05 **020099** 001 | 205 | 05 **020262** 001 | 199 | 05 **022040** 001 | 224 | 05 **022612** 001 | 223 |
| 05 **020100** 001 | 205 | 05 **020263** 001 | 199 | 05 **022041** 001 | 224 | 05 **022614** 001 | 223 |
| 05 **020101** 001 | 206 | 05 **020264** 001 | 199 | 05 **022042** 001 | 224 | 05 **022616** 001 | 223 |
| 05 **020102** 001 | 206 | 05 **020302** 001 | 201 | 05 **022043** 001 | 224 | 05 **022630** 001 | 223 |
| 05 **020103** 001 | 205 | 05 **020310** 001 | 207 | 05 **022044** 001 | 224 | 05 **022631** 001 | 223 |
| 05 **020104** 001 | 206 | 05 **020311** 001 | 207 | 05 **022045** 001 | 224 | 05 **022632** 001 | 223 |
| 05 **020110** 001 | 206 | 05 **020312** 001 | 207 | 05 **022046** 001 | 224 | 05 **022633** 001 | 223 |
| 05 **020129** 001 | 60 | 05 **020313** 001 | 207 | 05 **022047** 001 | 224 | 05 **022634** 001 | 223 |
| 05 **020131** 001 | 61 | 05 **020314** 001 | 207 | 05 **022048** 001 | 224 | 05 **022635** 001 | 223 |
| 05 **020132** 001 | 63 | 05 **020330** 001 | 208 | 05 **022050** 001 | 224 | 05 **022636** 001 | 223 |
| 05 **020133** 001 | 61 | 05 **020331** 001 | 208 | 05 **022052** 001 | 224 | 05 **022637** 001 | 223 |
| 05 **020134** 001 | 63 | 05 **020340** 001 | 207 | 05 **022054** 001 | 224 | 05 **022638** 001 | 223 |
| 05 **020150** 001 | 98 | 05 **020350** 001 | 209 | 05 **022056** 001 | 224 | 05 **022639** 001 | 215 |
| 05 **020151** 001 | 99 | 05 **020351** 001 | 209 | 05 **022058** 001 | 224 | 05 **022640** 001 | 215 |
| 05 **020152** 001 | 99 | 05 **020352** 001 | 209 | 05 **022060** 001 | 224 | 05 **022641** 001 | 215 |
| 05 **020153** 001 | 99 | 05 **020353** 001 | 209 | 05 **022062** 001 | 224 | 05 **022651** 001 | 223 |
| 05 **020170** 001 | 98 | 05 **020354** 001 | 209 | 05 **022063** 001 | 224 | 05 **022652** 001 | 223 |
| 05 **020171** 001 | 444 | 05 **020380** 001 | 209 | 05 **022064** 001 | 224 | 05 **022653** 001 | 223 |
| 05 **020172** 001 | 443 | 05 **020500** 001 | 199 | 05 **022066** 001 | 224 | 05 **022654** 001 | 223 |
| 05 **020173** 001 | 443 | 05 **020501** 001 | 199 | 05 **022067** 001 | 224 | 05 **022655** 001 | 223 |
| 05 **020174** 001 | 442 | 05 **020502** 001 | 199 | 05 **022068** 001 | 224 | 05 **022656** 001 | 223 |
| 05 **020175** 001 | 441 | 05 **020503** 001 | 199 | 05 **022070** 001 | 224 | 05 **022657** 001 | 223 |
| 05 **020176** 001 | 441 | 05 **020504** 001 | 199 | 05 **022071** 001 | 224 | 05 **022658** 001 | 223 |
| 05 **020177** 001 | 442 | 05 **020505** 001 | 199 | 05 **022072** 001 | 224 | 05 **022659** 001 | 223 |
| 05 **020190** 001 | 199 | 05 **020506** 001 | 199 | 05 **022073** 001 | 224 | 05 **022660** 001 | 221 |
| 05 **020198** 001 | 199 | 05 **020507** 001 | 199 | 05 **022074** 001 | 224 | 05 **022661** 001 | 221 |
| 05 **020199** 001 | 199 | 05 **021005** 001 | 225 | 05 **022076** 001 | 224 | 05 **022662** 001 | 221 |
| 05 **020200** 001 | 199 | 05 **021010** 001 | 225 | 05 **022078** 001 | 224 | 05 **022663** 001 | 221 |
| 05 **020201** 001 | 199 | 05 **021015** 001 | 225 | 05 **022079** 001 | 224 | 05 **022664** 001 | 221 |
| 05 **020202** 001 | 199 | 05 **021020** 001 | 225 | 05 **022080** 001 | 224 | 05 **022665** 001 | 221 |
| 05 **020203** 001 | 199 | 05 **021025** 001 | 225 | 05 **022081** 001 | 224 | 05 **022666** 001 | 221 |
| 05 **020204** 001 | 199 | 05 **021030** 001 | 225 | 05 **022082** 001 | 224 | 05 **022667** 001 | 221 |
| 05 **020205** 001 | 199 | 05 **021035** 001 | 225 | 05 **022086** 001 | 217 | 05 **022668** 001 | 221 |
| 05 **020206** 001 | 199 | 05 **021040** 001 | 225 | 05 **022087** 001 | 216 | 05 **022669** 001 | 212 |
| 05 **020207** 001 | 199 | 05 **021045** 001 | 225 | 05 **022089** 001 | 213 | 05 **022670** 001 | 223 |
| 05 **020208** 001 | 199 | 05 **021050** 001 | 225 | 05 **022095** 001 | 224 | 05 **022671** 001 | 223 |
| 05 **020209** 001 | 199 | 05 **021055** 001 | 225 | 05 **022096** 001 | 224 | 05 **022672** 001 | 223 |
| 05 **020210** 001 | 199 | 05 **021060** 001 | 225 | 05 **022101** 001 | 218 | 05 **022673** 001 | 223 |
| 05 **020211** 001 | 199 | 05 **021065** 001 | 225 | 05 **022102** 001 | 218 | 05 **022674** 001 | 223 |

# Code No. Index


| Code No. | Page |
|---|---|
| 05 **022675** 001 | 223 |
| 05 **022676** 001 | 223 |
| 05 **022677** 001 | 223 |
| 05 **022678** 001 | 223 |
| 05 **022680** 001 | 229 |
| 05 **022681** 001 | 229 |
| 05 **022682** 001 | 229 |
| 05 **022683** 001 | 229 |
| 05 **022684** 001 | 229 |
| 05 **022685** 001 | 229 |
| 05 **022686** 001 | 229 |
| 05 **022687** 001 | 229 |
| 05 **022688** 001 | 229 |
| 05 **022689** 001 | 227 |
| 05 **022693** 001 | 221 |
| 05 **022694** 001 | 221 |
| 05 **022695** 001 | 221 |
| 05 **022696** 001 | 221 |
| 05 **022697** 001 | 221 |
| 05 **022698** 001 | 221 |
| 05 **022699** 001 | 212 |
| 05 **022700** 001 | 222 |
| 05 **022701** 001 | 222 |
| 05 **022702** 001 | 222 |
| 05 **022703** 001 | 222 |
| 05 **022704** 001 | 222 |
| 05 **022705** 001 | 222 |
| 05 **022706** 001 | 222 |
| 05 **022708** 001 | 222 |
| 05 **022709** 001 | 222 |
| 05 **022710** 001 | 222 |
| 05 **022711** 001 | 222 |
| 05 **022712** 001 | 222 |
| 05 **022713** 001 | 222 |
| 05 **022714** 001 | 222 |
| 05 **022715** 001 | 222 |
| 05 **022716** 001 | 222 |
| 05 **022717** 001 | 222 |
| 05 **022718** 001 | 222 |
| 05 **022720** 001 | 212 |
| 05 **022721** 001 | 213 |
| 05 **022728** 001 | 59 |
| 05 **022729** 001 | 58 |
| 05 **022730** 001 | 58 |
| 05 **022731** 001 | 58 |
| 05 **022732** 001 | 58 |
| 05 **022733** 001 | 58 |
| 05 **022734** 001 | 58 |
| 05 **022740** 001 | 58 |
| 05 **022741** 001 | 58 |
| 05 **022745** 001 | 59 |
| 05 **022760** 001 | 59 |
| 05 **022761** 001 | 59 |
| 05 **022762** 001 | 59 |
| 05 **022763** 001 | 59 |
| 05 **022764** 001 | 59 |
| 05 **022765** 001 | 59 |
| 05 **022766** 001 | 59 |
| 05 **022767** 001 | 59 |
| 05 **022795** 001 | 15 |
| 05 **022800** 001 | 15 |
| 05 **022805** 001 | 15 |
| 05 **022810** 001 | 15 |
| 05 **022815** 001 | 15 |
| 05 **022820** 001 | 15 |
| 05 **022825** 001 | 15 |
| 05 **022830** 001 | 15 |
| 05 **022835** 001 | 15 |
| 05 **022850** 001 | 222 |
| 05 **022851** 001 | 222 |
| 05 **022852** 001 | 222 |
| 05 **022853** 001 | 222 |
| 05 **022854** 001 | 222 |
| 05 **022855** 001 | 222 |
| 05 **022856** 001 | 222 |
| 05 **022857** 001 | 222 |
| 05 **022858** 001 | 222 |
| 05 **022860** 001 | 215 |
| 05 **022905** 001 | 15 |
| 05 **022910** 001 | 15 |
| 05 **022920** 001 | 15 |
| 05 **023105** 001 | 14 |
| 05 **023107** 001 | 14 |
| 05 **023110** 001 | 14 |
| 05 **023115** 001 | 14 |
| 05 **023120** 001 | 14 |
| 05 **023125** 001 | 14 |
| 05 **023130** 001 | 14 |
| 05 **023330** 001 | 41 |
| 05 **023332** 001 | 41 |
| 05 **023334** 001 | 42 |
| 05 **023338** 001 | 42 |
| 05 **023339** 001 | 42 |
| 05 **023340** 001 | 42 |
| 05 **023342** 001 | 42 |
| 05 **023343** 001 | 42 |
| 05 **023344** 001 | 42 |
| 05 **023346** 001 | 42 |
| 05 **023347** 001 | 42 |
| 05 **023348** 001 | 42 |
| 05 **023350** 001 | 42 |
| 05 **023351** 001 | 42 |
| 05 **023352** 001 | 42 |
| 05 **023353** 001 | 42 |
| 05 **023354** 001 | 42 |
| 05 **023355** 001 | 42 |
| 05 **023356** 001 | 42 |
| 05 **023357** 001 | 42 |
| 05 **023358** 001 | 42 |
| 05 **023359** 001 | 42 |
| 05 **023360** 001 | 42 |
| 05 **023361** 001 | 42 |
| 05 **023362** 001 | 42 |
| 05 **023363** 001 | 42 |
| 05 **023364** 001 | 42 |
| 05 **023365** 001 | 42 |
| 05 **023366** 001 | 42 |
| 05 **023367** 001 | 42 |
| 05 **023368** 001 | 42 |
| 05 **023369** 001 | 42 |
| 05 **023370** 001 | 42 |
| 05 **023371** 001 | 42 |
| 05 **023372** 001 | 42 |
| 05 **023373** 001 | 42 |
| 05 **023374** 001 | 42 |
| 05 **023375** 001 | 42 |
| 05 **023376** 001 | 42 |
| 05 **023377** 001 | 42 |
| 05 **023378** 001 | 42 |
| 05 **023379** 001 | 42 |
| 05 **023380** 001 | 42 |
| 05 **023381** 001 | 43 |
| 05 **023382** 001 | 43 |
| 05 **023383** 001 | 43 |
| 05 **023384** 001 | 43 |
| 05 **023385** 001 | 43 |
| 05 **023386** 001 | 43 |
| 05 **023387** 001 | 43 |
| 05 **023389** 001 | 43 |
| 05 **023391** 001 | 43 |
| 05 **023393** 001 | 43 |
| 05 **023400** 001 | 265 |
| 05 **023404** 001 | 43 |
| 05 **023450** 001 | 45 |
| 05 **023451** 001 | 46 |
| 05 **023452** 001 | 47 |
| 05 **023453** 001 | 45 |
| 05 **023454** 001 | 46 |
| 05 **023456** 001 | 47 |
| 05 **023460** 001 | 44 |
| 05 **023461** 001 | 44 |
| 05 **023470** 001 | 239 |
| 05 **023471** 001 | 238 |
| 05 **024001** 001 | 231 |
| 05 **024002** 001 | 231 |
| 05 **024003** 001 | 231 |
| 05 **024004** 001 | 231 |
| 05 **024005** 001 | 231 |
| 05 **024008** 001 | 231 |
| 05 **024010** 001 | 231 |
| 05 **024012** 001 | 231 |
| 05 **024013** 001 | 231 |
| 05 **024015** 001 | 231 |
| 05 **024020** 001 | 231 |
| 05 **024100** 001 | 231 |
| 05 **024105** 001 | 231 |
| 05 **024160** 001 | 231 |
| 05 **024161** 001 | 231 |
| 05 **024162** 001 | 231 |
| 05 **024163** 001 | 231 |
| 05 **024164** 001 | 231 |
| 05 **024165** 001 | 231 |
| 05 **024166** 001 | 231 |
| 05 **024167** 001 | 231 |
| 05 **024168** 001 | 231 |
| 05 **024170** 001 | 229 |
| 05 **024171** 001 | 229 |
| 05 **024172** 001 | 229 |
| 05 **024173** 001 | 229 |
| 05 **024174** 001 | 229 |
| 05 **024175** 001 | 229 |
| 05 **024176** 001 | 229 |
| 05 **024177** 001 | 229 |
| 05 **024178** 001 | 229 |
| 05 **024179** 001 | 227 |
| 05 **024199** 001 | 231 |
| 05 **024200** 001 | 231 |
| 05 **024202** 001 | 231 |
| 05 **024204** 001 | 231 |
| 05 **024206** 001 | 231 |
| 05 **024208** 001 | 231 |
| 05 **024210** 001 | 231 |
| 05 **024242** 001 | 228 |
| 05 **024244** 001 | 227 |
| 05 **024335** 001 | 228 |
| 05 **024350** 001 | 230 |
| 05 **024351** 001 | 230 |
| 05 **024352** 001 | 230 |
| 05 **024353** 001 | 230 |
| 05 **024354** 001 | 230 |
| 05 **024355** 001 | 230 |
| 05 **024356** 001 | 230 |
| 05 **024357** 001 | 230 |
| 05 **024358** 001 | 230 |
| 05 **024400** 001 | 9 |
| 05 **024401** 001 | 9 |
| 05 **024402** 001 | 9 |
| 05 **024403** 001 | 9 |
| 05 **024404** 001 | 9 |
| 05 **024405** 001 | 9 |
| 05 **024410** 001 | 11 |
| 05 **024450** 001 | 227 |
| 05 **024451** 001 | 230 |
| 05 **024452** 001 | 230 |
| 05 **024453** 001 | 230 |
| 05 **024454** 001 | 230 |
| 05 **024455** 001 | 230 |
| 05 **024456** 001 | 230 |
| 05 **024457** 001 | 230 |
| 05 **024458** 001 | 230 |
| 05 **024459** 001 | 230 |
| 05 **024460** 001 | 228 |
| 05 **024461** 001 | 231 |
| 05 **024462** 001 | 231 |
| 05 **024463** 001 | 231 |
| 05 **024464** 001 | 230 |
| 05 **024465** 001 | 230 |
| 05 **024466** 001 | 230 |
| 05 **024467** 001 | 230 |
| 05 **024468** 001 | 230 |
| 05 **024469** 001 | 230 |
| 05 **024470** 001 | 227 |
| 05 **024471** 001 | 229 |
| 05 **024472** 001 | 229 |
| 05 **024473** 001 | 229 |
| 05 **024474** 001 | 229 |
| 05 **024475** 001 | 229 |
| 05 **024476** 001 | 229 |
| 05 **024477** 001 | 229 |
| 05 **024478** 001 | 229 |
| 05 **024479** 001 | 229 |
| 05 **024480** 001 | 227 |
| 05 **024481** 001 | 230 |
| 05 **024482** 001 | 230 |
| 05 **024483** 001 | 230 |
| 05 **024484** 001 | 229 |
| 05 **024485** 001 | 229 |
| 05 **024486** 001 | 229 |

| Code No. | Page |
|---|---|
| 05 **024487** 001 | 229 |
| 05 **024488** 001 | 229 |
| 05 **024489** 001 | 229 |
| 05 **026350** 001 | 30 |
| 05 **026351** 001 | 30 |
| 05 **026352** 001 | 30 |
| 05 **026353** 001 | 30 |
| 05 **026354** 001 | 30 |
| 05 **026360** 001 | 30 |
| 05 **026361** 001 | 30 |
| 05 **026363** 001 | 30 |
| 05 **026372** 001 | 30 |
| 05 **026373** 001 | 30 |
| 05 **026374** 001 | 30 |
| 05 **026382** 001 | 30 |
| 05 **027101** 001 | 224 |
| 05 **027102** 001 | 224 |
| 05 **027103** 001 | 224 |
| 05 **027104** 001 | 224 |
| 05 **027105** 001 | 224 |
| 05 **027106** 001 | 224 |
| 05 **027107** 001 | 224 |
| 05 **027108** 001 | 224 |
| 05 **027109** 001 | 224 |
| 05 **027110** 001 | 224 |
| 05 **027111** 001 | 224 |
| 05 **027201** 001 | 226 |
| 05 **027202** 001 | 226 |
| 05 **027203** 001 | 226 |
| 05 **027204** 001 | 226 |
| 05 **027205** 001 | 226 |
| 05 **027206** 001 | 226 |
| 05 **027207** 001 | 226 |
| 05 **027208** 001 | 226 |
| 05 **027209** 001 | 226 |
| 05 **027210** 001 | 226 |
| 05 **027211** 001 | 226 |
| 05 **027212** 001 | 226 |
| 05 **027213** 001 | 226 |
| 05 **027214** 001 | 226 |
| 05 **027215** 001 | 226 |
| 05 **027405** 001 | 31 |
| 05 **027450** 001 | 51 |
| 05 **027455** 001 | 31 |
| 05 **027456** 001 | 37 |
| 05 **027910** 001 | 417 |
| 05 **027911** 001 | 417 |
| 05 **027912** 001 | 417 |
| 05 **027913** 001 | 417 |
| 05 **027930** 001 | 417 |
| 05 **027931** 001 | 417 |
| 05 **027932** 001 | 417 |
| 05 **027933** 001 | 417 |
| 05 **027934** 001 | 417 |
| 05 **027935** 001 | 417 |
| 05 **027936** 001 | 418 |
| 05 **028000** 001 | 16 |
| 05 **028001** 001 | 16 |
| 05 **028002** 001 | 16 |
| 05 **028003** 001 | 16 |
| 05 **028004** 001 | 16 |
| 05 **028005** 001 | 16 |
| 05 **028008** 001 | 16 |
| 05 **028010** 001 | 16 |
| 05 **028012** 001 | 16 |
| 05 **028013** 001 | 16 |
| 05 **028015** 001 | 16 |
| 05 **028020** 001 | 16 |
| 05 **028029** 001 | 17 |
| 05 **028030** 001 | 17 |
| 05 **028031** 001 | 17 |
| 05 **028032** 001 | 17 |
| 05 **028033** 001 | 17 |
| 05 **028034** 001 | 17 |
| 05 **028035** 001 | 17 |
| 05 **028036** 001 | 17 |
| 05 **028037** 001 | 17 |
| 05 **028038** 001 | 17 |
| 05 **028040** 001 | 418 |
| 05 **028041** 001 | 418 |
| 05 **028042** 001 | 418 |
| 05 **028043** 001 | 418 |
| 05 **028044** 001 | 418 |
| 05 **028045** 001 | 418 |
| 05 **028046** 001 | 418 |
| 05 **028048** 001 | 15 |
| 05 **028049** 001 | 15 |
| 05 **028050** 001 | 15 |
| 05 **028051** 001 | 15 |
| 05 **028052** 001 | 15 |
| 05 **028053** 001 | 15 |
| 05 **028054** 001 | 15 |
| 05 **028055** 001 | 15 |
| 05 **028056** 001 | 15 |
| 05 **028059** 001 | 24 |
| 05 **028062** 001 | 25 |
| 05 **028070** 001 | 15 |
| 05 **028071** 001 | 15 |
| 05 **028072** 001 | 15 |
| 05 **028073** 001 | 15 |
| 05 **028074** 001 | 24 |
| 05 **028148** 001 | 18 |
| 05 **028150** 001 | 18 |
| 05 **028152** 001 | 18 |
| 05 **028160** 001 | 278 |
| 05 **028161** 001 | 278 |
| 05 **028205** 001 | 18 |
| 05 **028210** 001 | 18 |
| 05 **028215** 001 | 18 |
| 05 **028220** 001 | 18 |
| 05 **028225** 001 | 18 |
| 05 **028230** 001 | 18 |
| 05 **029405** 001 | 18 |
| 05 **029410** 001 | 18 |
| 05 **029415** 001 | 18 |
| 05 **029420** 001 | 18 |
| 05 **029425** 001 | 18 |
| 05 **029430** 001 | 18 |
| 05 **029435** 001 | 18 |
| 05 **029440** 001 | 18 |
| 05 **029445** 001 | 18 |
| 05 **029450** 001 | 18 |
| 05 **029460** 001 | 19 |
| 05 **029461** 001 | 19 |
| 05 **029462** 001 | 19 |
| 05 **029463** 001 | 19 |
| 05 **029464** 001 | 19 |
| 05 **029465** 001 | 19 |
| 05 **029466** 001 | 19 |
| 05 **029501** 001 | 19 |
| 05 **029502** 001 | 19 |
| 05 **029503** 001 | 19 |
| 05 **029504** 001 | 19 |
| 05 **029505** 001 | 19 |
| 05 **029506** 001 | 19 |
| 05 **029507** 001 | 19 |
| 05 **029510** 001 | 25 |
| 05 **030080** 001 | 51 |
| 05 **030081** 001 | 51 |
| 05 **030082** 001 | 51 |
| 05 **030083** 001 | 51 |
| 05 **030084** 001 | 51 |
| 05 **030099** 001 | 49 |
| 05 **030100** 001 | 49 |
| 05 **030101** 001 | 49 |
| 05 **030102** 001 | 49 |
| 05 **030103** 001 | 49 |
| 05 **030104** 001 | 49 |
| 05 **030105** 001 | 49 |
| 05 **030106** 001 | 49 |
| 05 **030107** 001 | 49 |
| 05 **030108** 001 | 49 |
| 05 **030109** 001 | 50 |
| 05 **030110** 001 | 49 |
| 05 **030111** 001 | 49 |
| 05 **030112** 001 | 49 |
| 05 **030113** 001 | 50 |
| 05 **030114** 001 | 50 |
| 05 **030115** 001 | 50 |
| 05 **030116** 001 | 50 |
| 05 **030117** 001 | 49 |
| 05 **030118** 001 | 49 |
| 05 **030119** 001 | 49 |
| 05 **030120** 001 | 50 |
| 05 **030121** 001 | 50 |
| 05 **030122** 001 | 50 |
| 05 **030135** 001 | 50 |
| 05 **030150** 001 | 51 |
| 05 **030151** 001 | 51 |
| 05 **030158** 001 | 50 |
| 05 **030159** 001 | 50 |
| 05 **030160** 001 | 35 |
| 05 **030170** 001 | 53 |
| 05 **030180** 001 | 53 |
| 05 **030181** 001 | 40 |
| 05 **030330** 001 | 51 |
| 05 **030331** 001 | 51 |
| 05 **030400** 001 | 50 |
| 05 **030401** 001 | 50 |
| 05 **030402** 001 | 50 |
| 05 **030403** 001 | 50 |
| 05 **030404** 001 | 50 |
| 05 **030405** 001 | 50 |
| 05 **030406** 001 | 50 |
| 05 **030410** 001 | 51 |
| 05 **030411** 001 | 51 |
| 05 **030412** 001 | 51 |
| 05 **030413** 001 | 51 |
| 05 **030414** 001 | 51 |
| 05 **030415** 001 | 51 |
| 05 **030416** 001 | 51 |
| 05 **030417** 001 | 51 |
| 05 **030418** 001 | 51 |
| 05 **032001** 001 | 6 |
| 05 **032002** 001 | 6 |
| 05 **032003** 001 | 6 |
| 05 **032004** 001 | 6 |
| 05 **032005** 001 | 6 |
| 05 **032006** 001 | 6 |
| 05 **032007** 001 | 6 |
| 05 **032020** 001 | 6 |
| 05 **032021** 001 | 6 |
| 05 **032022** 001 | 6 |
| 05 **032023** 001 | 6 |
| 05 **032030** 001 | 7 |
| 05 **032031** 001 | 7 |
| 05 **032032** 001 | 7 |
| 05 **032033** 001 | 7 |
| 05 **032050** 001 | 7 |
| 05 **032051** 001 | 7 |
| 05 **032052** 001 | 7 |
| 05 **032053** 001 | 7 |
| 05 **032054** 001 | 7 |
| 05 **032055** 001 | 7 |
| 05 **032056** 001 | 7 |
| 05 **032057** 001 | 7 |
| 05 **032058** 001 | 7 |
| 05 **032060** 001 | 7 |
| 05 **032061** 001 | 7 |
| 05 **032063** 001 | 8 |
| 05 **032070** 002 | 7 |
| 05 **032071** 002 | 7 |
| 05 **033404** 001 | 31 |
| 05 **040001** 001 | 265 |
| 05 **042605** 001 | 367 |
| 05 **042655** 001 | 367 |
| 05 **042665** 001 | 367 |
| 05 **042670** 001 | 366 |
| 05 **042671** 001 | 366 |
| 05 **042672** 001 | 366 |
| 05 **042673** 001 | 366 |
| 05 **042674** 001 | 366 |
| 05 **042680** 001 | 366 |
| 05 **042705** 001 | 367 |
| 05 **042715** 001 | 367 |
| 05 **042750** 001 | 367 |
| 05 **042755** 001 | 367 |
| 05 **042760** 001 | 367 |
| 05 **042765** 001 | 367 |
| 05 **042768** 001 | 367 |
| 05 **049000** 001 | 180 |
| 05 **049001** 001 | 181 |
| 05 **049002** 001 | 182 |
| 05 **049003** 001 | 181 |
| 05 **049004** 001 | 184 |
| 05 **049005** 001 | 184 |
| 05 **049020** 001 | 183 |
| 05 **049025** 001 | 184 |

# Code No. Index


| Code No. | Page |
|---|---|
| 05 **049050** 001 | 189 |
| 05 **049055** 001 | 185 |
| 05 **049056** 001 | 186 |
| 05 **049060** 001 | 186 |
| 05 **049065** 001 | 190 |
| 05 **049070** 001 | 191 |
| 05 **050005** 001 | 111 |
| 05 **050205** 001 | 365 |
| 05 **050210** 001 | 365 |
| 05 **050215** 001 | 365 |
| 05 **050220** 001 | 365 |
| 05 **050510** 001 | 365 |
| 05 **050650** 001 | 365 |
| 05 **051005** 001 | 279 |
| 05 **051010** 001 | 21 |
| 05 **051011** 001 | 21 |
| 05 **051012** 001 | 20 |
| 05 **051016** 001 | 250 |
| 05 **051017** 001 | 251 |
| 05 **051021** 001 | 251 |
| 05 **051024** 001 | 252 |
| 05 **051025** 001 | 252 |
| 05 **051028** 001 | 252 |
| 05 **051032** 001 | 253 |
| 05 **051042** 001 | 258 |
| 05 **051043** 001 | 54 |
| 05 **051045** 001 | 106 |
| 05 **051060** 001 | 241 |
| 05 **051061** 001 | 242 |
| 05 **051065** 001 | 241 |
| 05 **051066** 001 | 242 |
| 05 **051205** 001 | 279 |
| 05 **051272** 001 | 278 |
| 05 **051273** 001 | 54 |
| 05 **051274** 001 | 279 |
| 05 **051276** 001 | 37 |
| 05 **051278** 001 | 37 |
| 05 **051462** 001 | 278 |
| 05 **051464** 001 | 54 |
| 05 **051465** 001 | 277 |
| 05 **051482** 001 | 277 |
| 05 **051492** 001 | 247 |
| 05 **051493** 001 | 247 |
| 05 **051494** 001 | 246 |
| 05 **051495** 001 | 247 |
| 05 **051500** 001 | 362 |
| 05 **051501** 001 | 362 |
| 05 **051502** 001 | 362 |
| 05 **051510** 001 | 253 |
| 05 **051511** 001 | 254 |
| 05 **051512** 001 | 254 |
| 05 **051513** 001 | 234 |
| 05 **051514** 001 | 234 |
| 05 **051515** 001 | 235 |
| 05 **051516** 001 | 235 |
| 05 **051517** 001 | 235 |
| 05 **051518** 001 | 236 |
| 05 **051519** 001 | 236 |
| 05 **051520** 001 | 236 |
| 05 **051530** 001 | 237 |
| 05 **051531** 001 | 238 |
| 05 **051535** 001 | 243 |
| 05 **051536** 001 | 244 |
| 05 **051540** 001 | 246 |
| 05 **051575** 001 | 91 |
| 05 **051576** 001 | 92 |
| 05 **051580** 001 | 91 |
| 05 **051582** 001 | 91 |
| 05 **051583** 001 | 91 |
| 05 **051587** 001 | 91 |
| 05 **051601** 001 | 91 |
| 05 **051603** 001 | 91 |
| 05 **051611** 001 | 91 |
| 05 **051613** 001 | 91 |
| 05 **051835** 001 | 265 |
| 05 **052490** 001 | 360 |
| 05 **052500** 001 | 360 |
| 05 **052501** 001 | 361 |
| 05 **052502** 001 | 360 |
| 05 **052503** 001 | 360 |
| 05 **052504** 001 | 360 |
| 05 **052575** 001 | 362 |
| 05 **053425** 001 | 363 |
| 05 **053455** 001 | 363 |
| 05 **053457** 001 | 363 |
| 05 **053458** 001 | 363 |
| 05 **053459** 001 | 363 |
| 05 **053520** 001 | 361 |
| 05 **053522** 001 | 361 |
| 05 **053870** 001 | 361 |
| 05 **053872** 001 | 361 |
| 05 **053923** 001 | 359 |
| 05 **056064** 001 | 339 |
| 05 **056066** 001 | 339 |
| 05 **056068** 001 | 339 |
| 05 **056158** 001 | 384 |
| 05 **056159** 001 | 382 |
| 05 **056161** 001 | 381 |
| 05 **056164** 001 | 382 |
| 05 **056168** 001 | 384 |
| 05 **056172** 001 | 338 |
| 05 **056174** 001 | 338 |
| 05 **056176** 001 | 338 |
| 05 **056200** 001 | 339 |
| 05 **056203** 001 | 339 |
| 05 **056210** 001 | 339 |
| 05 **056220** 001 | 339 |
| 05 **056225** 001 | 339 |
| 05 **056233** 001 | 339 |
| 05 **056240** 001 | 339 |
| 05 **056294** 001 | 384 |
| 05 **056295** 001 | 383 |
| 05 **056296** 001 | 383 |
| 05 **056303** 001 | 342 |
| 05 **056305** 001 | 342 |
| 05 **056310** 001 | 342 |
| 05 **056315** 001 | 342 |
| 05 **056320** 001 | 342 |
| 05 **056325** 001 | 342 |
| 05 **056330** 001 | 342 |
| 05 **056332** 001 | 342 |
| 05 **056335** 001 | 342 |
| 05 **056340** 001 | 342 |
| 05 **056341** 001 | 347 |
| 05 **056342** 001 | 347 |
| 05 **056343** 001 | 347 |
| 05 **056344** 001 | 347 |
| 05 **056345** 001 | 347 |
| 05 **056346** 001 | 347 |
| 05 **056350** 001 | 343 |
| 05 **056352** 001 | 343 |
| 05 **056354** 001 | 343 |
| 05 **056356** 001 | 343 |
| 05 **056358** 001 | 343 |
| 05 **056374** 001 | 376 |
| 05 **056375** 001 | 381 |
| 05 **056400** 001 | 309 |
| 05 **056402** 001 | 309 |
| 05 **056404** 001 | 309 |
| 05 **056410** 001 | 309 |
| 05 **056412** 001 | 309 |
| 05 **056414** 001 | 309 |
| 05 **056420** 001 | 310 |
| 05 **056422** 001 | 310 |
| 05 **056424** 001 | 310 |
| 05 **056440** 001 | 380 |
| 05 **056470** 001 | 390 |
| 05 **056471** 001 | 386 |
| 05 **056472** 001 | 386 |
| 05 **056473** 001 | 385 |
| 05 **056474** 001 | 385 |
| 05 **056478** 001 | 386 |
| 05 **056500** 001 | 312 |
| 05 **056505** 001 | 312 |
| 05 **056507** 001 | 312 |
| 05 **056510** 001 | 312 |
| 05 **056515** 001 | 312 |
| 05 **056520** 001 | 312 |
| 05 **056525** 001 | 312 |
| 05 **056535** 001 | 312 |
| 05 **056605** 001 | 311 |
| 05 **056610** 001 | 311 |
| 05 **056625** 001 | 311 |
| 05 **056653** 001 | 249 |
| 05 **056662** 001 | 312 |
| 05 **056680** 001 | 342 |
| 05 **056681** 001 | 342 |
| 05 **056682** 001 | 342 |
| 05 **056683** 001 | 342 |
| 05 **056684** 001 | 342 |
| 05 **056685** 001 | 342 |
| 05 **056686** 001 | 342 |
| 05 **056687** 001 | 342 |
| 05 **056700** 001 | 320 |
| 05 **056702** 001 | 320 |
| 05 **056704** 001 | 320 |
| 05 **056710** 001 | 321 |
| 05 **056712** 001 | 321 |
| 05 **056714** 001 | 321 |
| 05 **056720** 001 | 321 |
| 05 **056722** 001 | 321 |
| 05 **056724** 001 | 321 |
| 05 **056805** 001 | 322 |
| 05 **056810** 001 | 322 |
| 05 **056812** 001 | 322 |
| 05 **056815** 001 | 322 |
| 05 **056820** 001 | 322 |
| 05 **056825** 001 | 322 |
| 05 **056835** 001 | 322 |
| 05 **056910** 001 | 322 |
| 05 **056915** 001 | 322 |
| 05 **056925** 001 | 322 |
| 05 **057113** 001 | 260 |
| 05 **057114** 001 | 260 |
| 05 **057115** 001 | 382 |
| 05 **057122** 001 | 379 |
| 05 **057150** 001 | 353 |
| 05 **057151** 001 | 353 |
| 05 **057152** 001 | 353 |
| 05 **057153** 001 | 353 |
| 05 **057160** 001 | 353 |
| 05 **057161** 001 | 353 |
| 05 **057162** 001 | 353 |
| 05 **057163** 001 | 353 |
| 05 **057225** 001 | 340 |
| 05 **057235** 001 | 340 |
| 05 **057240** 001 | 340 |
| 05 **057412** 001 | 378 |
| 05 **057415** 001 | 378 |
| 05 **057416** 001 | 377 |
| 05 **057417** 001 | 371 |
| 05 **057418** 001 | 174 |
| 05 **057420** 001 | 375 |
| 05 **057421** 001 | 377 |
| 05 **057422** 001 | 389 |
| 05 **057423** 001 | 389 |
| 05 **057424** 001 | 392 |
| 05 **057430** 001 | 375 |
| 05 **057431** 001 | 377 |
| 05 **057432** 001 | 388 |
| 05 **057433** 001 | 387 |
| 05 **057434** 001 | 391 |
| 05 **057435** 001 | 388 |
| 05 **057436** 001 | 387 |
| 05 **057437** 001 | 387 |
| 05 **057438** 001 | 388 |
| 05 **057440** 001 | 391 |
| 05 **057441** 001 | 374 |
| 05 **057450** 001 | 379 |
| 05 **057460** 001 | 261 |
| 05 **057471** 001 | 263 |
| 05 **057472** 001 | 56 |
| 05 **057473** 001 | 239 |
| 05 **057474** 001 | 240 |
| 05 **057480** 001 | 249 |
| 05 **057481** 001 | 85 |
| 05 **057482** 001 | 248 |
| 05 **057483** 001 | 248 |
| 05 **057490** 001 | 73 |
| 05 **057505** 001 | 346 |
| 05 **057510** 001 | 346 |
| 05 **057515** 001 | 346 |
| 05 **057520** 001 | 346 |
| 05 **057525** 001 | 346 |
| 05 **057530** 001 | 346 |
| 05 **057603** 001 | 341 |
| 05 **057604** 001 | 341 |
| 05 **057605** 001 | 341 |

| Code No. | Page |
|---|---|
| 05 **057606** 001 | 341 |
| 05 **057615** 001 | 308 |
| 05 **057616** 001 | 308 |
| 05 **057617** 001 | 308 |
| 05 **057620** 001 | 319 |
| 05 **057621** 001 | 319 |
| 05 **057622** 001 | 319 |
| 05 **057623** 001 | 327 |
| 05 **057624** 001 | 327 |
| 05 **057625** 001 | 327 |
| 05 **057626** 001 | 327 |
| 05 **057627** 001 | 327 |
| 05 **057628** 001 | 327 |
| 05 **057631** 001 | 348 |
| 05 **057632** 001 | 348 |
| 05 **057644** 001 | 343 |
| 05 **057645** 001 | 343 |
| 05 **057646** 001 | 343 |
| 05 **057656** 001 | 313 |
| 05 **057657** 001 | 313 |
| 05 **057661** 001 | 323 |
| 05 **057662** 001 | 323 |
| 05 **057664** 001 | 332 |
| 05 **057665** 001 | 332 |
| 05 **057666** 001 | 332 |
| 05 **057667** 001 | 332 |
| 05 **057671** 001 | 349 |
| 05 **057672** 001 | 349 |
| 05 **057675** 001 | 358 |
| 05 **057676** 001 | 358 |
| 05 **057680** 001 | 370 |
| 05 **057682** 001 | 371 |
| 05 **057683** 001 | 371 |
| 05 **057684** 001 | 371 |
| 05 **057688** 001 | 371 |
| 05 **057690** 001 | 370 |
| 05 **057691** 001 | 372 |
| 05 **057692** 001 | 372 |
| 05 **057693** 001 | 372 |
| 05 **057695** 001 | 372 |
| 05 **057697** 001 | 370 |
| 05 **057705** 001 | 318 |
| 05 **057710** 001 | 318 |
| 05 **057715** 001 | 318 |
| 05 **057720** 001 | 318 |
| 05 **057750** 001 | 313 |
| 05 **057751** 001 | 310 |
| 05 **057752** 001 | 308 |
| 05 **057760** 001 | 323 |
| 05 **057761** 001 | 321 |
| 05 **057762** 001 | 321 |
| 05 **057763** 001 | 319 |
| 05 **057770** 001 | 331 |
| 05 **057772** 001 | 327 |
| 05 **057773** 001 | 331 |
| 05 **057775** 001 | 327 |
| 05 **057776** 001 | 327 |
| 05 **057777** 001 | 330 |
| 05 **057778** 001 | 330 |
| 05 **057790** 001 | 349 |
| 05 **057900** 001 | 380 |
| 05 **057908** 001 | 380 |

| Code No. | Page |
|---|---|
| 05 **058005** 001 | 326 |
| 05 **058010** 001 | 326 |
| 05 **058015** 001 | 326 |
| 05 **058020** 001 | 326 |
| 05 **058101** 001 | 340 |
| 05 **058102** 001 | 335 |
| 05 **058104** 001 | 340 |
| 05 **058105** 001 | 340 |
| 05 **058108** 001 | 346 |
| 05 **058109** 001 | 346 |
| 05 **058110** 001 | 346 |
| 05 **058111** 001 | 346 |
| 05 **058112** 001 | 346 |
| 05 **058119** 001 | 318 |
| 05 **058120** 001 | 318 |
| 05 **058121** 001 | 318 |
| 05 **058122** 001 | 318 |
| 05 **058129** 001 | 335 |
| 05 **058130** 001 | 335 |
| 05 **058131** 001 | 335 |
| 05 **058132** 001 | 335 |
| 05 **058133** 001 | 335 |
| 05 **058140** 001 | 326 |
| 05 **058141** 001 | 326 |
| 05 **059293** 001 | 256 |
| 05 **059294** 001 | 258 |
| 05 **059295** 001 | 257 |
| 05 **059297** 001 | 259 |
| 05 **059298** 001 | 255 |
| 05 **059299** 001 | 255 |
| 05 **059305** 001 | 340 |
| 05 **059307** 001 | 340 |
| 05 **059310** 001 | 340 |
| 05 **059315** 001 | 340 |
| 05 **059320** 001 | 340 |
| 05 **059325** 001 | 340 |
| 05 **059330** 001 | 340 |
| 05 **059335** 001 | 340 |
| 05 **059337** 001 | 340 |
| 05 **059340** 001 | 340 |
| 05 **059345** 001 | 340 |
| 05 **059450** 001 | 340 |
| 05 **059451** 001 | 340 |
| 05 **059452** 001 | 340 |
| 05 **059453** 001 | 340 |
| 05 **059466** 001 | 340 |
| 05 **059472** 001 | 340 |
| 05 **059478** 001 | 340 |
| 05 **059480** 001 | 340 |
| 05 **059486** 001 | 340 |
| 05 **059488** 001 | 340 |
| 05 **059489** 001 | 340 |
| 05 **059490** 001 | 340 |
| 05 **059492** 001 | 340 |
| 05 **059496** 001 | 340 |
| 05 **059500** 001 | 340 |
| 05 **059530** 001 | 314 |
| 05 **059532** 001 | 314 |
| 05 **059534** 001 | 314 |
| 05 **059540** 001 | 315 |
| 05 **059542** 001 | 315 |
| 05 **059544** 001 | 315 |

| Code No. | Page |
|---|---|
| 05 **059550** 001 | 315 |
| 05 **059552** 001 | 315 |
| 05 **059554** 001 | 315 |
| 05 **059602** 001 | 345 |
| 05 **059603** 001 | 345 |
| 05 **059604** 001 | 345 |
| 05 **059605** 001 | 345 |
| 05 **059610** 001 | 345 |
| 05 **059615** 001 | 345 |
| 05 **059620** 001 | 345 |
| 05 **059625** 001 | 345 |
| 05 **059628** 001 | 345 |
| 05 **059629** 001 | 345 |
| 05 **059630** 001 | 345 |
| 05 **059631** 001 | 345 |
| 05 **059632** 001 | 345 |
| 05 **059633** 001 | 345 |
| 05 **059634** 001 | 345 |
| 05 **059635** 001 | 345 |
| 05 **059636** 001 | 345 |
| 05 **059637** 001 | 345 |
| 05 **059640** 001 | 347 |
| 05 **059641** 001 | 347 |
| 05 **059642** 001 | 347 |
| 05 **059643** 001 | 347 |
| 05 **059644** 001 | 347 |
| 05 **059645** 001 | 347 |
| 05 **059660** 001 | 345 |
| 05 **059661** 001 | 345 |
| 05 **059662** 001 | 345 |
| 05 **059663** 001 | 345 |
| 05 **059664** 001 | 345 |
| 05 **059665** 001 | 345 |
| 05 **059666** 001 | 345 |
| 05 **059667** 001 | 345 |
| 05 **059668** 001 | 345 |
| 05 **059680** 001 | 346 |
| 05 **059681** 001 | 346 |
| 05 **059682** 001 | 346 |
| 05 **059683** 001 | 346 |
| 05 **059700** 001 | 333 |
| 05 **059701** 001 | 333 |
| 05 **059702** 001 | 333 |
| 05 **059703** 001 | 333 |
| 05 **059704** 001 | 333 |
| 05 **059705** 001 | 333 |
| 05 **059720** 001 | 326 |
| 05 **059721** 001 | 326 |
| 05 **059755** 001 | 316 |
| 05 **059760** 001 | 316 |
| 05 **059765** 001 | 316 |
| 05 **059766** 001 | 316 |
| 05 **059770** 001 | 316 |
| 05 **059775** 001 | 316 |
| 05 **059780** 001 | 316 |
| 05 **059785** 001 | 316 |
| 05 **059786** 001 | 316 |
| 05 **059790** 001 | 316 |
| 05 **059795** 001 | 316 |
| 05 **059800** 001 | 316 |
| 05 **059802** 001 | 316 |
| 05 **059805** 001 | 316 |

| Code No. | Page |
|---|---|
| 05 **059810** 001 | 316 |
| 05 **059815** 001 | 316 |
| 05 **059855** 001 | 316 |
| 05 **059860** 001 | 316 |
| 05 **059865** 001 | 316 |
| 05 **059896** 001 | 327 |
| 05 **059897** 001 | 327 |
| 05 **059900** 001 | 324 |
| 05 **059902** 001 | 324 |
| 05 **059904** 001 | 324 |
| 05 **059910** 001 | 324 |
| 05 **059912** 001 | 324 |
| 05 **059914** 001 | 324 |
| 05 **059920** 001 | 325 |
| 05 **059922** 001 | 325 |
| 05 **059924** 001 | 325 |
| 05 **060005** 001 | 325 |
| 05 **060010** 001 | 325 |
| 05 **060015** 001 | 325 |
| 05 **060027** 001 | 325 |
| 05 **060029** 001 | 325 |
| 05 **060030** 001 | 325 |
| 05 **060031** 001 | 325 |
| 05 **060033** 001 | 325 |
| 05 **060035** 001 | 325 |
| 05 **060036** 001 | 325 |
| 05 **060037** 001 | 325 |
| 05 **060038** 001 | 325 |
| 05 **060041** 001 | 325 |
| 05 **060043** 001 | 325 |
| 05 **060045** 001 | 325 |
| 05 **060047** 001 | 325 |
| 05 **060048** 001 | 336 |
| 05 **060049** 001 | 336 |
| 05 **060050** 001 | 336 |
| 05 **060051** 001 | 336 |
| 05 **060052** 001 | 336 |
| 05 **060053** 001 | 336 |
| 05 **060054** 001 | 336 |
| 05 **060055** 001 | 325 |
| 05 **060056** 001 | 336 |
| 05 **060057** 001 | 336 |
| 05 **060060** 001 | 325 |
| 05 **060065** 001 | 325 |
| 05 **060098** 001 | 334 |
| 05 **060100** 001 | 334 |
| 05 **060105** 001 | 334 |
| 05 **060110** 001 | 334 |
| 05 **060115** 001 | 334 |
| 05 **060120** 001 | 334 |
| 05 **060125** 001 | 334 |
| 05 **060130** 001 | 334 |
| 05 **060131** 001 | 334 |
| 05 **060132** 001 | 334 |
| 05 **060133** 001 | 334 |
| 05 **060134** 001 | 334 |
| 05 **060135** 001 | 334 |
| 05 **060136** 001 | 334 |
| 05 **060137** 001 | 334 |
| 05 **060138** 001 | 334 |
| 05 **060139** 001 | 336 |
| 05 **060140** 001 | 336 |

# Code No. Index


| Code No. | Page |
|---|---|
| 05 **060141** 001 | 336 |
| 05 **060142** 001 | 336 |
| 05 **060143** 001 | 336 |
| 05 **060144** 001 | 336 |
| 05 **060145** 001 | 336 |
| 05 **060146** 001 | 336 |
| 05 **060147** 001 | 350 |
| 05 **060148** 001 | 350 |
| 05 **060149** 001 | 350 |
| 05 **060150** 001 | 350 |
| 05 **060155** 001 | 350 |
| 05 **060160** 001 | 350 |
| 05 **060165** 001 | 350 |
| 05 **060170** 001 | 350 |
| 05 **060175** 001 | 350 |
| 05 **060180** 001 | 350 |
| 05 **060182** 001 | 350 |
| 05 **060184** 001 | 350 |
| 05 **060185** 001 | 334 |
| 05 **060186** 001 | 334 |
| 05 **060187** 001 | 334 |
| 05 **060188** 001 | 334 |
| 05 **060189** 001 | 334 |
| 05 **060190** 001 | 334 |
| 05 **060191** 001 | 334 |
| 05 **060192** 001 | 334 |
| 05 **060193** 001 | 334 |
| 05 **060194** 001 | 334 |
| 05 **060195** 001 | 334 |
| 05 **060196** 001 | 334 |
| 05 **060197** 001 | 334 |
| 05 **060198** 001 | 334 |
| 05 **060199** 001 | 334 |
| 05 **060200** 001 | 334 |
| 05 **060201** 001 | 334 |
| 05 **060202** 001 | 334 |
| 05 **060210** 001 | 354 |
| 05 **060215** 001 | 354 |
| 05 **060220** 001 | 354 |
| 05 **060225** 001 | 354 |
| 05 **060230** 001 | 354 |
| 05 **060235** 001 | 354 |
| 05 **060237** 001 | 354 |
| 05 **060238** 001 | 354 |
| 05 **060240** 001 | 354 |
| 05 **060255** 001 | 354 |
| 05 **060260** 001 | 354 |
| 05 **060265** 001 | 354 |
| 05 **060272** 001 | 353 |
| 05 **060274** 001 | 353 |
| 05 **060276** 001 | 353 |
| 05 **060278** 001 | 353 |
| 05 **060280** 001 | 353 |
| 05 **060281** 001 | 353 |
| 05 **060282** 001 | 353 |
| 05 **060283** 001 | 353 |
| 05 **060284** 001 | 353 |
| 05 **060286** 001 | 353 |
| 05 **060288** 001 | 353 |
| 05 **060290** 001 | 353 |
| 05 **060296** 001 | 351 |
| 05 **060297** 001 | 351 |
| 05 **060298** 001 | 351 |
| 05 **060300** 001 | 351 |
| 05 **060301** 001 | 351 |
| 05 **060302** 001 | 351 |
| 05 **060303** 001 | 351 |
| 05 **060304** 001 | 351 |
| 05 **060400** 001 | 353 |
| 05 **060401** 001 | 353 |
| 05 **060402** 001 | 353 |
| 05 **060403** 001 | 353 |
| 05 **060404** 001 | 353 |
| 05 **060405** 001 | 353 |
| 05 **060406** 001 | 353 |
| 05 **060407** 001 | 353 |
| 05 **060408** 001 | 353 |
| 05 **060409** 001 | 353 |
| 05 **060410** 001 | 353 |
| 05 **060411** 001 | 353 |
| 05 **060412** 001 | 353 |
| 05 **060420** 001 | 354 |
| 05 **060421** 001 | 354 |
| 05 **060422** 001 | 354 |
| 05 **060423** 001 | 354 |
| 05 **060424** 001 | 354 |
| 05 **060425** 001 | 354 |
| 05 **060426** 001 | 354 |
| 05 **060427** 001 | 354 |
| 05 **060428** 001 | 354 |
| 05 **060429** 001 | 354 |
| 05 **060430** 001 | 354 |
| 05 **060431** 001 | 354 |
| 05 **060432** 001 | 354 |
| 05 **060505** 001 | 333 |
| 05 **060506** 001 | 333 |
| 05 **060507** 001 | 333 |
| 05 **060508** 001 | 333 |
| 05 **060509** 001 | 333 |
| 05 **060510** 001 | 333 |
| 05 **060511** 001 | 333 |
| 05 **064155** 001 | 335 |
| 05 **064170** 001 | 335 |
| 05 **064175** 001 | 335 |
| 05 **065081** 001 | 318 |
| 05 **065096** 001 | 326 |
| 05 **065110** 001 | 318 |
| 05 **065112** 001 | 318 |
| 05 **065114** 001 | 318 |
| 05 **065129** 001 | 326 |
| 05 **065197** 001 | 318 |
| 05 **066081** 001 | 332 |
| 05 **066082** 001 | 332 |
| 05 **066083** 001 | 332 |
| 05 **066100** 001 | 329 |
| 05 **066102** 001 | 329 |
| 05 **066104** 001 | 329 |
| 05 **066106** 001 | 329 |
| 05 **066108** 001 | 329 |
| 05 **066110** 001 | 329 |
| 05 **066120** 001 | 329 |
| 05 **066122** 001 | 329 |
| 05 **066124** 001 | 329 |
| 05 **066126** 001 | 329 |
| 05 **066128** 001 | 329 |
| 05 **066130** 001 | 329 |
| 05 **066140** 001 | 329 |
| 05 **066141** 001 | 329 |
| 05 **066142** 001 | 329 |
| 05 **066143** 001 | 329 |
| 05 **066144** 001 | 329 |
| 05 **066145** 001 | 329 |
| 05 **066150** 001 | 352 |
| 05 **066155** 001 | 352 |
| 05 **066160** 001 | 352 |
| 05 **066165** 001 | 352 |
| 05 **066170** 001 | 352 |
| 05 **066272** 001 | 337 |
| 05 **066274** 001 | 337 |
| 05 **066276** 001 | 337 |
| 05 **066278** 001 | 337 |
| 05 **066279** 001 | 337 |
| 05 **066280** 001 | 337 |
| 05 **066282** 001 | 337 |
| 05 **066284** 001 | 337 |
| 05 **066286** 001 | 337 |
| 05 **066287** 001 | 337 |
| 05 **066288** 001 | 337 |
| 05 **066290** 001 | 337 |
| 05 **066300** 001 | 330 |
| 05 **066301** 001 | 330 |
| 05 **066302** 001 | 330 |
| 05 **066303** 001 | 330 |
| 05 **066304** 001 | 330 |
| 05 **066305** 001 | 330 |
| 05 **066308** 001 | 330 |
| 05 **066310** 001 | 330 |
| 05 **066312** 001 | 330 |
| 05 **066313** 001 | 330 |
| 05 **066315** 001 | 330 |
| 05 **066320** 001 | 330 |
| 05 **066325** 001 | 330 |
| 05 **066330** 001 | 330 |
| 05 **066335** 001 | 330 |
| 05 **066394** 001 | 349 |
| 05 **066395** 001 | 349 |
| 05 **066396** 001 | 349 |
| 05 **066400** 001 | 349 |
| 05 **066405** 001 | 349 |
| 05 **066410** 001 | 349 |
| 05 **066415** 001 | 349 |
| 05 **066420** 001 | 349 |
| 05 **066455** 001 | 331 |
| 05 **066460** 001 | 331 |
| 05 **066465** 001 | 331 |
| 05 **066485** 001 | 330 |
| 05 **066486** 001 | 330 |
| 05 **066487** 001 | 330 |
| 05 **066488** 001 | 330 |
| 05 **066489** 001 | 330 |
| 05 **066490** 001 | 330 |
| 05 **066491** 001 | 330 |
| 05 **066492** 001 | 330 |
| 05 **066493** 001 | 330 |
| 05 **066494** 001 | 330 |
| 05 **066495** 001 | 330 |
| 05 **066496** 001 | 330 |
| 05 **066497** 001 | 335 |
| 05 **066498** 001 | 335 |
| 05 **066499** 001 | 335 |
| 05 **066500** 001 | 335 |
| 05 **066505** 001 | 335 |
| 05 **066510** 001 | 335 |
| 05 **066515** 001 | 335 |
| 05 **066520** 001 | 335 |
| 05 **066525** 001 | 335 |
| 05 **066530** 001 | 335 |
| 05 **066618** 001 | 351 |
| 05 **066619** 001 | 351 |
| 05 **066620** 001 | 351 |
| 05 **066622** 001 | 351 |
| 05 **066624** 001 | 351 |
| 05 **066626** 001 | 351 |
| 05 **066628** 001 | 351 |
| 05 **066630** 001 | 351 |
| 05 **066632** 001 | 351 |
| 05 **066633** 001 | 351 |
| 05 **066634** 001 | 351 |
| 05 **066635** 001 | 351 |
| 05 **066638** 001 | 351 |
| 05 **066640** 001 | 351 |
| 05 **066642** 001 | 351 |
| 05 **066644** 001 | 351 |
| 05 **066646** 001 | 351 |
| 05 **066654** 001 | 352 |
| 05 **066656** 001 | 352 |
| 05 **066660** 001 | 352 |
| 05 **066662** 001 | 352 |
| 05 **066664** 001 | 352 |
| 05 **066666** 001 | 352 |
| 05 **066668** 001 | 352 |
| 05 **066670** 001 | 352 |
| 05 **066672** 001 | 352 |
| 05 **066674** 001 | 352 |
| 05 **066676** 001 | 352 |
| 05 **066678** 001 | 352 |
| 05 **066680** 001 | 352 |
| 05 **066682** 001 | 352 |
| 05 **066683** 001 | 352 |
| 05 **066684** 001 | 352 |
| 05 **066685** 001 | 352 |
| 05 **066686** 001 | 352 |
| 05 **066687** 001 | 352 |
| 05 **066688** 001 | 351 |
| 05 **066690** 001 | 351 |
| 05 **066692** 001 | 351 |
| 05 **066694** 001 | 351 |
| 05 **066696** 001 | 351 |
| 05 **066758** 001 | 352 |
| 05 **066760** 001 | 352 |
| 05 **066762** 001 | 352 |
| 05 **066764** 001 | 352 |
| 05 **066766** 001 | 352 |
| 05 **066768** 001 | 352 |
| 05 **066785** 001 | 352 |
| 05 **066786** 001 | 352 |
| 05 **066787** 001 | 352 |
| 05 **066788** 001 | 352 |

| Code No. | Page | Code No. | Page | Code No. | Page | Code No. | Page |
|---|---|---|---|---|---|---|---|
| 05 **066850** 001 | 352 | 05 **071116** 001 | 256 | 05 **073074** 001 | 349 | 05 **073342** 001 | 343 |
| 05 **066851** 001 | 352 | 05 **071117** 001 | 257 | 05 **073075** 001 | 349 | 05 **073344** 001 | 343 |
| 05 **066852** 001 | 352 | 05 **071222** 001 | 353 | 05 **073076** 001 | 350 | 05 **073346** 001 | 330 |
| 05 **066853** 001 | 352 | 05 **071223** 001 | 353 | 05 **073077** 001 | 350 | 05 **073357** 001 | 363 |
| 05 **066854** 001 | 352 | 05 **071224** 001 | 353 | 05 **073200** 001 | 365 | 05 **073370** 001 | 322 |
| 05 **066900** 001 | 335 | 05 **071225** 001 | 353 | 05 **073201** 001 | 347 | 05 **073371** 001 | 322 |
| 05 **066901** 001 | 335 | 05 **071228** 001 | 353 | 05 **073202** 001 | 348 | 05 **073372** 001 | 322 |
| 05 **066902** 001 | 335 | 05 **072014** 001 | 456 | 05 **073210** 001 | 364 | 05 **073373** 001 | 322 |
| 05 **066905** 001 | 335 | 05 **072017** 001 | 456 | 05 **073230** 001 | 176 | 05 **073375** 001 | 330 |
| 05 **066910** 001 | 335 | 05 **072050** 001 | 339 | 05 **073240** 001 | 254 | 05 **073376** 001 | 330 |
| 05 **066915** 001 | 335 | 05 **072055** 001 | 339 | 05 **073241** 001 | 254 | 05 **073380** 001 | 323 |
| 05 **066920** 001 | 335 | 05 **072057** 001 | 339 | 05 **073260** 001 | 106 | 05 **073391** 001 | 216 |
| 05 **066925** 001 | 335 | 05 **072059** 001 | 339 | 05 **073261** 001 | 124 | 05 **073401** 001 | 362 |
| 05 **066941** 001 | 335 | 05 **072061** 001 | 339 | 05 **073262** 001 | 147 | 05 **073404** 001 | 384 |
| 05 **066950** 001 | 335 | 05 **072063** 001 | 339 | 05 **073268** 001 | 194 | 05 **073406** 001 | 383 |
| 05 **071010** 001 | 308 | 05 **072065** 001 | 339 | 05 **073270** 001 | 194 | 05 **073410** 001 | 381 |
| 05 **071011** 001 | 308 | 05 **072070** 001 | 312 | 05 **073271** 001 | 194 | 05 **073416** 001 | 382 |
| 05 **071012** 001 | 308 | 05 **072072** 001 | 312 | 05 **073272** 001 | 194 | 05 **073418** 001 | 376 |
| 05 **071020** 001 | 320 | 05 **072074** 001 | 312 | 05 **073273** 001 | 194 | 05 **073419** 001 | 378 |
| 05 **071021** 001 | 320 | 05 **072080** 001 | 322 | 05 **073274** 001 | 194 | 05 **073420** 001 | 359 |
| 05 **071022** 001 | 320 | 05 **072082** 001 | 322 | 05 **073275** 001 | 194 | 05 **073421** 001 | 360 |
| 05 **071030** 001 | 328 | 05 **072084** 001 | 322 | 05 **073276** 001 | 194 | 05 **073470** 001 | 334 |
| 05 **071032** 001 | 328 | 05 **072400** 001 | 312 | 05 **073277** 001 | 194 | 05 **073471** 001 | 334 |
| 05 **071033** 001 | 328 | 05 **072401** 001 | 312 | 05 **073278** 001 | 194 | 05 **073472** 001 | 334 |
| 05 **071034** 001 | 328 | 05 **072402** 001 | 312 | 05 **073279** 001 | 194 | 05 **073473** 001 | 334 |
| 05 **071035** 001 | 328 | 05 **072403** 001 | 323 | 05 **073280** 001 | 194 | 05 **073474** 001 | 334 |
| 05 **071037** 001 | 328 | 05 **072404** 001 | 323 | 05 **073281** 001 | 194 | 05 **073495** 001 | 355 |
| 05 **071038** 001 | 328 | 05 **072405** 001 | 323 | 05 **073282** 001 | 194 | 05 **073500** 001 | 354 |
| 05 **071070** 001 | 341 | 05 **072406** 001 | 331 | 05 **073283** 001 | 194 | 05 **073501** 001 | 354 |
| 05 **071071** 001 | 341 | 05 **072407** 001 | 331 | 05 **073284** 001 | 194 | 05 **073502** 001 | 354 |
| 05 **071072** 001 | 341 | 05 **072408** 001 | 331 | 05 **073285** 001 | 194 | 05 **073503** 001 | 354 |
| 05 **071073** 001 | 341 | 05 **072409** 001 | 331 | 05 **073286** 001 | 194 | 05 **073504** 001 | 354 |
| 05 **071074** 001 | 341 | 05 **072411** 001 | 331 | 05 **073287** 001 | 194 | 05 **073505** 001 | 354 |
| 05 **071075** 001 | 341 | 05 **072412** 001 | 331 | 05 **073290** 001 | 196 | 05 **073506** 001 | 354 |
| 05 **071076** 001 | 341 | 05 **072441** 001 | 313 | 05 **073295** 001 | 197 | 05 **073507** 001 | 354 |
| 05 **071077** 001 | 341 | 05 **072443** 001 | 323 | 05 **073304** 001 | 312 | 05 **073508** 001 | 354 |
| 05 **071080** 001 | 339 | 05 **072444** 001 | 323 | 05 **073305** 001 | 312 | 05 **073509** 001 | 354 |
| 05 **071081** 001 | 314 | 05 **072446** 001 | 331 | 05 **073306** 001 | 312 | 05 **073510** 001 | 354 |
| 05 **071082** 001 | 314 | 05 **072447** 001 | 331 | 05 **073307** 001 | 312 | 05 **073511** 001 | 360 |
| 05 **071083** 001 | 314 | 05 **072448** 001 | 331 | 05 **073308** 001 | 323 | 05 **073520** 001 | 317 |
| 05 **071084** 001 | 324 | 05 **072449** 001 | 331 | 05 **073309** 001 | 323 | 05 **073521** 001 | 317 |
| 05 **071085** 001 | 324 | 05 **072451** 001 | 331 | 05 **073310** 001 | 323 | 05 **073522** 001 | 317 |
| 05 **071086** 001 | 324 | 05 **072452** 001 | 331 | 05 **073311** 001 | 323 | 05 **073523** 001 | 326 |
| 05 **071089** 001 | 336 | 05 **073050** 001 | 343 | 05 **073313** 001 | 330 | 05 **073524** 001 | 326 |
| 05 **071090** 001 | 336 | 05 **073051** 001 | 343 | 05 **073314** 001 | 330 | 05 **073525** 001 | 326 |
| 05 **071091** 001 | 336 | 05 **073052** 001 | 343 | 05 **073315** 001 | 330 | 05 **073526** 001 | 334 |
| 05 **071092** 001 | 336 | 05 **073053** 001 | 343 | 05 **073316** 001 | 330 | 05 **073527** 001 | 334 |
| 05 **071094** 001 | 336 | 05 **073054** 001 | 343 | 05 **073317** 001 | 330 | 05 **073528** 001 | 334 |
| 05 **071097** 001 | 350 | 05 **073055** 001 | 343 | 05 **073318** 001 | 361 | 05 **073529** 001 | 334 |
| 05 **071098** 001 | 350 | 05 **073056** 001 | 345 | 05 **073323** 001 | 312 | 05 **073530** 001 | 334 |
| 05 **071099** 001 | 350 | 05 **073057** 001 | 345 | 05 **073324** 001 | 312 | 05 **073531** 001 | 334 |
| 05 **071100** 001 | 359 | 05 **073058** 001 | 345 | 05 **073325** 001 | 312 | 05 **073540** 001 | 278 |
| 05 **071101** 001 | 344 | 05 **073059** 001 | 345 | 05 **073326** 001 | 312 | 05 **073541** 001 | 277 |
| 05 **071102** 001 | 344 | 05 **073060** 001 | 345 | 05 **073332** 001 | 309 | 05 **073544** 001 | 213 |
| 05 **071103** 001 | 344 | 05 **073061** 001 | 345 | 05 **073333** 001 | 309 | 05 **073593** 001 | 214 |
| 05 **071104** 001 | 344 | 05 **073064** 001 | 336 | 05 **073334** 001 | 309 | 05 **073594** 001 | 217 |
| 05 **071105** 001 | 344 | 05 **073065** 001 | 336 | 05 **073335** 001 | 309 | 05 **073596** 001 | 217 |
| 05 **071106** 001 | 344 | 05 **073066** 001 | 336 | 05 **073336** 001 | 321 | 05 **073598** 001 | 228 |
| 05 **071107** 001 | 344 | 05 **073070** 001 | 337 | 05 **073337** 001 | 321 | 05 **073599** 001 | 228 |
| 05 **071108** 001 | 344 | 05 **073071** 001 | 337 | 05 **073338** 001 | 321 | 05 **073610** 001 | 309 |
| 05 **071109** 001 | 373 | 05 **073072** 001 | 337 | 05 **073339** 001 | 321 | 05 **073611** 001 | 309 |
| 05 **071110** 001 | 373 | 05 **073073** 001 | 337 | 05 **073340** 001 | 330 | 05 **073613** 001 | 320 |

# Code No. Index


| Code No. | Page |
|---|---|
| 05 **073614** 001 | 320 |
| 05 **073615** 001 | 320 |
| 05 **073616** 001 | 359 |
| 05 **073620** 001 | 328 |
| 05 **073621** 001 | 328 |
| 05 **073622** 001 | 328 |
| 05 **073623** 001 | 328 |
| 05 **073625** 001 | 328 |
| 05 **073630** 001 | 373 |
| 05 **073631** 001 | 397 |
| 05 **073634** 001 | 373 |
| 05 **073635** 001 | 385 |
| 05 **073637** 001 | 386 |
| 05 **073638** 001 | 385 |
| 05 **073639** 001 | 390 |
| 05 **073640** 001 | 172 |
| 05 **073641** 001 | 389 |
| 05 **073645** 001 | 174 |
| 05 **073670** 001 | 56 |
| 05 **073671** 001 | 55 |
| 05 **073675** 001 | 38 |
| 05 **073676** 001 | 39 |
| 05 **073677** 001 | 39 |
| 05 **073680** 001 | 32 |
| 05 **073681** 001 | 32 |
| 05 **073702** 001 | 83 |
| 05 **073720** 001 | 334 |
| 05 **073721** 001 | 334 |
| 05 **073722** 001 | 334 |
| 05 **073723** 001 | 334 |
| 05 **073724** 001 | 334 |
| 05 **073890** 001 | 372 |
| 05 **073904** 001 | 341 |
| 05 **073905** 001 | 341 |
| 05 **073906** 001 | 341 |
| 05 **073916** 001 | 308 |
| 05 **073917** 001 | 308 |
| 05 **073921** 001 | 319 |
| 05 **073922** 001 | 319 |
| 05 **073924** 001 | 327 |
| 05 **073925** 001 | 327 |
| 05 **073926** 001 | 327 |
| 05 **073927** 001 | 327 |
| 05 **073931** 001 | 348 |
| 05 **073932** 001 | 348 |
| 05 **073944** 001 | 344 |
| 05 **073945** 001 | 344 |
| 05 **073946** 001 | 344 |
| 05 **073956** 001 | 314 |
| 05 **073957** 001 | 314 |
| 05 **073961** 001 | 324 |
| 05 **073962** 001 | 324 |
| 05 **073964** 001 | 332 |
| 05 **073965** 001 | 332 |
| 05 **073966** 001 | 332 |
| 05 **073967** 001 | 332 |
| 05 **073971** 001 | 350 |
| 05 **073972** 001 | 350 |
| 05 **073980** 001 | 371 |
| 05 **073984** 001 | 57 |
| 05 **073985** 001 | 365 |
| 05 **073990** 001 | 358 |
| 05 **074700** 001 | 400 |
| 05 **074701** 001 | 400 |
| 05 **074702** 001 | 400 |
| 05 **074705** 001 | 400 |
| 05 **074710** 001 | 400 |
| 05 **074711** 001 | 400 |
| 05 **074712** 001 | 400 |
| 05 **074715** 001 | 405 |
| 05 **074715** 010 | 410 |
| 05 **074716** 001 | 405 |
| 05 **074716** 010 | 410 |
| 05 **074717** 001 | 406 |
| 05 **074717** 010 | 411 |
| 05 **074720** 001 | 406 |
| 05 **074720** 010 | 411 |
| 05 **074721** 001 | 407 |
| 05 **074721** 010 | 412 |
| 05 **074722** 001 | 406 |
| 05 **074722** 010 | 411 |
| 05 **074728** 001 | 406 |
| 05 **074728** 010 | 411 |
| 05 **074730** 001 | 404 |
| 05 **074731** 001 | 404 |
| 05 **074733** 001 | 404 |
| 05 **074734** 001 | 404 |
| 05 **074738** 001 | 402 |
| 05 **074739** 001 | 403 |
| 05 **074745** 001 | 403 |
| 05 **074746** 001 | 402 |
| 05 **074750** 001 | 83 |
| 05 **074752** 001 | 83 |
| 05 **074757** 001 | 83 |
| 05 **074770** 001 | 400 |
| 05 **074772** 001 | 400 |
| 05 **074774** 001 | 400 |
| 05 **074780** 001 | 404 |
| 05 **074782** 001 | 404 |
| 05 **074784** 001 | 404 |
| 05 **074786** 001 | 404 |
| 05 **074788** 001 | 404 |
| 05 **074790** 001 | 405 |
| 05 **074790** 010 | 410 |
| 05 **074792** 001 | 405 |
| 05 **074792** 010 | 410 |
| 05 **074794** 001 | 405 |
| 05 **074794** 010 | 410 |
| 05 **074800** 001 | 409 |
| 05 **074800** 010 | 413 |
| 05 **074802** 001 | 404 |
| 05 **074804** 001 | 404 |
| 05 **074810** 001 | 409 |
| 05 **074810** 010 | 413 |
| 05 **074820** 001 | 408 |
| 05 **074820** 010 | 414 |
| 05 **074822** 001 | 408 |
| 05 **074822** 010 | 414 |
| 05 **074824** 001 | 408 |
| 05 **074824** 010 | 414 |
| 05 **074826** 001 | 408 |
| 05 **074826** 010 | 414 |
| 05 **074828** 001 | 408 |
| 05 **074828** 010 | 414 |
| 05 **074840** 001 | 407 |
| 05 **074840** 010 | 413 |
| 05 **074842** 001 | 407 |
| 05 **074842** 010 | 413 |
| 05 **075604** 001 | 422 |
| 05 **075605** 001 | 422 |
| 05 **075610** 001 | 425 |
| 05 **075611** 001 | 425 |
| 05 **075620** 001 | 426 |
| 05 **075621** 001 | 426 |
| 05 **075622** 001 | 427 |
| 05 **075623** 001 | 429 |
| 05 **075624** 001 | 429 |
| 05 **075625** 001 | 431 |
| 05 **075626** 001 | 432 |
| 05 **075630** 001 | 429 |
| 05 **075631** 001 | 432 |
| 05 **075651** 001 | 434 |
| 05 **075652** 001 | 435 |
| 05 **075653** 001 | 435 |
| 05 **075654** 001 | 435 |
| 05 **075655** 001 | 436 |
| 05 **075656** 001 | 436 |
| 05 **075657** 001 | 437 |
| 05 **075670** 001 | 439 |
| 05 **075670** 010 | 439 |
| 05 **075671** 001 | 439 |
| 05 **075671** 010 | 439 |
| 05 **075672** 001 | 440 |
| 05 **075672** 010 | 440 |
| 05 **075673** 001 | 440 |
| 05 **075673** 010 | 440 |
| 05 **075680** 001 | 428 |
| 05 **075681** 001 | 428 |
| 05 **075690** 001 | 430 |
| 05 **075691** 001 | 430 |
| 05 **075692** 001 | 431 |
| 05 **075693** 001 | 433 |
| 05 **075694** 001 | 433 |
| 05 **075695** 001 | 434 |
| 05 **075800** 001 | 419 |
| 05 **075801** 001 | 419 |
| 05 **075810** 001 | 415 |
| 05 **075815** 001 | 416 |
| 05 **075830** 001 | 420 |
| 05 **075831** 001 | 420 |
| 05 **075832** 001 | 421 |
| 05 **075840** 001 | 415 |
| 05 **075850** 001 | 417 |
| 05 **075851** 001 | 416 |
| 05 **075870** 001 | 69 |
| 05 **075876** 001 | 69 |
| 05 **078200** 001 | 449 |
| 05 **078205** 001 | 450 |
| 05 **078210** 001 | 450 |
| 05 **078345** 001 | 450 |
| 05 **078600** 001 | 444 |
| 05 **078601** 001 | 444 |
| 05 **078602** 001 | 444 |
| 05 **078603** 001 | 444 |
| 05 **078604** 001 | 444 |
| 05 **078605** 001 | 444 |
| 05 **078606** 001 | 444 |
| 05 **078607** 001 | 444 |
| 05 **078608** 001 | 444 |
| 05 **078609** 001 | 444 |
| 05 **078610** 001 | 444 |
| 05 **078611** 001 | 444 |
| 05 **078612** 001 | 444 |
| 05 **078620** 001 | 446 |
| 05 **078621** 001 | 446 |
| 05 **078622** 001 | 446 |
| 05 **078623** 001 | 446 |
| 05 **078624** 001 | 446 |
| 05 **078625** 001 | 446 |
| 05 **078626** 001 | 446 |
| 05 **078627** 001 | 446 |
| 05 **078628** 001 | 446 |
| 05 **078629** 001 | 446 |
| 05 **078630** 001 | 446 |
| 05 **078631** 001 | 446 |
| 05 **078632** 001 | 446 |
| 05 **078633** 001 | 446 |
| 05 **078635** 001 | 448 |
| 05 **078636** 001 | 448 |
| 05 **078637** 001 | 448 |
| 05 **078640** 001 | 451 |
| 05 **078641** 001 | 451 |
| 05 **078642** 001 | 452 |
| 05 **078650** 001 | 452 |
| 05 **078651** 001 | 452 |
| 05 **078652** 001 | 452 |
| 05 **078653** 001 | 452 |
| 05 **078654** 001 | 452 |
| 05 **078655** 001 | 452 |
| 05 **078656** 001 | 452 |
| 05 **078657** 001 | 452 |
| 05 **078658** 001 | 452 |
| 05 **078660** 001 | 452 |
| 05 **078661** 001 | 452 |
| 05 **078662** 001 | 452 |
| 05 **078663** 001 | 452 |
| 05 **078664** 001 | 452 |
| 05 **078666** 001 | 453 |
| 05 **078667** 001 | 453 |
| 05 **078670** 001 | 445 |
| 05 **078671** 001 | 445 |
| 05 **078672** 001 | 445 |
| 05 **078673** 001 | 445 |
| 05 **078674** 001 | 445 |
| 05 **078675** 001 | 445 |
| 05 **078676** 001 | 445 |
| 05 **078677** 001 | 445 |
| 05 **078678** 001 | 445 |
| 05 **078679** 001 | 445 |
| 05 **078680** 001 | 445 |
| 05 **078681** 001 | 445 |
| 05 **078682** 001 | 445 |
| 05 **078683** 001 | 445 |
| 05 **078684** 001 | 445 |
| 05 **078685** 001 | 445 |
| 05 **078686** 001 | 445 |
| 05 **078687** 001 | 445 |
| 05 **078690** 001 | 447 |

| Code No. | Page |
|---|---|
| 05 **078691** 001 | 447 |
| 05 **078692** 001 | 447 |
| 05 **078693** 001 | 447 |
| 05 **078694** 001 | 447 |
| 05 **078695** 001 | 447 |
| 05 **078696** 001 | 447 |
| 05 **078697** 001 | 447 |
| 05 **078698** 001 | 447 |
| 05 **078699** 001 | 447 |
| 05 **078700** 001 | 447 |
| 05 **078701** 001 | 447 |
| 05 **078702** 001 | 447 |
| 05 **078703** 001 | 447 |
| 05 **078704** 001 | 447 |
| 05 **078705** 001 | 447 |
| 05 **078706** 001 | 455 |
| 05 **078707** 001 | 449 |
| 05 **078708** 001 | 449 |
| 05 **078709** 001 | 455 |
| 05 **078710** 001 | 451 |
| 05 **078711** 001 | 455 |
| 05 **078714** 001 | 453 |
| 05 **078715** 001 | 453 |
| 05 **078716** 001 | 453 |
| 05 **078717** 001 | 453 |
| 05 **078720** 001 | 454 |
| 05 **078721** 001 | 454 |
| 05 **100000** 001 | 60 |
| 05 **100001** 001 | 60 |
| 05 **100002** 001 | 60 |
| 05 **100003** 001 | 60 |
| 05 **100004** 001 | 60 |
| 05 **100011** 001 | 61 |
| 05 **100012** 001 | 61 |
| 05 **100015** 001 | 61 |
| 05 **100016** 001 | 61 |
| 05 **100019** 001 | 62 |
| 05 **100020** 001 | 62 |
| 05 **100021** 001 | 62 |
| 05 **100022** 001 | 62 |
| 05 **100024** 001 | 63 |
| 05 **100025** 001 | 63 |
| 05 **100026** 001 | 63 |
| 05 **100030** 001 | 12 |
| 05 **100031** 001 | 12 |
| 05 **100042** 001 | 12 |
| 05 **100043** 001 | 12 |
| 05 **100044** 001 | 12 |
| 05 **100050** 001 | 13 |
| 05 **100051** 001 | 13 |
| 05 **100052** 001 | 13 |
| 05 **100055** 001 | 14 |
| 05 **100056** 001 | 14 |
| 05 **100057** 001 | 14 |
| 05 **100060** 001 | 16 |
| 05 **100061** 001 | 16 |
| 05 **100062** 001 | 16 |
| 05 **100063** 001 | 16 |
| 05 **100064** 001 | 16 |
| 05 **100070** 001 | 17 |
| 05 **100071** 001 | 17 |
| 05 **100072** 001 | 17 |

| Code No. | Page |
|---|---|
| 05 **100075** 001 | 9 |
| 05 **100076** 001 | 9 |
| 05 **100077** 001 | 9 |
| 05 **100080** 001 | 9 |
| 05 **100081** 001 | 9 |
| 05 **100082** 001 | 9 |
| 05 **100085** 001 | 8 |
| 05 **100086** 001 | 8 |
| 05 **100087** 001 | 8 |
| 05 **100100** 001 | 64 |
| 05 **104600** 001 | 395 |
| 05 **104601** 001 | 395 |
| 05 **104602** 001 | 395 |
| 05 **104603** 001 | 395 |
| 05 **104604** 001 | 395 |
| 05 **104605** 001 | 395 |
| 05 **104610** 001 | 395 |
| 05 **104611** 001 | 395 |
| 05 **104612** 001 | 395 |
| 05 **104613** 001 | 395 |
| 05 **104614** 001 | 395 |
| 05 **104615** 001 | 395 |
| 05 **104616** 001 | 395 |
| 05 **104617** 001 | 395 |
| 05 **104618** 001 | 395 |
| 05 **104619** 001 | 395 |
| 05 **104620** 001 | 395 |
| 05 **104621** 001 | 395 |
| 05 **104622** 001 | 395 |
| 05 **104630** 001 | 393 |
| 05 **104631** 001 | 393 |
| 05 **104632** 001 | 393 |
| 05 **104633** 001 | 393 |
| 05 **104634** 001 | 393 |
| 05 **104635** 001 | 393 |
| 05 **104640** 001 | 394 |
| 05 **104641** 001 | 394 |
| 05 **104642** 001 | 394 |
| 05 **104643** 001 | 394 |
| 05 **104644** 001 | 394 |
| 05 **104645** 001 | 394 |
| 05 **104650** 001 | 394 |
| 05 **104652** 001 | 395 |
| 05 **104653** 001 | 396 |
| 05 **104655** 001 | 393 |
| 05 **104660** 001 | 393 |
| 05 **104661** 001 | 393 |
| 05 **104662** 001 | 393 |
| 05 **104663** 001 | 393 |
| 05 **104664** 001 | 393 |
| 05 **104665** 001 | 393 |
| 05 **104666** 001 | 392 |
| 05 **104667** 001 | 392 |
| 05 **104668** 001 | 392 |
| 05 **104669** 001 | 392 |
| 05 **104670** 001 | 392 |
| 05 **104671** 001 | 392 |
| 05 **104672** 001 | 392 |
| 05 **104751** 001 | 394 |
| 05 **104754** 001 | 393 |
| 05 **105622** 001 | 23 |
| 05 **105630** 001 | 20 |

| Code No. | Page |
|---|---|
| 05 **105631** 001 | 64 |
| 05 **105650** 001 | 22 |
| 05 **105656** 001 | 23 |
| 05 **110000** 001 | 11 |
| 05 **110001** 001 | 11 |
| 05 **110002** 001 | 11 |
| 05 **110003** 001 | 11 |
| 05 **110004** 001 | 11 |
| 05 **110005** 001 | 11 |
| 05 **110006** 001 | 11 |
| 05 **110007** 001 | 11 |
| 05 **110008** 001 | 11 |
| 05 **110010** 001 | 12 |
| 05 **110011** 001 | 12 |
| 05 **110104** 001 | 12 |
| 05 **110105** 001 | 12 |
| 05 **117680** 001 | 17 |
| 05 **117681** 001 | 17 |
| 05 **117682** 001 | 17 |
| 05 **117683** 001 | 17 |
| 05 **117684** 001 | 17 |
| 05 **117685** 001 | 17 |
| 05 **117686** 001 | 17 |
| 05 **117687** 001 | 17 |
| 05 **117691** 001 | 17 |
| 05 **117990** 001 | 34 |
| 05 **117991** 001 | 34 |
| 05 **117992** 001 | 34 |
| 05 **117993** 001 | 34 |
| 05 **117994** 001 | 34 |
| 05 **117995** 001 | 34 |
| 05 **117997** 001 | 34 |
| 05 **118000** 001 | 34 |
| 05 **118002** 001 | 34 |
| 05 **118003** 001 | 34 |
| 05 **118004** 001 | 34 |
| 05 **118005** 001 | 34 |
| 05 **118006** 001 | 34 |
| 05 **118007** 001 | 34 |
| 05 **118008** 001 | 34 |
| 05 **118010** 001 | 34 |
| 05 **118012** 001 | 34 |
| 05 **118014** 001 | 34 |
| 05 **118017** 001 | 34 |
| 05 **118019** 001 | 35 |
| 05 **118020** 001 | 35 |
| 05 **118022** 001 | 35 |
| 05 **118023** 001 | 35 |
| 05 **118024** 001 | 35 |
| 05 **118026** 001 | 35 |
| 05 **118030** 001 | 34 |
| 05 **118032** 001 | 34 |
| 05 **118035** 001 | 35 |
| 05 **118036** 001 | 35 |
| 05 **118037** 001 | 35 |
| 05 **118039** 001 | 35 |
| 05 **118040** 001 | 35 |
| 05 **118042** 001 | 35 |
| 05 **118044** 001 | 35 |
| 05 **118046** 001 | 35 |
| 05 **118048** 001 | 35 |
| 05 **118050** 001 | 35 |

| Code No. | Page |
|---|---|
| 05 **118052** 001 | 35 |
| 05 **118054** 001 | 35 |
| 05 **118060** 001 | 36 |
| 05 **118062** 001 | 36 |
| 05 **118064** 001 | 36 |
| 05 **118066** 001 | 36 |
| 05 **118068** 001 | 36 |
| 05 **118070** 001 | 36 |
| 05 **118072** 001 | 36 |
| 05 **118074** 001 | 36 |
| 05 **118075** 001 | 36 |
| 05 **118076** 001 | 36 |
| 05 **118078** 001 | 36 |
| 05 **118080** 001 | 36 |
| 05 **118082** 001 | 36 |
| 05 **118089** 001 | 36 |
| 05 **118090** 001 | 36 |
| 05 **118092** 001 | 36 |
| 05 **118094** 001 | 36 |
| 05 **118096** 001 | 36 |
| 05 **118098** 001 | 36 |
| 05 **118100** 001 | 36 |
| 05 **118102** 001 | 36 |
| 05 **118103** 001 | 36 |
| 05 **118106** 001 | 36 |
| 05 **118108** 001 | 37 |
| 05 **118109** 001 | 37 |
| 05 **118110** 001 | 37 |
| 05 **118112** 001 | 37 |
| 05 **118114** 001 | 37 |
| 05 **118116** 001 | 37 |
| 05 **118118** 001 | 37 |
| 05 **118120** 001 | 37 |
| 05 **118122** 001 | 37 |
| 05 **118124** 001 | 37 |
| 05 **118126** 001 | 37 |
| 05 **118128** 001 | 37 |
| 05 **118130** 001 | 37 |
| 05 **118132** 001 | 37 |
| 05 **118134** 001 | 37 |
| 05 **118135** 001 | 37 |
| 05 **118136** 001 | 37 |
| 05 **118137** 001 | 37 |
| 05 **118145** 001 | 36 |
| 05 **118150** 001 | 40 |
| 05 **118152** 001 | 40 |
| 05 **118154** 001 | 41 |
| 05 **118156** 001 | 41 |
| 05 **118158** 001 | 41 |
| 05 **118180** 001 | 35 |
| 05 **118181** 001 | 35 |
| 05 **118182** 001 | 35 |
| 05 **118183** 001 | 35 |
| 05 **118184** 001 | 35 |
| 05 **118185** 001 | 35 |
| 05 **118186** 001 | 35 |
| 05 **130002** 001 | 364 |
| 05 **130003** 001 | 364 |
| 05 **130110** 001 | 423 |
| 05 **133150** 001 | 225 |
| 05 **133151** 001 | 225 |
| 05 **133152** 001 | 225 |

# Code No. Index


| Code No. | Page |
|---|---|
| 05 **133153** 001 | 225 |
| 05 **133154** 001 | 225 |
| 05 **133155** 001 | 225 |
| 05 **133156** 001 | 225 |
| 05 **133157** 001 | 225 |
| 05 **133158** 001 | 225 |
| 05 **133163** 001 | 217 |
| 05 **133164** 001 | 214 |
| 05 **133165** 001 | 214 |
| 05 **133180** 001 | 220 |
| 05 **133285** 001 | 10 |
| 05 **133355** 001 | 67 |
| 05 **133356** 001 | 66 |
| 05 **133862** 001 | 169 |
| 05 **134000** 001 | 38 |
| 05 **134001** 001 | 31 |
| 05 **134002** 001 | 31 |
| 05 **134011** 001 | 302 |
| 05 **134013** 001 | 275 |
| 05 **134015** 001 | 276 |
| 05 **134019** 001 | 52 |
| 05 **134021** 001 | 396 |
| 05 **134025** 001 | 303 |
| 05 **134200** 001 | 381 |
| 05 **134275** 001 | 26 |
| 05 **134370** 001 | 315 |
| 05 **134371** 001 | 315 |
| 05 **134372** 001 | 315 |
| 05 **134373** 001 | 315 |
| 05 **134374** 001 | 329 |
| 05 **134375** 001 | 329 |
| 05 **134376** 001 | 329 |
| 05 **134377** 001 | 329 |
| 05 **134378** 001 | 329 |
| 05 **134379** 001 | 329 |
| 05 **134380** 001 | 316 |
| 05 **134381** 001 | 316 |
| 05 **134382** 001 | 316 |
| 05 **134384** 001 | 325 |
| 05 **134385** 001 | 325 |
| 05 **134386** 001 | 325 |
| 05 **134397** 001 | 363 |
| 05 **134398** 001 | 363 |
| 05 **134399** 001 | 365 |
| 05 **134480** 001 | 362 |
| 05 **134491** 001 | 255 |
| 05 **134605** 001 | 318 |
| 05 **134609** 001 | 337 |
| 05 **134654** 001 | 338 |
| 05 **134655** 001 | 338 |
| 05 **134656** 001 | 338 |
| 05 **134657** 001 | 338 |
| 05 **134658** 001 | 338 |
| 05 **134664** 001 | 337 |
| 05 **134665** 001 | 337 |
| 05 **134667** 001 | 337 |
| 05 **134668** 001 | 337 |
| 05 **134669** 001 | 337 |
| 05 **134670** 001 | 337 |
| 05 **134671** 001 | 337 |
| 05 **134672** 001 | 337 |
| 05 **134673** 001 | 337 |
| 05 **134674** 001 | 337 |
| 05 **134675** 001 | 337 |
| 05 **134676** 001 | 337 |
| 05 **134677** 001 | 337 |
| 05 **134678** 001 | 337 |
| 05 **134679** 001 | 337 |
| 05 **134680** 001 | 337 |
| 05 **134681** 001 | 337 |
| 05 **134682** 001 | 337 |
| 05 **134683** 001 | 337 |
| 05 **134684** 001 | 337 |
| 05 **134685** 001 | 337 |
| 05 **134686** 001 | 337 |
| 05 **134687** 001 | 337 |
| 05 **134688** 001 | 337 |
| 05 **134690** 001 | 337 |
| 05 **134691** 001 | 337 |
| 05 **134695** 001 | 337 |
| 05 **134698** 001 | 338 |
| 05 **134699** 001 | 338 |
| 05 **134700** 001 | 338 |
| 05 **134701** 001 | 338 |
| 05 **134702** 001 | 338 |
| 05 **134703** 001 | 338 |
| 05 **134704** 001 | 338 |
| 05 **134705** 001 | 338 |
| 05 **134706** 001 | 338 |
| 05 **134707** 001 | 338 |
| 05 **134720** 001 | 338 |
| 05 **134722** 001 | 338 |
| 05 **134723** 001 | 338 |
| 05 **134732** 001 | 338 |
| 05 **134740** 001 | 334 |
| 05 **134800** 001 | 350 |
| 05 **134801** 001 | 350 |
| 05 **134802** 001 | 350 |
| 05 **134805** 001 | 350 |
| 05 **134806** 001 | 350 |
| 05 **134807** 001 | 350 |
| 05 **134905** 001 | 312 |
| 05 **134906** 001 | 315 |
| 05 **134907** 001 | 315 |
| 05 **134910** 001 | 315 |
| 05 **134911** 001 | 315 |
| 05 **134913** 001 | 315 |
| 05 **134914** 001 | 315 |
| 05 **134915** 001 | 315 |
| 05 **134919** 001 | 310 |
| 05 **134920** 001 | 310 |
| 05 **134921** 001 | 310 |
| 05 **134929** 001 | 315 |
| 05 **134930** 001 | 315 |
| 05 **134931** 001 | 315 |
| 05 **134932** 001 | 315 |
| 05 **135003** 001 | 322 |
| 05 **135005** 001 | 311 |
| 05 **135008** 001 | 310 |
| 05 **135009** 001 | 311 |
| 05 **135017** 001 | 322 |
| 05 **135040** 001 | 313 |
| 05 **135041** 001 | 313 |
| 05 **135060** 001 | 342 |
| 05 **135068** 001 | 342 |
| 05 **135069** 001 | 342 |
| 05 **135070** 001 | 342 |
| 05 **135071** 001 | 342 |
| 05 **135072** 001 | 342 |
| 05 **135073** 001 | 342 |
| 05 **135074** 001 | 342 |
| 05 **135075** 001 | 342 |
| 05 **135076** 001 | 342 |
| 05 **135077** 001 | 342 |
| 05 **135078** 001 | 342 |
| 05 **135079** 001 | 342 |
| 05 **135090** 001 | 345 |
| 05 **135091** 001 | 345 |
| 05 **135092** 001 | 345 |
| 05 **135093** 001 | 345 |
| 05 **135094** 001 | 345 |
| 05 **135095** 001 | 345 |
| 05 **135096** 001 | 345 |
| 05 **135097** 001 | 345 |
| 05 **135098** 001 | 345 |
| 05 **135099** 001 | 345 |
| 05 **135120** 001 | 337 |
| 05 **135121** 001 | 337 |
| 05 **135140** 001 | 330 |
| 05 **135141** 001 | 330 |
| 05 **135142** 001 | 330 |
| 05 **135143** 001 | 330 |
| 05 **135200** 001 | 334 |
| 05 **135201** 001 | 334 |
| 05 **135202** 001 | 334 |
| 05 **135204** 001 | 334 |
| 05 **135205** 001 | 334 |
| 05 **135220** 001 | 335 |
| 05 **135221** 001 | 335 |
| 05 **135222** 001 | 335 |
| 05 **135224** 001 | 355 |
| 05 **135225** 001 | 355 |
| 05 **135230** 001 | 337 |
| 05 **135231** 001 | 337 |
| 05 **135232** 001 | 337 |
| 05 **135233** 001 | 337 |
| 05 **135234** 001 | 337 |
| 05 **135235** 001 | 337 |
| 05 **135264** 001 | 340 |
| 05 **135265** 001 | 340 |
| 05 **135266** 001 | 340 |
| 05 **135267** 001 | 340 |
| 05 **135268** 001 | 346 |
| 05 **135269** 001 | 346 |
| 05 **135270** 001 | 318 |
| 05 **135271** 001 | 318 |
| 05 **135272** 001 | 318 |
| 05 **135273** 001 | 318 |
| 05 **135276** 001 | 318 |
| 05 **135277** 001 | 318 |
| 05 **135280** 001 | 319 |
| 05 **135281** 001 | 319 |
| 05 **135284** 001 | 319 |
| 05 **135285** 001 | 319 |
| 05 **135311** 001 | 26 |
| 05 **135530** 001 | 317 |
| 05 **135531** 001 | 317 |
| 05 **135532** 001 | 317 |
| 05 **135810** 001 | 383 |
| 05 **135870** 001 | 271 |
| 05 **135871** 001 | 271 |
| 05 **135903** 001 | 355 |
| 05 **135904** 001 | 355 |
| 05 **135918** 001 | 173 |
| 05 **135926** 001 | 270 |
| 05 **135927** 001 | 274 |
| 05 **135928** 001 | 273 |
| 05 **135938** 001 | 40 |
| 05 **135939** 001 | 272 |
| 05 **135942** 001 | 249 |
| 05 **135949** 001 | 104 |
| 05 **135961** 001 | 66 |
| 05 **135973** 001 | 55 |
| 05 **136000** 001 | 364 |
| 05 **136001** 001 | 365 |
| 05 **136002** 001 | 365 |
| 05 **136011** 001 | 397 |
| 05 **136026** 001 | 275 |
| 05 **136033** 001 | 29 |
| 05 **136039** 001 | 32 |
| 05 **136042** 001 | 276 |
| 05 **136043** 001 | 401 |
| 05 **136070** 001 | 47 |
| 05 **136071** 001 | 304 |
| 05 **136072** 001 | 240 |
| 05 **136073** 001 | 421 |
| 05 **136074** 001 | 164 |
| 05 **136075** 001 | 253 |
| 05 **136076** 001 | 438 |
| 05 **136301** 001 | 345 |
| 05 **136302** 001 | 345 |
| 05 **136303** 001 | 345 |
| 05 **136304** 001 | 345 |
| 05 **136305** 001 | 317 |
| 05 **136306** 001 | 317 |
| 05 **136307** 001 | 317 |
| 05 **136308** 001 | 326 |
| 05 **136309** 001 | 326 |
| 05 **136310** 001 | 326 |
| 05 **136311** 001 | 334 |
| 05 **136312** 001 | 334 |
| 05 **136313** 001 | 334 |
| 05 **136314** 001 | 334 |
| 05 **136315** 001 | 334 |
| 05 **136316** 001 | 334 |
| 05 **136385** 001 | 375 |
| 05 **136390** 001 | 389 |
| 05 **136391** 001 | 390 |
| 05 **136392** 001 | 377 |
| 05 **136393** 001 | 392 |
| 05 **136400** 001 | 170 |
| 05 **136413** 001 | 209 |
| 05 **136414** 001 | 31 |
| 05 **136420** 001 | 119 |
| 05 **136421** 001 | 144 |
| 05 **136422** 001 | 171 |
| 05 **136424** 001 | 48 |
| 05 **136425** 001 | 48 |

| Code No. | Page |
|---|---|
| 05 **136426** 001 | 49 |
| 05 **136700** 001 | 32 |
| 05 **138006** 001 | 364 |
| 05 **138007** 001 | 159 |
| 05 **138070** 001 | 15 |
| 05 **138250** 001 | 25 |
| 05 **138257** 001 | 16 |
| 05 **138258** 001 | 16 |
| 05 **138259** 001 | 16 |
| 05 **138260** 001 | 16 |
| 05 **138261** 001 | 16 |
| 05 **138262** 001 | 16 |
| 05 **138263** 001 | 16 |
| 05 **138264** 001 | 16 |
| 05 **138265** 001 | 16 |
| 05 **138266** 001 | 16 |
| 05 **138268** 001 | 16 |
| 05 **138269** 001 | 16 |
| 05 **138270** 001 | 16 |
| 05 **140310** 001 | 266 |
| 05 **145100** 001 | 279 |
| 05 **150101** 001 | 283 |
| 05 **150102** 001 | 284 |
| 05 **150103** 001 | 284 |
| 05 **150104** 001 | 285 |
| 05 **150105** 001 | 285 |
| 05 **150106** 001 | 286 |
| 05 **150110** 001 | 286 |
| 05 **150111** 001 | 287 |
| 05 **150112** 001 | 287 |
| 05 **150113** 001 | 288 |
| 05 **150114** 001 | 288 |
| 05 **150115** 001 | 289 |
| 05 **150116** 001 | 289 |
| 05 **150120** 001 | 290 |
| 05 **150121** 001 | 290 |
| 05 **150122** 001 | 291 |
| 05 **150123** 001 | 291 |
| 05 **150124** 001 | 292 |
| 05 **150130** 001 | 282 |

| Code No. | Page |
|---|---|
| 05 **150140** 001 | 292 |
| 05 **150150** 001 | 293 |
| 05 **150151** 001 | 294 |
| 05 **150152** 001 | 295 |
| 05 **150180** 001 | 296 |
| 05 **150181** 001 | 296 |
| 05 **150182** 001 | 296 |
| 05 **150183** 001 | 297 |
| 05 **150184** 001 | 297 |
| 05 **160785** 001 | 105 |
| 05 **160821** 001 | 338 |
| 05 **160830** 001 | 334 |
| 05 **160885** 001 | 345 |
| 05 **160895** 001 | 318 |
| 05 **160896** 001 | 316 |
| 05 **160899** 001 | 316 |
| 05 **160901** 001 | 318 |
| 05 **160908** 001 | 318 |
| 05 **160917** 001 | 337 |
| 05 **160924** 001 | 363 |
| 05 **160956** 001 | 337 |
| 05 **160976** 001 | 363 |
| 05 **160977** 001 | 363 |
| 05 **160979** 001 | 363 |
| 05 **160981** 001 | 363 |
| 05 **160983** 001 | 315 |
| 05 **200496** 001 | 335 |
| 05 **203913** 001 | 317 |
| 05 **203914** 001 | 317 |
| 05 **204126** 001 | 338 |
| 05 **221110** 001 | 352 |
| 05 **223161** 001 | 24 |
| 05 **259135** 001 | 338 |
| 05 **300004** 001 | 53 |
| 05 **308428** 001 | 334 |
| 05 **311517** 001 | 364 |
| 05 **319835** 001 | 334 |
| 05 **320430** 001 | 337 |
| 05 **320540** 001 | 24 |
| 05 **323780** 001 | 317 |

| Code No. | Page |
|---|---|
| 05 **323781** 001 | 317 |
| 05 **324901** 001 | 351 |
| 05 **326310** 001 | 337 |
| 05 **328448** 001 | 334 |
| 05 **332600** 001 | 334 |
| 05 **332606** 001 | 337 |
| 05 **332607** 001 | 335 |
| 05 **332609** 001 | 335 |
| 05 **332610** 001 | 335 |
| 05 **340245** 001 | 349 |
| 05 **340330** 001 | 12 |
| 05 **344511** 001 | 367 |
| 05 **344512** 001 | 367 |
| 05 **344513** 001 | 367 |
| 05 **344514** 001 | 367 |
| 05 **344900** 001 | 337 |
| 05 **345018** 001 | 335 |
| 05 **345019** 001 | 337 |
| 05 **345026** 001 | 335 |
| 05 **345028** 001 | 335 |
| 05 **345032** 001 | 335 |
| 05 **345035** 001 | 335 |
| 05 **345047** 001 | 334 |
| 05 **345056** 001 | 335 |
| 05 **345281** 001 | 37 |
| 05 **345282** 001 | 37 |
| 05 **345284** 001 | 36 |
| 05 **345285** 001 | 36 |
| 05 **345290** 001 | 35 |
| 05 **345350** 001 | 335 |
| 05 **345351** 001 | 335 |
| 05 **345352** 001 | 335 |
| 05 **346281** 001 | 311 |
| 05 **346286** 001 | 317 |
| 05 **346288** 001 | 345 |
| 05 **346293** 001 | 173 |

| Code No. | Page |
|---|---|
| 05 **347100** 001 | 363 |
| 05 **347106** 001 | 21 |
| 05 **347153** 001 | 376 |
| 05 **347735** 002 | 23 |
| 05 **347736** 002 | 23 |
| 05 **347743** 001 | 14 |
| 05 **347777** 001 | 67 |
| 05 **347778** 001 | 25 |
| 05 **350430** 001 | 345 |
| 05 **350451** 001 | 403 |
| 05 **380033** 001 | 345 |
| 05 **380045** 001 | 345 |
| 05 **380046** 001 | 345 |
| 05 **380047** 001 | 345 |
| 05 **380048** 001 | 345 |
| 05 **380049** 001 | 345 |
| 05 **380050** 001 | 345 |
| 05 **380124** 001 | 346 |
| 05 **380125** 001 | 346 |
| 05 **380126** 001 | 346 |
| 05 **380127** 001 | 346 |
| 05 **380128** 001 | 346 |
| 05 **380129** 001 | 346 |
| 05 **380130** 001 | 346 |
| 05 **380131** 001 | 346 |
| 05 **380161** 001 | 315 |
| 05 **380200** 001 | 317 |
| 05 **380201** 001 | 317 |
| 05 **380202** 001 | 317 |
| 05 **480172** 001 | 311 |
| 05 **480222** 001 | 322 |
| 05 **670446** 001 | 305 |
| 05 **670447** 001 | 305 |
| 05 **670448** 001 | 305 |

# Article No. Index


| Article No. | Page |
|---|---|
| 68 | 266 |
| 80 | 265 |
| 80 RA | 247 |
| 81 | 266 |
| 82 | 266 |
| 83 | 266 |
| 84 | 266 |
| 85 | 266 |
| 86 | 266 |
| 87 | 266 |
| 88/1 | 264 |
| 91 | 265 |
| 95 Vario | 265 |
| 160 i VDE | 60 |
| 160 i VDE SB | 60 |
| 160 i/162 i/167 i/9 | 67 |
| 160 i/165 i/7 Rack | 65 |
| 160 i/168 i/6 Rack | 67 |
| 160 i/6 Rack | 65 |
| 160 i/7 Rack | 65 |
| 160 iS VDE | 60 |
| 160 iS/7 | 66 |
| 160 iSS | 60 |
| 160 iSS/7 | 66 |
| 162 i PH/S VDE | 62 |
| 162 i PH/S VDE SB | 62 |
| 162 i VDE PH | 61 |
| 162 i VDE PH SB | 61 |
| 162 iS PH VDE | 61 |
| 162 iS PH/S VDE | 62 |
| 162 iSS PH VDE | 61 |
| 165 i PZ VDE | 61 |
| 165 i PZ VDE SB | 61 |
| 165 i PZ/S VDE | 62 |
| 165 i PZ/S VDE SB | 62 |
| 165 iS PZ VDE | 62 |
| 165 iS PZ/S VDE | 63 |
| 165 iS PZ/S VDE # 1 + 2 | 67 |
| 165 iSS PZ/S VDE | 63 |
| 167 i TORX® VDE | 63 |
| 167 i/6 TORX® VDE | 66 |
| 168 i VDE | 63 |
| 168 i VDE SB | 63 |
| 190 i VDE | 64 |
| 247 | 64 |
| 247 SB | 64 |
| 300 Hex | 417 |
| 300 IP | 418 |
| 300 TX | 417 |
| 334 | 12 |
| 334 SB | 12 |
| 334 SK | 12 |
| 334 SK/6 | 22 |
| 334/355 SK/6 | 22 |
| 334/355/6 Rack | 23 |
| 334/368/6 | 25 |
| 334/6 | 22 |
| 335 | 11 |
| 335 SB | 12 |
| 335 Stubby | 19 |
| 335/350/355/3 | 23 |
| 335/350/355/4 | 23 |
| 335/350/355/6 | 23 |
| 335/350/367/7 | 24 |
| 338 | 18 |
| 338/2 | 26 |
| 350 PH | 13 |
| 350 PH SB | 13 |
| 350 SK | 13 |
| 350 PH Stubby | 19 |
| 352 | 15 |
| 354 | 14 |
| 355 PZ | 14 |
| 355 PZ SB | 14 |
| 355 SK | 13 |
| 355 Stubby | 19 |
| 367 TORX® | 16 |
| 367 TORX® SB | 16 |
| 367/6 TORX® | 25 |
| 367 TORX® BO | 16 |
| 367/6 TORX® BO | 25 |
| 367 TORX® HF | 15 |
| 367/4 TORX® HF | 24 |
| 367/6 TORX® HF | 24 |
| 367/7 TORX® HF | 24 |
| 367 TORX® Stubby | 19 |
| 367 TORX PLUS® | 17 |
| 368 | 17 |
| 368 SB | 17 |
| 368 Stubby | 20 |
| 391 | 18 |
| 391/3 | 26 |
| 392 | 278 |
| 393 S | 278 |
| 395 | 18 |
| 395 HO | 19 |
| 395 HO/3 | 26 |
| 395 HO/7 SM | 25 |
| 400 Hex | 418 |
| 400 i Hex | 99 |
| 400 TX | 418 |
| 410 i VDE A RA | 92 |
| 410 i VDE B | 92 |
| 410 i VDE B RA | 92 |
| 411 A RA | 44 |
| 416 R | 43 |
| 416 RA | 44 |
| 454 | 41 |
| 454 HF | 42 |
| 454 Imperial | 42 |
| 454 Imperial HF | 42 |
| 454/5 HF SHK Set 1 | 47 |
| 454/7 HF Set 1 | 45 |
| 454/7 HF Set 2 | 45 |
| 454/10 HF Set Imperial 1 | 46 |
| 454/10 HF Set Imperial 2 | 46 |
| 467 TORX® HF | 42 |
| 467/7 TORX® HF Set 1 | 47 |
| 467/7 TORX® HF Set 2 | 47 |
| 495 | 43 |
| 712 | 265 |
| 780 A | 367 |
| 780 B | 367 |
| 780 C | 367 |
| 781 A | 366 |
| 781 B | 366 |
| 781 C | 366 |
| 781/5 Set 1 | 366 |
| 784 A/1 | 367 |
| 784 B | 367 |
| 784 C | 367 |
| 800 S | 269 |
| 800/0 Micro | 340 |
| 800/1 BDC | 338 |
| 800/1 BTZ | 339 |
| 800/1 TZ | 339 |
| 800/1 Z | 339 |
| 800/2 Z | 340 |
| 800/4 Z | 340 |
| 800/9 C | 340 |
| 809/1 ESD Stubby | 57 |
| 810/1 Vario | 279 |
| 811/1 ESD Stubby | 57 |
| 811/1 Stubby | 279 |
| 812/1 Vario | 279 |
| 813 | 279 |
| 813 R | 278 |
| 813 R ESD | 54 |
| 815/1 | 279 |
| 816 R | 278 |
| 816 R SB | 278 |
| 816 R ESD | 54 |
| 817 R | 277 |
| 817 R SB | 277 |
| 817 VDE | 84 |
| 826 T Kraftform Turbo | 249 |
| 827 T Kraftform Turbo | 85 |
| 830 | 265 |
| 837 i RA | 73 |
| 838 RA S | 247 |
| 838 RA-R L | 246 |
| 838 RA-R M | 247 |
| 840 S | 269 |
| 840/0 Micro | 346 |
| 840/1 BTZ | 342 |

| Article No. | Page |
|---|---|
| 840/1 IMP DC DIY | 341 |
| 840/1 IMP DC SB | 341 |
| 840/1 Z | 342 |
| 840/1 Z SB | 343 |
| 840/1 Z BO | 347 |
| 840/2 Z | 346 |
| 840/4 IMP DC DIY | 343 |
| 840/4 IMP DC SB | 344 |
| 840/4 Z | 345 |
| 840/4 Z SB | 345 |
| 840/4 Z BO | 347 |
| 840/9 C | 346 |
| 842/1 Z | 343 |
| 842/4 | 346 |
| 843 | 392 |
| 844 | 392 |
| 844/7 | 393 |
| 845 | 393 |
| 845/8 | 393 |
| 846 HSS | 393 |
| 846/8 | 394 |
| 847 HSS | 394 |
| 847/7 | 394 |
| 848 HSS | 395 |
| 848/851/867/19 | 395 |
| 849 HSS | 395 |
| 849/855/867/18 | 396 |
| 851 S | 268 |
| 851/0 Micro | 318 |
| 851/1 A | 310 |
| 851/1 BDC | 309 |
| 851/1 BDC SB | 309 |
| 851/1 BTH | 309 |
| 851/1 BTZ | 310 |
| 851/1 IMP DC DIY | 308 |
| 851/1 IMP DC SB | 308 |
| 851/1 J | 313 |
| 851/1 RDC | 310 |
| 851/1 RH | 311 |
| 851/1 RZ | 311 |
| 851/1 RZ SB | 311 |
| 851/1 TH | 311 |
| 851/1 TiN | 311 |
| 851/1 TZ | 312 |
| 851/1 TZ SB | 312 |
| 851/1 Z | 312 |
| 851/1 Z DIY | 312 |
| 851/1 Z DIY 100 | 313 |
| 851/1 Z SB | 312 |
| 851/2 Z | 318 |
| 851/4 A | 315 |
| 851/4 BDC | 314 |
| 851/4 BTH | 315 |
| 851/4 BTZ | 315 |
| 851/4 IMP DC DIY | 313 |
| 851/4 IMP DC SB | 314 |
| 851/4 J | 317 |
| 851/4 PH/S | 326 |
| 851/4 R | 316 |
| 851/4 RH | 315 |
| 851/4 TH | 316 |
| 851/4 TZ | 316 |
| 851/4 TZ SB | 316 |
| 851/4 Z | 316 |
| 851/4 Z SB | 317 |
| 851/9 C | 318 |
| 851/11 | 318 |
| 851/12 | 318 |
| 851/16 | 318 |
| 851/21 J | 319 |
| 853/1 TZ ACR® | 312 |
| 853/4 ACR® | 317 |
| 853/4 ACR® Harpoon | 318 |
| 853/4 ACR® SL | 317 |
| 855 S | 268 |
| 855/0 Micro | 326 |
| 855/1 BDC | 320 |
| 855/1 BDC SB | 321 |
| 855/1 BTH | 321 |
| 855/1 BTZ | 321 |
| 855/1 IMP DC DIY | 319 |
| 855/1 IMP DC SB | 319 |
| 855/1 RZ | 322 |
| 855/1 TH | 322 |
| 855/1 TH SB | 322 |
| 855/1 TiN | 322 |
| 855/1 TZ | 322 |
| 855/1 Z | 322 |
| 855/1 Z DIY | 323 |
| 855/1 Z DIY 100 | 323 |
| 855/1 Z SB | 323 |
| 855/2 Z | 326 |
| 855/4 BDC | 324 |
| 855/4 BTH | 324 |
| 855/4 BTZ | 325 |
| 855/4 IMP DC DIY | 323 |
| 855/4 IMP DC SB | 324 |
| 855/4 PZ/S | 327 |
| 855/4 TH | 325 |
| 855/4 TZ | 325 |
| 855/4 TZ SB | 325 |
| 855/4 Z | 325 |
| 855/4 Z SB | 326 |
| 855/11 | 326 |
| 855/12 | 326 |
| 857/1 Z | 353 |
| 857/4 Z | 353 |
| 860/1 XZN | 352 |
| 867 S TORX® | 268 |
| 867/0 Micro TORX® | 335 |
| 867/1 IMP DC TORX® DIY | 327 |
| 867/1 IMP DC TORX® SB | 327 |
| 867/1 TORX® | 330 |
| 867/1 TORX® SB | 330 |
| 867/1 TORX® BDC | 329 |
| 867/1 TORX® BDC SB | 329 |
| 867/1 TORX® BTZ | 329 |
| 867/1 TORX® DIY | 331 |
| 867/1 TORX® DIY 100 | 331 |
| 867/1 TORX® HF | 329 |
| 867/1 TZ TORX® | 330 |
| 867/1 Z TORX® BO | 335 |
| 867/1 Z TORX® BO SB | 336 |
| 867/1 Z TORX® W | 331 |
| 867/1 ZA TORX® | 332 |
| 867/2 Z TORX® | 335 |
| 867/4 IMP DC TORX® DIY | 332 |
| 867/4 IMP DC TORX® SB | 332 |
| 867/4 TORX® HF | 333 |
| 867/4 TORX® KK | 333 |
| 867/4 Z TORX® | 334 |
| 867/4 Z TORX® BO | 336 |
| 867/4 Z TORX® BO SB | 337 |
| 867/4 Z TORX® SB | 334 |
| 867/9 C TORX® | 335 |
| 867/12 TORX® | 335 |
| 867/15 TORX® | 335 |
| 867/1 IP TORX PLUS® | 337 |
| 867/4 IP TORX PLUS® | 337 |
| 867/9 C IP TORX PLUS® | 337 |
| 867/1 IPR TORX PLUS® | 338 |
| 867/4 IPR TORX PLUS® | 338 |
| 868 S | 269 |
| 868/1 IMP DC DIY | 348 |
| 868/1 IMP DC SB | 348 |
| 868/1 V | 349 |
| 868/1 Z | 349 |
| 868/1 Z SB | 349 |
| 868/4 | 350 |
| 868/4 SB | 350 |
| 868/4 BTZ | 350 |
| 868/4 IMP DC DIY | 349 |
| 868/4 IMP DC SB | 350 |
| 868/4 V | 351 |
| 869/4 | 353 |
| 869/4 M | 354 |
| 869/4 M SB | 354 |
| 869/4 M SB Set A | 355 |
| 869/9 | 355 |
| 870/1 | 364 |
| 870/2 | 365 |
| 870/4 | 365 |
| 870/4 A | 364 |
| 870/4 SB | 365 |
| 870/4/7 Set A SB | 365 |

# Article No. Index


| Article No. | Page |
|---|---|
| 870/7 | 365 |
| 870/14 | 365 |
| 871/1 DC TORQ-SET® Mplus | 351 |
| 871/1 TORQ-SET® Mplus 25 mm | 351 |
| 871/1 TORQ-SET® Mplus 32 mm | 351 |
| 871/2 TORQ-SET® Mplus | 352 |
| 871/4 DC TORQ-SET® Mplus | 351 |
| 871/4 TORQ-SET® Mplus | 352 |
| 872/9 | 352 |
| 875/1 TRI-WING® 25 mm | 352 |
| 875/4 TRI-WING® | 352 |
| 879/4 | 355 |
| 881/4/1 SB | 364 |
| 887/4 RR | 360 |
| 887/4 RR SB | 360 |
| 888/4/1 K | 360 |
| 889/4 R | 360 |
| 889/4/1 | 360 |
| 889/4/1 F | 361 |
| 889/4/1 K | 360 |
| 889/4/1 K SB | 360 |
| 890/4/1 | 362 |
| 893/4/1 K | 362 |
| 893/4/1 K SB | 362 |
| 894/4/1 | 361 |
| 894/4/1 K | 361 |
| 895/4/1 | 361 |
| 895/4/1 K | 361 |
| 895/4/1 K SB | 361 |
| 896/4/1 SB | 364 |
| 897/4 IMP R | 358 |
| 897/4 Impaktor | 358 |
| 897/4 Impaktor R | 358 |
| 897/4 R | 359 |
| 897/4 R SB | 359 |
| 898/4 | 362 |
| 898/9 | 362 |
| 898/21 | 362 |
| 899/3/1 | 363 |
| 899/4/1 | 363 |
| 899/4/1 SB | 363 |
| 899/4/1 S | 363 |
| 899/14/1 SB | 363 |
| 917 SPH | 9 |
| 917 SPH SB | 9 |
| 917 SPHS | 9 |
| 918 SPZ | 9 |
| 918 SPZ SB | 9 |
| 921 | 268 |
| 932 A | 8 |
| 932 A SB | 8 |
| 932 AS | 8 |
| 932/6 | 10 |
| 932/918/6 | 10 |
| 932 S/6 | 10 |

| Article No. | Page |
|---|---|
| 950 | 225 |
| 950 BM | 226 |
| 950 L | 225 |
| 950 L HF | 225 |
| 950 PKL | 224 |
| 950 PKL BM | 224 |
| 950 PKL Imperial | 224 |
| 950 PKLS | 224 |
| 950 PKS | 225 |
| 950 SPKL HF Multicolour | 222 |
| 950 SPKL Multicolour | 223 |
| 950 SPKL Multicolour Imperial | 223 |
| 950 SPKS Multicolour | 223 |
| 950 SPKS Multicolour Imperial | 223 |
| 950/7 Hex-Plus 1 | 218 |
| 950/7 Hex-Plus Magnet 1 | 218 |
| 950/7 Hex-Plus Multicolour Magnet 1 | 216 |
| 950/9 Hex-Plus 1 | 216 |
| 950/9 Hex-Plus 1 SB | 216 |
| 950/9 Hex-Plus 2 | 216 |
| 950/9 Hex-Plus 3 | 217 |
| 950/9 Hex-Plus 4 | 217 |
| 950/9 Hex-Plus 5 | 217 |
| 950/9 Hex-Plus 6 | 217 |
| 950/9 Hex-Plus 6 SB | 217 |
| 950/9 Hex-Plus 7 | 217 |
| 950/9 Hex-Plus 8 | 218 |
| 950/9 Hex-Plus Imperial 1 | 220 |
| 950/9 Hex-Plus Imperial 1 SB | 220 |
| 950/9 Hex-Plus Multicolour 1 | 213 |
| 950/9 Hex-Plus Multicolour 1 SB | 214 |
| 950/9 Hex-Plus Multicolour 2 | 214 |
| 950/9 Hex-Plus Multicolour 3 | 214 |
| 950/9 Hex-Plus Multicolour HF 1 | 213 |
| 950/9 Hex-Plus Multicolour Imperial 1 | 215 |
| 950/9 Hex-Plus Multicolour Imperial 2 | 215 |
| 950/9 Hex-Plus Multicolour Imperial 3 | 215 |
| 950/9 L Hex-Plus HF 1 | 216 |
| 950/13 Hex-Plus Imperial 1 | 219 |
| 950/13 Hex-Plus Imperial 1 SB | 219 |
| 967 L TORX® HF | 231 |
| 967 PKL TORX® | 231 |
| 967 PKXL TORX® | 230 |
| 967 SL TORX® HF | 229 |
| 967 SPKL TORX® BO Multicolour | 230 |
| 967 SPKXL TORX® Multicolour | 229 |
| 967 SXL HF TORX® Multicolour | 229 |
| 967 SXL TORX® Multicolour | 230 |
| 967 TORX® | 231 |
| 967 XL HF TORX® | 230 |
| 967 XL TORX® | 231 |
| 967/9 TORX® BO Multicolour 1 | 228 |
| 967/9 TORX® BO Multicolour 1 SB | 228 |
| 967/9 TX 1 | 228 |
| 967/9 TX 1 SB | 228 |

| Article No. | Page |
|---|---|
| 967/9 TX HF 1 | 227 |
| 967/9 TX Multicolour HF 1 | 227 |
| 967/9 TX XL 1 | 228 |
| 967/9 TX XL HF 1 | 227 |
| 967/9 TX XL Multicolour 1 | 227 |
| 967/9 TX XL Multicolour HF 1 | 227 |
| 977 TORX® | 9 |
| 977/6 TORX® | 11 |
| 1013 | 37 |
| 1013 ESD | 53 |
| 1014 | 37 |
| 1060 i VDE | 91 |
| 1060 i/1062 i/6 VDE | 91 |
| 1060 i/1065 i/6 VDE | 92 |
| 1062 i PH VDE | 91 |
| 1065 i PZ VDE | 91 |
| 1267 A TORX PLUS® | 30 |
| 1267 A TORX® | 30 |
| 1267 B TORX PLUS® | 30 |
| 1267 B TORX® | 30 |
| 1427 | 31 |
| 1428 | 31 |
| 1429 | 37 |
| 1430 ESD | 404 |
| 1440/1442 | 32 |
| 1441 | 32 |
| 1460 ESD Kraftform Micro | 409, 413 |
| 1529 ESD | 51 |
| 1550 PH ESD | 49 |
| 1550 PH S ESD | 50 |
| 1550/6 ESD | 53 |
| 1555 PZ ESD | 50 |
| 1567 TORX® ESD | 50 |
| 1567 TORX® HF ESD | 50 |
| 1567 TORX® BO ESD | 50 |
| 1567 TORX PLUS® IPR ESD | 50 |
| 1569 ESD | 51 |
| 1572 ESD | 51 |
| 1573 ESD | 51 |
| 1578 A ESD | 49 |
| 1578 A/6 ESD | 53 |
| 1834 | 28 |
| 1850 PH | 28 |
| 1855 PZ | 28 |
| 2035 | 34 |
| 2035/6 A Micro | 40 |
| 2035/6 B Micro | 40 |
| 2050 PH | 35 |
| 2050/6 Micro | 40 |
| 2052 | 36 |
| 2052/6 Micro | 41 |
| 2054 | 36 |
| 2055 PZ | 34 |
| 2067 TORX® | 35 |
| 2067 TORX® HF | 35 |

| Article No. | Page |
|---|---|
| 2067 TORX® BO | 35 |
| 2067/6 TORX® BO | 41 |
| 2067 TORX PLUS® IPR | 35 |
| 2069 Micro | 37 |
| 2069/6 Micro | 41 |
| 2072 | 36 |
| 2090 | 456 |
| 2090/17 | 456 |
| 3160 i VDE | 58 |
| 3160 i/7 Rack | 59 |
| 3162 i PH VDE | 58 |
| 3165 i VDE | 58 |
| 3165 i/6 Rack | 59 |
| 3167 i VDE TORX® | 59 |
| 3167 i/7 Rack | 59 |
| 3334 | 6 |
| 3334/3350/3355/6 | 8 |
| 3334/3355/6 | 7 |
| 3334/6 | 7 |
| 3335 | 6 |
| 3350 PH | 6 |
| 3355 PZ | 7 |
| 3367 | 7 |
| 3368 | 7 |
| 3800/4 | 339 |
| 3816 R | 277 |
| 3817 VDE Stainless | 70 |
| 3840/1 TS | 341 |
| 3840/4 | 344 |
| 3851/1 TS PH | 308 |
| 3851/1 TS PH SB | 309 |
| 3851/4 PH | 314 |
| 3855/1 TS PZ | 320 |
| 3855/1 TS PZ SB | 320 |
| 3855/4 PZ | 324 |
| 3867/1 TS TORX® | 328 |
| 3867/1 TS TORX® SB | 328 |
| 3867/4 TORX® BO | 336 |
| 3868/4 | 350 |
| 3869/4 | 353 |
| 3888/4/1 K | 359 |
| 3888/4/1 K SB | 359 |
| 3950 PKL | 222 |
| 3950 PKL Imperial | 222 |
| 3950 SPKL Multicolour | 221 |
| 3950 SPKL Multicolour HF | 221 |
| 3950 SPKL Multicolour Imperial | 222 |
| 3950/9 Hex-Plus Imperial Stainless 1 | 213 |
| 3950/9 Hex-Plus Multicolour HF Stainless 1 | 212 |
| 3950/9 Hex-Plus Multicolour Imperial Stainless 1 | 215 |
| 3950/9 Hex-Plus Multicolour Stainless 1 | 212 |
| 3950/9 Hex-Plus Stainless 1 | 212 |
| 3950/9 Hex-Plus Stainless 1 SB | 213 |

| Article No. | Page |
|---|---|
| 3967 SXL HF TORX® Multicolour | 229 |
| 3967/9 TX SXL Multicolour HF Stainless 1 | 227 |
| 6000 Joker | 194 |
| 6000 Joker 4 Set 1 | 196 |
| 6000 Joker 11 Set 1 | 196 |
| 6000 Joker Imperial | 194 |
| 6000 Joker 4 Imperial Set 1 | 197 |
| 6000 Joker 8 Imperial Set 1 | 196 |
| 6000/6002 Joker 6 Set 1 | 196 |
| 6001 Joker Switch | 197 |
| 6001 Joker Switch 4 Set 1 | 198 |
| 6001 Joker Switch 11 Set 1 | 198 |
| 6001 Joker Switch Imperial | 197 |
| 6001 Joker Switch 4 Imperial Set 1 | 198 |
| 6001 Joker Switch 8 Imperial Set 1 | 198 |
| 6002 Joker Double | 199 |
| 6003 Joker | 199 |
| 6003 Joker 4 Set 1 | 203 |
| 6003 Joker 5 Set 1 | 201 |
| 6003 Joker 11 Set 1 | 201 |
| 6003 Joker 15 Set 1 | 201 |
| 6003 Joker 22 Set 1 | 200 |
| 6003 Joker Imperial | 199 |
| 6003 Joker 4 Imperial Set 1 | 204 |
| 6003 Joker 5 Imperial Set 1 | 203 |
| 6003 Joker 8 Imperial Set 1 | 201 |
| 6003 Joker Pedal | 200 |
| 6004 Joker S | 205 |
| 6004 Joker M | 205 |
| 6004 Joker L | 206 |
| 6004 Joker XS | 205 |
| 6004 Joker XL | 206 |
| 6004 Joker XXL | 206 |
| 6004 Joker 4 Set 1 | 206 |
| 6004 Joker VDE XS | 98 |
| 6004 Joker VDE S | 99 |
| 6004 Joker VDE M | 99 |
| 6004 Joker VDE L | 99 |
| 6004 Joker VDE 4 Set 1 | 98 |
| 6005 Joker Double | 207 |
| 6005 Joker 4 Set 1 | 207 |
| 6006 Joker XS/S | 208 |
| 6006 Joker M/L | 208 |
| 6006 Joker 2 Set 1 | 207 |
| 6007 Joker | 209 |
| 6007 Joker 5 Set 1 | 209 |
| 7400 | 400, 404, 405, 406, 407, 410, 411, 412 |
| 7400 ESD | 404, 407, 408, 413, 414 |
| 7400 ESD Halfmoon | 404, 408, 414 |
| 7400 ESD Imperial | 404 |
| 7400 VDE | 83 |
| 7440/41 | 402 |
| 7440/41/42 | 403 |
| 7443/12 | 402 |

| Article No. | Page |
|---|---|
| 7443/61/9 | 403 |
| 7445/46/47 | 403 |
| 7508 VDE | 69 |
| 7510 | 415 |
| 7510/14 | 415 |
| 7515 | 416 |
| 7515/7 | 417 |
| 7515/16 | 416 |
| 7516 VDE | 69 |
| 7761 | 455 |
| 7762 | 455 |
| 7763 | 455 |
| 7770 | 444 |
| 7771 | 446 |
| 7772 A | 448 |
| 7772 B | 448 |
| 7772 C | 448 |
| 7773 A | 449 |
| 7773 B | 450 |
| 7773 C | 450 |
| 7774/1 | 451 |
| 7774/2 | 451 |
| 7774/3 | 452 |
| 7775 | 452 |
| 7776 | 452 |
| 7779/1 | 453 |
| 7779/2 | 453 |
| 7780 | 445 |
| 7781 | 447 |
| 7782 C | 449 |
| 7782 E | 449 |
| 7783 C | 450 |
| 7783 E | 451 |
| 7786 | 453 |
| 7790/1 | 454 |
| 7790/2 | 454 |
| 7870 Joker L | 442 |
| 7870 Joker M | 441 |
| 7870 Joker S | 441 |
| 7880 Joker L | 444 |
| 7880 Joker XL | 443 |
| 7880 Joker XXL | 443 |
| 7880 Joker 3XL | 442 |
| 8000 A | 106 |
| 8000 A SB | 106 |
| 8000 B | 123 |
| 8000 B SB | 124 |
| 8000 C | 147 |
| 8000 C SB | 147 |
| 8000 E | 170 |
| 8001 A SB | 176 |
| 8002 C KOLOSS All Inclusive Set | 169 |
| 8002 C KOLOSS Set | 170 |
| 8003 A | 108 |
| 8003 B | 127 |

# Article No. Index


| Article No. | Page |
|---|---|
| 8003 C | 150 |
| 8004 A | 109 |
| 8004 B | 129 |
| 8004 C | 152 |
| 8005 | 176 |
| 8006 C | 148 |
| 8006 SC 1 | 148 |
| 8007 B VDE | 95 |
| 8008 A | 177 |
| 8009 Zyklop Pocket Set 1 | 165 |
| 8009 Zyklop Pocket Set 2 | 167 |
| 8009 Zyklop Pocket Set 3 | 168 |
| 8009 Zyklop Pocket Set 4 | 169 |
| 8009 Zyklop Pocket Imperial Set 1 | 166 |
| 8009 Zyklop Pocket Imperial Set 2 | 167 |
| 8010 B | 125 |
| 8011 A | 176 |
| 8100 SA 2 | 104 |
| 8100 SA 4 | 105 |
| 8100 SA 6 | 103 |
| 8100 SA 7 | 107 |
| 8100 SA 8 | 108 |
| 8100 SA 9 | 103 |
| 8100 SA 10 | 107 |
| 8100 SA 11 | 109 |
| 8100 SA 12 HF | 109 |
| 8100 SA All-In | 102 |
| 8100 SA/SC 2 | 105 |
| 8100 SB 2 | 122 |
| 8100 SB 4 | 122 |
| 8100 SB 6 | 121 |
| 8100 SB 7 | 126 |
| 8100 SB 8 | 128 |
| 8100 SB 9 | 121 |
| 8100 SB 10 | 127 |
| 8100 SB 11 | 129 |
| 8100 SB 12 | 124 |
| 8100 SB 13 | 125 |
| 8100 SB All-in | 120 |
| 8100 SB HF 1 | 129 |
| 8100 SB VDE 1 | 94 |
| 8100 SC 2 | 146 |
| 8100 SC 4 | 147 |
| 8100 SC 6 | 145 |
| 8100 SC 7 | 149 |
| 8100 SC 8 | 151 |
| 8100 SC 9 | 146 |
| 8100 SC 10 | 150 |
| 8100 SC 11 | 152 |
| 8700 A FL | 117 |
| 8740 A | 116 |
| 8740 A HF | 116 |
| 8740 A HF 1 | 117 |
| 8740 A VDE HF | 93 |
| 8740 B | 140 |
| 8740 B HF | 139 |
| 8740 B HF 1 | 141 |
| 8740 B HF Imperial 1 | 141 |
| 8740 B VDE HF | 96 |
| 8740 C HF | 162 |
| 8740 C HF 1 | 163 |
| 8740 C HF 2 | 163 |
| 8751 A | 117 |
| 8755 A | 117 |
| 8760 B VDE XZN | 96 |
| 8767 A | 114 |
| 8767 A HF | 114 |
| 8767 A HF 1 | 115 |
| 8767 A VDE HF | 93 |
| 8767 B | 138 |
| 8767 B HF | 137 |
| 8767 B HF 1 | 139 |
| 8767 B VDE HF | 96 |
| 8767 C HF | 160 |
| 8767 C HF 1 | 161 |
| 8767 C HF 2 | 161 |
| 8767 C HF 3 | 162 |
| 8780 C | 170 |
| 8781 C | 170 |
| 8782 C | 170 |
| 8784 A1 | 119 |
| 8784 B1 | 143 |
| 8784 C2 | 165 |
| 8789 A | 118 |
| 8789 B | 143 |
| 8789 C | 164 |
| 8790 A VDE | 93 |
| 8790 B Impaktor | 130 |
| 8790 B Impaktor Deep | 130 |
| 8790 B Impaktor Deep Set 1 | 133 |
| 8790 B Impaktor Deep Imperial Set 1 | 133 |
| 8790 B VDE | 96 |
| 8790 C HF 1 | 157 |
| 8790 C Impaktor | 152 |
| 8790 C Impaktor Deep | 154 |
| 8790 C Impaktor Deep Set 1 | 154 |
| 8790 C Wheel Impaktor | 157 |
| 8790 FA | 177 |
| 8790 HMA | 110 |
| 8790 HMA Deep | 113 |
| 8790 HMA HF | 110 |
| 8790 HMB | 131 |
| 8790 HMB Deep | 136 |
| 8790 HMB HF | 131 |
| 8790 HMC | 155 |
| 8790 HMC Deep | 158, 159 |
| 8790 HMC Deep | 159 |
| 8790 HMC HF | 155 |
| 8794 A | 119 |
| 8794 B | 143 |
| 8794 C | 165 |
| 8794 LA | 118 |
| 8794 LB | 143 |
| 8794 LB VDE | 97 |
| 8794 LC | 164 |
| 8794 SA | 118 |
| 8794 SA VDE | 94 |
| 8794 SB | 143 |
| 8794 SB VDE | 97 |
| 8794 SC | 164 |
| 8795 A | 118 |
| 8795 B | 143 |
| 8795 C | 165 |
| 8796 LA | 117 |
| 8796 LB | 142 |
| 8796 LC | 164 |
| 8796 SA | 118 |
| 8796 SB | 143 |
| 8796 SC | 164 |
| 8797 C | 149 |
| 9100 | 276 |
| 9108/2 | 32 |
| 9200 | 364 |
| 9500 | 31 |
| 9506 SB | 347 |
| 9507 SB | 348 |
| 9514 ESD | 57 |
| 9523 | 32 |
| 9524 | 401 |
| 9529 C SB | 164 |
| 9530 | 438 |
| 9532 | 276 |
| 9549 | 184 |
| 9550 | 184 |
| 9600 | 119 |
| 9601 | 144 |
| 9602 | 171 |
| 9604 | 48 |
| 9605 | 48 |
| 9606 | 49 |
| 9607 | 132 |
| 9608 | 132 |
| 9610 | 209 |
| 9611 | 31 |
| 9621 | 29 |
| 9630 | 195 |
| 9631 | 195 |
| 9632 | 195 |
| 9640 | 204 |
| 9641 | 204 |
| 9642 | 204 |
| 9650 | 20 |
| 9660 | 132 |
| 9661 | 133 |
| 9700 | 282 |

| Article No. | Page |
|---|---|
| 9710 | 283 |
| 9711 | 284 |
| 9712 | 284 |
| 9713 | 285 |
| 9714 | 285 |
| 9715 | 286 |
| 9720 | 286 |
| 9721 | 287 |
| 9722 | 287 |
| 9723 | 288 |
| 9724 | 288 |
| 9725 | 289 |
| 9726 | 289 |
| 9730 | 290 |
| 9731 | 290 |
| 9732 | 291 |
| 9733 | 291 |
| 9734 | 292 |
| 9740 | 292 |
| 9750 | 293 |
| 9751 | 294 |
| 9752 | 295 |
| 9780 | 296 |
| 9781 | 296 |
| 9782 | 296 |
| 9783 | 297 |
| 9784 | 297 |
| Belt A 1 | 111 |
| Belt A 2 | 116 |
| Belt A 3 | 115 |
| Belt A 4 | 111 |
| Belt A Deep 1 | 113 |
| Belt A Imperial 1 | 112 |
| Belt A 8/0 | 119 |
| Belt A 9/0 | 119 |
| Belt B 1 | 134 |
| Belt B 2 | 140 |
| Belt B 3 | 138 |
| Belt B 4 | 134 |
| Belt B Deep 1 | 136 |
| Belt B Imperial 1 | 142 |
| Belt B VDE 1 | 95 |
| Belt B VDE 10/0 | 97 |
| Belt B 8/0 | 144 |
| Belt B, 9/0 | 144 |
| Belt C 1 | 156 |
| Belt C 2 | 163 |
| Belt C 3 | 160 |
| Belt C Deep 1 | 159 |
| Belt C Impaktor 1 | 153 |
| Belt C Impaktor 9/0 | 171 |
| Belt C, 6/0 | 171 |
| Bicycle Big Pack 1 | 27 |
| Bicycle Set 1 | 175 |
| Bicycle Set 2 | 259 |

| Article No. | Page |
|---|---|
| Bicycle Set 3 | 187 |
| Bicycle Set 3 A | 188 |
| Bicycle Set 4 | 220 |
| Bicycle Set 5 | 245 |
| Bicycle Set 6 | 48 |
| Bicycle Set 7 | 123 |
| Bicycle Set 8 | 142 |
| Bicycle Set 9 | 175 |
| Bicycle Set 10 | 202 |
| Bicycle Set 11 | 264 |
| Bicycle Set 12 | 202 |
| Bicycle Set 13 | 33 |
| Bicycle Set 15 | 33 |
| Bicycle Set Torque 1 | 424 |
| Bit-Box 15 Impaktor PH | 308 |
| Bit-Box 15 Impaktor PZ | 319 |
| Bit-Box 15 Impaktor TX | 327 |
| Bit-Box 20 BTH PZ | 321 |
| Bit-Box 20 BTZ PH | 310 |
| Bit-Box 20 BTZ PZ | 321 |
| Bit-Box 20 PH | 313 |
| Bit-Box 20 PZ | 323 |
| Bit-Box 20 TX | 331 |
| Bit-Box 20 TX HF | 330 |
| Bit-Box 20 V Robertson | 349 |
| Bit-Check 6 Impaktor 1 | 372 |
| Bit-Check 6 Impaktor 1 SB | 372 |
| Bit-Check 6 PH Impaktor 1 | 372 |
| Bit-Check 6 PZ Impaktor 1 | 372 |
| Bit-Check 6 PZ Universal 1 | 386 |
| Bit-Check 6 SHK 1 SB | 397 |
| Bit-Check 6 Stainless 1 | 373 |
| Bit-Check 6 TX Impaktor 1 | 372 |
| Bit-Check 6 TX Universal 1 | 386 |
| Bit-Check 6 TX Universal 1 SB | 386 |
| Bit-Check 6 Universal 1 | 385 |
| Bit-Check 6 Universal 1 SB | 385 |
| Bit-Check 6 Universal 2 | 385 |
| Bit-Check 6 Universal 2 SB | 385 |
| Bit-Check 6 V Universal 1 | 386 |
| Bit-Check 6 Wood TX HF 1 | 390 |
| Bit-Check 6 Wood TX HF 1 SB | 390 |
| Bit-Check 7 Diamond 1 | 377 |
| Bit-Check 7 Diamond 1 SB | 378 |
| Bit-Check 7 Hex-Plus 1 | 384 |
| Bit-Check 7 PZ Diamond 1 | 378 |
| Bit-Check 7 PZ Universal 1 | 383 |
| Bit-Check 7 TX BO Universal 1 | 384 |
| Bit-Check 7 TX Diamond 1 | 378 |
| Bit-Check 7 TX Universal 1 | 384 |
| Bit-Check 7 TX Universal 1 SB | 384 |
| Bit-Check 7 Universal 1 | 383 |
| Bit-Check 7 Universal 1 SB | 383 |
| Bit-Check 7 Universal 4 | 383 |
| Bit-Check 10 BiTorsion 1 | 376 |

| Article No. | Page |
|---|---|
| Bit-Check 10 BiTorsion 3 SB | 376 |
| Bit-Check 10 Drywall 1 | 397 |
| Bit-Check 10 Impaktor 1 | 370 |
| Bit-Check 10 Impaktor 1 SB | 371 |
| Bit-Check 10 Impaktor 2 | 371 |
| Bit-Check 10 Impaktor 3 | 371 |
| Bit-Check 10 Impaktor 4 | 371 |
| Bit-Check 10 PZ BiTorsion 2 | 376 |
| Bit-Check 10 PZ Impaktor 1 | 371 |
| Bit-Check 10 Stainless 1 | 373 |
| Bit-Check 10 Stainless 1 SB | 373 |
| Bit-Check 10 TX Impaktor 1 | 371 |
| Bit-Check 10 TX Universal 1 | 382 |
| Bit-Check 10 TX Universal 2 | 382 |
| Bit-Check 10 Universal 1 | 381 |
| Bit-Check 10 Universal 2 | 381 |
| Bit-Check 10 Universal 3 | 381 |
| Bit-Check 10 Universal 3 SB | 381 |
| Bit-Check 10 Universal 4 | 382 |
| Bit-Check 10 Universal 5 SB | 382 |
| Bit-Check 10 Zyklop Mini 1 | 174 |
| Bit-Check 10 Zyklop Mini BiTorsion 1 | 174 |
| Bit-Check 12 BiTorsion 1 | 375 |
| Bit-Check 12 BiTorsion 1 SB | 375 |
| Bit-Check 12 Diamond 1 | 377 |
| Bit-Check 12 Diamond 1 SB | 377 |
| Bit-Check 12 Metal 1 | 392 |
| Bit-Check 12 Metal 1 SB | 392 |
| Bit-Check 12 Wood 1 | 389 |
| Bit-Check 12 Wood 1 SB | 389 |
| Bit-Check 12 Wood 2 | 389 |
| Bit-Check 12 Wood 2 SB | 390 |
| Bit-Check 12 Wood TX HF 1 | 388 |
| Bit-Check 12 Wood TX HF 1 SB | 389 |
| Bit-Check 30 BiTorsion 1 | 375 |
| Bit-Check 30 Diamond 1 | 377 |
| Bit-Check 30 Impaktor 1 | 370 |
| Bit-Check 30 Impaktor 2 | 370 |
| Bit-Check 30 Metal 1 | 391 |
| Bit-Check 30 Metal 1 SB | 391 |
| Bit-Check 30 Stainless 1 | 373 |
| Bit-Check 30 TX Universal 1 | 380 |
| Bit-Check 30 TX Universal 1 SB | 380 |
| Bit-Check 30 Universal 1 | 380 |
| Bit-Check 30 Wood 1 | 387 |
| Bit-Check 30 Wood 2 | 388 |
| Bit-Check 30 Wood 2 SB | 388 |
| Bit-Check 30 Wood TX HF 1 | 387 |
| Bit-Check 30 Wood TX HF 1 SB | 387 |
| Bit-Check 30 Zyklop Mini 1 | 172 |
| Bit-Check 30 Zyklop Mini 2 | 173 |
| Bit-Safe 43 Universal 1 | 379 |
| Bit-Safe 61 BiTorsion 1 | 374 |
| Bit-Safe 61 Universal 1 | 379 |
| Click-Torque A 5 | 422 |

# Article No. Index


| Article No. | Page |
|---|---|
| Click-Torque A 6 | 422 |
| Click-Torque A 6 Set 1 | 423 |
| Click-Torque B 1 | 425 |
| Click-Torque B 2 | 425 |
| Click-Torque C 1 | 426 |
| Click-Torque C 2 | 426 |
| Click-Torque C 2 Push R/L | 431 |
| Click-Torque C 3 | 427 |
| Click-Torque C 3 Push R/L | 432 |
| Click-Torque C 3 Set 1 | 428 |
| Click-Torque C 3 Set 2 | 428 |
| Click-Torque C 4 | 429 |
| Click-Torque C 5 | 429 |
| Click-Torque E 1 | 429 |
| Click-Torque E 1 Push R/L | 432 |
| Click-Torque Lock A 5 | 430 |
| Click-Torque Lock A 5 R/L | 433 |
| Click-Torque Lock A 6 | 430 |
| Click-Torque Lock A 6 R/L | 433 |
| Click-Torque Lock C 3 | 431 |
| Click-Torque Lock C 3 R/L | 434 |
| Click-Torque X 1 | 434 |
| Click-Torque X 2 | 435 |
| Click-Torque X 3 | 435 |
| Click-Torque X 4 | 435 |
| Click-Torque X 5 | 436 |
| Click-Torque X 6 | 436 |
| Click-Torque X 7 | 437 |
| Click-Torque XP 1 | 439 |
| Click-Torque XP 2 | 439 |
| Click-Torque XP 3 | 440 |
| Click-Torque XP 4 | 440 |
| K 50 | 305 |
| K 70 | 305 |
| K 120 | 305 |
| Kraftform 2go 100 | 65 |
| Kraftform 2go 300 | 22 |
| Kraftform Big Pack 100 VDE | 64 |
| Kraftform Big Pack 300 | 20 |
| Kraftform Big Pack 900 | 10 |
| Kraftform Kompakt 10 | 249 |
| Kraftform Kompakt 12 | 249 |
| Kraftform Kompakt 20 | 251 |
| Kraftform Kompakt 20 RA-R | 234 |
| Kraftform Kompakt 20 Tool Finder 1 | 250 |
| Kraftform Kompakt 20 Tool Finder 2 | 251 |
| Kraftform Kompakt 25 | 252 |
| Kraftform Kompakt 25 RA-R | 235 |
| Kraftform Kompakt 26 | 252 |
| Kraftform Kompakt 26 RA-R | 235 |
| Kraftform Kompakt 27 Imperial Set 1 | 254 |
| Kraftform Kompakt 27 RA 1 | 235 |
| Kraftform Kompakt 27 RA 2 | 236 |
| Kraftform Kompakt 27 Set 1 | 253 |
| Kraftform Kompakt 27 Set 2 | 254 |
| Kraftform Kompakt 27 XL SHK 1 | 253 |
| Kraftform Kompakt 27 XL Universal 1 | 252 |
| Kraftform Kompakt 27 XL Universal Imperial Set 1 | 253 |
| Kraftform Kompakt 28 | 255 |
| Kraftform Kompakt 28 Imperial 1 | 254 |
| Kraftform Kompakt 28 RA 1 | 236 |
| Kraftform Kompakt 28 SB | 254 |
| Kraftform Kompakt 40 | 255 |
| Kraftform Kompakt 41 | 255 |
| Kraftform Kompakt 60 | 257 |
| Kraftform Kompakt 60 ESD | 54 |
| Kraftform Kompakt 60 Imperial | 258 |
| Kraftform Kompakt 60 KK | 258 |
| Kraftform Kompakt 60 RA-R 1 | 237 |
| Kraftform Kompakt 60 RA-R Imperial 1 | 238 |
| Kraftform Kompakt 60 Stainless | 256 |
| Kraftform Kompakt 60 Stainless Imperial | 257 |
| Kraftform Kompakt 60 Torque | 256 |
| Kraftform Kompakt 62 | 259 |
| Kraftform Kompakt 70 Universal | 260 |
| Kraftform Kompakt 71 Security | 260 |
| Kraftform Kompakt 96 VK 6,3 | 90 |
| Kraftform Kompakt 97 VK 8,1 | 90 |
| Kraftform Kompakt 98 DK | 90 |
| Kraftform Kompakt 99 FL | 90 |
| Kraftform Kompakt 100 | 261 |
| Kraftform Kompakt 400 RA Imperial Set 1 | 239 |
| Kraftform Kompakt 400 RA Imperial Set 2 | 240 |
| Kraftform Kompakt 400 RA Set 1 | 238 |
| Kraftform Kompakt 400 RA Set 2 | 239 |
| Kraftform Kompakt 400 RA SHK Set 1 | 240 |
| Kraftform Kompakt 838 RA S Imperial Set 1 | 241 |
| Kraftform Kompakt 838 RA S Set 1 | 241 |
| Kraftform Kompakt 838 RA-R M Imperial Set 1 | 242 |
| Kraftform Kompakt 838 RA-R M Set 1 | 242 |
| Kraftform Kompakt 900 | 267 |
| Kraftform Kompakt 900 Imperial Set 1 | 267 |
| Kraftform Kompakt A VDE 712 i | 83 |
| Kraftform Kompakt A VDE 712 i SB2 | 83 |
| Kraftform Kompakt F 1 | 275 |
| Kraftform Kompakt H 1 | 272 |
| Kraftform Kompakt M 1 | 273 |
| Kraftform Kompakt Micro 11 Electronics 1 | 39 |
| Kraftform Kompakt Micro 11 ESD 1 | 56 |
| Kraftform Kompakt Micro 11 Universal 1 | 40 |
| Kraftform Kompakt Micro 20 ESD 1 | 55 |
| Kraftform Kompakt Micro 21 ESD 1 | 55 |
| Kraftform Kompakt Pistol RA-R 1 | 243 |
| Kraftform Kompakt Pistol RA-R 2 | 244 |
| Kraftform Kompakt SH 1 | 274 |
| Kraftform Kompakt SH 2 | 275 |
| Kraftform Kompakt Stubby 1 | 263 |
| Kraftform Kompakt Stubby ESD 1 | 56 |
| Kraftform Kompakt Stubby Magazin 1 | 262 |
| Kraftform Kompakt Stubby Magazin 2 | 262 |
| Kraftform Kompakt Stubby Magazin 3 | 263 |
| Kraftform Kompakt Stubby Magazin 4 | 263 |
| Kraftform Kompakt Stubby Magazin 5 | 263 |
| Kraftform Kompakt Stubby Magazin RA 1 | 244 |
| Kraftform Kompakt Stubby Magazin RA 2 | 245 |
| Kraftform Kompakt Stubby Magazin RA 4 | 245 |
| Kraftform Kompakt Turbo 1 | 248 |
| Kraftform Kompakt Turbo i 1 Tool Finder | 84 |
| Kraftform Kompakt Turbo i Imperial 1 Tool Finder | 85 |
| Kraftform Kompakt Turbo Imperial 1 | 248 |
| Kraftform Kompakt Vario RA | 246 |
| Kraftform Kompakt VDE 7 extra slim 1 Tool Finder | 82 |
| Kraftform Kompakt VDE 7 Imperial 1 Tool Finder | 82 |
| Kraftform Kompakt VDE 7 Universal 1 Tool Finder | 82 |
| Kraftform Kompakt VDE 7 Universal 2 Tool Finder | 83 |
| Kraftform Kompakt VDE 15 Torque 1,2-3,0 Nm extra slim 1 Tool Finder | 76 |
| Kraftform Kompakt VDE 16 extra slim 1 Tool Finder | 81 |
| Kraftform Kompakt VDE 16 Torque 1,2-3,0 Nm extra slim 1 Tool Finder | 76 |
| Kraftform Kompakt VDE 16 Universal 1 Tool Finder | 81 |
| Kraftform Kompakt VDE 17 extra slim 1 Tool Finder | 79 |
| Kraftform Kompakt VDE 17 extra slim 2 Tool Finder | 80 |
| Kraftform Kompakt VDE 17 RA 1 | 75 |
| Kraftform Kompakt VDE 17 RA Imperial 1 | 75 |
| Kraftform Kompakt VDE 17 Universal 1 Tool Finder | 80 |
| Kraftform Kompakt VDE 18 Imperial 1 Tool Finder | 78 |
| Kraftform Kompakt VDE 18 Safe-Torque Speed Set 1 | 68 |
| Kraftform Kompakt VDE 18 Universal 1 Tool Finder | 78 |
| Kraftform Kompakt VDE 18 Universal 2 Tool Finder | 79 |
| Kraftform Kompakt VDE 24 Allrounder Set 1 | 74 |
| Kraftform Kompakt VDE 60 i Take it easy | 85 |
| Kraftform Kompakt VDE 60 i Take it easy SB | 85 |
| Kraftform Kompakt VDE 60 iS Take it easy | 86 |
| Kraftform Kompakt VDE 60 iS Take it easy SB | 86 |

| Article No. | Page |
|---|---|
| Kraftform Kompakt VDE 62 i PH/S Take it easy | 87 |
| Kraftform Kompakt VDE 62 i Take it easy | 86 |
| Kraftform Kompakt VDE 62 iS PH/S Take it easy | 87 |
| Kraftform Kompakt VDE 62 iS Take it easy | 86 |
| Kraftform Kompakt VDE 62 iS Take it easy SB | 86 |
| Kraftform Kompakt VDE 64 i Take it easy | 90 |
| Kraftform Kompakt VDE 64 i Take it easy SB | 90 |
| Kraftform Kompakt VDE 65 i PZ/S Take it easy | 88 |
| Kraftform Kompakt VDE 65 i Take it easy | 87 |
| Kraftform Kompakt VDE 65 iS PZ/S Take it easy | 88 |
| Kraftform Kompakt VDE 65 iS PZ/S Take it easy SB | 88 |
| Kraftform Kompakt VDE 65 iS Take it easy | 87 |
| Kraftform Kompakt VDE 65 iS Take it easy SB | 87 |
| Kraftform Kompakt VDE 67 i TORX® Take it easy | 88 |
| Kraftform Kompakt VDE 67 i TORX® Take it easy SB | 89 |
| Kraftform Kompakt VDE 67 iS TORX® Take it easy | 89 |
| Kraftform Kompakt VDE 68 i Take it easy | 89 |
| Kraftform Kompakt VDE 68 iS Take it easy | 89 |
| Kraftform Kompakt VDE 3060 i Take it easy SB | 71 |
| Kraftform Kompakt VDE 3060 iS Take it easy SB | 71 |
| Kraftform Kompakt VDE 3062 iS Take it easy SB | 71 |
| Kraftform Kompakt VDE 3065 iS PZ Take it easy SB | 72 |
| Kraftform Kompakt VDE 3065 iS PZ/S Take it easy SB | 72 |
| Kraftform Kompakt VDE 3067 i TORX® Take it easy SB | 73 |
| Kraftform Kompakt VDE 3067 iS TORX® Take it easy SB | 72 |
| Kraftform Kompakt VDE Big Pack 1 | 77 |
| Kraftform Kompakt VDE Stainless 17 extra slim 1 Tool Finder | 69 |
| Kraftform Kompakt VDE Stainless 8 extra slim 1 Tool Finder | 70 |
| Kraftform Kompakt W 1 | 270 |
| Kraftform Kompakt W 2 | 271 |
| Kraftform Kompakt W Imperial 1 | 271 |
| Kraftform Kompakt Zyklop | 106 |
| Kraftform Kompakt Zyklop Mini 2 | 173 |
| Kraftform Kompakt Zyklop MS1 Metal/Speed 1/4" | 104 |
| Kraftform Micro 12 Electronics 1 | 39 |
| Kraftform Micro 12 Universal 1 | 38 |
| Kraftform Micro Big Pack 1 | 38 |
| Kraftform Micro ESD Big Pack 1 | 52 |
| Kraftform XXL | 21 |
| Kraftform XXL 2 | 21 |
| Kraftform XXL 3 | 21 |
| M 1 | 111 |
| Magnetic socket rail A 4 | 112 |
| Magnetic socket rail A Deep 1 | 114 |
| Magnetic socket rail A Imperial 1 | 112 |
| Magnetic socket rail B 4 | 135 |
| Magnetic socket rail B Deep 1 | 137 |
| Magnetic socket rail B Imperial 1 | 135 |
| Magnetic socket rail C 4 | 161 |
| Magnetic socket rail C Deep 1 | 159 |
| Magnetic socket rail C Impaktor 1 | 153 |
| Magnetic socket rail C Imperial 1 | 156 |
| Rack Kraftform | 31 |
| Rack Kraftform Micro | 31 |
| Safe-Torque A 1 | 419 |
| Safe-Torque A 1 Imperial Set 1 | 420 |
| Safe-Torque A 1 Set 1 | 420 |
| Safe-Torque A 1 SHK Set 1 | 421 |
| Safe-Torque A 2 | 419 |
| Safe-Torque A 2 Set 1 | 421 |
| Stubby Set 1 | 26 |
| Stubby Set 2 | 27 |
| Stubby Set 3 | 27 |
| Stubby Set TX 1 | 27 |
| T 1 | 396 |
| Tool-Check 1 | 189 |
| Tool-Check Automotive 1 | 190 |
| Tool-Check Combi 1 | 191 |
| Tool-Check Modular 1 | 180 |
| Tool-Check Modular Imperial 1 | 181 |
| Tool-Check Modular Micro 1 | 182 |
| Tool-Check Modular Set 1 | 183 |
| Tool-Check Modular Set Imperial 1 | 184 |
| Tool-Check Modular Hex-Plus 1 | 181 |
| Tool-Check PLUS 1 | 185 |
| Tool-Check PLUS 2 | 186 |
| Tool-Check PLUS Imperial 1 | 186 |
| Wera 2go 1 | 300 |
| Wera 2go 2 | 300 |
| Wera 2go 2 XL | 301 |
| Wera 2go 3 | 301 |
| Wera 2go 4 | 301 |
| Wera 2go 5 | 301 |
| Wera 2go 6 | 302 |
| Wera 2go 7 | 302 |
| Wera 2go E 1 | 303 |
| Wera 2go H 1 | 302 |
| Wera 2go SHK 1 | 304 |
| Wheel Impaktor C Set 1 | 158 |
| Zyklop Hybrid Set | 148 |

## Wera Werkzeuge GmbH
Korzerter Straße 21-25
42349 Wuppertal

+49 / (0)202 / 40 45 - 0
E-Mail: info@wera.de

## Wera Tools Ibérica, S.L.
Avda. Corts Catalanes 2, Local 5
08173 Sant Cugat del Vallès, Barcelona
+34/93/72 97 - 240
E - Mail: ventas@weraspain.com

## Wera Tools Finland Oy
Vantaankoskentie 14
01670 Vantaa, Finland
+358 50 362 8935
E-Mail: joki@wera.de

## Wera Outillages S.A.S.
13, rue Ampère
F - 67500 Haguenau
+33 9 72 61 16 52
E - Mail: info@wera-outillages.fr

## Wera Tools (UK) Ltd.
Railway View
Clay Cross
Chesterfield
S45 9FR
+44 (0)1246 / 27 77 56
Fax: +44 (0)1246 / 27 33 35
E-Mail: queries@wera-tools.co.uk

## Wera Tools Inc.
3325 Harvester Rd., Unit 16
Burlington, Ontario
Canada, L7N 3N2
1-800-267-55 41
E-Mail: info@weratools.com

## Wera Tools Inc.
3325 Harvester Rd., Unit 16
Burlington, Ontario
Canada, L7N 3N2
1-800-267-55 41
E-Mail: info@weratools.com

## NL - Noord
Frederik Koning
+31 / 615 26 36 97
E-Mail: koning@wera.de

## NL - Zuid
Wouter Steijvers
+31 / 652 85 01 62
E-Mail: steijvers@wera.de

## NL - Midden
Martijn van Houdt
+31 / 611 06 35 35
E-Mail: vanhoudt@wera.de

## Demovan
Vincent van Gaalen
+31 / 615 44 37 19
E-Mail: vangaalen@wera.de

## Wera Tools Inc.
3325 Harvester Rd., Unit 16
Burlington, Ontario
Canada, L7N 3N2
1-800-267-55 41
E-Mail: info@weratools.com

## Wera Tools Japan G.K
2F, Eden Bldg.,
1-10-8 Kamiikebukuro, Toshima-Ku,
Tokyo, 170-0012 Japan
東京都豊島区上池袋1-10-8
エデンビル2階
+81-3-3915-2555
E-Mail メール: frank.yang@wera.de

## Wera Tools Australia Pty Ltd
Australia
+61-435 755 123
E - Mail: mike.sack@wera.de



For more regional contacts please see
**www.wera.de**, **www.weratools.com** and **www.wera-tools.co.uk**

# Imprint

Subject to technical modifications!
Any reprinting – even only excerpts – shall only be permissible with the prior written consent of the company Wera Werkzeuge GmbH.

Edition: EN 2/2025

**Trademarks used:**

| | |
|---|---|
| ACR | Phillips Screw Company |
| ASSY | Adolf Würth GmbH & Co. KG |
| AW | Adolf Würth GmbH & Co. KG |
| HIOS | Totsu, Katsuyuki |
| Microstix | OSG System Products Co. Ltd. |
| Phillips Recess | Phillips Screw Company |
| Pozidriv | registered trademark for Phillips Screw Company in Canada, Mexico and in the USA; for Trifast plc in the UK |
| PZ | registered trademark for Phillips Screw Company in Canada, Mexico and in the USA |
| PZ1, PZ2, PZ3 | registered trademark in the USA for Phillips Screw Company |
| PUK | Josef Haunstetter Sägenfabrik KG |
| Robertson | British Robertson S.L.U. |
| SDS plus | Robert Bosch GmbH |
| SIT | Adolf Würth GmbH & Co. KG |
| SPAX | Altenloh, Brinck & Co. GmbH & Co. KG |
| T-STAR plus | Altenloh, Brinck & Co. GmbH & Co. KG |
| TORQ-SET | Phillips Screw Company |
| TORX | Acument Intellectual Properties, LLC, Troy, Mich., US |
| TORX PLUS | Acument Intellectual Properties, LLC, Troy, Mich., US |
| TRI-WING | Phillips Screw Company |

| | |
|---|---|
| BESSEY® | BESSEY Tool GmbH & Co. KG |
| “KIRSCHEN“® | Wilh. Schmitt & Comp. GmbH & Co. KG |
| KNIPEX® | KNIPEX-Werk C. Gustav Putsch KG |
| COBRA® | KNIPEX-Werk C. Gustav Putsch KG |
| Lyra® | Johann Froescheis Lyra-Bleistift-Fabrik GmbH & Co. KG |
| PFERD | August Rüggeberg GmbH & Co. KG |
| PICARD® | Picard GmbH |
| RENNSTEIG | Rennsteig Werkzeuge GmbH |
| Stabila® | STABILA Messgeräte Gustav Ullrich GmbH |

We reserve the right to modify without prior notification any details stated in this catalogue regarding product features, versions and designs.
No liability for printing errors or mistakes shall be assumed.

## Contact us

All regions (except for North America, UK and Republic of Ireland)

**Wera Werkzeuge GmbH** · Germany

Korzerter Straße 21–25
D-42349 Wuppertal
Phone: +49 (0) 202 / 40 45-0

E-Mail: info@wera.de

Internet: www.wera.de

North America

**Wera Tools Inc.**
3325 Harvester Rd., Unit 16
Burlington, Ontario
Canada, L7N 3N2

Phone: 1-800-267-55 41
E-Mail: info@weratools.com

Internet: www.weratools.com

UK & Republic of Ireland

**Wera Tools (UK) Ltd.**
Railway View
Clay Cross
Chesterfield
S45 9FR

Phone: +44 (0)1246 / 27 77 56
E-Mail: queries@wera-tools.co.uk

Internet: www.wera-tools.co.uk
Socials: @weratoolsuk

EN-2/2025